

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1048195

Luminaire Tested: **GALN-SA8C-940-U-T2BC**

Issue Date: 07/10/2025

Test Information

Test Method: LM-79-08
Report Number: P1048195
Test Lab: INNOVATION CENTER(G3)
Issue Date: 07/10/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: GALN-SA8C-940-U-T2BC
Description: GALLEON II AREA AND ROADWAY LUMINAIRE 1050mA 8xLight Square PACKAGE
90CRI 4000K FIXTURE w/ TYPE II ANGLED BACKLIGHT CONTROL
Light Source: (112) 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 32180.1 lumens
Efficiency: N/A
Efficacy: 86.3 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type II - Short
BUG Rating: B0 - U0 - G4

Input Watts (W): 372.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1048195

CATALOG NUMBER: GALN-SA8C-940-U-T2BC

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

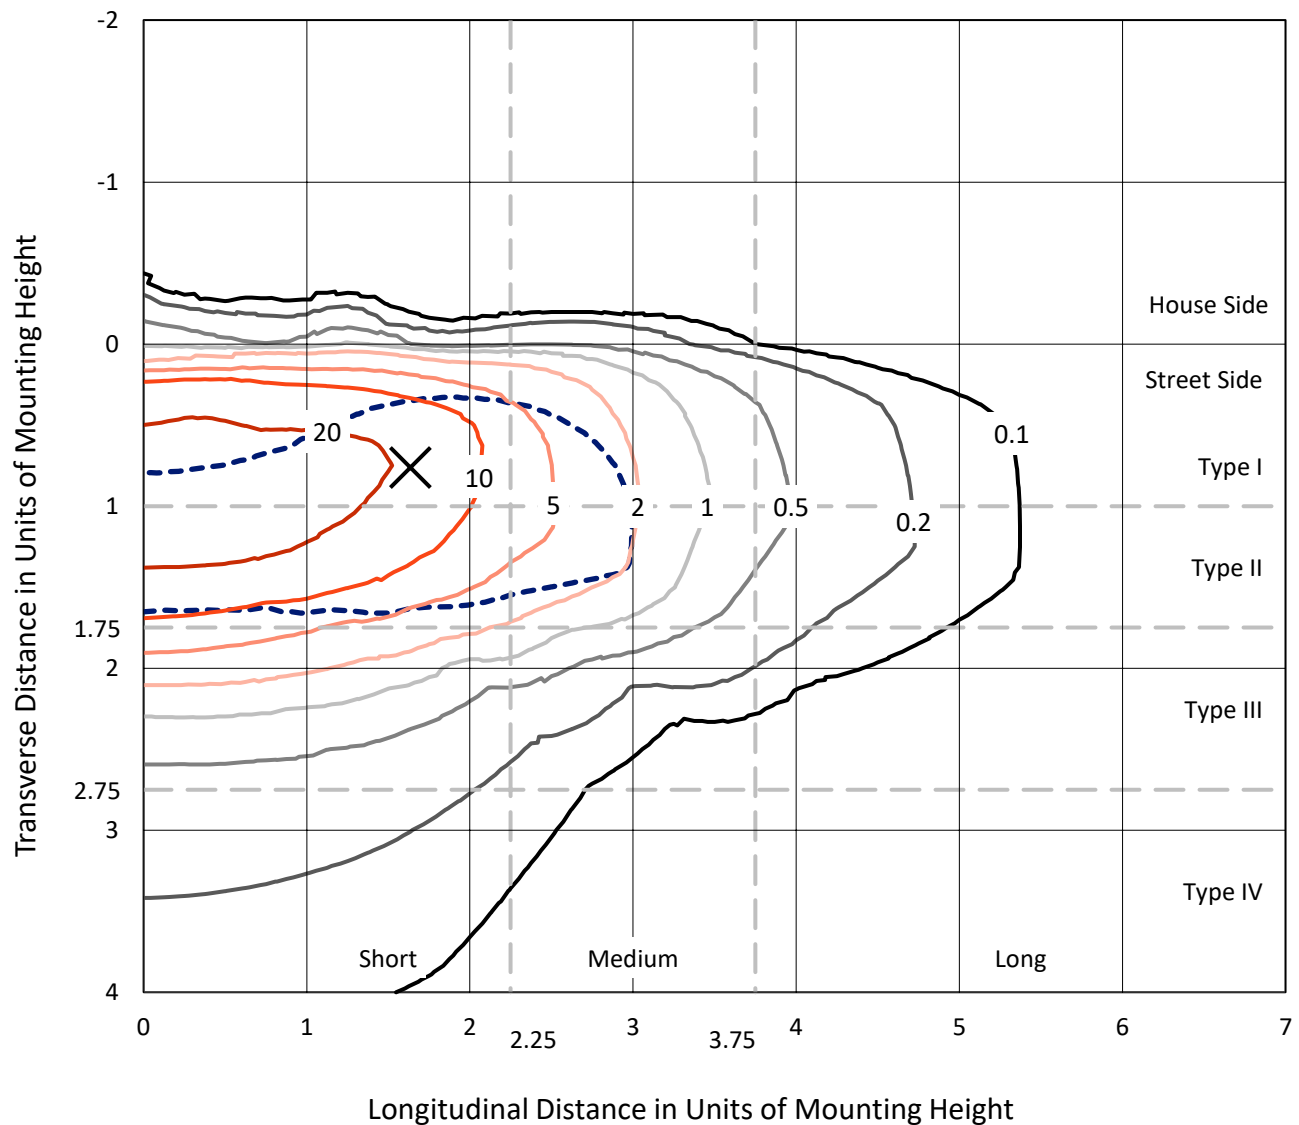


Based on 15 foot mounting height. Maximum calculated value = 42.6 fc
 Type II - Short - N/A

REPORT NUMBER: P1048195

CATALOG NUMBER: GALN-SA8C-940-U-T2BC

Luminous Intensity Polar Plot

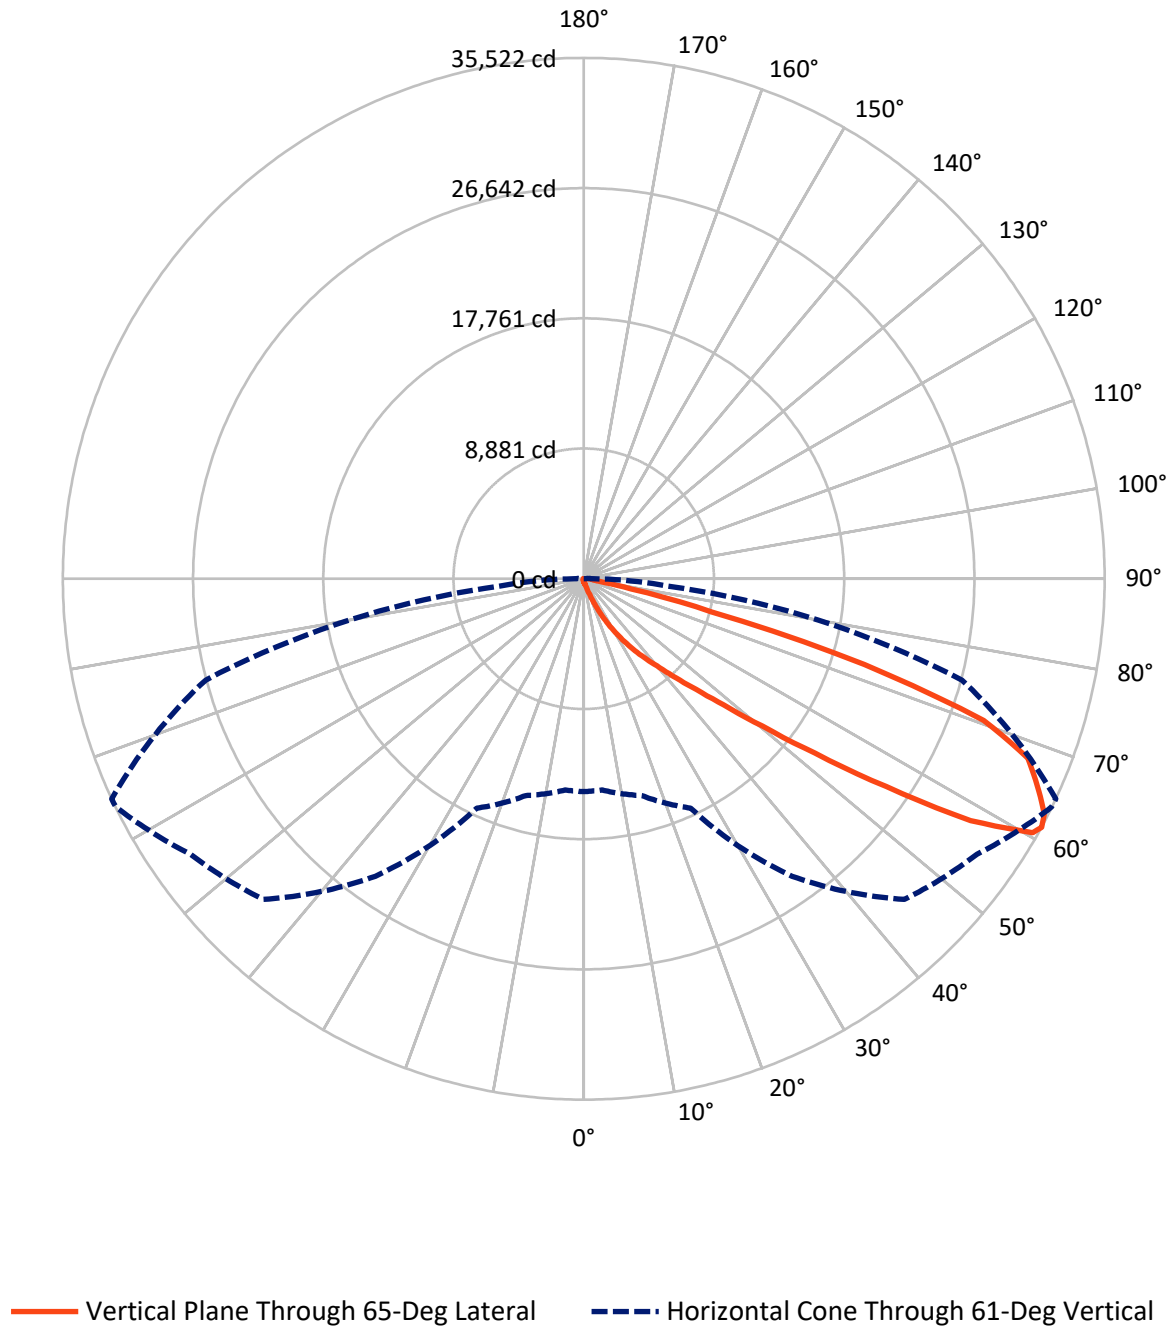

REPORT NUMBER: P1048195

CATALOG NUMBER: GALN-SA8C-940-U-T2BC


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	137.4	0.0	137.4
	% Fixture	0.4	0.0	0.4
Street Side	Lumens	32042.8	0.0	32042.8
	% Fixture	99.6	0.0	99.6
Total	Lumens	32180.1	0.0	32180.1
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	25.1	0.1
10°-20°	264.6	0.8
20°-30°	949.7	3.0
30°-40°	2528.4	7.9
40°-50°	6642.2	20.6
50°-60°	10290.0	32.0
60°-70°	8628.0	26.8
70°-80°	2539.1	7.9
80°-90°	313.2	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	32180.1	100.0
0°-180°	32180.1	100.0

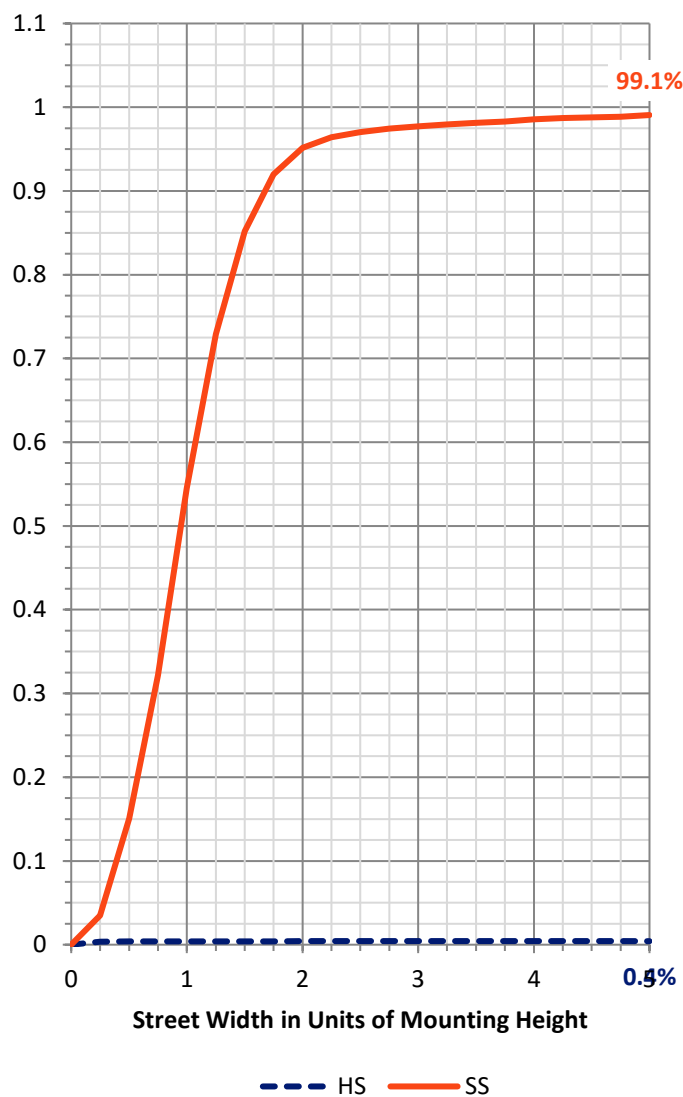

REPORT NUMBER: P1048195


CATALOG NUMBER: GALN-SA8C-940-U-T2BC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1208.5	3.8			
FM	(30°-60°)	19408.3	60.3			
FH	(60°-80°)	11118.6	34.6			G4/12000
FVH	(80°-90°)	307.4	1.0			G3/500
BL	(0°-30°)	30.8	0.1	B0/110		
BM	(30°-60°)	52.3	0.2	B0/220		
BH	(60°-80°)	48.5	0.2	B0/110		G0/110
BVH	(80°-90°)	5.8	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G4

Type II Short

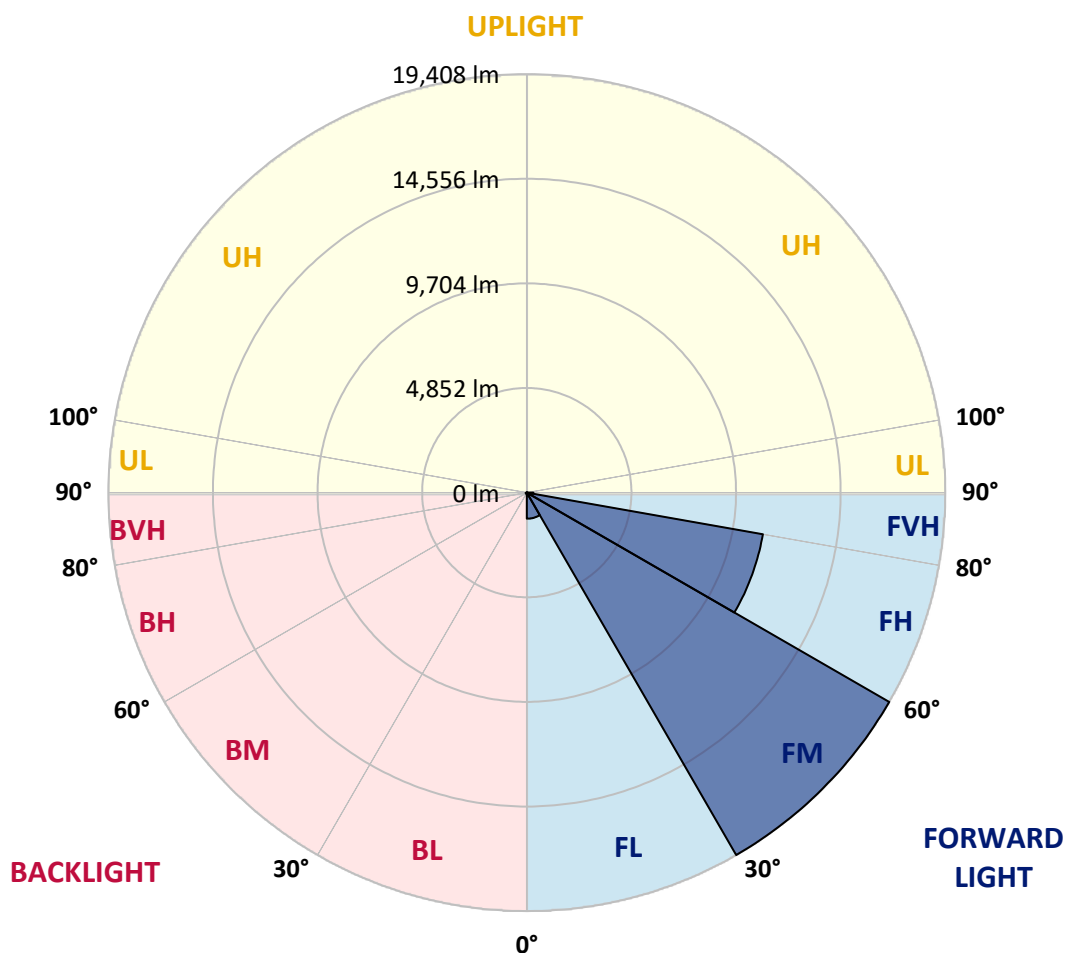



REPORT NUMBER: P1048195

CATALOG NUMBER: GALN-SA8C-940-U-T2BC

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	64°	65°	75°	85°
0°	197.0	197.0	197.0	197.0	197.0	197.0	197.0	197.0	197.0	197.0	197.0
2.5°	239.1	241.3	236.9	228.0	221.4	221.4	219.2	212.5	212.5	205.9	201.4
5°	334.3	329.8	321.0	303.3	287.8	272.3	256.8	241.3	239.1	219.2	205.9
7.5°	546.8	551.2	522.4	467.1	420.6	360.8	305.5	272.3	267.9	234.6	208.1
10°	1199.8	1166.6	1100.2	885.5	728.3	549.0	407.3	316.6	312.1	252.4	212.5
12.5°	2187.1	2160.5	2038.8	1817.4	1412.3	982.9	595.5	391.8	378.5	267.9	214.7
15°	3152.2	3110.2	3043.8	2820.2	2346.5	1762.1	974.0	535.7	500.3	290.0	212.5
17.5°	3767.6	3774.3	3714.5	3619.3	3313.8	2607.7	1682.4	799.1	730.5	329.8	208.1
20°	4305.5	4290.0	4323.3	4272.3	4057.6	3544.0	2448.3	1266.2	1148.9	394.0	210.3
22.5°	4925.4	4963.0	4987.3	4976.3	4739.4	4301.1	3318.3	1894.9	1746.6	511.4	216.9
25°	5755.5	5751.1	5753.3	5724.5	5494.3	5007.3	4190.4	2676.3	2525.8	701.7	232.4
27.5°	6625.4	6652.0	6663.1	6559.0	6258.0	5779.8	4998.4	3530.8	3353.7	1007.2	252.4
30°	7814.2	7792.0	7741.1	7528.6	7163.4	6570.1	5795.3	4427.3	4241.3	1434.4	283.3
32.5°	9416.9	9392.5	9135.7	8666.4	8119.7	7393.6	6596.7	5326.0	5100.2	1967.9	325.4
35°	12057.7	12095.4	11464.5	10249.2	9268.5	8383.1	7484.3	6220.3	6021.1	2625.4	383.0
37.5°	16102.1	15896.2	15039.5	12892.3	10780.5	9618.3	8332.2	7123.5	6950.9	3435.6	458.2
40°	20031.3	19827.6	19579.7	17545.4	13408.1	10979.7	9518.7	8183.9	7960.3	4349.8	568.9
42.5°	24162.0	24049.1	24038.0	22503.9	18202.8	13120.3	10946.5	9425.7	9235.3	5352.6	750.4
45°	27088.4	26975.5	27212.4	27480.2	24733.1	17707.0	13432.4	11039.5	10762.8	6570.1	1040.4
47.5°	27482.4	27486.9	28120.0	28958.9	29585.4	24801.7	16744.0	13177.8	12841.4	8312.2	1527.4
50°	26172.0	26222.9	27230.1	28730.9	30417.7	30754.2	22583.6	16281.4	15783.3	10377.6	2218.1
52.5°	23677.2	23734.7	25138.2	27606.4	29651.8	32184.2	29459.2	20341.2	19767.9	12954.3	3192.1
55°	21430.3	21465.7	23075.1	26194.1	28728.7	31407.2	33541.2	25762.4	25009.8	16124.2	4152.8
57.5°	19205.6	19123.7	20170.8	23741.4	28571.5	30453.1	34143.3	31940.7	31110.6	19588.6	4901.0
60°	16230.5	16093.2	16934.4	19205.6	26504.0	31079.6	33016.6	35358.6	35170.4	24412.1	5478.8
61°	14519.3	14461.8	15307.4	17255.4	24764.1	30920.2	32746.5	35502.5	35522.4	26694.4	5737.8
62.5°	10368.7	10532.5	11825.3	14357.7	20741.9	29886.5	32781.9	35057.5	35254.6	29727.1	6408.5
65°	4608.8	4872.2	5877.2	7938.1	12062.2	24861.5	32467.6	34081.3	33983.9	30559.4	8719.6
67.5°	2733.9	2773.7	3274.0	4498.1	6388.6	13372.6	28651.2	32790.8	32660.2	26603.6	10849.1
70°	2153.9	2173.8	2333.2	2822.4	3707.9	5122.4	16352.2	28370.1	28939.0	21572.0	10621.1
72.5°	2043.2	2038.8	2060.9	2147.2	2335.4	2541.3	6331.0	18858.1	20015.8	15535.4	8905.5
75°	2016.6	2007.8	1985.6	1952.4	1691.2	1496.4	1961.3	8341.0	9011.8	10614.4	6705.1
77.5°	1956.9	1959.1	1963.5	1872.7	1449.9	1058.1	949.7	2676.3	3291.7	6736.1	4766.0
80°	1323.8	1343.7	1376.9	1341.5	1303.8	765.9	670.7	951.9	965.2	3780.9	3147.8
82.5°	670.7	670.7	655.2	584.4	504.7	498.1	533.5	690.7	699.5	1912.6	1480.9
85°	405.1	427.2	436.1	396.2	363.0	334.3	407.3	549.0	568.9	741.6	345.3
87.5°	90.8	93.0	101.8	135.0	197.0	267.9	378.5	502.5	511.4	475.9	42.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1048195

CATALOG NUMBER: GALN-SA8C-940-U-T2BC

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	197.0	197.0	197.0	197.0	197.0	197.0	197.0	197.0	197.0	197.0	197.0
2.5°	199.2	194.8	192.6	185.9	179.3	172.7	168.2	166.0	168.2	170.5	170.5
5°	197.0	190.4	179.3	168.2	159.4	150.5	141.7	139.5	139.5	141.7	141.7
7.5°	197.0	185.9	170.5	157.2	143.9	130.6	124.0	119.5	121.8	121.8	121.8
10°	197.0	183.7	163.8	143.9	128.4	112.9	101.8	97.4	97.4	97.4	97.4
12.5°	194.8	181.5	157.2	132.8	110.7	93.0	79.7	73.1	75.3	75.3	75.3
15°	190.4	174.9	148.3	112.9	88.5	70.8	57.6	50.9	53.1	57.6	59.8
17.5°	183.7	168.2	132.8	95.2	70.8	53.1	39.8	35.4	37.6	44.3	44.3
20°	181.5	161.6	117.3	77.5	53.1	37.6	26.6	22.1	24.4	33.2	35.4
22.5°	181.5	157.2	106.3	64.2	39.8	24.4	15.5	8.9	8.9	15.5	15.5
25°	183.7	155.0	97.4	53.1	28.8	17.7	8.9	4.4	8.9	24.4	28.8
27.5°	188.2	152.7	93.0	44.3	22.1	15.5	6.6	15.5	26.6	26.6	26.6
30°	192.6	148.3	86.3	37.6	19.9	11.1	11.1	22.1	22.1	26.6	28.8
32.5°	199.2	146.1	81.9	33.2	15.5	8.9	15.5	13.3	13.3	15.5	17.7
35°	212.5	148.3	77.5	33.2	15.5	11.1	13.3	6.6	4.4	4.4	4.4
37.5°	230.2	150.5	70.8	28.8	13.3	13.3	6.6	0.0	0.0	0.0	0.0
40°	259.0	157.2	66.4	26.6	11.1	11.1	2.2	0.0	0.0	0.0	0.0
42.5°	307.7	170.5	64.2	24.4	11.1	8.9	0.0	0.0	0.0	0.0	0.0
45°	405.1	201.4	59.8	22.1	11.1	4.4	0.0	0.0	0.0	0.0	0.0
47.5°	582.2	274.5	57.6	17.7	6.6	0.0	0.0	0.0	0.0	0.0	0.0
50°	850.0	371.9	55.3	15.5	2.2	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	1084.7	391.8	37.6	13.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	1111.3	270.1	28.8	8.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	885.5	174.9	24.4	6.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	670.7	132.8	22.1	2.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
61°	644.2	119.5	22.1	2.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	710.6	104.0	19.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	1155.5	86.3	17.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	2007.8	75.3	15.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	2536.8	70.8	13.3	2.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	2211.4	64.2	13.3	4.4	2.2	0.0	0.0	0.0	0.0	0.0	0.0
75°	1330.4	55.3	13.3	8.9	4.4	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	697.3	42.1	13.3	11.1	6.6	2.2	0.0	0.0	0.0	0.0	0.0
80°	338.7	37.6	15.5	11.1	8.9	4.4	0.0	0.0	0.0	0.0	0.0
82.5°	132.8	31.0	17.7	15.5	11.1	6.6	2.2	0.0	0.0	0.0	0.0
85°	59.8	26.6	19.9	17.7	15.5	8.9	2.2	0.0	0.0	0.0	0.0
87.5°	31.0	24.4	22.1	19.9	15.5	11.1	4.4	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-16

Test Date: 10/11/2024

Luminaire Tested: GSS-SB1A-940-U-5WQ

Data in this report applies to families of products including GSS-SB1A-940-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-16
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-940-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 90 CRI
 4000K CCT 26 LEDS

Spectral Parameters

CCT (K): 3856
 CIE u' : 0.2261
 CIE v' : 0.5084
 Duv: 0.0032
 CIE x: 0.3896
 CIE y: 0.3894
 CIE z: 0.2211
 Peak Wavelength (nm): 614
 Dominant Wavelength (nm): 578
 Purity: 33.77304
 R_f: 91.8
 R_g: 98.4

CRI (Ra): 92.1
 R1: 91.8
 R2: 94.1
 R3: 95.3
 R4: 92.8
 R5: 91.0
 R6: 91.6
 R7: 95.0
 R8: 85.2
 R9: 60.7
 R10: 85.2
 R11: 92.4
 R12: 74.5
 R13: 92.3
 R14: 97.0
 R15: 88.5



Test Conditions

Stabilization Time: 23M
 Operation Time: 1H 23M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-16

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-16

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-16

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	492	NR	620	993	NR	750	73	NR	880	1	NR
365	0	NR	495	539	NR	625	978	NR	755	62	NR	885	1	NR
370	0	NR	500	583	NR	630	962	NR	760	54	NR	890	1	NR
375	0	NR	505	623	NR	635	933	NR	765	46	NR	895	1	NR
380	0	NR	510	661	NR	640	898	NR	770	39	NR	900	1	NR
385	0	NR	515	698	NR	645	855	NR	775	34	NR	905	1	NR
390	0	NR	520	733	NR	650	810	NR	780	29	NR	910	1	NR
395	1	NR	525	764	NR	655	759	NR	785	25	NR	915	1	NR
400	3	NR	530	794	NR	660	704	NR	790	21	NR	920	1	NR
405	6	NR	535	820	NR	665	651	NR	795	18	NR	925	1	NR
410	12	NR	540	837	NR	670	592	NR	800	16	NR	930	1	NR
415	22	NR	545	853	NR	675	538	NR	805	13	NR	935	0	NR
420	42	NR	550	864	NR	680	486	NR	810	12	NR	940	0	NR
425	79	NR	555	872	NR	685	435	NR	815	10	NR	945	0	NR
430	147	NR	560	876	NR	690	389	NR	820	9	NR	950	0	NR
435	278	NR	565	883	NR	695	344	NR	825	7	NR	955	0	NR
440	515	NR	570	891	NR	700	303	NR	830	6	NR	960	0	NR
445	832	NR	575	900	NR	705	266	NR	835	5	NR	965	0	NR
450	874	NR	580	914	NR	710	233	NR	840	5	NR	970	0	NR
455	659	NR	585	927	NR	715	203	NR	845	4	NR	975	0	NR
460	567	NR	590	944	NR	720	178	NR	850	4	NR	980	0	NR
465	485	NR	595	961	NR	725	154	NR	855	3	NR	985	0	NR
470	401	NR	600	975	NR	730	133	NR	860	3	NR	990	0	NR
475	393	NR	605	988	NR	735	115	NR	865	2	NR	995	1	NR
480	417	NR	610	996	NR	740	98	NR	870	2	NR	1000	0	NR
485	448	NR	615	998	NR	745	85	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-16

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.72

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	492	NR	620	993	NR	750	73	NR	880	1	NR
365	0	NR	495	539	NR	625	978	NR	755	62	NR	885	1	NR
370	0	NR	500	583	NR	630	962	NR	760	54	NR	890	1	NR
375	0	NR	505	623	NR	635	933	NR	765	46	NR	895	1	NR
380	0	NR	510	661	NR	640	898	NR	770	39	NR	900	1	NR
385	0	NR	515	698	NR	645	855	NR	775	34	NR	905	1	NR
390	0	NR	520	733	NR	650	810	NR	780	29	NR	910	1	NR
395	1	NR	525	764	NR	655	759	NR	785	25	NR	915	1	NR
400	3	NR	530	794	NR	660	704	NR	790	21	NR	920	1	NR
405	6	NR	535	820	NR	665	651	NR	795	18	NR	925	1	NR
410	12	NR	540	837	NR	670	592	NR	800	16	NR	930	1	NR
415	22	NR	545	853	NR	675	538	NR	805	13	NR	935	0	NR
420	42	NR	550	864	NR	680	486	NR	810	12	NR	940	0	NR
425	79	NR	555	872	NR	685	435	NR	815	10	NR	945	0	NR
430	147	NR	560	876	NR	690	389	NR	820	9	NR	950	0	NR
435	278	NR	565	883	NR	695	344	NR	825	7	NR	955	0	NR
440	515	NR	570	891	NR	700	303	NR	830	6	NR	960	0	NR
445	832	NR	575	900	NR	705	266	NR	835	5	NR	965	0	NR
450	874	NR	580	914	NR	710	233	NR	840	5	NR	970	0	NR
455	659	NR	585	927	NR	715	203	NR	845	4	NR	975	0	NR
460	567	NR	590	944	NR	720	178	NR	850	4	NR	980	0	NR
465	485	NR	595	961	NR	725	154	NR	855	3	NR	985	0	NR
470	401	NR	600	975	NR	730	133	NR	860	3	NR	990	0	NR
475	393	NR	605	988	NR	735	115	NR	865	2	NR	995	1	NR
480	417	NR	610	996	NR	740	98	NR	870	2	NR	1000	0	NR
485	448	NR	615	998	NR	745	85	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-16

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 3.52

λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	492	NR	620	993	NR	750	73	NR	880	1	NR
365	0	NR	495	539	NR	625	978	NR	755	62	NR	885	1	NR
370	0	NR	500	583	NR	630	962	NR	760	54	NR	890	1	NR
375	0	NR	505	623	NR	635	933	NR	765	46	NR	895	1	NR
380	0	NR	510	661	NR	640	898	NR	770	39	NR	900	1	NR
385	0	NR	515	698	NR	645	855	NR	775	34	NR	905	1	NR
390	0	NR	520	733	NR	650	810	NR	780	29	NR	910	1	NR
395	1	NR	525	764	NR	655	759	NR	785	25	NR	915	1	NR
400	3	NR	530	794	NR	660	704	NR	790	21	NR	920	1	NR
405	6	NR	535	820	NR	665	651	NR	795	18	NR	925	1	NR
410	12	NR	540	837	NR	670	592	NR	800	16	NR	930	1	NR
415	22	NR	545	853	NR	675	538	NR	805	13	NR	935	0	NR
420	42	NR	550	864	NR	680	486	NR	810	12	NR	940	0	NR
425	79	NR	555	872	NR	685	435	NR	815	10	NR	945	0	NR
430	147	NR	560	876	NR	690	389	NR	820	9	NR	950	0	NR
435	278	NR	565	883	NR	695	344	NR	825	7	NR	955	0	NR
440	515	NR	570	891	NR	700	303	NR	830	6	NR	960	0	NR
445	832	NR	575	900	NR	705	266	NR	835	5	NR	965	0	NR
450	874	NR	580	914	NR	710	233	NR	840	5	NR	970	0	NR
455	659	NR	585	927	NR	715	203	NR	845	4	NR	975	0	NR
460	567	NR	590	944	NR	720	178	NR	850	4	NR	980	0	NR
465	485	NR	595	961	NR	725	154	NR	855	3	NR	985	0	NR
470	401	NR	600	975	NR	730	133	NR	860	3	NR	990	0	NR
475	393	NR	605	988	NR	735	115	NR	865	2	NR	995	1	NR
480	417	NR	610	996	NR	740	98	NR	870	2	NR	1000	0	NR
485	448	NR	615	998	NR	745	85	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-16




TM-30-18

Summary

$R_f = 91.8$
 $R_g = 98.4$
 $CIE R_a = 92.1$
 $R_9 = 60.7$



Color Vector Graphics

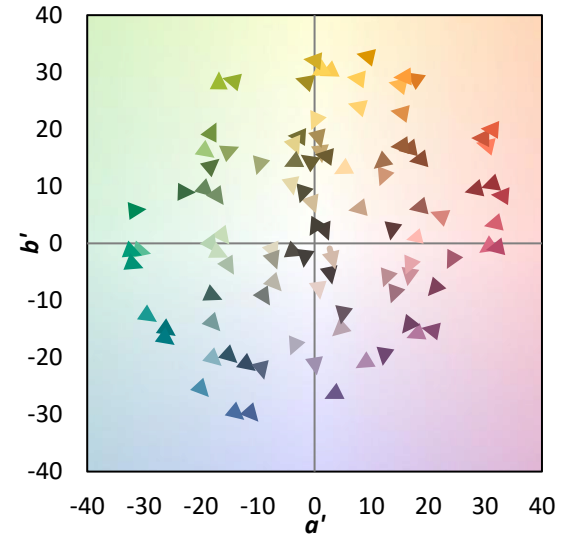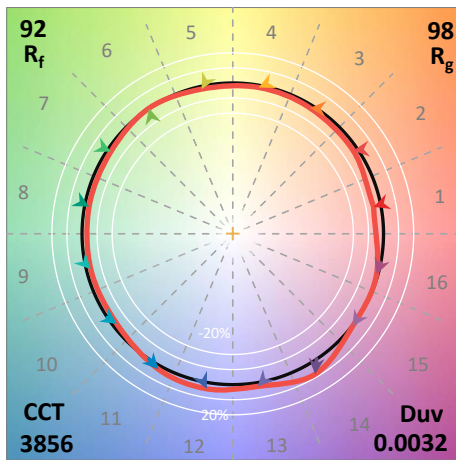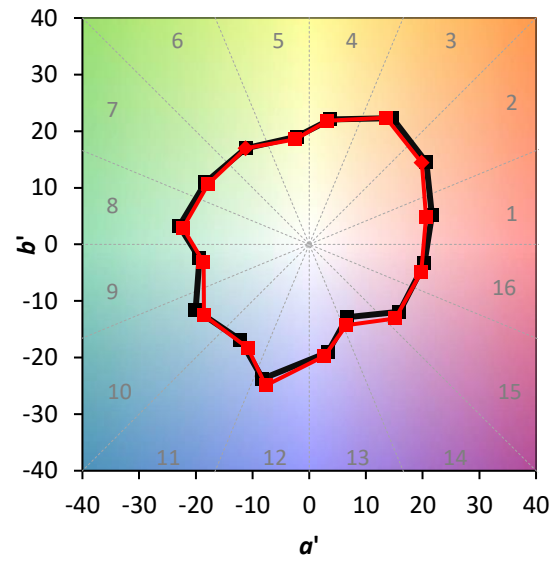

Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 86	CES26 = 94	CES51 = 96	CES76 = 87
CES02 = 62	CES27 = 91	CES52 = 98	CES77 = 90
CES03 = 31	CES28 = 96	CES53 = 95	CES78 = 84
CES04 = 69	CES29 = 96	CES54 = 94	CES79 = 96
CES05 = 49	CES30 = 93	CES55 = 92	CES80 = 94
CES06 = 50	CES31 = 97	CES56 = 93	CES81 = 89
CES07 = 42	CES32 = 92	CES57 = 92	CES82 = 97
CES08 = 41	CES33 = 99	CES58 = 92	CES83 = 98
CES09 = 29	CES34 = 94	CES59 = 96	CES84 = 94
CES10 = 74	CES35 = 96	CES60 = 93	CES85 = 85
CES11 = 57	CES36 = 82	CES61 = 92	CES86 = 88
CES12 = 63	CES37 = 95	CES62 = 87	CES87 = 92
CES13 = 43	CES38 = 88	CES63 = 92	CES88 = 96
CES14 = 74	CES39 = 99	CES64 = 89	CES89 = 87
CES15 = 71	CES40 = 98	CES65 = 88	CES90 = 96
CES16 = 47	CES41 = 97	CES66 = 87	CES91 = 74
CES17 = 49	CES42 = 96	CES67 = 86	CES92 = 80
CES18 = 56	CES43 = 96	CES68 = 88	CES93 = 88
CES19 = 71	CES44 = 99	CES69 = 89	CES94 = 82
CES20 = 66	CES45 = 98	CES70 = 86	CES95 = 83
CES21 = 85	CES46 = 97	CES71 = 81	CES96 = 92
CES22 = 78	CES47 = 97	CES72 = 94	CES97 = 95
CES23 = 91	CES48 = 91	CES73 = 81	CES98 = 94
CES24 = 90	CES49 = 96	CES74 = 93	CES99 = 91
CES25 = 71	CES50 = 97	CES75 = 83	



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)