

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1435230

Luminaire Tested: **GALN-SB5D-727-U-T4LG**

Issue Date: 03/24/202

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763



**Test Information**

Test Method: LM-79-08  
 Report Number: P1435230  
 Test Lab: INNOVATION CENTER(G1)  
 Issue Date: 03/24/202  
 Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
 Product Line: McGRAW-EDISON  
 Catalog Number: GALN-SB5D-727-U-T4LG  
 Description: GALLEON II AREA AND ROADWAY HIGH DENSITY LUMINAIRE 900mA 5xLight Square PACKAGE 70CRI 2700K FIXTURE w/ TYPE IV LOW GLARE  
 Light Source: (130) 2700K CCT, 70 CRI LEDS  
 Ballast/Driver: ELECTRONIC DRIVER  
 Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
a	good	reflector
b	good	lens
c	good	housing
d	good	cord


**Summary**

Lumens per Lamp: N/A  
 Luminaire Lumens: 46676.4 lumens  
 Efficiency: N/A  
 Efficacy: 127.9 lumens/watt  
 Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')  
 IES Classification: Type IV - Short  
 BUG Rating: B4 - U0 - G4  
  
 Input Watts (W): 364.9  
 Input Voltage (V): 120  
 Input Current (Ain): NR  
 Voltage Rise (V): NR  
 Power Factor: 0.97  
 Total Harmonic Distortion (THDi): NR  
 Frequency (hertz): 60  
 Stabilization Time: NR  
 Operation Time: NR  
 Ambient Temperature (°C): NR  
 Test Distance: 28.75 FT

REPORT NUMBER: P1435230  
 CATALOG NUMBER: GALN-SB5D-727-U-T4LG

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

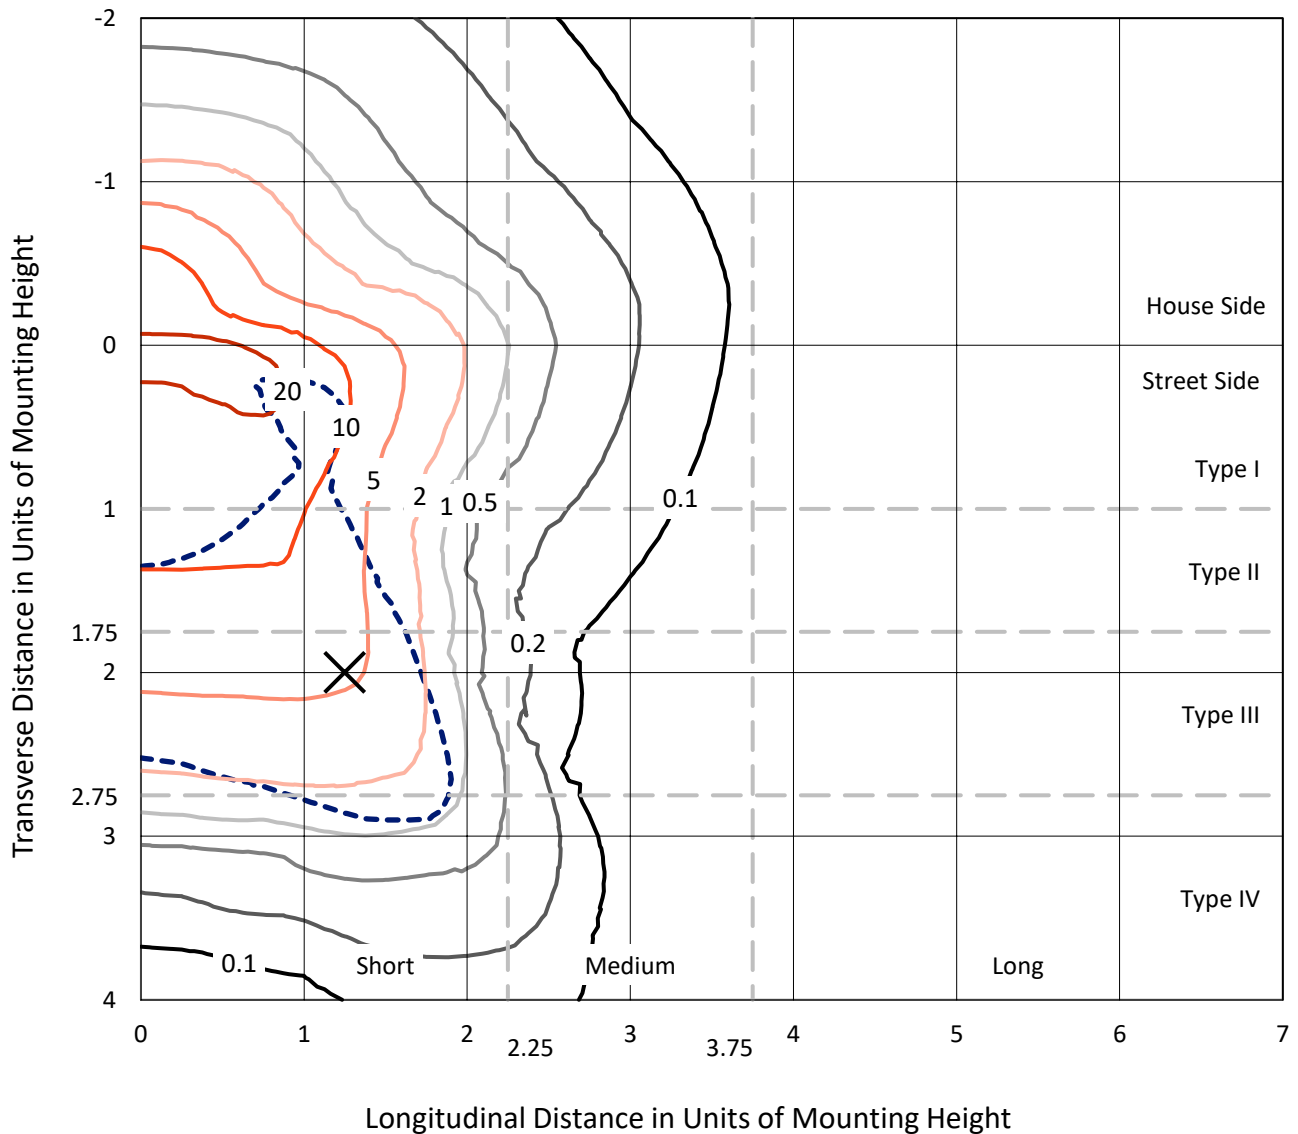

Based on 20 foot mounting height. Maximum calculated value = 28.8 fc  
 Type IV - Short - N/A

REPORT NUMBER: P1435230  
CATALOG NUMBER: GALN-SB5D-727-U-T4LG

### Luminous Intensity Polar Plot

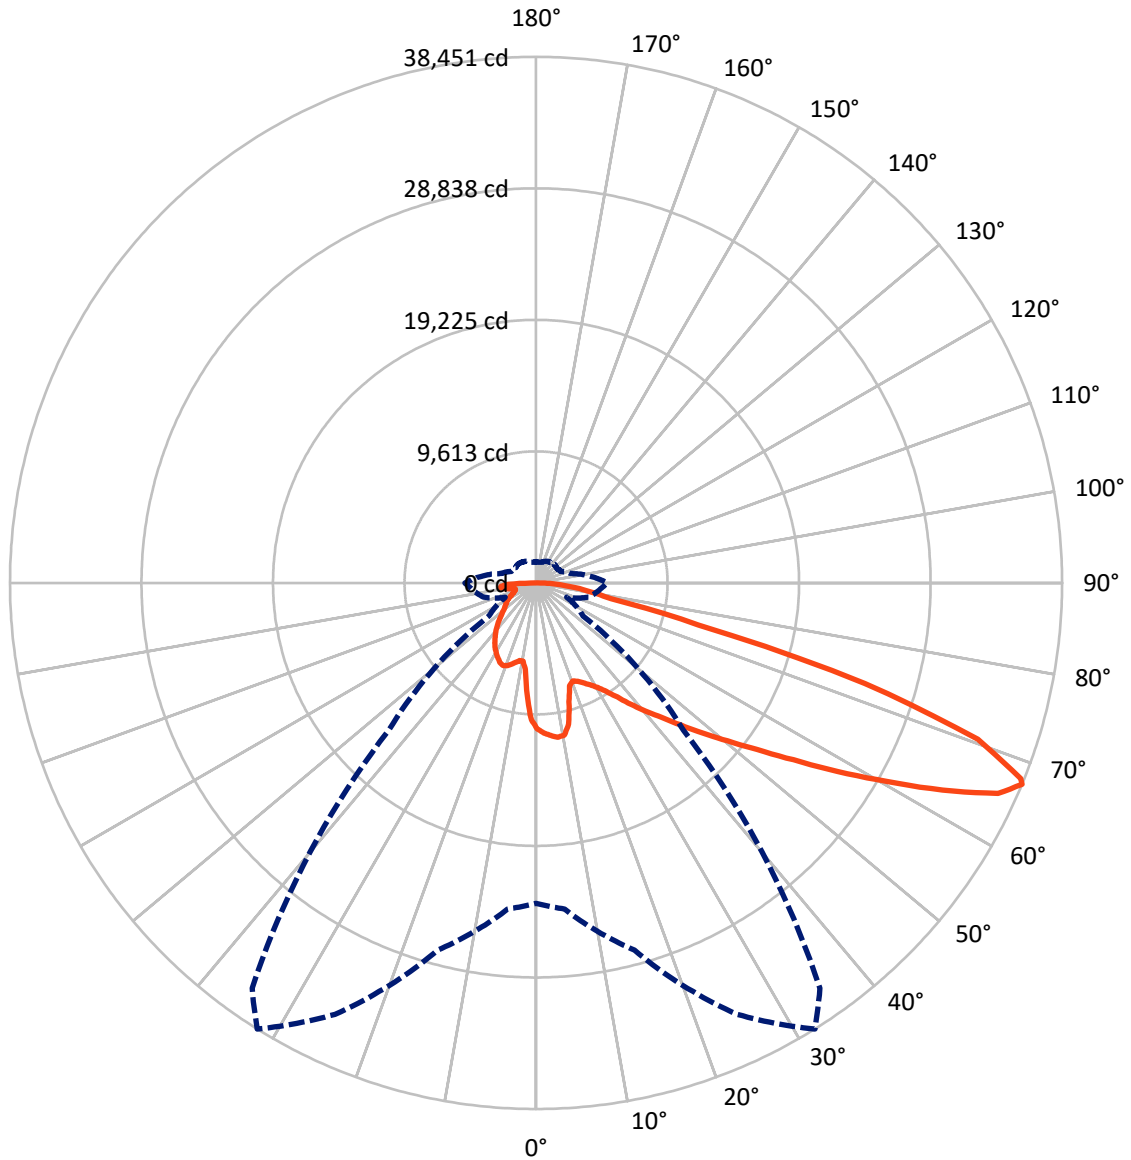

— Vertical Plane Through 32-Deg Lateral      - - - Horizontal Cone Through 67-Deg Vertical

REPORT NUMBER: P1435230  
 CATALOG NUMBER: GALN-SB5D-727-U-T4LG

**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	11050.5	0.0	11050.5
	% Fixture	23.7	0.0	23.7
<b>Street Side</b>	Lumens	35626.0	0.0	35626.0
	% Fixture	76.3	0.0	76.3
<b>Total</b>	Lumens	46676.4	0.0	46676.4
	% Fixture	100.0	0.0	100.0

**Coefficient of Utilization**

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	931.8	2.0
10°-20°	2474.1	5.3
20°-30°	4040.3	8.7
30°-40°	5955.0	12.8
40°-50°	8212.3	17.6
50°-60°	10374.6	22.2
60°-70°	10040.7	21.5
70°-80°	3583.5	7.7
80°-90°	1064.1	2.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	46676.4	100.0
0°-180°	46676.4	100.0




REPORT NUMBER: P1435230  
 CATALOG NUMBER: GALN-SB5D-727-U-T4LG

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	4497.4	9.6			
FM (30°-60°)	19199.5	41.1			
FH (60°-80°)	11528.1	24.7			G4/12000
FVH (80°-90°)	401.0	0.9			G3/500
BL (0°-30°)	2948.8	6.3	B4/5000		
BM (30°-60°)	5342.4	11.4	B4/8500		
BH (60°-80°)	2096.1	4.5	B3/2500		G3/2500
BVH (80°-90°)	663.1	1.4			G4/750
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B4-U0-G4**  
 Type IV Short

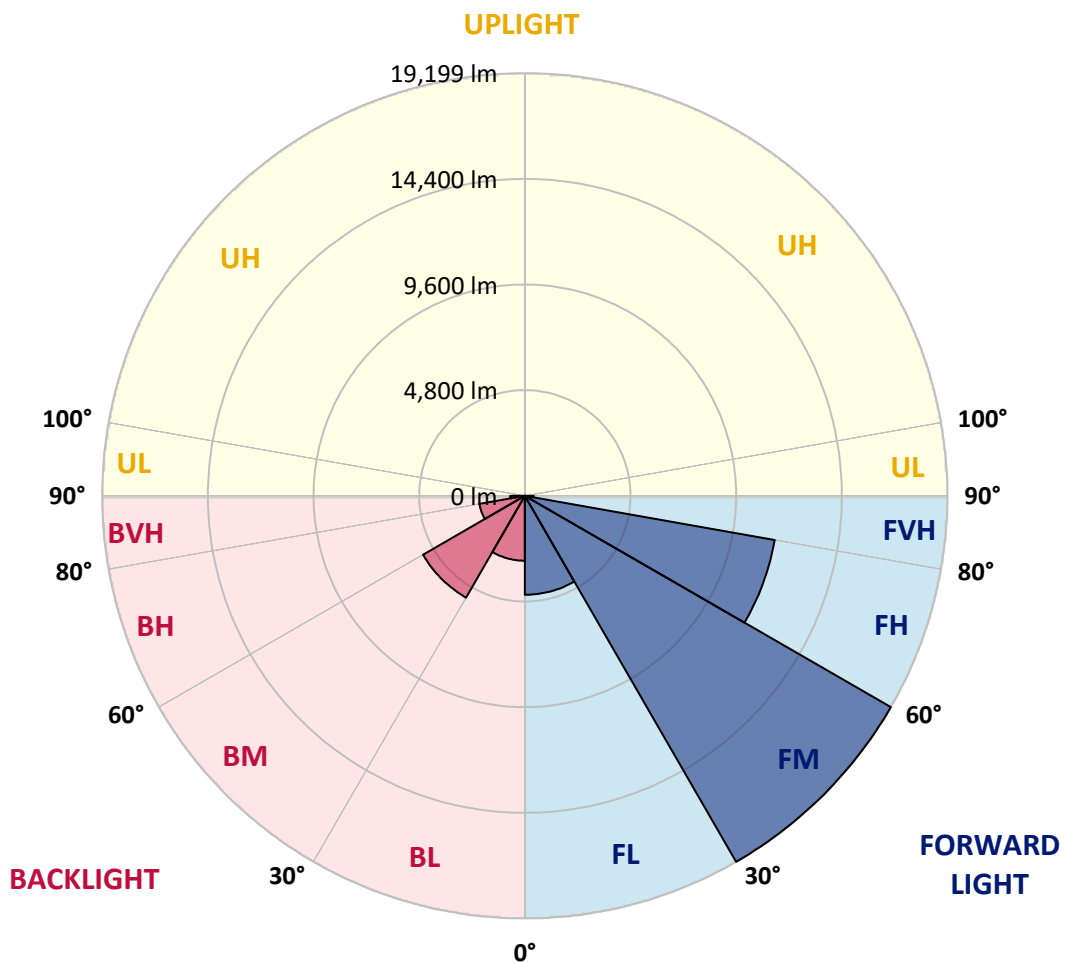



REPORT NUMBER: P1435230

CATALOG NUMBER: GALN-SB5D-727-U-T4LG

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	32°	35°	45°	55°	65°	75°	85°
0°	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6
2.5°	11068.8	11037.7	11006.7	11027.4	10985.9	10975.6	10923.7	10903.0	10840.8	10830.5	10716.5
5°	11296.8	11234.7	11224.3	11245.0	11203.6	11203.6	11162.1	11131.0	11037.7	10985.9	10820.1
7.5°	11296.8	11286.5	11307.2	11379.8	11390.1	11390.1	11390.1	11400.5	11307.2	11234.7	10975.6
10°	10654.3	10550.6	10778.6	11141.4	11317.6	11421.2	11607.8	11721.8	11649.2	11597.4	11245.0
12.5°	8736.9	8747.3	9110.0	9887.3	10592.1	10892.6	11670.0	12084.5	12115.6	12032.7	11587.0
15°	7410.3	7462.1	7648.7	8208.4	9016.8	9462.4	11307.2	12405.8	12654.5	12571.6	12001.6
17.5°	7006.1	7037.2	7120.1	7441.4	7897.4	8260.2	10322.6	12613.1	13307.5	13203.8	12468.0
20°	6943.9	6964.7	7068.3	7337.8	7648.7	7856.0	9317.3	12447.3	13919.0	13877.5	12892.9
22.5°	6954.3	6975.0	7109.8	7482.9	7804.2	7980.3	8996.0	12063.8	14561.5	14603.0	13328.2
25°	6975.0	6985.4	7192.7	7690.1	8094.3	8312.0	9203.3	11721.8	15100.5	15452.8	13805.0
27.5°	7089.0	7120.1	7400.0	7959.6	8436.4	8685.1	9690.4	11835.8	15691.2	16416.7	14375.0
30°	7400.0	7420.7	7762.7	8343.1	8861.3	9120.4	10270.8	12291.8	16416.7	17411.7	14934.6
32.5°	7887.1	7907.8	8301.6	8902.7	9462.4	9773.3	11027.4	13162.4	17225.1	18458.4	15494.3
35°	8560.7	8571.1	9016.8	9659.3	10250.1	10602.5	11908.3	14147.0	18064.6	19349.7	15908.9
37.5°	9358.8	9431.3	9887.3	10561.0	11255.4	11576.7	12944.7	15297.4	18810.8	20106.3	16147.2
40°	10457.4	10478.1	10923.7	11576.7	12312.5	12623.5	13981.1	16385.6	19629.6	20552.0	16364.9
42.5°	11587.0	11763.2	12136.3	12861.8	13411.1	13659.9	15162.7	17380.6	20282.5	20572.7	16271.6
45°	13100.2	13234.9	13608.0	14250.6	14799.9	15090.1	16437.4	18292.6	20614.2	20396.5	16064.3
47.5°	14831.0	14913.9	15214.5	15794.9	16406.3	16613.6	17764.0	18810.8	20738.5	20272.1	15971.0
50°	16872.7	16872.7	17090.4	17587.8	18147.5	18437.7	18987.0	19121.7	21101.3	20054.5	16209.4
52.5°	18593.2	18676.1	18966.3	19671.0	20230.7	20562.3	19940.5	19598.5	20365.4	18841.9	16282.0
55°	20241.1	20334.3	20987.3	21868.2	22821.7	23184.5	21132.4	19360.1	17888.4	17069.6	15784.5
57.5°	21816.4	22013.3	22832.1	24552.5	25993.1	25962.0	22645.5	17225.1	14603.0	15110.8	14696.3
60°	24013.6	24220.9	25526.7	27692.8	29454.7	28718.9	22666.2	14333.5	11379.8	12063.8	12654.5
62.5°	25848.0	26200.4	28117.8	31724.5	33341.3	32190.8	20790.3	10975.6	7555.4	8415.6	9783.7
65°	25682.2	26148.6	29123.1	34688.6	37103.4	36035.9	18043.9	6943.9	3896.9	5752.1	6850.7
67°	23422.8	23930.7	27786.1	34792.2	38450.7	36170.6	15235.2	4197.5	2477.0	3990.2	4757.1
67.5°	22127.3	22873.5	27122.8	34595.3	38202.0	35600.6	13970.8	3513.4	2331.9	3710.3	4332.2
70°	13608.0	14810.3	20355.1	30584.4	34242.9	29796.7	7762.7	1989.9	1896.6	2487.4	2995.2
72.5°	4093.8	4456.6	7856.0	19619.2	25132.9	22085.9	3492.7	1533.9	1699.7	2000.3	2311.2
75°	1989.9	2124.6	3244.0	8021.8	12240.0	12177.8	1948.4	1316.2	1575.3	1679.0	1824.1
77.5°	1274.8	1357.7	2021.0	4487.6	5607.0	4995.5	1409.5	1150.4	1399.2	1378.4	1357.7
80°	798.0	839.5	1295.5	2601.4	4135.3	3451.2	1036.4	943.1	1202.2	1067.5	963.9
82.5°	518.2	570.0	829.1	1585.7	2953.8	2570.3	684.0	673.7	995.0	849.9	746.2
85°	342.0	383.5	528.6	932.8	1751.5	1834.4	445.7	466.4	766.9	642.6	570.0
87.5°	124.4	155.5	269.5	414.6	818.8	1015.7	186.6	176.2	373.1	300.6	238.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1435230

CATALOG NUMBER: GALN-SB5D-727-U-T4LG

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6	10664.6
2.5°	10695.7	10664.6	10519.5	10395.2	10301.9	10177.5	10042.8	9887.3	9783.7	9804.4	9773.3
5°	10747.6	10664.6	10384.8	9959.9	9545.3	9027.1	8363.8	7970.0	7669.4	7514.0	7555.4
7.5°	10861.6	10716.5	10125.7	9265.5	8187.6	7130.5	6477.6	6104.4	5928.3	5855.7	5845.3
10°	11058.5	10809.7	9794.1	8187.6	6778.1	6063.0	5824.6	5721.0	5700.2	5700.2	5689.9
12.5°	11296.8	10903.0	9234.4	7140.9	6104.4	5845.3	5803.9	5814.2	5845.3	5876.4	5824.6
15°	11587.0	10944.5	8540.0	6508.6	5969.7	5907.5	5969.7	6042.3	6094.1	6135.5	6083.7
17.5°	11877.2	10903.0	7887.1	6208.1	5990.4	6073.4	6197.7	6311.7	6342.8	6405.0	6363.5
20°	12084.5	10757.9	7327.4	6094.1	6042.3	6228.8	6384.3	6508.6	6570.8	6612.3	6570.8
22.5°	12240.0	10571.4	6923.2	5980.1	6042.3	6270.3	6456.8	6601.9	6674.5	6715.9	6664.1
25°	12374.7	10312.3	6612.3	5814.2	5917.9	6135.5	6342.8	6487.9	6591.6	6653.7	6622.6
27.5°	12540.5	10105.0	6322.1	5565.5	5658.8	5866.1	6083.7	6259.9	6456.8	6560.5	6539.7
30°	12727.1	10001.3	6042.3	5296.0	5358.2	5565.5	5824.6	6063.0	6332.5	6467.2	6467.2
32.5°	12944.7	9928.8	5783.2	5036.9	5088.8	5316.8	5565.5	5783.2	6073.4	6291.0	6280.6
35°	13038.0	9845.9	5575.9	4798.6	4902.2	5088.8	5285.7	5430.8	5731.3	5990.4	6011.2
37.5°	13131.3	9814.8	5472.2	4612.0	4694.9	4840.0	4943.7	5016.2	5296.0	5565.5	5575.9
40°	13245.3	9959.9	5544.8	4487.6	4415.1	4560.2	4612.0	4653.5	4798.6	4974.8	4974.8
42.5°	13172.7	10063.5	5710.6	4373.6	4073.1	4238.9	4259.6	4249.3	4259.6	4270.0	4259.6
45°	12986.2	9959.9	5710.6	4197.5	3710.3	3886.5	3876.2	3824.3	3741.4	3523.8	3492.7
47.5°	12944.7	9897.7	5493.0	3907.3	3347.6	3492.7	3513.4	3409.8	3171.4	2943.4	2870.9
50°	13120.9	10011.7	5150.9	3554.9	3036.7	3161.0	3212.9	3036.7	2767.2	2528.8	2487.4
52.5°	13380.0	10156.8	4653.5	3171.4	2777.6	2901.9	2964.1	2767.2	2487.4	2300.8	2280.1
55°	13348.9	10156.8	4093.8	2819.0	2580.7	2673.9	2777.6	2570.3	2352.6	2249.0	2238.6
57.5°	12675.3	9773.3	3679.2	2570.3	2394.1	2477.0	2611.7	2414.8	2207.5	2228.3	2259.4
60°	11359.0	8778.4	3368.3	2404.5	2228.3	2311.2	2456.3	2228.3	1958.8	1886.3	1886.3
62.5°	9358.8	7234.1	3119.6	2238.6	2072.8	2176.5	2249.0	1948.4	1772.3	1689.3	1689.3
65°	7016.5	5596.6	2860.5	2103.9	1938.1	2052.1	1969.2	1824.1	1647.9	1585.7	1596.1
67°	5202.8	4342.6	2642.8	1989.9	1855.2	1907.0	1844.8	1741.2	1565.0	1513.2	1565.0
67.5°	4674.2	4124.9	2591.0	1958.8	1834.4	1875.9	1813.7	1730.8	1544.2	1492.4	1544.2
70°	3212.9	3171.4	2311.2	1813.7	1720.4	1679.0	1710.1	1606.4	1451.0	1430.2	1482.1
72.5°	2445.9	2528.8	2072.8	1689.3	1596.1	1544.2	1616.8	1513.2	1357.7	1388.8	1440.6
75°	1917.4	2041.7	1855.2	1513.2	1451.0	1461.3	1606.4	1565.0	1440.6	1471.7	1482.1
77.5°	1419.9	1647.9	1585.7	1316.2	1264.4	1409.5	1813.7	1938.1	1720.4	1668.6	1596.1
80°	1036.4	1181.5	1337.0	1088.2	1057.1	1357.7	2238.6	2477.0	2124.6	1917.4	1865.5
82.5°	766.9	829.1	1098.6	870.6	766.9	1212.6	2487.4	2912.3	2528.8	2135.0	2072.8
85°	549.3	642.6	870.6	642.6	507.8	995.0	2435.6	2850.1	2508.1	2021.0	1969.2
87.5°	196.9	279.8	373.1	290.2	259.1	684.0	2010.6	2052.1	1565.0	715.1	725.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-3

Test Date: 10/09/2024

Luminaire Tested: GSS-SB1A-727-U-5WQ

Data in this report applies to families of products including GSS-SB1A-727-U-5WQ

**Test Information**

Test Method: LM-79-2019  
 Report Number: SP1-2407-184-3  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 10/15/2024  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: McGraw-Edison  
 Catalog Number: **GSS-SB1A-727-U-5WQ**  
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI 2700K CCT 26 LEDS

**Spectral Parameters**

CCT (K): 2672  
 CIE u': 0.2638  
 CIE v': 0.5276  
 Duv: -0.0002  
 CIE x: 0.4619  
 CIE y: 0.4106  
 CIE z: 0.1275  
 Peak Wavelength (nm): 601  
 Dominant Wavelength (nm): 584  
 Purity: 61.88407  
 Rf: 67.9  
 Rg: 98.6

CRI (Ra):	71.1		
R1:	68.3	R9:	-27.8
R2:	79.8	R10:	54.4
R3:	91.2	R11:	65.8
R4:	69.4	R12:	45.6
R5:	66.5	R13:	69.8
R6:	72.6	R14:	94.5
R7:	77.0	R15:	60.1
R8:	44.1		



**Test Conditions**

Stabilization Time: 21M  
 Operation Time: 1H 21M  
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-3

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-3

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 2700K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-3

**Photopic Flux vs. Wavelength**



**Photopic Lumens: NR**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	52	NR	620	888	NR	750	27	NR	880	1	NR
365	0	NR	495	87	NR	625	834	NR	755	23	NR	885	1	NR
370	0	NR	500	135	NR	630	776	NR	760	20	NR	890	1	NR
375	0	NR	505	196	NR	635	712	NR	765	17	NR	895	0	NR
380	0	NR	510	258	NR	640	648	NR	770	15	NR	900	0	NR
385	1	NR	515	317	NR	645	583	NR	775	12	NR	905	0	NR
390	2	NR	520	368	NR	650	523	NR	780	11	NR	910	0	NR
395	4	NR	525	408	NR	655	465	NR	785	9	NR	915	0	NR
400	6	NR	530	443	NR	660	410	NR	790	8	NR	920	0	NR
405	11	NR	535	473	NR	665	360	NR	795	7	NR	925	0	NR
410	23	NR	540	498	NR	670	313	NR	800	6	NR	930	0	NR
415	51	NR	545	530	NR	675	272	NR	805	5	NR	935	0	NR
420	111	NR	550	563	NR	680	236	NR	810	4	NR	940	0	NR
425	214	NR	555	605	NR	685	203	NR	815	4	NR	945	0	NR
430	339	NR	560	651	NR	690	175	NR	820	3	NR	950	0	NR
435	467	NR	565	705	NR	695	150	NR	825	3	NR	955	0	NR
440	535	NR	570	765	NR	700	128	NR	830	3	NR	960	0	NR
445	372	NR	575	824	NR	705	110	NR	835	2	NR	965	0	NR
450	160	NR	580	882	NR	710	94	NR	840	2	NR	970	0	NR
455	89	NR	585	930	NR	715	80	NR	845	2	NR	975	0	NR
460	53	NR	590	968	NR	720	69	NR	850	1	NR	980	0	NR
465	31	NR	595	991	NR	725	59	NR	855	1	NR	985	0	NR
470	23	NR	600	999	NR	730	50	NR	860	1	NR	990	0	NR
475	21	NR	605	992	NR	735	43	NR	865	1	NR	995	0	NR
480	23	NR	610	969	NR	740	36	NR	870	1	NR	1000	0	NR
485	32	NR	615	935	NR	745	31	NR	875	1	NR			

REPORT NUMBER: SP1-2407-184-3

**Scotopic Flux vs. Wavelength**



**Scotopic Lumens: NR**

**S/P: 1.02**

$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)
360	0	NR	490	52	NR	620	888	NR	750	27	NR	880	1	NR
365	0	NR	495	87	NR	625	834	NR	755	23	NR	885	1	NR
370	0	NR	500	135	NR	630	776	NR	760	20	NR	890	1	NR
375	0	NR	505	196	NR	635	712	NR	765	17	NR	895	0	NR
380	0	NR	510	258	NR	640	648	NR	770	15	NR	900	0	NR
385	1	NR	515	317	NR	645	583	NR	775	12	NR	905	0	NR
390	2	NR	520	368	NR	650	523	NR	780	11	NR	910	0	NR
395	4	NR	525	408	NR	655	465	NR	785	9	NR	915	0	NR
400	6	NR	530	443	NR	660	410	NR	790	8	NR	920	0	NR
405	11	NR	535	473	NR	665	360	NR	795	7	NR	925	0	NR
410	23	NR	540	498	NR	670	313	NR	800	6	NR	930	0	NR
415	51	NR	545	530	NR	675	272	NR	805	5	NR	935	0	NR
420	111	NR	550	563	NR	680	236	NR	810	4	NR	940	0	NR
425	214	NR	555	605	NR	685	203	NR	815	4	NR	945	0	NR
430	339	NR	560	651	NR	690	175	NR	820	3	NR	950	0	NR
435	467	NR	565	705	NR	695	150	NR	825	3	NR	955	0	NR
440	535	NR	570	765	NR	700	128	NR	830	3	NR	960	0	NR
445	372	NR	575	824	NR	705	110	NR	835	2	NR	965	0	NR
450	160	NR	580	882	NR	710	94	NR	840	2	NR	970	0	NR
455	89	NR	585	930	NR	715	80	NR	845	2	NR	975	0	NR
460	53	NR	590	968	NR	720	69	NR	850	1	NR	980	0	NR
465	31	NR	595	991	NR	725	59	NR	855	1	NR	985	0	NR
470	23	NR	600	999	NR	730	50	NR	860	1	NR	990	0	NR
475	21	NR	605	992	NR	735	43	NR	865	1	NR	995	0	NR
480	23	NR	610	969	NR	740	36	NR	870	1	NR	1000	0	NR
485	32	NR	615	935	NR	745	31	NR	875	1	NR			

REPORT NUMBER: SP1-2407-184-3

**Melanopic Flux vs. Wavelength**



**Melanopic Lumens: NR**

**M/P: 1.71**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	52	NR	620	888	NR	750	27	NR	880	1	NR
365	0	NR	495	87	NR	625	834	NR	755	23	NR	885	1	NR
370	0	NR	500	135	NR	630	776	NR	760	20	NR	890	1	NR
375	0	NR	505	196	NR	635	712	NR	765	17	NR	895	0	NR
380	0	NR	510	258	NR	640	648	NR	770	15	NR	900	0	NR
385	1	NR	515	317	NR	645	583	NR	775	12	NR	905	0	NR
390	2	NR	520	368	NR	650	523	NR	780	11	NR	910	0	NR
395	4	NR	525	408	NR	655	465	NR	785	9	NR	915	0	NR
400	6	NR	530	443	NR	660	410	NR	790	8	NR	920	0	NR
405	11	NR	535	473	NR	665	360	NR	795	7	NR	925	0	NR
410	23	NR	540	498	NR	670	313	NR	800	6	NR	930	0	NR
415	51	NR	545	530	NR	675	272	NR	805	5	NR	935	0	NR
420	111	NR	550	563	NR	680	236	NR	810	4	NR	940	0	NR
425	214	NR	555	605	NR	685	203	NR	815	4	NR	945	0	NR
430	339	NR	560	651	NR	690	175	NR	820	3	NR	950	0	NR
435	467	NR	565	705	NR	695	150	NR	825	3	NR	955	0	NR
440	535	NR	570	765	NR	700	128	NR	830	3	NR	960	0	NR
445	372	NR	575	824	NR	705	110	NR	835	2	NR	965	0	NR
450	160	NR	580	882	NR	710	94	NR	840	2	NR	970	0	NR
455	89	NR	585	930	NR	715	80	NR	845	2	NR	975	0	NR
460	53	NR	590	968	NR	720	69	NR	850	1	NR	980	0	NR
465	31	NR	595	991	NR	725	59	NR	855	1	NR	985	0	NR
470	23	NR	600	999	NR	730	50	NR	860	1	NR	990	0	NR
475	21	NR	605	992	NR	735	43	NR	865	1	NR	995	0	NR
480	23	NR	610	969	NR	740	36	NR	870	1	NR	1000	0	NR
485	32	NR	615	935	NR	745	31	NR	875	1	NR			

**Summary**

$R_f = 67.9$   
 $R_g = 98.6$   
 $CIE R_a = 71.1$   
 $R_9 = -27.8$



**Color Vector Graphics**



Individual Sample Fidelity Index ( $R_{f,i}$ )

CES01 = 86	CES26 = 53	CES51 = 75	CES76 = 51
CES02 = 63	CES27 = 70	CES52 = 80	CES77 = 79
CES03 = 31	CES28 = 81	CES53 = 64	CES78 = 58
CES04 = 71	CES29 = 37	CES54 = 73	CES79 = 82
CES05 = 50	CES30 = 33	CES55 = 69	CES80 = 82
CES06 = 52	CES31 = 44	CES56 = 60	CES81 = 69
CES07 = 42	CES32 = 47	CES57 = 54	CES82 = 92
CES08 = 41	CES33 = 45	CES58 = 59	CES83 = 82
CES09 = 29	CES34 = 67	CES59 = 85	CES84 = 92
CES10 = 77	CES35 = 84	CES60 = 86	CES85 = 87
CES11 = 60	CES36 = 68	CES61 = 86	CES86 = 60
CES12 = 66	CES37 = 77	CES62 = 59	CES87 = 79
CES13 = 44	CES38 = 40	CES63 = 66	CES88 = 70
CES14 = 74	CES39 = 88	CES64 = 69	CES89 = 66
CES15 = 72	CES40 = 82	CES65 = 64	CES90 = 64
CES16 = 48	CES41 = 70	CES66 = 65	CES91 = 81
CES17 = 51	CES42 = 76	CES67 = 64	CES92 = 69
CES18 = 57	CES43 = 63	CES68 = 73	CES93 = 81
CES19 = 73	CES44 = 97	CES69 = 83	CES94 = 53
CES20 = 67	CES45 = 74	CES70 = 64	CES95 = 77
CES21 = 88	CES46 = 67	CES71 = 60	CES96 = 79
CES22 = 80	CES47 = 55	CES72 = 87	CES97 = 78
CES23 = 92	CES48 = 42	CES73 = 57	CES98 = 69
CES24 = 92	CES49 = 65	CES74 = 84	CES99 = 60
CES25 = 73	CES50 = 74	CES75 = 60	



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)