

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P955256

Luminaire Tested: **GALN-SB8B-735-U-SLL**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P955256
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: GALN-SB8B-735-U-SLL
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(8) 70 CRI, 3500K, 450mA LIGHTSQUARES WITH 26 LEDS EACH AND SPILL LIGHT
ELIMINATOR LEFT OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 45370 lumens
Efficiency: N/A
Efficacy: 155.0 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B4 - U0 - G5


Input Watts (W): 292.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P955256
 CATALOG NUMBER: GALN-SB8B-735-U-SLL

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

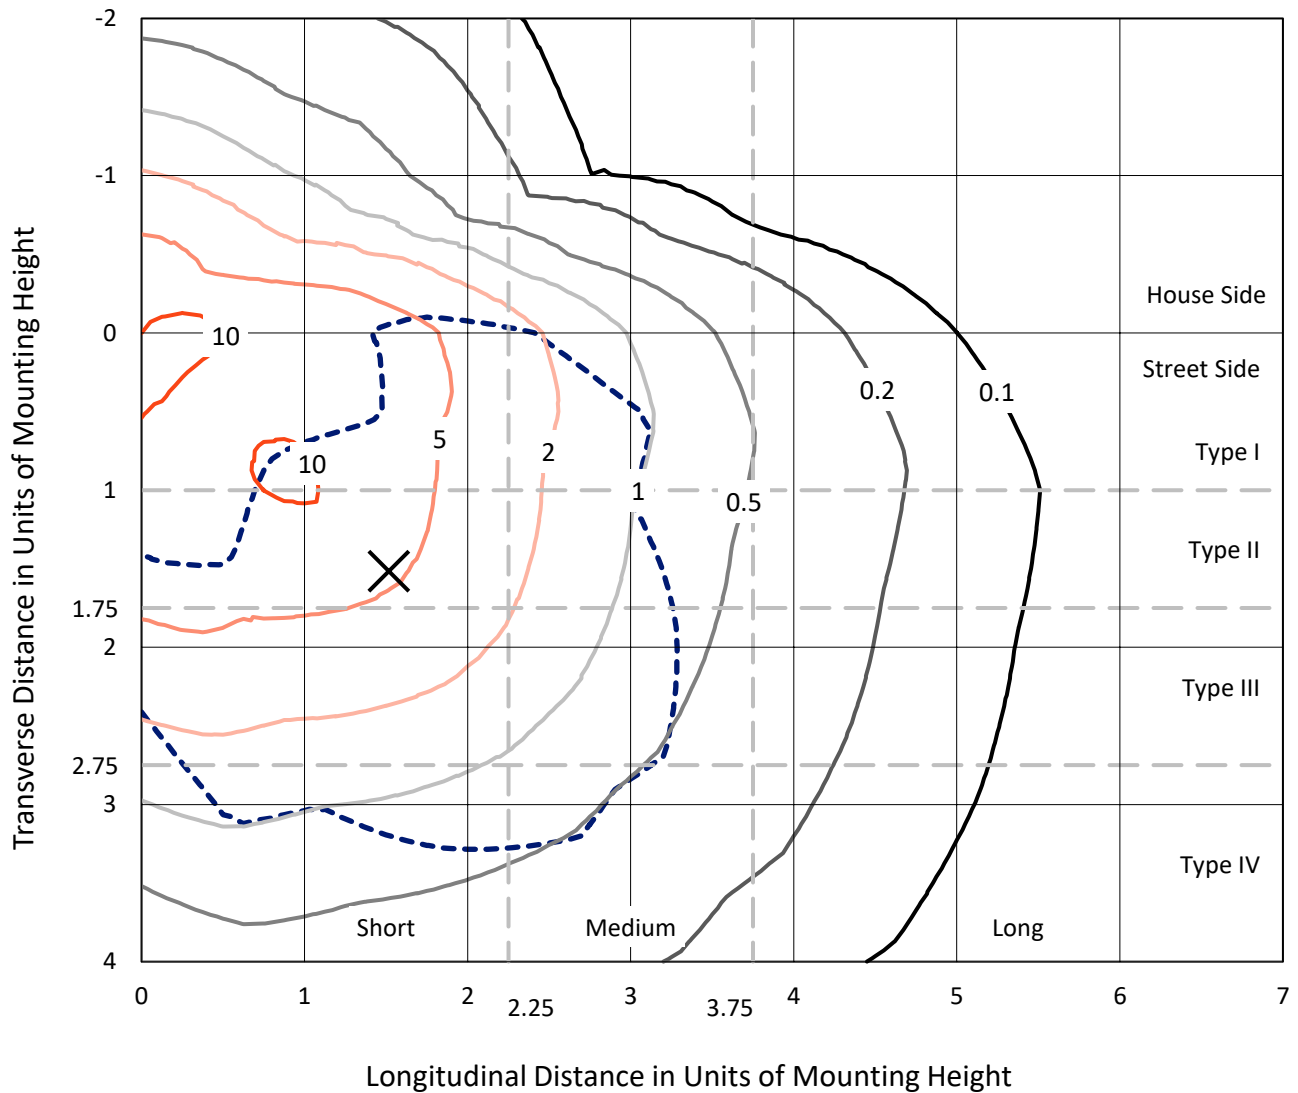

Based on 25 foot mounting height. Maximum calculated value = 13.8 fc
 Type IV - Short - N/A

REPORT NUMBER: P955256
CATALOG NUMBER: GALN-SB8B-735-U-SLL

Luminous Intensity Polar Plot

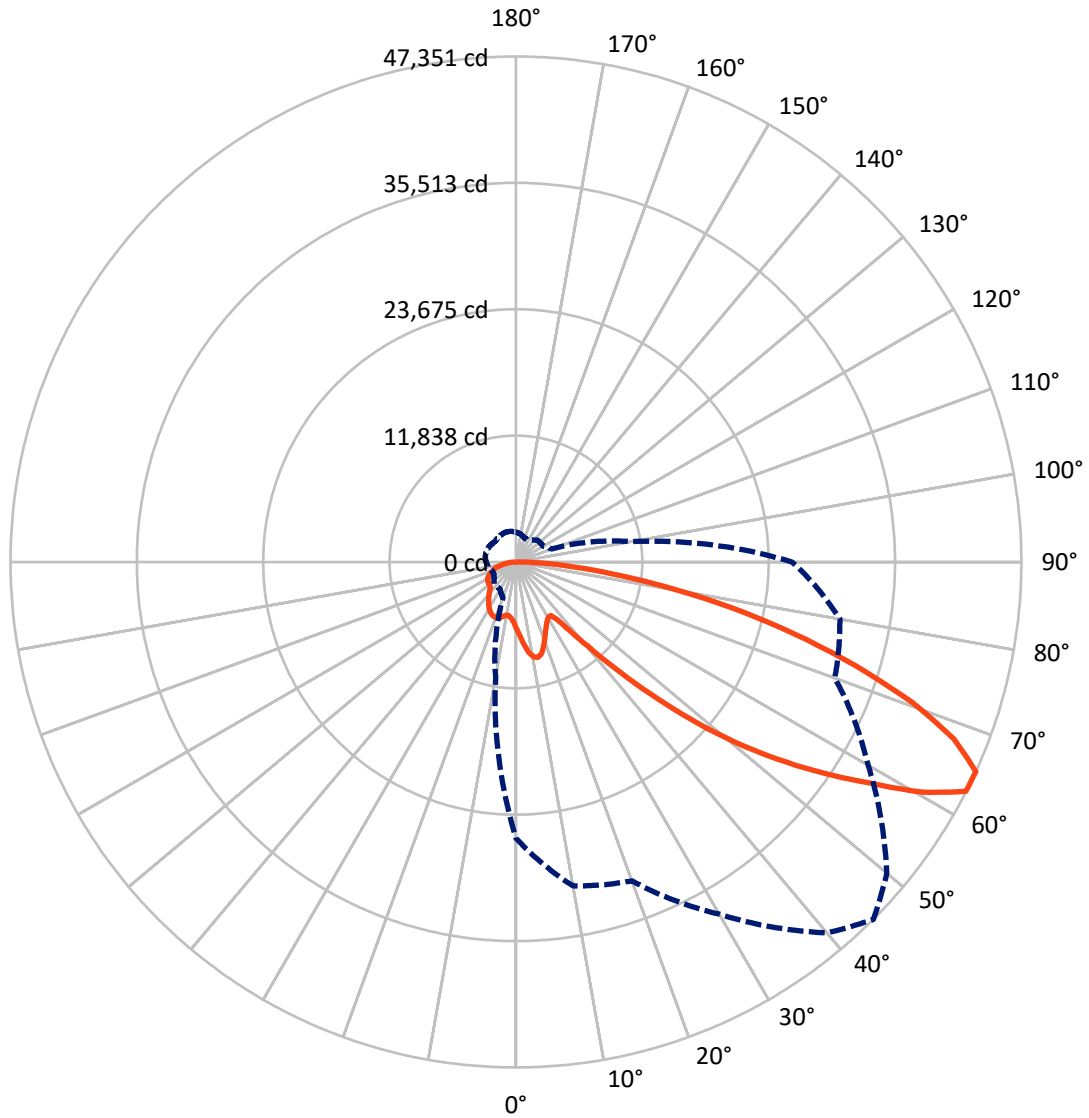

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 65-Deg Vertical

REPORT NUMBER: P955256

CATALOG NUMBER: GALN-SB8B-735-U-SLL

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	11530.8	0.0	11530.8
	% Fixture	25.4	0.0	25.4
Street Side	Lumens	33839.2	0.0	33839.2
	% Fixture	74.6	0.0	74.6
Total	Lumens	45370.0	0.0	45370.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	618.9	1.4
10°-20°	1942.8	4.3
20°-30°	3000.9	6.6
30°-40°	3802.9	8.4
40°-50°	5735.8	12.6
50°-60°	9267.1	20.4
60°-70°	11552.9	25.5
70°-80°	7575.8	16.7
80°-90°	1872.9	4.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	45370.0	100.0
0°-180°	45370.0	100.0

Coefficient of Utilization




REPORT NUMBER: P955256
 CATALOG NUMBER: GALN-SB8B-735-U-SLL

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	3051.7	6.7			
FM (30°-60°)	13233.4	29.2			
FH (60°-80°)	16011.3	35.3			G5
FVH (80°-90°)	1542.9	3.4			G5
BL (0°-30°)	2511.0	5.5	B4/5000		
BM (30°-60°)	5572.4	12.3	B4/8500		
BH (60°-80°)	3117.4	6.9	B4/5000		G4/5000
BVH (80°-90°)	330.0	0.7			G3/500
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B4-U0-G5

Type IV Short

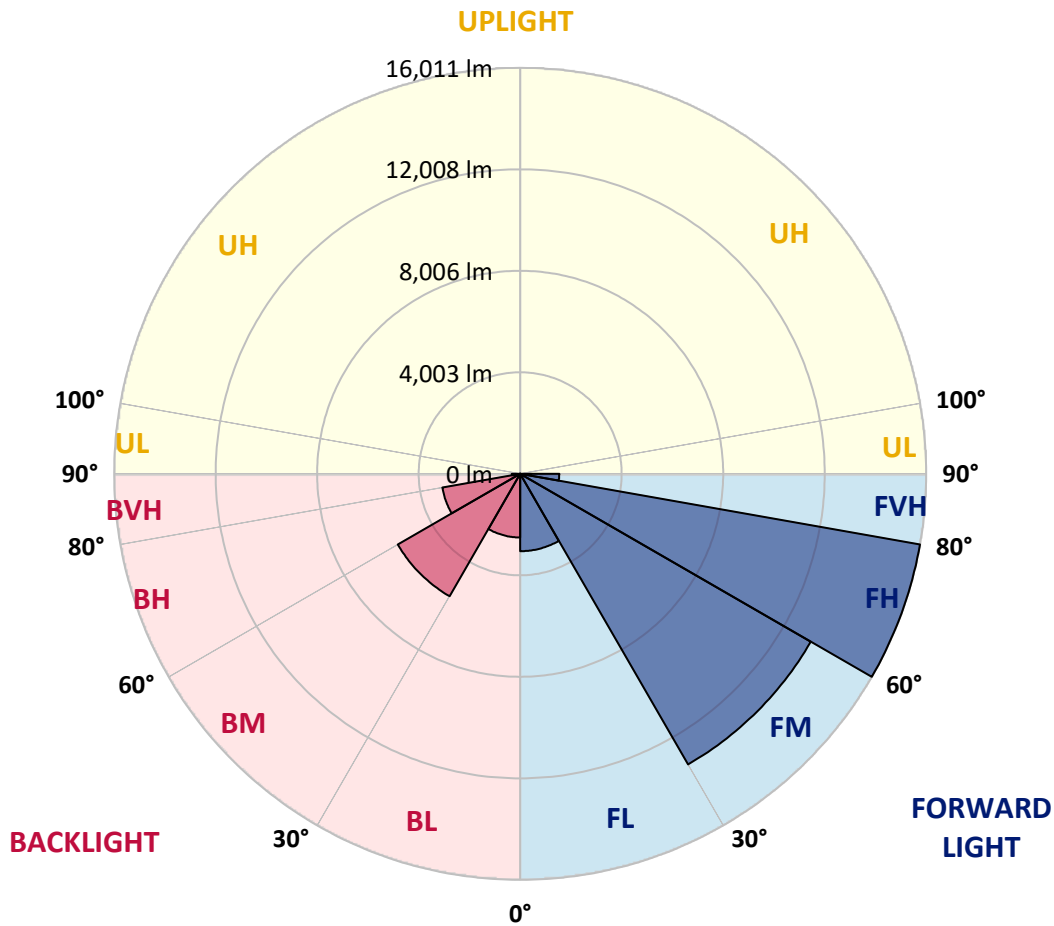

REPORT NUMBER: P955256
 CATALOG NUMBER: GALN-SB8B-735-U-SLL

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°
0°	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8
2.5°	6709.2	6734.6	6760.2	6796.3	6832.5	6854.0	6875.6	6886.3	6897.1	6892.3
5°	7214.3	7303.1	7392.2	7480.3	7568.6	7616.5	7664.4	7693.4	7722.6	7744.6
7.5°	7721.8	7866.4	8010.8	8140.8	8270.8	8349.1	8427.4	8469.7	8511.9	8532.2
10°	8110.9	8281.8	8452.7	8605.2	8757.7	8850.1	8942.1	8983.2	9024.2	9039.7
12.5°	8349.1	8534.4	8719.4	8857.3	8994.7	9061.8	9128.8	9151.3	9173.8	9176.2
15°	8493.9	8653.8	8813.5	8899.9	8986.6	8989.0	8991.4	8967.4	8943.5	8915.3
17.5°	8575.3	8683.3	8791.2	8792.9	8794.4	8697.4	8600.4	8511.6	8422.6	8359.9
20°	8665.1	8702.7	8740.5	8626.8	8513.1	8299.0	8085.0	7929.2	7773.3	7677.6
22.5°	8769.2	8719.9	8670.6	8435.0	8199.5	7884.6	7569.8	7375.0	7180.1	7074.3
25°	8903.3	8747.7	8592.1	8234.4	7876.7	7494.4	7112.1	6907.2	6702.7	6602.7
27.5°	9085.2	8807.0	8528.6	8054.9	7581.3	7157.6	6733.8	6532.3	6330.9	6236.4
30°	9330.6	8915.7	8501.1	7917.9	7334.7	6893.3	6451.8	6264.9	6077.9	5989.8
32.5°	9620.3	9052.2	8484.3	7824.6	7164.8	6749.9	6335.0	6188.3	6041.3	5977.8
35°	9972.2	9277.0	8582.0	7894.5	7207.1	6918.9	6630.9	6596.7	6562.4	6557.2
37.5°	10564.7	9746.9	8929.1	8304.3	7679.5	7660.8	7642.1	7798.7	7955.3	8036.7
40°	11460.1	10570.7	9681.3	9216.7	8752.0	9080.0	9407.9	9788.6	10169.2	10358.8
42.5°	12647.5	11765.1	10882.6	10615.0	10347.3	11062.7	11778.0	12470.3	13162.7	13569.2
45°	14113.8	13321.2	12528.3	12410.3	12292.0	13438.0	14584.3	15721.9	16859.7	17550.4
47.5°	15947.6	15176.5	14405.2	14381.2	14357.3	16010.6	17663.4	19328.9	20994.2	21972.1
50°	18351.2	17398.6	16446.3	16450.4	16454.4	18585.1	20715.8	22914.2	25112.6	26441.7
52.5°	21110.3	19956.9	18803.7	18687.1	18570.3	21115.3	23660.4	26380.5	29100.3	30693.5
55°	24047.7	22908.2	21768.6	21314.0	20859.4	23692.0	26524.3	29767.0	33009.7	34904.5
57.5°	26719.4	26098.9	25478.2	24566.3	23654.6	26514.8	29374.9	33047.7	36720.4	39070.1
60°	28334.2	29298.0	30262.1	29129.7	27997.4	30704.0	33410.7	37343.1	41275.4	43815.0
62.5°	27514.2	30147.9	32781.5	32653.9	32526.1	35005.6	37485.3	41226.6	44967.7	47315.0
65°	25873.2	28345.0	30816.8	31305.9	31794.7	34945.7	38096.9	41724.8	45352.4	47350.9
67.5°	23674.3	26025.2	28376.1	28605.4	28834.5	32117.7	35400.6	39044.0	42687.4	44253.1
70°	21032.5	23589.5	26146.8	26249.3	26352.0	29288.0	32223.7	35359.2	38494.3	39364.6
72.5°	17884.4	20818.7	23753.3	23827.0	23900.5	26197.5	28494.6	30842.9	33190.9	33279.0
75°	13902.0	16939.0	19976.0	20248.7	20521.4	22308.5	24095.6	25748.7	27401.7	26958.8
77.5°	9932.7	12767.7	15602.9	15993.1	16383.3	17741.9	19100.5	20272.9	21445.5	20684.2
80°	6500.9	8886.1	11271.0	11756.0	12241.0	13267.1	14292.7	14908.4	15523.9	14299.4
82.5°	3778.9	5409.5	7040.3	7582.0	8124.0	8830.3	9536.5	9793.4	10050.0	9087.6
85°	1662.6	2528.1	3393.5	3854.3	4315.2	4895.5	5475.6	5621.4	5767.1	4996.3
87.5°	514.7	805.6	1096.5	1353.6	1610.7	1900.8	2191.0	2203.4	2215.6	1860.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P955256
 CATALOG NUMBER: GALN-SB8B-735-U-SLL

CANDELA DISTRIBUTION (continued):

50°		55°	60°	65°	70°	75°	80°	85°	90°	95°	100°
6238.8	0°	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8
6897.1	2.5°	6886.3	6875.6	6854.0	6832.5	6796.3	6760.2	6734.6	6709.2	6657.7	6606.2
7722.6	5°	7693.4	7664.4	7616.5	7568.6	7480.3	7392.2	7303.1	7214.3	7100.6	6986.9
8511.9	7.5°	8469.7	8427.4	8349.1	8270.8	8140.8	8010.8	7866.4	7721.8	7534.2	7346.7
9024.2	10°	8983.2	8942.1	8850.1	8757.7	8605.2	8452.7	8281.8	8110.9	7873.6	7636.4
9173.8	12.5°	9151.3	9128.8	9061.8	8994.7	8857.3	8719.4	8534.4	8349.1	8088.4	7827.9
8943.5	15°	8967.4	8991.4	8989.0	8986.6	8899.9	8813.5	8653.8	8493.9	8222.2	7950.5
8422.6	17.5°	8511.6	8600.4	8697.4	8794.4	8792.9	8791.2	8683.3	8575.3	8299.8	8024.2
7773.3	20°	7929.2	8085.0	8299.0	8513.1	8626.8	8740.5	8702.7	8665.1	8378.8	8092.2
7180.1	22.5°	7375.0	7569.8	7884.6	8199.5	8435.0	8670.6	8719.9	8769.2	8476.7	8183.9
6702.7	25°	6907.2	7112.1	7494.4	7876.7	8234.4	8592.1	8747.7	8903.3	8616.5	8329.9
6330.9	27.5°	6532.3	6733.8	7157.6	7581.3	8054.9	8528.6	8807.0	9085.2	8811.8	8538.2
6077.9	30°	6264.9	6451.8	6893.3	7334.7	7917.9	8501.1	8915.7	9330.6	9066.3	8802.3
6041.3	32.5°	6188.3	6335.0	6749.9	7164.8	7824.6	8484.3	9052.2	9620.3	9358.6	9097.2
6562.4	35°	6596.7	6630.9	6918.9	7207.1	7894.5	8582.0	9277.0	9972.2	9721.8	9471.1
7955.3	37.5°	7798.7	7642.1	7660.8	7679.5	8304.3	8929.1	9746.9	10564.7	10245.4	9926.0
10169.2	40°	9788.6	9407.9	9080.0	8752.0	9216.7	9681.3	10570.7	11460.1	10994.7	10529.3
13162.7	42.5°	12470.3	11778.0	11062.7	10347.3	10615.0	10882.6	11765.1	12647.5	11975.7	11304.0
16859.7	45°	15721.9	14584.3	13438.0	12292.0	12410.3	12528.3	13321.2	14113.8	13207.7	12301.6
20994.2	47.5°	19328.9	17663.4	16010.6	14357.3	14381.2	14405.2	15176.5	15947.6	14672.4	13396.8
25112.6	50°	22914.2	20715.8	18585.1	16454.4	16450.4	16446.3	17398.6	18351.2	16428.6	14505.7
29100.3	52.5°	26380.5	23660.4	21115.3	18570.3	18687.1	18803.7	19956.9	21110.3	18273.4	15436.5
33009.7	55°	29767.0	26524.3	23692.0	20859.4	21314.0	21768.6	22908.2	24047.7	19909.0	15770.5
36720.4	57.5°	33047.7	29374.9	26514.8	23654.6	24566.3	25478.2	26098.9	26719.4	21068.2	15416.9
41275.4	60°	37343.1	33410.7	30704.0	27997.4	29129.7	30262.1	29298.0	28334.2	21357.8	14381.2
44967.7	62.5°	41226.6	37485.3	35005.6	32526.1	32653.9	32781.5	30147.9	27514.2	20138.1	12761.9
45352.4	65°	41724.8	38096.9	34945.7	31794.7	31305.9	30816.8	28345.0	25873.2	18412.3	10951.4
42687.4	67.5°	39044.0	35400.6	32117.7	28834.5	28605.4	28376.1	26025.2	23674.3	16358.4	9042.6
38494.3	70°	35359.2	32223.7	29288.0	26352.0	26249.3	26146.8	23589.5	21032.5	14117.4	7202.4
33190.9	72.5°	30842.9	28494.6	26197.5	23900.5	23827.0	23753.3	20818.7	17884.4	11688.0	5491.8
27401.7	75°	25748.7	24095.6	22308.5	20521.4	20248.7	19976.0	16939.0	13902.0	8903.0	3904.1
21445.5	77.5°	20272.9	19100.5	17741.9	16383.3	15993.1	15602.9	12767.7	9932.7	6231.3	2530.0
15523.9	80°	14908.4	14292.7	13267.1	12241.0	11756.0	11271.0	8886.1	6500.9	4014.7	1528.6
10050.0	82.5°	9793.4	9536.5	8830.3	8124.0	7582.0	7040.3	5409.5	3778.9	2323.6	868.5
5767.1	85°	5621.4	5475.6	4895.5	4315.2	3854.3	3393.5	2528.1	1662.6	1045.2	428.0
2215.6	87.5°	2203.4	2191.0	1900.8	1610.7	1353.6	1096.5	805.6	514.7	342.3	170.0
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P955256
 CATALOG NUMBER: GALN-SB8B-735-U-SLL

CANDELA DISTRIBUTION (continued):

105°		110°	115°	120°	125°	130°	135°	140°	145°	150°	155°
6238.8	0°	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8
6551.4	2.5°	6496.8	6441.8	6386.7	6334.0	6281.4	6230.4	6173.6	6127.7	6082.0	6040.5
6873.4	5°	6760.2	6646.0	6532.0	6425.5	6319.0	6218.4	6119.1	6032.4	5945.5	5872.7
7173.4	7.5°	7000.1	6831.3	6662.5	6513.8	6365.2	6228.0	6099.4	5984.0	5868.9	5773.1
7407.3	10°	7178.4	6973.5	6768.3	6592.6	6416.4	6247.1	6109.0	5987.4	5865.8	5770.0
7568.4	12.5°	7308.9	7067.1	6825.3	6626.4	6427.4	6249.5	6121.0	6021.4	5922.3	5858.6
7668.9	15°	7387.4	7109.0	6830.6	6600.3	6370.0	6172.9	6070.0	6022.3	5974.9	5983.6
7717.1	17.5°	7409.9	7086.7	6763.5	6486.5	6209.6	5977.8	5914.4	5931.9	5949.1	6053.5
7754.6	20°	7417.1	7025.4	6633.8	6290.5	5947.2	5677.4	5660.6	5742.0	5823.4	6004.6
7805.4	22.5°	7426.7	6950.3	6473.9	6060.4	5647.0	5339.8	5372.6	5493.0	5613.5	5820.3
7897.3	25°	7464.5	6876.0	6287.8	5803.5	5319.5	5004.7	5093.2	5232.1	5370.9	5557.0
8041.0	27.5°	7543.5	6826.5	6109.5	5568.7	5027.9	4741.3	4849.0	4983.1	5117.2	5270.2
8227.0	30°	7651.7	6803.3	5954.4	5372.4	4790.4	4549.8	4634.3	4740.6	4847.4	4974.3
8421.1	32.5°	7745.1	6774.5	5803.5	5203.1	4602.5	4408.6	4446.1	4509.1	4572.1	4673.3
8642.3	35°	7813.5	6720.4	5627.8	5036.7	4445.7	4284.1	4268.5	4285.7	4303.2	4380.5
8890.1	37.5°	7854.2	6627.8	5401.3	4840.9	4280.5	4139.2	4082.2	4063.1	4043.9	4099.5
9204.7	40°	7879.9	6500.2	5120.8	4607.3	4093.7	3965.7	3878.3	3834.9	3791.6	3831.6
9616.2	42.5°	7928.5	6368.5	4809.1	4349.4	3889.8	3771.7	3661.6	3604.2	3546.7	3579.3
10157.7	45°	8013.9	6246.2	4478.7	4075.5	3672.4	3552.7	3446.2	3390.1	3334.4	3361.7
10734.7	47.5°	8072.6	6145.2	4217.8	3858.9	3500.0	3345.6	3253.9	3207.0	3160.1	3185.9
11270.0	50°	8034.3	6035.0	4035.8	3715.0	3394.2	3191.2	3084.7	3043.0	3001.6	3041.8
11617.6	52.5°	7798.5	5849.0	3899.8	3620.2	3340.8	3107.4	2958.5	2917.3	2876.4	2937.0
11541.0	55°	7311.3	5540.7	3770.1	3551.5	3332.9	3115.8	2891.5	2826.4	2761.5	2847.4
11001.9	57.5°	6587.1	5105.9	3624.5	3470.1	3315.7	3124.2	2851.3	2756.5	2661.6	2754.1
9998.5	60°	5615.8	4541.4	3467.0	3345.6	3224.2	3097.8	2813.4	2690.6	2567.6	2648.7
8641.9	62.5°	4521.8	3865.8	3209.9	3129.2	3048.8	3033.2	2769.4	2615.7	2462.2	2513.7
7257.7	65°	3564.2	3258.0	2951.8	2913.7	2875.7	2877.6	2676.5	2513.2	2349.7	2369.6
5901.7	67.5°	2760.8	2673.9	2586.7	2608.0	2629.1	2623.8	2510.8	2374.8	2238.9	2232.6
4646.8	70°	2091.2	2116.1	2140.7	2239.3	2337.7	2337.7	2300.6	2203.9	2107.2	2085.7
3552.5	72.5°	1613.1	1688.0	1763.2	1903.0	2042.6	2066.0	2066.5	2000.2	1933.9	1902.3
2578.3	75°	1252.5	1320.5	1388.5	1545.1	1701.7	1809.9	1800.8	1749.8	1698.5	1668.4
1747.1	77.5°	964.3	1010.5	1057.0	1209.0	1361.0	1539.3	1534.6	1493.6	1452.7	1422.0
1125.7	80°	723.0	742.1	761.3	890.1	1018.6	1231.7	1231.0	1196.8	1162.3	1136.7
692.3	82.5°	516.6	520.0	523.8	618.6	713.4	895.4	905.4	888.7	871.9	853.7
370.1	85°	312.4	310.7	308.8	378.3	447.7	582.9	596.1	578.2	560.2	539.8
153.5	87.5°	136.9	135.3	133.6	161.8	190.3	246.6	263.3	256.2	249.0	245.1
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P955256
 CATALOG NUMBER: GALN-SB8B-735-U-SLL

CANDELA DISTRIBUTION (continued):

160°		165°	170°	175°	180°	185°	190°	195°	200°	205°	210°
6238.8	0°	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8
5999.4	2.5°	5963.2	5927.1	5890.7	5854.5	5826.5	5798.3	5775.5	5752.8	5735.1	5717.4
5800.2	5°	5736.0	5671.9	5613.7	5555.3	5510.5	5465.5	5434.1	5402.8	5380.5	5358.3
5677.4	7.5°	5596.7	5515.8	5444.4	5373.3	5319.9	5266.8	5229.5	5192.1	5166.5	5141.1
5674.3	10°	5587.4	5500.2	5420.0	5339.8	5276.1	5212.2	5170.6	5128.4	5104.2	5080.1
5795.4	12.5°	5726.9	5658.9	5575.9	5493.0	5411.6	5330.2	5276.4	5222.5	5195.5	5168.6
5992.2	15°	5974.5	5956.8	5884.7	5812.6	5696.8	5580.9	5499.0	5417.1	5379.6	5342.2
6157.8	17.5°	6213.4	6268.7	6210.5	6152.6	5999.1	5845.7	5725.0	5604.4	5548.8	5493.0
6186.1	20°	6302.2	6418.3	6391.5	6364.5	6189.0	6013.7	5865.8	5718.1	5647.0	5575.6
6027.6	22.5°	6178.7	6329.7	6346.0	6362.1	6194.5	6026.9	5874.6	5722.1	5647.2	5572.0
5743.2	25°	5891.9	6040.5	6096.1	6151.4	6014.0	5876.8	5741.3	5606.3	5541.2	5476.3
5422.9	27.5°	5542.1	5661.3	5723.1	5785.1	5687.2	5589.5	5484.4	5379.3	5335.7	5291.9
5101.1	30°	5200.0	5299.1	5349.4	5399.7	5325.2	5250.5	5175.4	5099.7	5077.4	5054.9
4774.8	32.5°	4869.6	4964.7	5020.5	5076.5	5008.0	4939.3	4879.2	4819.1	4804.5	4789.9
4457.6	35°	4551.5	4645.6	4712.6	4779.6	4730.8	4682.2	4626.6	4571.3	4549.1	4527.1
4154.8	37.5°	4248.4	4342.2	4425.1	4507.9	4485.4	4462.9	4411.9	4360.7	4320.2	4280.0
3871.6	40°	3962.1	4052.6	4147.8	4243.4	4248.9	4254.1	4210.8	4167.5	4108.6	4050.2
3612.1	42.5°	3697.8	3783.7	3886.7	3989.6	4017.1	4044.7	4008.0	3971.6	3898.6	3825.6
3389.4	45°	3470.8	3552.2	3659.0	3765.8	3805.3	3844.8	3811.7	3778.9	3695.4	3612.1
3211.6	47.5°	3291.3	3370.8	3476.1	3581.4	3626.9	3672.4	3649.4	3626.4	3552.2	3478.0
3082.3	50°	3157.4	3232.4	3326.7	3421.0	3479.4	3537.9	3536.4	3535.5	3476.1	3416.7
2997.3	52.5°	3066.2	3134.9	3222.8	3310.9	3380.1	3449.3	3461.7	3474.2	3425.8	3377.5
2933.1	55°	3007.3	3081.6	3158.6	3235.5	3308.7	3382.2	3399.5	3416.7	3374.6	3332.4
2846.5	57.5°	2933.6	3020.8	3096.9	3173.2	3247.2	3321.0	3338.4	3355.9	3313.3	3270.7
2729.6	60°	2829.7	2929.8	3007.1	3084.7	3158.9	3233.1	3252.2	3271.4	3229.7	3188.3
2565.2	62.5°	2681.8	2798.6	2881.2	2963.8	3031.8	3099.8	3118.2	3136.6	3099.0	3061.4
2389.2	65°	2514.2	2639.4	2718.4	2797.4	2857.2	2917.1	2936.0	2954.7	2918.5	2882.4
2226.4	67.5°	2341.8	2457.4	2532.4	2607.1	2658.8	2710.5	2728.9	2747.1	2713.8	2680.8
2064.1	70°	2165.6	2267.1	2331.8	2396.4	2443.1	2489.8	2507.5	2525.2	2498.1	2471.1
1870.9	72.5°	1950.9	2030.6	2089.0	2147.4	2193.1	2238.9	2259.9	2281.0	2258.5	2236.0
1638.0	75°	1697.3	1756.7	1809.6	1862.5	1904.2	1945.8	1967.9	1989.9	1978.9	1967.9
1391.4	77.5°	1439.8	1487.9	1533.4	1578.8	1622.7	1666.2	1686.8	1707.4	1692.1	1676.3
1110.8	80°	1151.0	1191.0	1229.3	1267.6	1300.9	1333.9	1361.2	1388.5	1381.8	1375.4
835.5	82.5°	832.2	828.8	815.4	802.0	872.9	943.7	990.2	1036.6	1033.7	1030.6
519.5	85°	502.3	484.8	447.7	410.6	476.9	543.4	600.9	658.4	653.6	648.8
241.3	87.5°	240.6	239.9	211.6	183.1	210.9	238.9	262.1	285.4	279.6	273.4
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P955256
 CATALOG NUMBER: GALN-SB8B-735-U-SLL

CANDELA DISTRIBUTION (continued):

215°		220°	225°	230°	235°	240°	245°	250°	255°	260°	265°
6238.8	0°	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8
5701.1	2.5°	5684.6	5664.2	5684.6	5701.1	5717.4	5735.1	5752.8	5775.5	5798.3	5826.5
5341.3	5°	5324.3	5307.5	5324.3	5341.3	5358.3	5380.5	5402.8	5434.1	5465.5	5510.5
5125.8	7.5°	5110.7	5099.2	5110.7	5125.8	5141.1	5166.5	5192.1	5229.5	5266.8	5319.9
5067.1	10°	5054.2	5048.9	5054.2	5067.1	5080.1	5104.2	5128.4	5170.6	5212.2	5276.1
5157.6	12.5°	5146.6	5144.7	5146.6	5157.6	5168.6	5195.5	5222.5	5276.4	5330.2	5411.6
5327.8	15°	5313.5	5312.3	5313.5	5327.8	5342.2	5379.6	5417.1	5499.0	5580.9	5696.8
5474.8	17.5°	5456.4	5453.5	5456.4	5474.8	5493.0	5548.8	5604.4	5725.0	5845.7	5999.1
5552.9	20°	5530.1	5523.0	5530.1	5552.9	5575.6	5647.0	5718.1	5865.8	6013.7	6189.0
5546.9	22.5°	5521.8	5511.0	5521.8	5546.9	5572.0	5647.2	5722.1	5874.6	6026.9	6194.5
5452.6	25°	5429.1	5415.2	5429.1	5452.6	5476.3	5541.2	5606.3	5741.3	5876.8	6014.0
5281.2	27.5°	5270.4	5266.8	5270.4	5281.2	5291.9	5335.7	5379.3	5484.4	5589.5	5687.2
5054.9	30°	5054.9	5058.5	5054.9	5054.9	5054.9	5077.4	5099.7	5175.4	5250.5	5325.2
4791.8	32.5°	4794.0	4797.6	4794.0	4791.8	4789.9	4804.5	4819.1	4879.2	4939.3	5008.0
4522.3	35°	4517.5	4515.1	4517.5	4522.3	4527.1	4549.1	4571.3	4626.6	4682.2	4730.8
4258.7	37.5°	4237.4	4225.4	4237.4	4258.7	4280.0	4320.2	4360.7	4411.9	4462.9	4485.4
4010.4	40°	3971.2	3947.7	3971.2	4010.4	4050.2	4108.6	4167.5	4210.8	4254.1	4248.9
3767.9	42.5°	3710.2	3672.4	3710.2	3767.9	3825.6	3898.6	3971.6	4008.0	4044.7	4017.1
3544.3	45°	3476.6	3433.0	3476.6	3544.3	3612.1	3695.4	3778.9	3811.7	3844.8	3805.3
3415.3	47.5°	3352.8	3310.9	3352.8	3415.3	3478.0	3552.2	3626.4	3649.4	3672.4	3626.9
3358.8	50°	3300.8	3260.6	3300.8	3358.8	3416.7	3476.1	3535.5	3536.4	3537.9	3479.4
3325.5	52.5°	3273.8	3236.7	3273.8	3325.5	3377.5	3425.8	3474.2	3461.7	3449.3	3380.1
3287.0	55°	3241.5	3208.0	3241.5	3287.0	3332.4	3374.6	3416.7	3399.5	3382.2	3308.7
3225.7	57.5°	3180.4	3145.7	3180.4	3225.7	3270.7	3313.3	3355.9	3338.4	3321.0	3247.2
3141.9	60°	3095.4	3059.5	3095.4	3141.9	3188.3	3229.7	3271.4	3252.2	3233.1	3158.9
3012.6	62.5°	2963.8	2920.7	2963.8	3012.6	3061.4	3099.0	3136.6	3118.2	3099.8	3031.8
2835.0	65°	2787.8	2750.7	2787.8	2835.0	2882.4	2918.5	2954.7	2936.0	2917.1	2857.2
2636.8	67.5°	2592.7	2559.2	2592.7	2636.8	2680.8	2713.8	2747.1	2728.9	2710.5	2658.8
2429.0	70°	2386.8	2348.5	2386.8	2429.0	2471.1	2498.1	2525.2	2507.5	2489.8	2443.1
2195.8	72.5°	2155.8	2118.7	2155.8	2195.8	2236.0	2258.5	2281.0	2259.9	2238.9	2193.1
1934.1	75°	1900.4	1864.9	1900.4	1934.1	1967.9	1978.9	1989.9	1967.9	1945.8	1904.2
1642.3	77.5°	1608.3	1580.0	1608.3	1642.3	1676.3	1692.1	1707.4	1686.8	1666.2	1622.7
1329.6	80°	1283.7	1230.5	1283.7	1329.6	1375.4	1381.8	1388.5	1361.2	1333.9	1300.9
992.1	82.5°	953.3	919.3	953.3	992.1	1030.6	1033.7	1036.6	990.2	943.7	872.9
618.6	85°	588.4	557.8	588.4	618.6	648.8	653.6	658.4	600.9	543.4	476.9
258.1	87.5°	242.3	227.4	242.3	258.1	273.4	279.6	285.4	262.1	238.9	210.9
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P955256
 CATALOG NUMBER: GALN-SB8B-735-U-SLL

CANDELA DISTRIBUTION (continued):

270°		275°	280°	285°	290°	295°	300°	305°	310°	315°	320°
6238.8	0°	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8
5854.5	2.5°	5890.7	5927.1	5963.2	5999.4	6040.5	6082.0	6127.7	6173.6	6230.4	6281.4
5555.3	5°	5613.7	5671.9	5736.0	5800.2	5872.7	5945.5	6032.4	6119.1	6218.4	6319.0
5373.3	7.5°	5444.4	5515.8	5596.7	5677.4	5773.1	5868.9	5984.0	6099.4	6228.0	6365.2
5339.8	10°	5420.0	5500.2	5587.4	5674.3	5770.0	5865.8	5987.4	6109.0	6247.1	6416.4
5493.0	12.5°	5575.9	5658.9	5726.9	5795.4	5858.6	5922.3	6021.4	6121.0	6249.5	6427.4
5812.6	15°	5884.7	5956.8	5974.5	5992.2	5983.6	5974.9	6022.3	6070.0	6172.9	6370.0
6152.6	17.5°	6210.5	6268.7	6213.4	6157.8	6053.5	5949.1	5931.9	5914.4	5977.8	6209.6
6364.5	20°	6391.5	6418.3	6302.2	6186.1	6004.6	5823.4	5742.0	5660.6	5677.4	5947.2
6362.1	22.5°	6346.0	6329.7	6178.7	6027.6	5820.3	5613.5	5493.0	5372.6	5339.8	5647.0
6151.4	25°	6096.1	6040.5	5891.9	5743.2	5557.0	5370.9	5232.1	5093.2	5004.7	5319.5
5785.1	27.5°	5723.1	5661.3	5542.1	5422.9	5270.2	5117.2	4983.1	4849.0	4741.3	5027.9
5399.7	30°	5349.4	5299.1	5200.0	5101.1	4974.3	4847.4	4740.6	4634.3	4549.8	4790.4
5076.5	32.5°	5020.5	4964.7	4869.6	4774.8	4673.3	4572.1	4509.1	4446.1	4408.6	4602.5
4779.6	35°	4712.6	4645.6	4551.5	4457.6	4380.5	4303.2	4285.7	4268.5	4284.1	4445.7
4507.9	37.5°	4425.1	4342.2	4248.4	4154.8	4099.5	4043.9	4063.1	4082.2	4139.2	4280.5
4243.4	40°	4147.8	4052.6	3962.1	3871.6	3831.6	3791.6	3834.9	3878.3	3965.7	4093.7
3989.6	42.5°	3886.7	3783.7	3697.8	3612.1	3579.3	3546.7	3604.2	3661.6	3771.7	3889.8
3765.8	45°	3659.0	3552.2	3470.8	3389.4	3361.7	3334.4	3390.1	3446.2	3552.7	3672.4
3581.4	47.5°	3476.1	3370.8	3291.3	3211.6	3185.9	3160.1	3207.0	3253.9	3345.6	3500.0
3421.0	50°	3326.7	3232.4	3157.4	3082.3	3041.8	3001.6	3043.0	3084.7	3191.2	3394.2
3310.9	52.5°	3222.8	3134.9	3066.2	2997.3	2937.0	2876.4	2917.3	2958.5	3107.4	3340.8
3235.5	55°	3158.6	3081.6	3007.3	2933.1	2847.4	2761.5	2826.4	2891.5	3115.8	3332.9
3173.2	57.5°	3096.9	3020.8	2933.6	2846.5	2754.1	2661.6	2756.5	2851.3	3124.2	3315.7
3084.7	60°	3007.1	2929.8	2829.7	2729.6	2648.7	2567.6	2690.6	2813.4	3097.8	3224.2
2963.8	62.5°	2881.2	2798.6	2681.8	2565.2	2513.7	2462.2	2615.7	2769.4	3033.2	3048.8
2797.4	65°	2718.4	2639.4	2514.2	2389.2	2369.6	2349.7	2513.2	2676.5	2877.6	2875.7
2607.1	67.5°	2532.4	2457.4	2341.8	2226.4	2232.6	2238.9	2374.8	2510.8	2623.8	2629.1
2396.4	70°	2331.8	2267.1	2165.6	2064.1	2085.7	2107.2	2203.9	2300.6	2337.7	2337.7
2147.4	72.5°	2089.0	2030.6	1950.9	1870.9	1902.3	1933.9	2000.2	2066.5	2066.0	2042.6
1862.5	75°	1809.6	1756.7	1697.3	1638.0	1668.4	1698.5	1749.8	1800.8	1809.9	1701.7
1578.8	77.5°	1533.4	1487.9	1439.8	1391.4	1422.0	1452.7	1493.6	1534.6	1539.3	1361.0
1267.6	80°	1229.3	1191.0	1151.0	1110.8	1136.7	1162.3	1196.8	1231.0	1231.7	1018.6
802.0	82.5°	815.4	828.8	832.2	835.5	853.7	871.9	888.7	905.4	895.4	713.4
410.6	85°	447.7	484.8	502.3	519.5	539.8	560.2	578.2	596.1	582.9	447.7
183.1	87.5°	211.6	239.9	240.6	241.3	245.1	249.0	256.2	263.3	246.6	190.3
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P955256
 CATALOG NUMBER: GALN-SB8B-735-U-SLL

CANDELA DISTRIBUTION (continued):

325°		330°	335°	340°	345°	350°	355°	360°
6238.8	0°	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8	6238.8
6334.0	2.5°	6386.7	6441.8	6496.8	6551.4	6606.2	6657.7	6709.2
6425.5	5°	6532.0	6646.0	6760.2	6873.4	6986.9	7100.6	7214.3
6513.8	7.5°	6662.5	6831.3	7000.1	7173.4	7346.7	7534.2	7721.8
6592.6	10°	6768.3	6973.5	7178.4	7407.3	7636.4	7873.6	8110.9
6626.4	12.5°	6825.3	7067.1	7308.9	7568.4	7827.9	8088.4	8349.1
6600.3	15°	6830.6	7109.0	7387.4	7668.9	7950.5	8222.2	8493.9
6486.5	17.5°	6763.5	7086.7	7409.9	7717.1	8024.2	8299.8	8575.3
6290.5	20°	6633.8	7025.4	7417.1	7754.6	8092.2	8378.8	8665.1
6060.4	22.5°	6473.9	6950.3	7426.7	7805.4	8183.9	8476.7	8769.2
5803.5	25°	6287.8	6876.0	7464.5	7897.3	8329.9	8616.5	8903.3
5568.7	27.5°	6109.5	6826.5	7543.5	8041.0	8538.2	8811.8	9085.2
5372.4	30°	5954.4	6803.3	7651.7	8227.0	8802.3	9066.3	9330.6
5203.1	32.5°	5803.5	6774.5	7745.1	8421.1	9097.2	9358.6	9620.3
5036.7	35°	5627.8	6720.4	7813.5	8642.3	9471.1	9721.8	9972.2
4840.9	37.5°	5401.3	6627.8	7854.2	8890.1	9926.0	10245.4	10564.7
4607.3	40°	5120.8	6500.2	7879.9	9204.7	10529.3	10994.7	11460.1
4349.4	42.5°	4809.1	6368.5	7928.5	9616.2	11304.0	11975.7	12647.5
4075.5	45°	4478.7	6246.2	8013.9	10157.7	12301.6	13207.7	14113.8
3858.9	47.5°	4217.8	6145.2	8072.6	10734.7	13396.8	14672.4	15947.6
3715.0	50°	4035.8	6035.0	8034.3	11270.0	14505.7	16428.6	18351.2
3620.2	52.5°	3899.8	5849.0	7798.5	11617.6	15436.5	18273.4	21110.3
3551.5	55°	3770.1	5540.7	7311.3	11541.0	15770.5	19909.0	24047.7
3470.1	57.5°	3624.5	5105.9	6587.1	11001.9	15416.9	21068.2	26719.4
3345.6	60°	3467.0	4541.4	5615.8	9998.5	14381.2	21357.8	28334.2
3129.2	62.5°	3209.9	3865.8	4521.8	8641.9	12761.9	20138.1	27514.2
2913.7	65°	2951.8	3258.0	3564.2	7257.7	10951.4	18412.3	25873.2
2608.0	67.5°	2586.7	2673.9	2760.8	5901.7	9042.6	16358.4	23674.3
2239.3	70°	2140.7	2116.1	2091.2	4646.8	7202.4	14117.4	21032.5
1903.0	72.5°	1763.2	1688.0	1613.1	3552.5	5491.8	11688.0	17884.4
1545.1	75°	1388.5	1320.5	1252.5	2578.3	3904.1	8903.0	13902.0
1209.0	77.5°	1057.0	1010.5	964.3	1747.1	2530.0	6231.3	9932.7
890.1	80°	761.3	742.1	723.0	1125.7	1528.6	4014.7	6500.9
618.6	82.5°	523.8	520.0	516.6	692.3	868.5	2323.6	3778.9
378.3	85°	308.8	310.7	312.4	370.1	428.0	1045.2	1662.6
161.8	87.5°	133.6	135.3	136.9	153.5	170.0	342.3	514.7
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)