

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P954544

Luminaire Tested: **GALN-SB7D-735-U-SLR**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P954544
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: GALN-SB7D-735-U-SLR
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(7) 70 CRI, 3500K, 900mA LIGHTSQUARES WITH 26 LEDS EACH AND SPILL LIGHT
ELIMINATOR RIGHT OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 72109 lumens
Efficiency: N/A
Efficacy: 140.6 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B5 - U0 - G5


Input Watts (W): 512.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P954544
 CATALOG NUMBER: GALN-SB7D-735-U-SLR

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

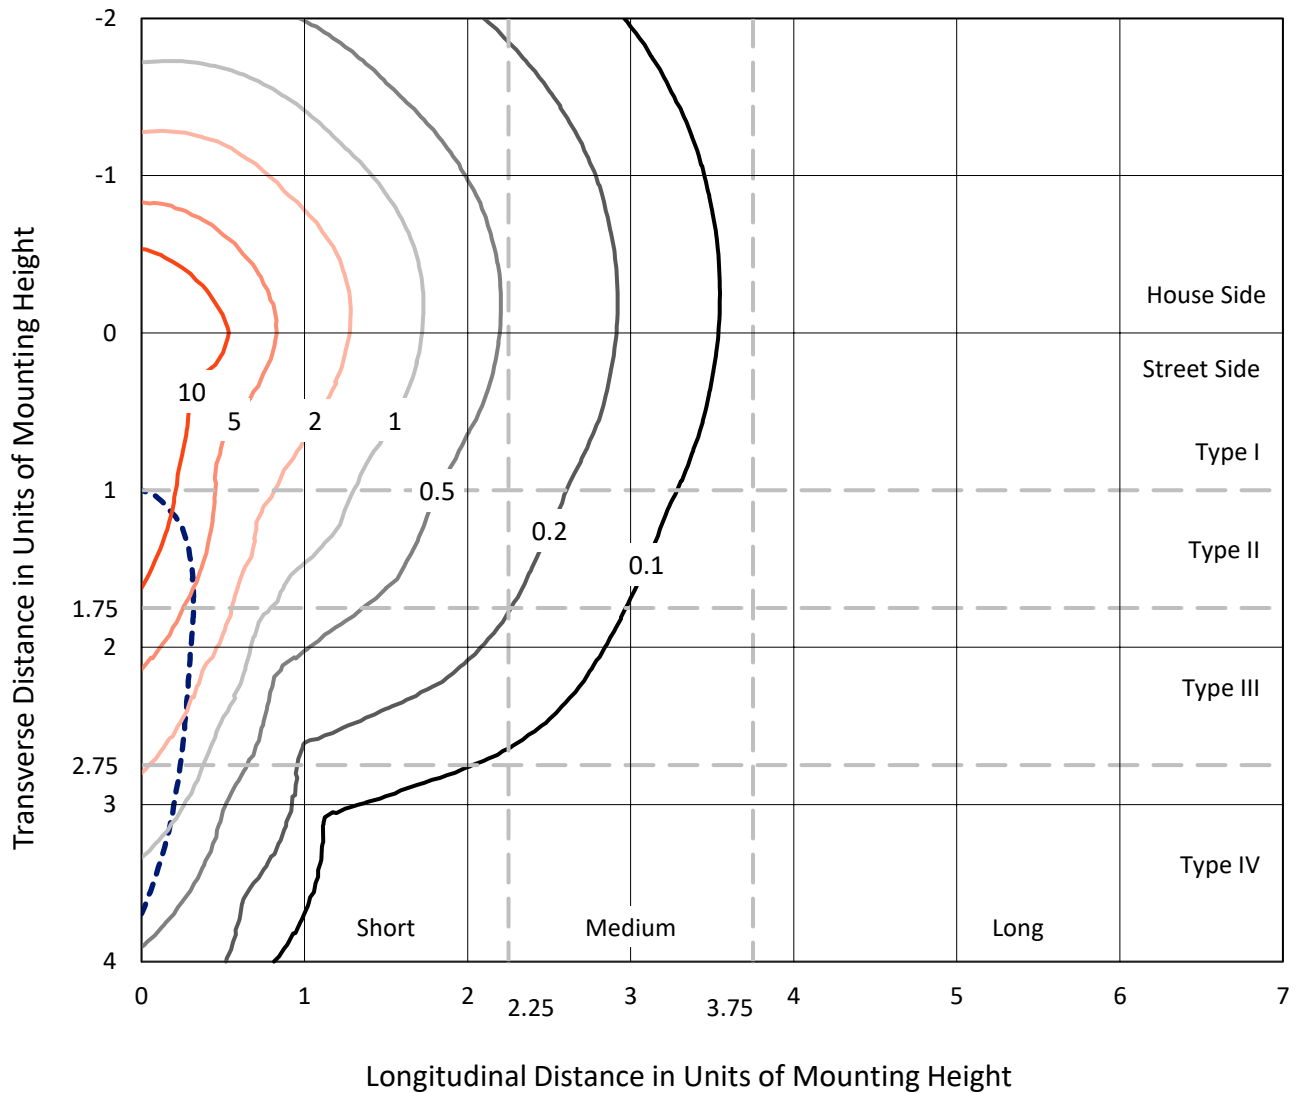

Based on 25 foot mounting height. Maximum calculated value = 19.6 fc
 Type IV - Short - N/A

REPORT NUMBER: P954544
CATALOG NUMBER: GALN-SB7D-735-U-SLR

Luminous Intensity Polar Plot

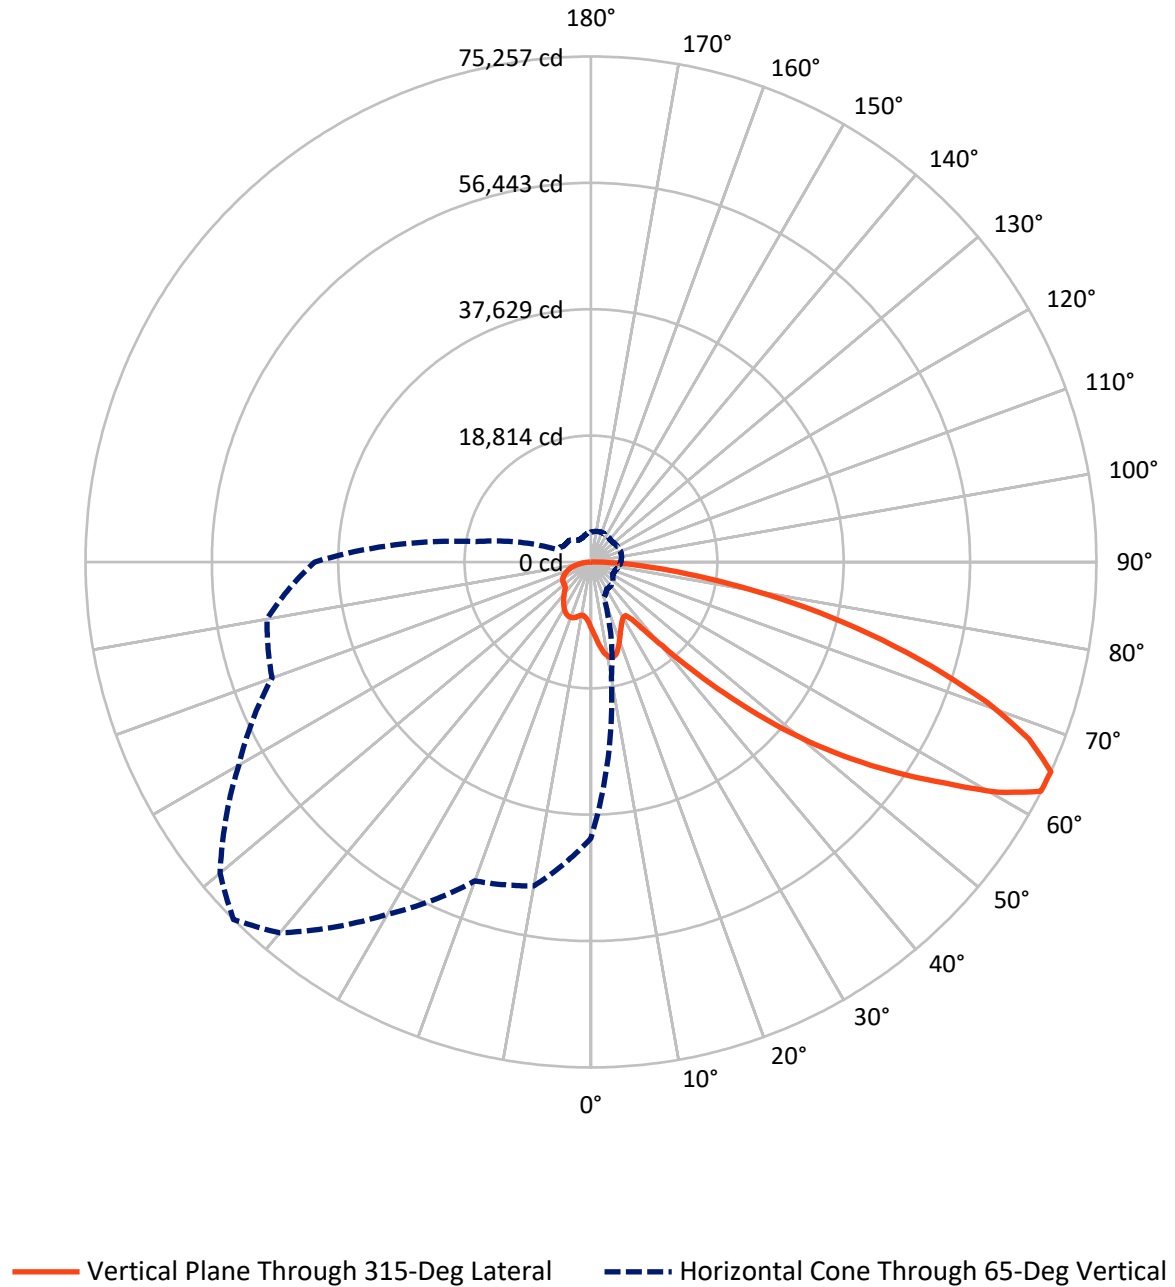

REPORT NUMBER: P954544

CATALOG NUMBER: GALN-SB7D-735-U-SLR

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	18326.5	0.0	18326.5
	% Fixture	25.4	0.0	25.4
Street Side	Lumens	53782.5	0.0	53782.5
	% Fixture	74.6	0.0	74.6
Total	Lumens	72109.0	0.0	72109.0
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	983.6	1.4
10°-20°	3087.8	4.3
20°-30°	4769.6	6.6
30°-40°	6044.2	8.4
40°-50°	9116.2	12.6
50°-60°	14728.6	20.4
60°-70°	18361.6	25.5
70°-80°	12040.6	16.7
80°-90°	2976.7	4.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	72109.0	100.0
0°-180°	72109.0	100.0



REPORT NUMBER: P954544


CATALOG NUMBER: GALN-SB7D-735-U-SLR

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	4850.2	6.7			
FM (30°-60°)	21032.6	29.2			
FH (60°-80°)	25447.6	35.3			G5
FVH (80°-90°)	2452.2	3.4			G5
BL (0°-30°)	3990.8	5.5	B4/5000		
BM (30°-60°)	8856.5	12.3	B5		
BH (60°-80°)	4954.6	6.9	B4/5000		G4/5000
BVH (80°-90°)	524.6	0.7			G4/750
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G5

Type IV Short

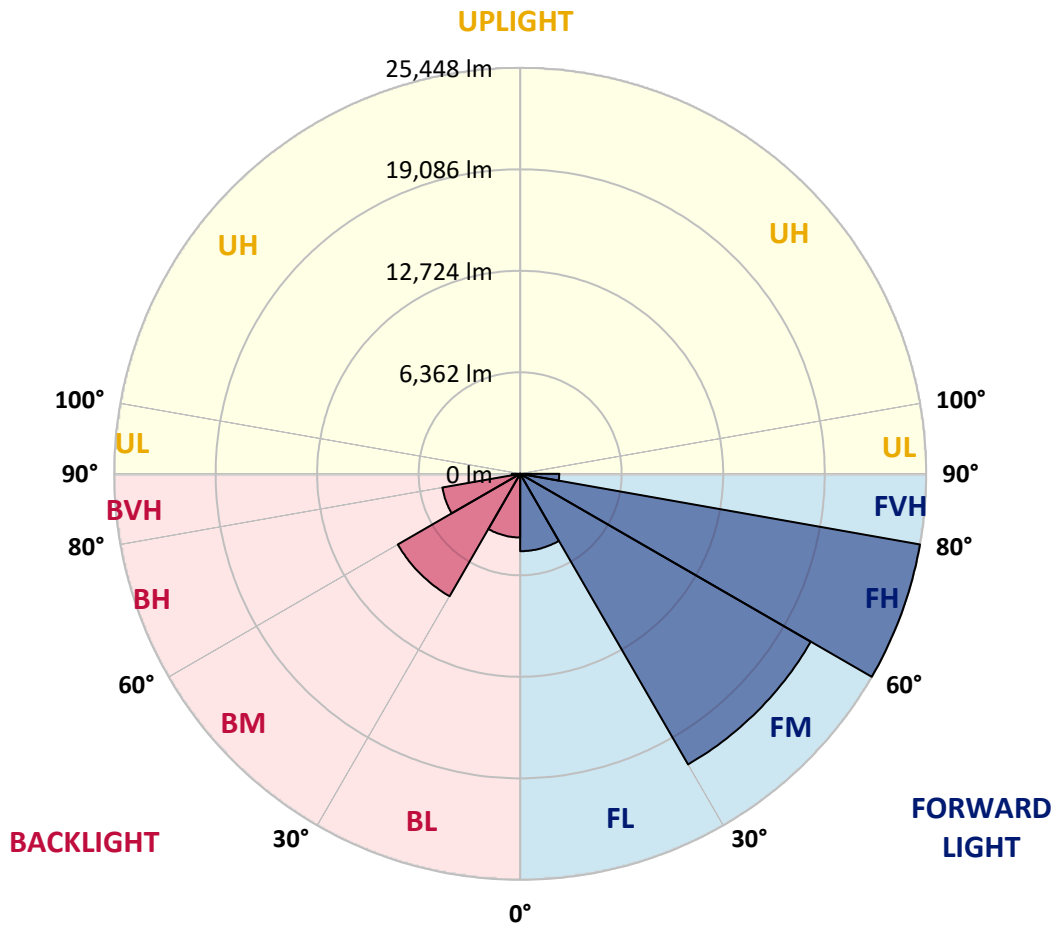

REPORT NUMBER: P954544

CATALOG NUMBER: GALN-SB7D-735-U-SLR

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°
0°	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6
2.5°	10663.3	10581.5	10499.7	10412.5	10325.8	10238.3	10150.8	10067.0	9983.3	9902.3
5°	11466.1	11285.4	11104.6	10924.3	10744.3	10562.8	10381.7	10212.4	10043.1	9883.3
7.5°	12272.8	11974.4	11676.5	11401.0	11125.6	10857.3	10589.1	10352.8	10116.5	9898.5
10°	12891.1	12514.0	12136.9	11772.8	11409.0	11083.3	10757.3	10478.0	10197.9	9928.9
12.5°	13269.6	12855.3	12441.3	12028.9	11616.4	11232.1	10847.8	10531.6	10215.4	9932.7
15°	13499.8	13068.0	12636.1	12188.7	11741.2	11298.7	10856.2	10490.2	10124.1	9811.0
17.5°	13629.2	13191.3	12753.3	12265.1	11777.0	11263.3	10749.6	10309.4	9869.2	9500.9
20°	13771.9	13316.8	12861.4	12324.9	11788.4	11165.9	10543.4	9997.8	9452.2	9023.4
22.5°	13937.4	13472.4	13007.1	12405.5	11803.6	11046.4	10289.3	9632.1	8975.0	8486.9
25°	14150.5	13694.7	13239.2	12551.7	11863.7	10928.5	9993.6	9223.9	8454.5	7954.2
27.5°	14439.7	14005.1	13570.2	12779.9	11989.3	10849.7	9710.1	8850.6	7991.1	7535.6
30°	14829.7	14409.6	13989.9	13075.6	12161.3	10812.8	9463.6	8538.6	7613.6	7231.2
32.5°	15290.1	14874.2	14458.7	13384.2	12309.7	10767.1	9223.9	8269.6	7314.9	7006.8
35°	15849.4	15451.4	15053.0	13735.7	12418.5	10681.2	8944.6	8005.2	7065.7	6808.9
37.5°	16791.1	16283.5	15775.9	14129.6	12483.2	10533.9	8584.6	7693.9	6803.2	6578.7
40°	18214.1	17474.5	16734.8	14629.5	12523.9	10331.1	8138.7	7322.6	6506.4	6302.8
42.5°	20101.4	19033.7	17966.0	15283.6	12601.1	10121.8	7643.3	6912.8	6182.2	5994.6
45°	22431.9	20991.7	19551.6	16144.3	12737.0	9927.4	7118.2	6477.5	5836.7	5646.5
47.5°	25346.4	23319.6	21292.3	17061.2	12830.2	9766.8	6703.5	6133.1	5562.8	5317.4
50°	29166.6	26110.8	23054.7	17912.0	12769.3	9591.8	6414.3	5904.5	5394.6	5072.0
52.5°	33551.7	29042.9	24534.1	18464.5	12394.5	9296.2	6198.2	5753.8	5309.8	4938.8
55°	38220.4	31642.4	25064.9	18342.7	11620.2	8806.1	5992.0	5644.6	5297.2	4952.1
57.5°	42466.7	33484.8	24502.9	17485.9	10469.2	8115.1	5760.6	5515.2	5269.8	4965.4
60°	45033.1	33945.2	22856.9	15891.2	8925.6	7217.9	5510.3	5317.4	5124.5	4923.6
62.5°	43729.9	32006.6	20283.2	13735.0	7186.7	6144.2	5101.6	4973.4	4845.6	4820.8
65°	41121.6	29263.6	17405.6	11535.0	5664.8	5178.1	4691.5	4631.0	4570.5	4573.5
67.5°	37626.8	25999.4	14371.9	9379.9	4387.8	4249.7	4111.2	4145.1	4178.6	4170.2
70°	33428.1	22437.6	11447.1	7385.3	3323.6	3363.2	3402.4	3559.1	3715.5	3715.5
72.5°	28424.6	18576.4	8728.5	5646.1	2563.8	2682.8	2802.3	3024.5	3246.4	3283.6
75°	22095.1	14150.1	6205.1	4097.9	1990.7	2098.8	2206.9	2455.7	2704.5	2876.5
77.5°	15786.6	9903.8	4021.0	2776.8	1532.6	1606.1	1679.9	1921.5	2163.1	2446.6
80°	10332.2	6380.8	2429.4	1789.1	1149.1	1179.5	1210.0	1414.7	1619.0	1957.6
82.5°	6006.1	3693.1	1380.4	1100.4	821.1	826.4	832.5	983.2	1133.9	1423.0
85°	2642.5	1661.2	680.3	588.2	496.5	493.9	490.8	601.2	711.5	926.5
87.5°	818.1	544.1	270.1	243.9	217.6	215.0	212.3	257.2	302.5	391.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P954544
 CATALOG NUMBER: GALN-SB7D-735-U-SLR

CANDELA DISTRIBUTION (continued):

50°		55°	60°	65°	70°	75°	80°	85°	90°	95°	100°
9915.6	0°	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6
9812.1	2.5°	9739.1	9666.4	9600.6	9535.1	9477.7	9420.2	9362.4	9304.9	9260.4	9215.5
9725.4	5°	9587.6	9449.5	9333.8	9218.5	9116.6	9014.6	8922.1	8829.3	8758.2	8686.6
9694.2	7.5°	9510.8	9327.7	9175.6	9023.4	8895.1	8766.5	8653.1	8540.1	8455.3	8370.8
9709.4	10°	9516.1	9322.8	9170.6	9018.4	8880.3	8741.8	8614.3	8486.9	8385.7	8284.1
9728.4	12.5°	9570.1	9412.6	9311.4	9210.9	9102.1	8994.1	8862.0	8730.4	8601.0	8471.6
9647.4	15°	9571.6	9496.3	9510.0	9523.7	9495.5	9467.4	9352.9	9238.3	9054.2	8870.0
9400.0	17.5°	9427.8	9455.2	9621.1	9787.0	9875.3	9963.2	9870.7	9778.6	9534.7	9290.8
8996.7	20°	9126.1	9255.5	9543.5	9831.9	10016.4	10201.0	10158.4	10115.4	9836.5	9557.9
8539.0	22.5°	8730.4	8921.8	9250.5	9580.0	9820.1	10060.2	10086.1	10111.6	9845.2	9578.9
8095.0	25°	8315.6	8536.3	8832.0	9128.0	9364.3	9600.6	9688.8	9776.7	9558.3	9340.3
7706.9	27.5°	7919.9	8133.0	8376.1	8618.9	8808.4	8997.9	9096.0	9194.6	9039.0	8883.7
7365.6	30°	7534.5	7704.2	7905.9	8107.5	8264.7	8422.2	8502.1	8582.0	8463.7	8344.9
7066.5	32.5°	7166.6	7266.6	7427.6	7588.9	7739.6	7890.6	7979.3	8068.3	7959.5	7850.3
6784.2	35°	6811.6	6839.3	6962.2	7084.8	7233.9	7383.4	7490.0	7596.5	7518.9	7441.7
6488.1	37.5°	6457.7	6427.3	6515.5	6603.4	6752.2	6901.4	7033.0	7164.7	7128.9	7093.1
6164.0	40°	6095.1	6026.2	6089.8	6153.3	6297.1	6441.0	6592.4	6744.2	6753.0	6761.3
5819.6	42.5°	5728.3	5637.0	5688.7	5740.9	5877.1	6013.7	6177.3	6340.9	6384.6	6428.4
5477.2	45°	5388.1	5299.5	5342.9	5387.0	5516.4	5645.7	5815.4	5985.1	6047.9	6110.7
5171.6	47.5°	5097.1	5022.5	5063.6	5104.3	5231.0	5357.3	5524.7	5692.2	5764.4	5836.7
4902.6	50°	4836.4	4770.6	4834.5	4898.8	5018.3	5137.4	5287.3	5437.2	5530.1	5622.9
4702.1	52.5°	4636.7	4571.6	4667.9	4763.8	4873.3	4982.5	5122.2	5262.2	5372.2	5482.1
4595.6	55°	4492.1	4389.0	4525.6	4661.8	4779.7	4897.7	5020.2	5142.3	5258.8	5375.6
4531.7	57.5°	4381.0	4230.3	4377.2	4524.0	4662.5	4801.0	4922.0	5043.4	5161.0	5278.2
4471.5	60°	4276.3	4080.8	4209.8	4338.4	4497.4	4656.5	4779.4	4902.6	5020.6	5138.5
4401.5	62.5°	4157.3	3913.4	3995.2	4077.0	4262.3	4447.9	4579.2	4710.5	4818.5	4926.6
4253.9	65°	3994.4	3734.5	3766.1	3797.3	3995.9	4194.9	4320.5	4446.0	4541.2	4636.3
3990.6	67.5°	3774.5	3558.4	3548.5	3538.6	3722.0	3905.7	4024.8	4143.6	4225.7	4307.9
3656.5	70°	3502.8	3349.1	3314.8	3280.6	3441.9	3603.3	3706.0	3808.7	3882.9	3957.1
3284.4	72.5°	3179.0	3073.6	3023.4	2973.5	3100.6	3227.3	3320.2	3413.0	3485.7	3558.4
2862.1	75°	2781.0	2699.6	2651.6	2603.3	2697.7	2792.0	2876.1	2960.2	3026.4	3092.6
2439.0	77.5°	2373.9	2308.8	2260.1	2211.4	2288.3	2364.8	2437.0	2509.3	2579.0	2648.2
1956.5	80°	1902.1	1847.3	1806.6	1765.5	1829.4	1892.9	1953.8	2014.7	2067.6	2120.1
1439.0	82.5°	1412.4	1385.8	1356.8	1327.9	1322.6	1317.3	1296.0	1274.6	1387.3	1499.9
947.4	85°	918.9	890.4	858.0	825.7	798.3	770.5	711.5	652.5	757.9	863.7
418.5	87.5°	407.1	395.7	389.6	383.5	382.4	381.3	336.4	291.1	335.2	379.7
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P954544
 CATALOG NUMBER: GALN-SB7D-735-U-SLR

CANDELA DISTRIBUTION (continued):

105°		110°	115°	120°	125°	130°	135°	140°	145°	150°	155°
9915.6	0°	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6
9179.4	2.5°	9143.2	9115.1	9086.9	9061.0	9034.8	9002.4	9034.8	9061.0	9086.9	9115.1
8636.8	5°	8586.9	8551.5	8516.2	8489.1	8462.1	8435.5	8462.1	8489.1	8516.2	8551.5
8311.5	7.5°	8252.1	8211.4	8171.1	8146.7	8122.7	8104.5	8122.7	8146.7	8171.1	8211.4
8217.9	10°	8150.9	8112.5	8074.0	8053.5	8032.9	8024.6	8032.9	8053.5	8074.0	8112.5
8386.0	12.5°	8300.4	8257.4	8214.8	8197.3	8179.8	8176.8	8179.8	8197.3	8214.8	8257.4
8739.9	15°	8609.8	8550.0	8490.7	8467.8	8445.0	8443.1	8445.0	8467.8	8490.7	8550.0
9099.1	17.5°	8907.3	8819.0	8730.4	8701.5	8672.2	8667.6	8672.2	8701.5	8730.4	8819.0
9322.8	20°	9088.0	8975.0	8861.6	8825.5	8789.4	8777.9	8789.4	8825.5	8861.6	8975.0
9336.9	22.5°	9094.5	8975.4	8855.9	8816.0	8776.0	8758.9	8776.0	8816.0	8855.9	8975.4
9124.9	25°	8910.3	8806.9	8703.7	8666.1	8628.8	8606.7	8628.8	8666.1	8703.7	8806.9
8716.7	27.5°	8549.6	8480.4	8410.8	8393.6	8376.5	8370.8	8376.5	8393.6	8410.8	8480.4
8225.5	30°	8105.2	8069.8	8034.1	8034.1	8034.1	8039.8	8034.1	8034.1	8034.1	8069.8
7754.8	32.5°	7659.3	7636.1	7612.9	7615.9	7619.3	7625.0	7619.3	7615.9	7612.9	7636.1
7353.4	35°	7265.5	7230.1	7195.1	7187.5	7179.9	7176.1	7179.9	7187.5	7195.1	7230.1
7012.1	37.5°	6930.7	6866.3	6802.4	6768.6	6734.7	6715.7	6734.7	6768.6	6802.4	6866.3
6692.5	40°	6623.6	6530.0	6437.2	6374.0	6311.6	6274.3	6311.6	6374.0	6437.2	6530.0
6370.2	42.5°	6312.4	6196.3	6080.3	5988.6	5896.9	5836.7	5896.9	5988.6	6080.3	6196.3
6058.2	45°	6006.1	5873.3	5740.9	5633.2	5525.5	5456.2	5525.5	5633.2	5740.9	5873.3
5800.2	47.5°	5763.7	5645.7	5527.8	5428.1	5328.8	5262.2	5328.8	5428.1	5527.8	5645.7
5620.6	50°	5619.1	5524.7	5430.4	5338.3	5246.2	5182.3	5246.2	5338.3	5430.4	5524.7
5501.9	52.5°	5521.7	5444.8	5368.0	5285.4	5203.2	5144.2	5203.2	5285.4	5368.0	5444.8
5403.0	55°	5430.4	5363.4	5296.4	5224.1	5151.9	5098.6	5151.9	5224.1	5296.4	5363.4
5306.0	57.5°	5333.7	5266.0	5198.3	5126.7	5054.8	4999.7	5054.8	5126.7	5198.3	5266.0
5169.0	60°	5199.4	5133.2	5067.4	4993.6	4919.8	4862.7	4919.8	4993.6	5067.4	5133.2
4955.9	62.5°	4985.2	4925.5	4865.7	4788.1	4710.5	4642.0	4710.5	4788.1	4865.7	4925.5
4666.3	65°	4696.0	4638.6	4581.1	4505.8	4430.8	4371.8	4430.8	4505.8	4581.1	4638.6
4337.2	67.5°	4366.1	4313.3	4260.7	4190.7	4120.7	4067.5	4120.7	4190.7	4260.7	4313.3
3985.3	70°	4013.4	3970.4	3927.4	3860.5	3793.5	3732.6	3793.5	3860.5	3927.4	3970.4
3591.8	72.5°	3625.3	3589.6	3553.8	3489.9	3426.3	3367.3	3426.3	3489.9	3553.8	3589.6
3127.6	75°	3162.6	3145.1	3127.6	3074.0	3020.3	2964.0	3020.3	3074.0	3127.6	3145.1
2680.9	77.5°	2713.7	2689.3	2664.2	2610.2	2556.1	2511.2	2556.1	2610.2	2664.2	2689.3
2163.5	80°	2206.9	2196.2	2185.9	2113.2	2040.2	1955.7	2040.2	2113.2	2185.9	2196.2
1573.7	82.5°	1647.5	1643.0	1638.0	1576.8	1515.1	1461.1	1515.1	1576.8	1638.0	1643.0
955.0	85°	1046.4	1038.7	1031.1	983.2	935.2	886.5	935.2	983.2	1031.1	1038.7
416.6	87.5°	453.5	444.4	434.5	410.2	385.1	361.5	385.1	410.2	434.5	444.4
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P954544
 CATALOG NUMBER: GALN-SB7D-735-U-SLR

CANDELA DISTRIBUTION (continued):

160°		165°	170°	175°	180°	185°	190°	195°	200°	205°	210°
9915.6	0°	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6
9143.2	2.5°	9179.4	9215.5	9260.4	9304.9	9362.4	9420.2	9477.7	9535.1	9600.6	9666.4
8586.9	5°	8636.8	8686.6	8758.2	8829.3	8922.1	9014.6	9116.6	9218.5	9333.8	9449.5
8252.1	7.5°	8311.5	8370.8	8455.3	8540.1	8653.1	8766.5	8895.1	9023.4	9175.6	9327.7
8150.9	10°	8217.9	8284.1	8385.7	8486.9	8614.3	8741.8	8880.3	9018.4	9170.6	9322.8
8300.4	12.5°	8386.0	8471.6	8601.0	8730.4	8862.0	8994.1	9102.1	9210.9	9311.4	9412.6
8609.8	15°	8739.9	8870.0	9054.2	9238.3	9352.9	9467.4	9495.5	9523.7	9510.0	9496.3
8907.3	17.5°	9099.1	9290.8	9534.7	9778.6	9870.7	9963.2	9875.3	9787.0	9621.1	9455.2
9088.0	20°	9322.8	9557.9	9836.5	10115.4	10158.4	10201.0	10016.4	9831.9	9543.5	9255.5
9094.5	22.5°	9336.9	9578.9	9845.2	10111.6	10086.1	10060.2	9820.1	9580.0	9250.5	8921.8
8910.3	25°	9124.9	9340.3	9558.3	9776.7	9688.8	9600.6	9364.3	9128.0	8832.0	8536.3
8549.6	27.5°	8716.7	8883.7	9039.0	9194.6	9096.0	8997.9	8808.4	8618.9	8376.1	8133.0
8105.2	30°	8225.5	8344.9	8463.7	8582.0	8502.1	8422.2	8264.7	8107.5	7905.9	7704.2
7659.3	32.5°	7754.8	7850.3	7959.5	8068.3	7979.3	7890.6	7739.6	7588.9	7427.6	7266.6
7265.5	35°	7353.4	7441.7	7518.9	7596.5	7490.0	7383.4	7233.9	7084.8	6962.2	6839.3
6930.7	37.5°	7012.1	7093.1	7128.9	7164.7	7033.0	6901.4	6752.2	6603.4	6515.5	6427.3
6623.6	40°	6692.5	6761.3	6753.0	6744.2	6592.4	6441.0	6297.1	6153.3	6089.8	6026.2
6312.4	42.5°	6370.2	6428.4	6384.6	6340.9	6177.3	6013.7	5877.1	5740.9	5688.7	5637.0
6006.1	45°	6058.2	6110.7	6047.9	5985.1	5815.4	5645.7	5516.4	5387.0	5342.9	5299.5
5763.7	47.5°	5800.2	5836.7	5764.4	5692.2	5524.7	5357.3	5231.0	5104.3	5063.6	5022.5
5619.1	50°	5620.6	5622.9	5530.1	5437.2	5287.3	5137.4	5018.3	4898.8	4834.5	4770.6
5521.7	52.5°	5501.9	5482.1	5372.2	5262.2	5122.2	4982.5	4873.3	4763.8	4667.9	4571.6
5430.4	55°	5403.0	5375.6	5258.8	5142.3	5020.2	4897.7	4779.7	4661.8	4525.6	4389.0
5333.7	57.5°	5306.0	5278.2	5161.0	5043.4	4922.0	4801.0	4662.5	4524.0	4377.2	4230.3
5199.4	60°	5169.0	5138.5	5020.6	4902.6	4779.4	4656.5	4497.4	4338.4	4209.8	4080.8
4985.2	62.5°	4955.9	4926.6	4818.5	4710.5	4579.2	4447.9	4262.3	4077.0	3995.2	3913.4
4696.0	65°	4666.3	4636.3	4541.2	4446.0	4320.5	4194.9	3995.9	3797.3	3766.1	3734.5
4366.1	67.5°	4337.2	4307.9	4225.7	4143.6	4024.8	3905.7	3722.0	3538.6	3548.5	3558.4
4013.4	70°	3985.3	3957.1	3882.9	3808.7	3706.0	3603.3	3441.9	3280.6	3314.8	3349.1
3625.3	72.5°	3591.8	3558.4	3485.7	3413.0	3320.2	3227.3	3100.6	2973.5	3023.4	3073.6
3162.6	75°	3127.6	3092.6	3026.4	2960.2	2876.1	2792.0	2697.7	2603.3	2651.6	2699.6
2713.7	77.5°	2680.9	2648.2	2579.0	2509.3	2437.0	2364.8	2288.3	2211.4	2260.1	2308.8
2206.9	80°	2163.5	2120.1	2067.6	2014.7	1953.8	1892.9	1829.4	1765.5	1806.6	1847.3
1647.5	82.5°	1573.7	1499.9	1387.3	1274.6	1296.0	1317.3	1322.6	1327.9	1356.8	1385.8
1046.4	85°	955.0	863.7	757.9	652.5	711.5	770.5	798.3	825.7	858.0	890.4
453.5	87.5°	416.6	379.7	335.2	291.1	336.4	381.3	382.4	383.5	389.6	395.7
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P954544
 CATALOG NUMBER: GALN-SB7D-735-U-SLR

CANDELA DISTRIBUTION (continued):

215°		220°	225°	230°	235°	240°	245°	250°	255°	260°	265°
9915.6	0°	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6
9739.1	2.5°	9812.1	9902.3	9983.3	10067.0	10150.8	10238.3	10325.8	10412.5	10499.7	10581.5
9587.6	5°	9725.4	9883.3	10043.1	10212.4	10381.7	10562.8	10744.3	10924.3	11104.6	11285.4
9510.8	7.5°	9694.2	9898.5	10116.5	10352.8	10589.1	10857.3	11125.6	11401.0	11676.5	11974.4
9516.1	10°	9709.4	9928.9	10197.9	10478.0	10757.3	11083.3	11409.0	11772.8	12136.9	12514.0
9570.1	12.5°	9728.4	9932.7	10215.4	10531.6	10847.8	11232.1	11616.4	12028.9	12441.3	12855.3
9571.6	15°	9647.4	9811.0	10124.1	10490.2	10856.2	11298.7	11741.2	12188.7	12636.1	13068.0
9427.8	17.5°	9400.0	9500.9	9869.2	10309.4	10749.6	11263.3	11777.0	12265.1	12753.3	13191.3
9126.1	20°	8996.7	9023.4	9452.2	9997.8	10543.4	11165.9	11788.4	12324.9	12861.4	13316.8
8730.4	22.5°	8539.0	8486.9	8975.0	9632.1	10289.3	11046.4	11803.6	12405.5	13007.1	13472.4
8315.6	25°	8095.0	7954.2	8454.5	9223.9	9993.6	10928.5	11863.7	12551.7	13239.2	13694.7
7919.9	27.5°	7706.9	7535.6	7991.1	8850.6	9710.1	10849.7	11989.3	12779.9	13570.2	14005.1
7534.5	30°	7365.6	7231.2	7613.6	8538.6	9463.6	10812.8	12161.3	13075.6	13989.9	14409.6
7166.6	32.5°	7066.5	7006.8	7314.9	8269.6	9223.9	10767.1	12309.7	13384.2	14458.7	14874.2
6811.6	35°	6784.2	6808.9	7065.7	8005.2	8944.6	10681.2	12418.5	13735.7	15053.0	15451.4
6457.7	37.5°	6488.1	6578.7	6803.2	7693.9	8584.6	10533.9	12483.2	14129.6	15775.9	16283.5
6095.1	40°	6164.0	6302.8	6506.4	7322.6	8138.7	10331.1	12523.9	14629.5	16734.8	17474.5
5728.3	42.5°	5819.6	5994.6	6182.2	6912.8	7643.3	10121.8	12601.1	15283.6	17966.0	19033.7
5388.1	45°	5477.2	5646.5	5836.7	6477.5	7118.2	9927.4	12737.0	16144.3	19551.6	20991.7
5097.1	47.5°	5171.6	5317.4	5562.8	6133.1	6703.5	9766.8	12830.2	17061.2	21292.3	23319.6
4836.4	50°	4902.6	5072.0	5394.6	5904.5	6414.3	9591.8	12769.3	17912.0	23054.7	26110.8
4636.7	52.5°	4702.1	4938.8	5309.8	5753.8	6198.2	9296.2	12394.5	18464.5	24534.1	29042.9
4492.1	55°	4595.6	4952.1	5297.2	5644.6	5992.0	8806.1	11620.2	18342.7	25064.9	31642.4
4381.0	57.5°	4531.7	4965.4	5269.8	5515.2	5760.6	8115.1	10469.2	17485.9	24502.9	33484.8
4276.3	60°	4471.5	4923.6	5124.5	5317.4	5510.3	7217.9	8925.6	15891.2	22856.9	33945.2
4157.3	62.5°	4401.5	4820.8	4845.6	4973.4	5101.6	6144.2	7186.7	13735.0	20283.2	32006.6
3994.4	65°	4253.9	4573.5	4570.5	4631.0	4691.5	5178.1	5664.8	11535.0	17405.6	29263.6
3774.5	67.5°	3990.6	4170.2	4178.6	4145.1	4111.2	4249.7	4387.8	9379.9	14371.9	25999.4
3502.8	70°	3656.5	3715.5	3715.5	3559.1	3402.4	3363.2	3323.6	7385.3	11447.1	22437.6
3179.0	72.5°	3284.4	3283.6	3246.4	3024.5	2802.3	2682.8	2563.8	5646.1	8728.5	18576.4
2781.0	75°	2862.1	2876.5	2704.5	2455.7	2206.9	2098.8	1990.7	4097.9	6205.1	14150.1
2373.9	77.5°	2439.0	2446.6	2163.1	1921.5	1679.9	1606.1	1532.6	2776.8	4021.0	9903.8
1902.1	80°	1956.5	1957.6	1619.0	1414.7	1210.0	1179.5	1149.1	1789.1	2429.4	6380.8
1412.4	82.5°	1439.0	1423.0	1133.9	983.2	832.5	826.4	821.1	1100.4	1380.4	3693.1
918.9	85°	947.4	926.5	711.5	601.2	490.8	493.9	496.5	588.2	680.3	1661.2
407.1	87.5°	418.5	391.9	302.5	257.2	212.3	215.0	217.6	243.9	270.1	544.1
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P954544
 CATALOG NUMBER: GALN-SB7D-735-U-SLR

CANDELA DISTRIBUTION (continued):

270°		275°	280°	285°	290°	295°	300°	305°	310°	315°	320°
9915.6	0°	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6
10663.3	2.5°	10703.6	10744.3	10801.8	10859.2	10893.5	10927.7	10944.8	10962.0	10954.4	10962.0
11466.1	5°	11607.3	11748.8	11888.8	12029.2	12105.3	12181.4	12227.5	12273.9	12308.9	12273.9
12272.8	7.5°	12502.6	12732.0	12938.6	13145.2	13269.6	13394.1	13461.4	13528.4	13560.7	13528.4
12891.1	10°	13162.7	13434.4	13676.8	13919.1	14066.0	14212.1	14277.6	14342.6	14367.4	14342.6
13269.6	12.5°	13564.1	13858.3	14077.4	14295.8	14402.4	14508.9	14544.7	14580.4	14584.2	14580.4
13499.8	15°	13754.0	14007.8	14145.2	14282.9	14286.7	14290.5	14252.5	14214.4	14169.5	14214.4
13629.2	17.5°	13800.8	13972.4	13975.1	13977.4	13823.3	13669.2	13528.0	13386.5	13286.8	13386.5
13771.9	20°	13831.6	13891.7	13711.0	13530.3	13190.1	12850.0	12602.3	12354.6	12202.4	12354.6
13937.4	22.5°	13859.0	13780.6	13406.2	13031.8	12531.5	12031.1	11721.4	11411.7	11243.5	11411.7
14150.5	25°	13903.2	13655.8	13087.4	12518.9	11911.3	11303.6	10977.9	10653.0	10494.0	10653.0
14439.7	27.5°	13997.5	13555.0	12802.0	12049.4	11375.9	10702.5	10382.1	10062.1	9911.8	10062.1
14829.7	30°	14170.3	13511.3	12584.4	11657.5	10955.9	10254.2	9957.1	9659.9	9519.9	9659.9
15290.1	32.5°	14387.1	13484.6	12436.0	11387.3	10728.0	10068.6	9835.3	9601.7	9500.9	9601.7
15849.4	35°	14744.4	13639.9	12547.1	11454.7	10996.6	10538.9	10484.4	10430.0	10421.7	10430.0
16791.1	37.5°	15491.3	14191.6	13198.5	12205.4	12175.7	12146.0	12394.9	12643.7	12773.1	12643.7
18214.1	40°	16800.6	15387.1	14648.5	13910.0	14431.3	14952.6	15557.5	16162.5	16463.9	16162.5
20101.4	42.5°	18698.9	17296.4	16871.0	16445.6	17582.5	18719.4	19819.8	20920.2	21566.3	20920.2
22431.9	45°	21172.1	19911.9	19724.3	19536.3	21357.7	23179.5	24987.6	26796.1	27893.8	26796.1
25346.4	47.5°	24120.9	22894.9	22856.9	22818.8	25446.5	28073.4	30720.5	33367.2	34921.5	33367.2
29166.6	50°	27652.6	26139.0	26145.5	26151.9	29538.3	32924.7	36418.7	39912.8	42025.3	39912.8
33551.7	52.5°	31718.5	29885.7	29700.4	29514.7	33559.7	37604.7	41927.9	46250.6	48782.8	46250.6
38220.4	55°	36409.2	34598.1	33875.5	33153.0	37655.0	42156.6	47310.3	52464.1	55475.7	52464.1
42466.7	57.5°	41480.4	40493.8	39044.5	37595.6	42141.3	46687.1	52524.6	58361.7	62096.2	58361.7
45033.1	60°	46564.9	48097.2	46297.4	44497.7	48799.6	53101.4	59351.3	65601.3	69637.6	65601.3
43729.9	62.5°	47915.7	52101.5	51898.7	51695.5	55636.2	59577.4	65523.7	71469.6	75200.3	71469.6
41121.6	65°	45050.2	48978.8	49756.1	50533.1	55541.1	60549.5	66315.5	72081.1	75257.4	72081.1
37626.8	67.5°	41363.2	45099.7	45464.2	45828.3	51046.4	56264.0	62054.7	67845.4	70333.9	67845.4
33428.1	70°	37492.1	41556.5	41719.4	41882.6	46548.9	51214.9	56198.2	61181.1	62564.2	61181.1
28424.6	72.5°	33088.3	37752.4	37869.6	37986.4	41637.2	45288.0	49020.2	52752.1	52892.1	52752.1
22095.1	75°	26922.1	31749.0	32182.4	32615.7	35456.1	38296.5	40923.8	43551.1	42847.1	43551.1
15786.6	77.5°	20292.4	24798.5	25418.7	26038.9	28198.2	30357.5	32220.8	34084.4	32874.5	34084.4
10332.2	80°	14123.1	17913.5	18684.4	19455.3	21086.1	22716.1	23694.7	24673.0	22726.8	24673.0
6006.1	82.5°	8597.6	11189.5	12050.5	12912.0	14034.4	15156.9	15565.1	15973.0	14443.5	15973.0
2642.5	85°	4018.0	5393.5	6125.9	6858.4	7780.7	8702.6	8934.3	9166.0	7940.9	9166.0
818.1	87.5°	1280.4	1742.7	2151.3	2559.9	3021.1	3482.3	3502.0	3521.4	2956.4	3521.4
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P954544
 CATALOG NUMBER: GALN-SB7D-735-U-SLR

CANDELA DISTRIBUTION (continued):

325°		330°	335°	340°	345°	350°	355°	360°
9915.6	0°	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6	9915.6
10944.8	2.5°	10927.7	10893.5	10859.2	10801.8	10744.3	10703.6	10663.3
12227.5	5°	12181.4	12105.3	12029.2	11888.8	11748.8	11607.3	11466.1
13461.4	7.5°	13394.1	13269.6	13145.2	12938.6	12732.0	12502.6	12272.8
14277.6	10°	14212.1	14066.0	13919.1	13676.8	13434.4	13162.7	12891.1
14544.7	12.5°	14508.9	14402.4	14295.8	14077.4	13858.3	13564.1	13269.6
14252.5	15°	14290.5	14286.7	14282.9	14145.2	14007.8	13754.0	13499.8
13528.0	17.5°	13669.2	13823.3	13977.4	13975.1	13972.4	13800.8	13629.2
12602.3	20°	12850.0	13190.1	13530.3	13711.0	13891.7	13831.6	13771.9
11721.4	22.5°	12031.1	12531.5	13031.8	13406.2	13780.6	13859.0	13937.4
10977.9	25°	11303.6	11911.3	12518.9	13087.4	13655.8	13903.2	14150.5
10382.1	27.5°	10702.5	11375.9	12049.4	12802.0	13555.0	13997.5	14439.7
9957.1	30°	10254.2	10955.9	11657.5	12584.4	13511.3	14170.3	14829.7
9835.3	32.5°	10068.6	10728.0	11387.3	12436.0	13484.6	14387.1	15290.1
10484.4	35°	10538.9	10996.6	11454.7	12547.1	13639.9	14744.4	15849.4
12394.9	37.5°	12146.0	12175.7	12205.4	13198.5	14191.6	15491.3	16791.1
15557.5	40°	14952.6	14431.3	13910.0	14648.5	15387.1	16800.6	18214.1
19819.8	42.5°	18719.4	17582.5	16445.6	16871.0	17296.4	18698.9	20101.4
24987.6	45°	23179.5	21357.7	19536.3	19724.3	19911.9	21172.1	22431.9
30720.5	47.5°	28073.4	25446.5	22818.8	22856.9	22894.9	24120.9	25346.4
36418.7	50°	32924.7	29538.3	26151.9	26145.5	26139.0	27652.6	29166.6
41927.9	52.5°	37604.7	33559.7	29514.7	29700.4	29885.7	31718.5	33551.7
47310.3	55°	42156.6	37655.0	33153.0	33875.5	34598.1	36409.2	38220.4
52524.6	57.5°	46687.1	42141.3	37595.6	39044.5	40493.8	41480.4	42466.7
59351.3	60°	53101.4	48799.6	44497.7	46297.4	48097.2	46564.9	45033.1
65523.7	62.5°	59577.4	55636.2	51695.5	51898.7	52101.5	47915.7	43729.9
66315.5	65°	60549.5	55541.1	50533.1	49756.1	48978.8	45050.2	41121.6
62054.7	67.5°	56264.0	51046.4	45828.3	45464.2	45099.7	41363.2	37626.8
56198.2	70°	51214.9	46548.9	41882.6	41719.4	41556.5	37492.1	33428.1
49020.2	72.5°	45288.0	41637.2	37986.4	37869.6	37752.4	33088.3	28424.6
40923.8	75°	38296.5	35456.1	32615.7	32182.4	31749.0	26922.1	22095.1
32220.8	77.5°	30357.5	28198.2	26038.9	25418.7	24798.5	20292.4	15786.6
23694.7	80°	22716.1	21086.1	19455.3	18684.4	17913.5	14123.1	10332.2
15565.1	82.5°	15156.9	14034.4	12912.0	12050.5	11189.5	8597.6	6006.1
8934.3	85°	8702.6	7780.7	6858.4	6125.9	5393.5	4018.0	2642.5
3502.0	87.5°	3482.3	3021.1	2559.9	2151.3	1742.7	1280.4	818.1
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)