

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P955271

Luminaire Tested: **GALN-SB8B-740-U-RW**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P955271
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-19)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: GALN-SB8B-740-U-RW
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(8) 70 CRI, 4000K, 450mA LIGHTSQUARES WITH 26 LEDS EACH AND RECTANGULAR
WIDE OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 49606 lumens
Efficiency: N/A
Efficacy: 169.4 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type III - Medium
BUG Rating: B5 - U0 - G5


Input Watts (W): 292.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P955271
 CATALOG NUMBER: GALN-SB8B-740-U-RW

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

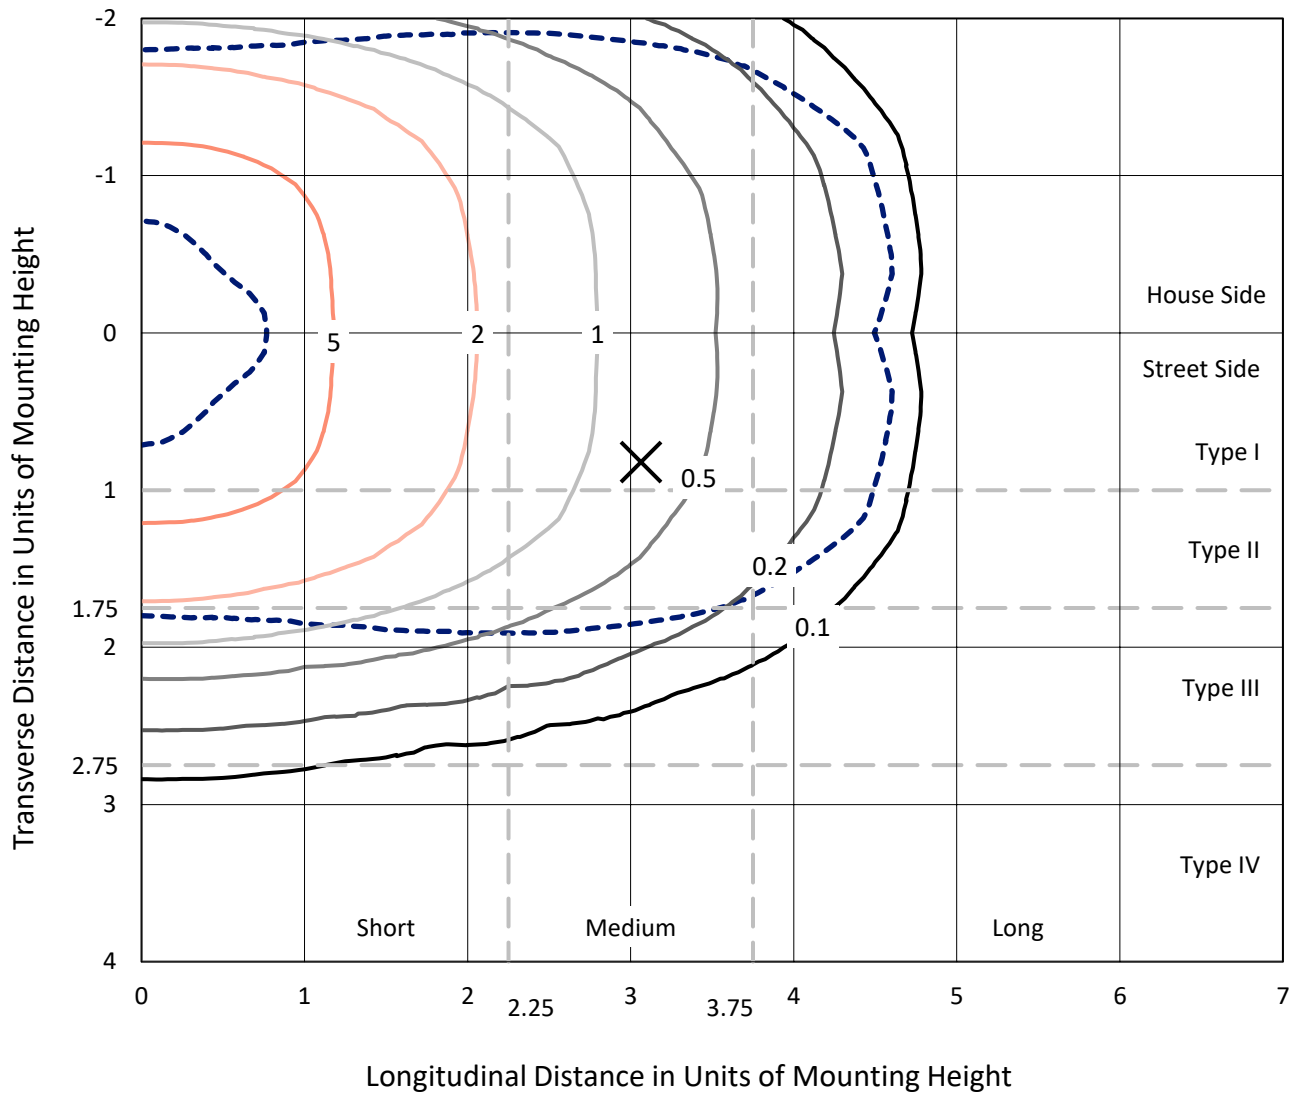

Based on 25 foot mounting height. Maximum calculated value = 9.3 fc
 Type III - Medium - N/A

REPORT NUMBER: P955271
CATALOG NUMBER: GALN-SB8B-740-U-RW

Luminous Intensity Polar Plot

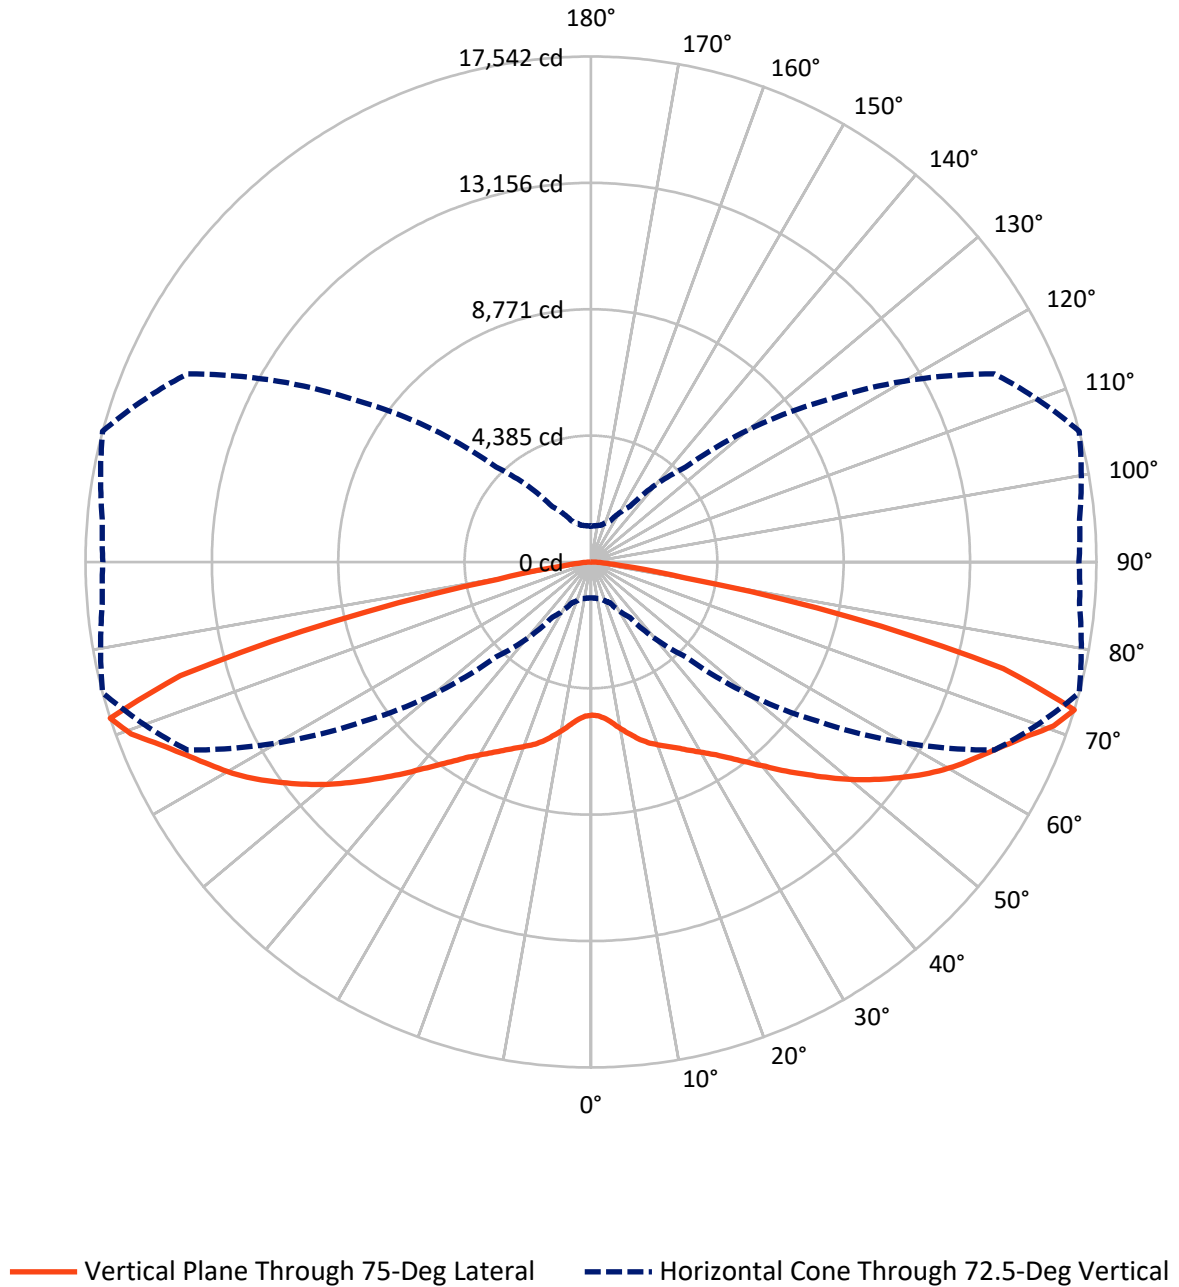

REPORT NUMBER: P955271
 CATALOG NUMBER: GALN-SB8B-740-U-RW

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	24803.0	0.0	24803.0
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	24803.0	0.0	24803.0
	% Fixture	50.0	0.0	50.0
Total	Lumens	49606.0	0.0	49606.0
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	520.5	1.0
10°-20°	1716.8	3.5
20°-30°	3317.3	6.7
30°-40°	5601.5	11.3
40°-50°	8883.4	17.9
50°-60°	11893.8	24.0
60°-70°	11319.1	22.8
70°-80°	5906.5	11.9
80°-90°	447.1	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	49606.0	100.0
0°-180°	49606.0	100.0



REPORT NUMBER: P955271


CATALOG NUMBER: GALN-SB8B-740-U-RW

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	2777.3	5.6			
FM (30°-60°)	13189.3	26.6			
FH (60°-80°)	8612.8	17.4			G4/12000
FVH (80°-90°)	223.5	0.5			G2/225
BL (0°-30°)	2777.3	5.6	B4/5000		
BM (30°-60°)	13189.3	26.6	B5		
BH (60°-80°)	8612.8	17.4	B5		G5
BVH (80°-90°)	223.5	0.5			G2/225
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G5

Type III Medium

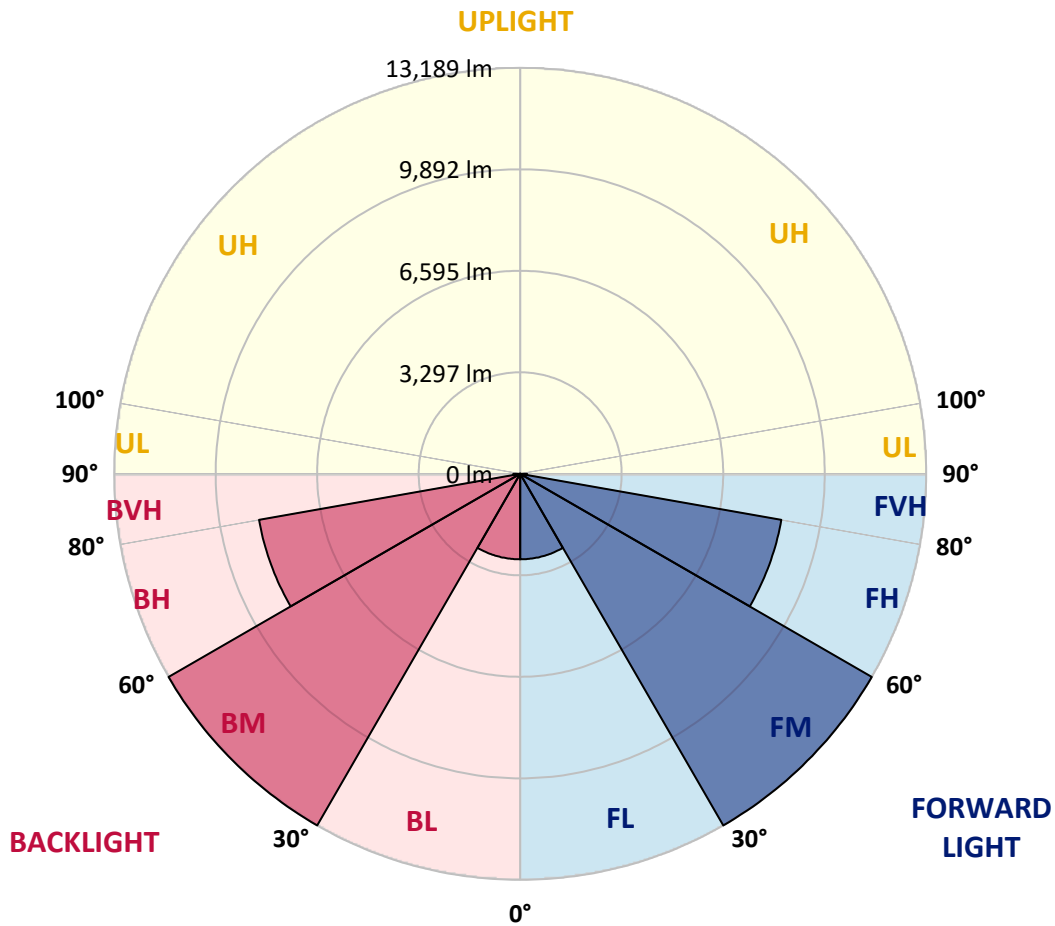

REPORT NUMBER: P955271
 CATALOG NUMBER: GALN-SB8B-740-U-RW

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°
0°	5313.7	5313.7	5313.7	5313.7	5313.7	5313.7	5313.7	5313.7	5313.7	5313.7
2.5°	5313.7	5308.6	5313.7	5318.8	5316.2	5316.2	5328.9	5336.5	5351.7	5349.1
5°	5278.2	5275.7	5296.0	5318.8	5336.5	5366.9	5404.9	5432.7	5468.2	5475.8
7.5°	5260.5	5252.9	5288.4	5328.9	5384.6	5460.6	5534.0	5610.0	5670.8	5691.1
10°	5273.2	5275.7	5323.8	5399.8	5488.4	5594.8	5698.7	5827.8	5914.0	5934.2
12.5°	5331.4	5326.4	5407.4	5529.0	5650.5	5784.8	5906.4	6048.2	6141.9	6190.0
15°	5437.8	5427.7	5541.6	5721.5	5898.8	6055.8	6154.6	6288.8	6397.7	6458.5
17.5°	5564.4	5569.5	5718.9	5951.9	6185.0	6362.2	6456.0	6524.3	6607.9	6661.1
20°	5787.3	5797.4	5964.6	6240.7	6506.6	6709.2	6785.2	6759.9	6782.7	6823.2
22.5°	6086.2	6091.2	6278.7	6577.5	6856.1	7079.0	7129.7	7025.8	6962.5	6990.4
25°	6433.2	6466.1	6653.5	6960.0	7246.2	7458.9	7481.7	7324.7	7167.7	7175.3
27.5°	6856.1	6886.5	7076.5	7380.4	7671.7	7856.6	7854.0	7643.8	7413.3	7355.1
30°	7314.6	7347.5	7542.5	7856.6	8127.6	8289.7	8254.2	8003.5	7674.2	7565.3
32.5°	7859.1	7879.4	8076.9	8391.0	8641.7	8770.9	8697.4	8388.4	7978.1	7854.0
35°	8517.6	8548.0	8694.9	8991.2	9211.6	9318.0	9193.8	8829.1	8368.2	8228.9
37.5°	9269.8	9249.6	9416.7	9680.1	9862.5	9928.3	9758.7	9325.6	8813.9	8649.3
40°	10055.0	10044.9	10227.2	10480.5	10579.3	10619.8	10369.0	9895.4	9328.1	9150.8
42.5°	10766.7	10759.1	11004.8	11285.9	11404.9	11359.3	11042.8	10500.7	9923.3	9720.7
45°	11336.5	11326.4	11627.8	12022.9	12255.9	12180.0	11754.5	11169.4	10526.1	10315.9
47.5°	11774.7	11779.8	12104.0	12592.8	13000.6	13028.4	12481.3	11850.7	11189.6	10951.6
50°	12091.3	12106.5	12453.5	12995.5	13552.7	13798.4	13223.4	12549.7	11876.0	11607.6
52.5°	12169.8	12197.7	12615.6	13251.3	13907.3	14375.8	13978.2	13220.9	12526.9	12271.1
55°	11751.9	11807.6	12337.0	13231.0	14125.1	14755.7	14641.8	13902.2	13182.9	12919.5
57.5°	10792.0	10870.5	11488.5	12656.1	14077.0	15016.6	15155.9	14555.7	13838.9	13585.6
60°	9447.1	9540.8	10133.5	11407.5	13398.2	15112.9	15518.1	15191.4	14441.7	14196.0
62.5°	7418.4	7540.0	8249.1	9743.5	11964.7	14664.6	15827.1	15766.3	14983.7	14677.2
65°	4759.0	4888.2	5635.3	7400.7	10052.4	13291.8	15923.3	16326.0	15556.1	15128.1
67.5°	2869.6	2927.8	3297.6	4485.5	7347.5	11222.6	15107.8	16946.6	16224.7	15692.9
70°	1836.2	1869.2	2089.5	2634.1	4153.7	8188.4	13086.7	17063.1	17035.2	16272.9
72.5°	1246.1	1256.2	1314.5	1560.2	2350.4	4652.6	9652.3	15447.2	17541.8	17020.0
75°	911.8	967.5	1061.2	1104.3	1334.8	2325.1	5531.5	10852.8	14783.6	15011.6
77.5°	678.8	681.3	810.5	861.1	952.3	1238.5	2340.3	6058.3	9178.7	9637.1
80°	574.9	544.5	542.0	694.0	716.8	772.5	1046.0	2092.0	3287.5	1993.3
82.5°	478.7	445.8	402.7	542.0	488.8	473.6	453.4	851.0	1046.0	514.1
85°	334.3	319.1	303.9	354.6	278.6	238.1	217.8	397.6	440.7	217.8
87.5°	144.4	149.4	152.0	157.0	116.5	83.6	83.6	111.4	111.4	86.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END C

90°
5313.7
5346.6
5475.8
5696.1
5954.5
6210.3
6481.3
6686.4
6853.6
7010.6
7187.9
7372.8
7578.0
7884.4
8249.1
8679.7
9209.0
9771.3
10364.0
11022.5
11688.6
12337.0
12993.0
13643.9
14249.2
14712.7
15181.2
15733.4
16267.8
16939.0
14459.4
8596.1
1507.0
438.2
192.5
63.3
0.0

OF REPORT)