

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P946753

Luminaire Tested: **GALN-SB2B-760-U-SLR**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P946753
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: GALN-SB2B-760-U-SLR
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(2) 70 CRI, 5700K, 450mA LIGHTSQUARES WITH 26 LEDS EACH AND SPILL LIGHT
ELIMINATOR RIGHT OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11871 lumens
Efficiency: N/A
Efficacy: 160.6 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 1' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B2 - U0 - G3


Input Watts (W): 73.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P946753
 CATALOG NUMBER: GALN-SB2B-760-U-SLR

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

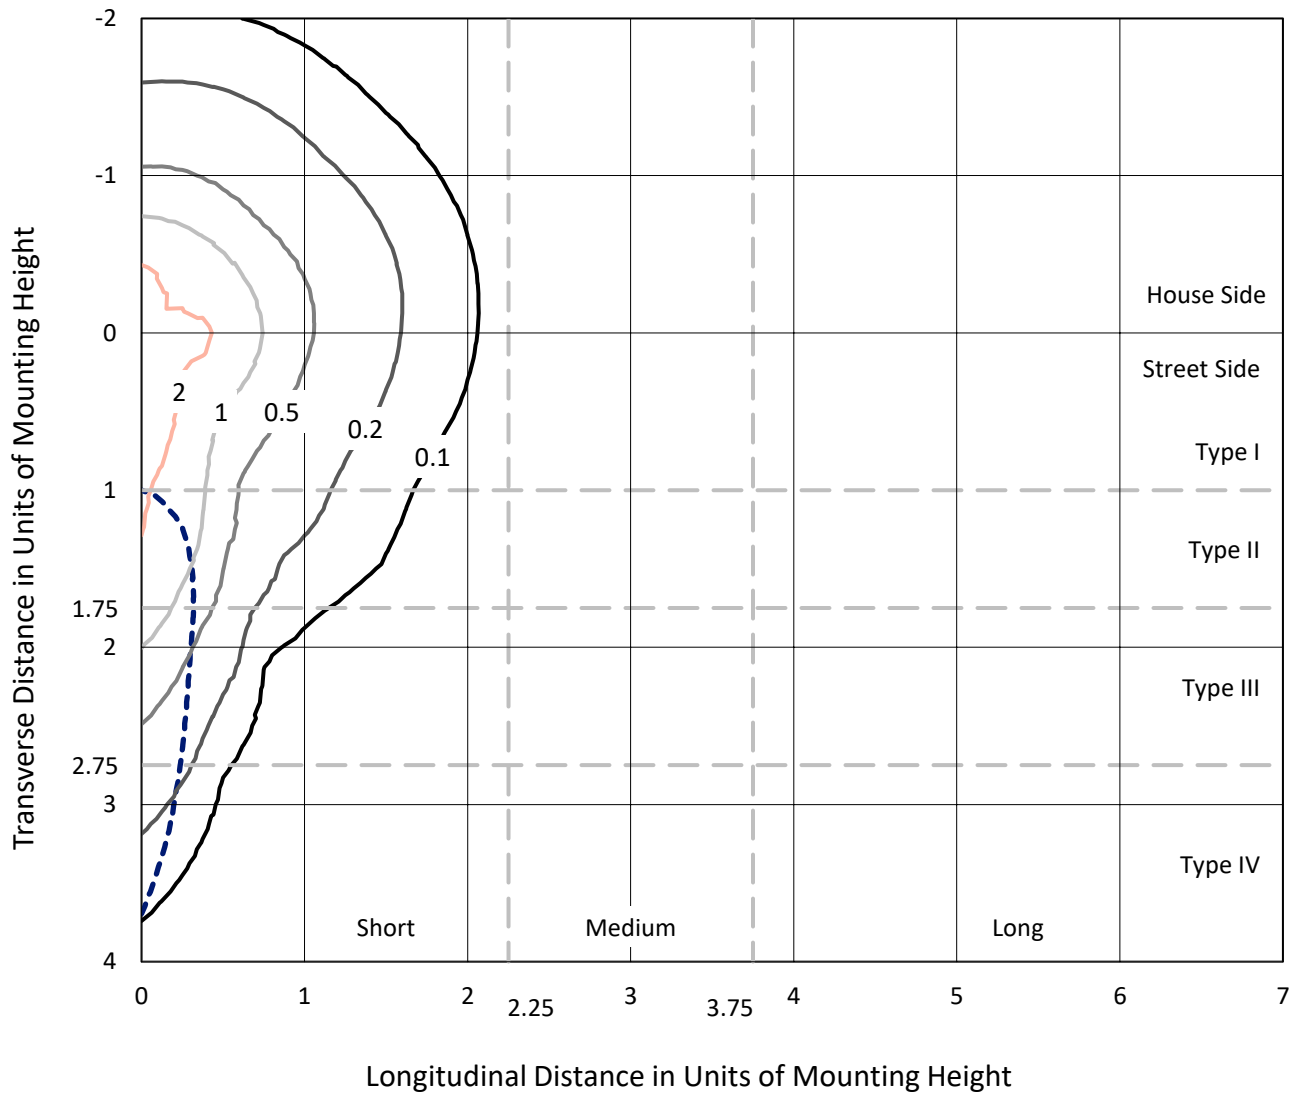

Based on 25 foot mounting height. Maximum calculated value = 3.2 fc
 Type IV - Short - N/A

REPORT NUMBER: P946753
CATALOG NUMBER: GALN-SB2B-760-U-SLR

Luminous Intensity Polar Plot

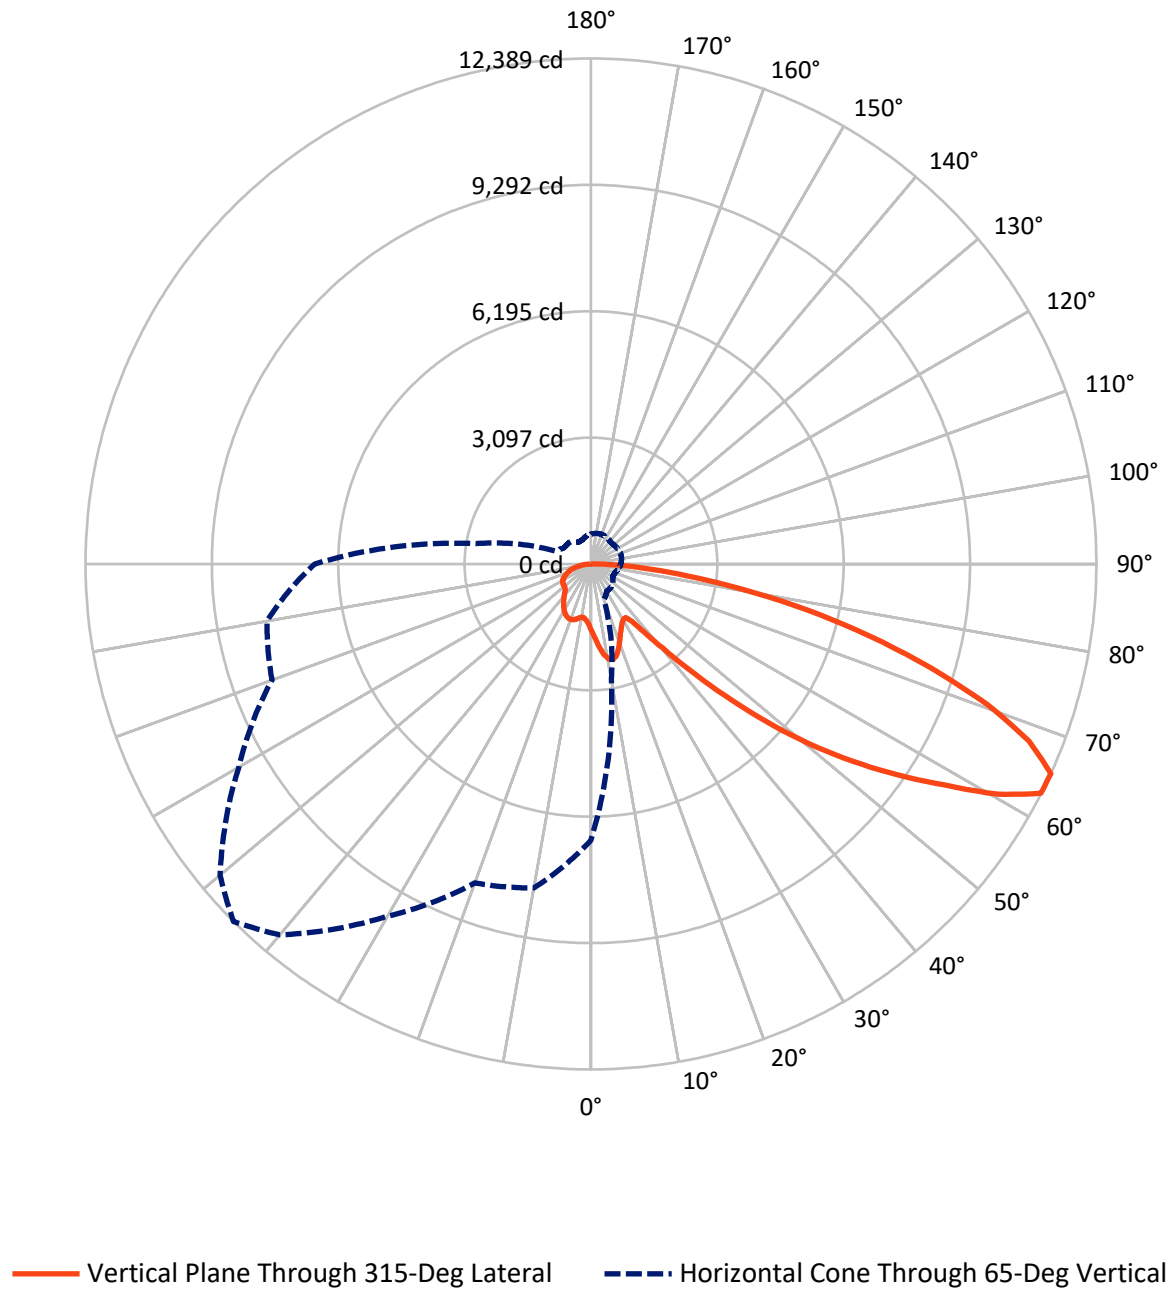

REPORT NUMBER: P946753

CATALOG NUMBER: GALN-SB2B-760-U-SLR

FLUX DISTRIBUTION:

| | | Downward | Upward | Total |
|--------------------|-----------|----------|--------|---------|
| House Side | Lumens | 3017.0 | 0.0 | 3017.0 |
| | % Fixture | 25.4 | 0.0 | 25.4 |
| Street Side | Lumens | 8854.0 | 0.0 | 8854.0 |
| | % Fixture | 74.6 | 0.0 | 74.6 |
| Total | Lumens | 11871.0 | 0.0 | 11871.0 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|---------|-----------|
| 0°-10° | 161.9 | 1.4 |
| 10°-20° | 508.3 | 4.3 |
| 20°-30° | 785.2 | 6.6 |
| 30°-40° | 995.0 | 8.4 |
| 40°-50° | 1500.8 | 12.6 |
| 50°-60° | 2424.7 | 20.4 |
| 60°-70° | 3022.8 | 25.5 |
| 70°-80° | 1982.2 | 16.7 |
| 80°-90° | 490.1 | 4.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 11871.0 | 100.0 |
| 0°-180° | 11871.0 | 100.0 |

Coefficient of Utilization



REPORT NUMBER: P946753


CATALOG NUMBER: GALN-SB2B-760-U-SLR

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | Lumens | % Fixture | Zone Rating/Lumen Limit | | |
|----------------|--------|-----------|-------------------------|------|---------|
| | | | B | U | G |
| FL (0°-30°) | 798.5 | 6.7 | | | |
| FM (30°-60°) | 3462.5 | 29.2 | | | |
| FH (60°-80°) | 4189.3 | 35.3 | | | G2/5000 |
| FVH (80°-90°) | 403.7 | 3.4 | | | G3/500 |
| BL (0°-30°) | 657.0 | 5.5 | B2/1000 | | |
| BM (30°-60°) | 1458.0 | 12.3 | B2/2500 | | |
| BH (60°-80°) | 815.7 | 6.9 | B2/1000 | | G2/1000 |
| BVH (80°-90°) | 86.4 | 0.7 | | | G1/100 |
| UL (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH (100°-180°) | 0.0 | 0.0 | | U0/0 | |

BUG Rating: B2-U0-G3

Type IV Short

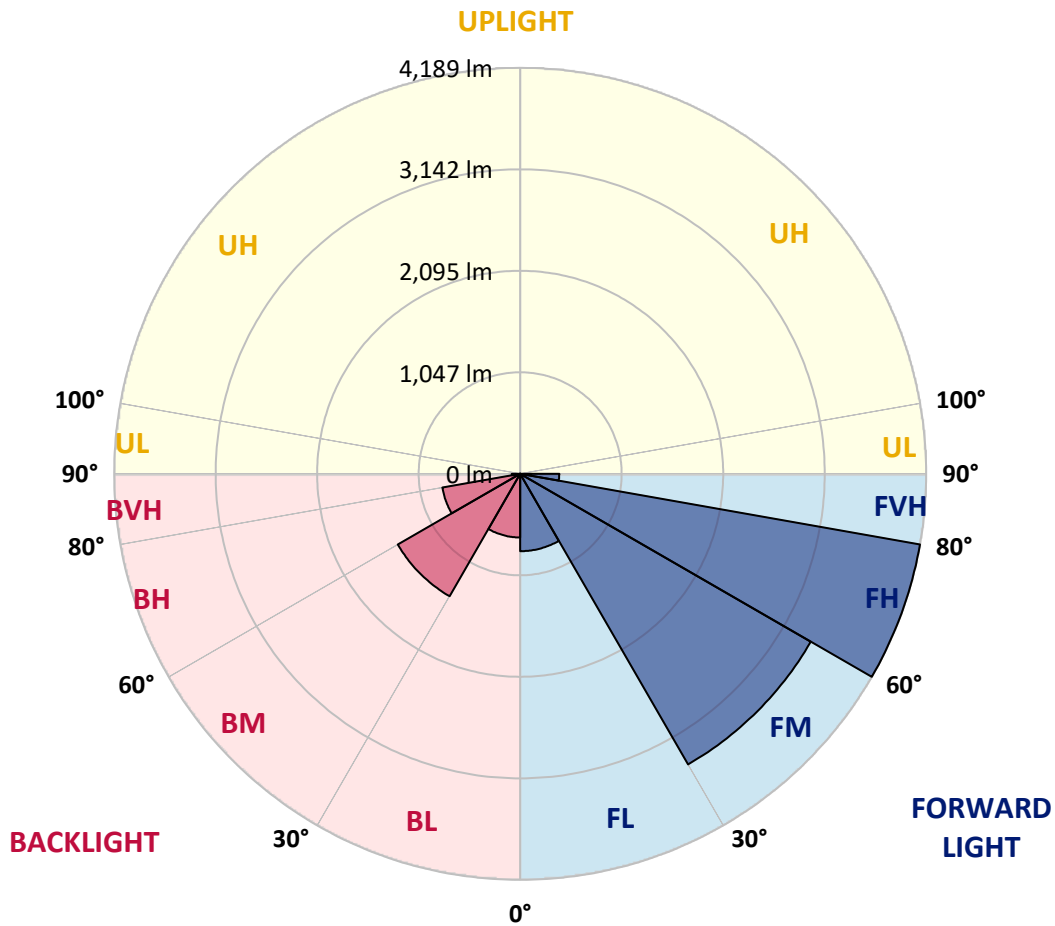

REPORT NUMBER: P946753

CATALOG NUMBER: GALN-SB2B-760-U-SLR

CANDELA DISTRIBUTION (FULL):

| | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 |
| 2.5° | 1755.4 | 1742.0 | 1728.5 | 1714.2 | 1699.9 | 1685.5 | 1671.1 | 1657.3 | 1643.5 | 1630.2 |
| 5° | 1887.6 | 1857.9 | 1828.1 | 1798.4 | 1768.8 | 1738.9 | 1709.1 | 1681.2 | 1653.3 | 1627.0 |
| 7.5° | 2020.4 | 1971.3 | 1922.3 | 1876.9 | 1831.6 | 1787.4 | 1743.2 | 1704.3 | 1665.4 | 1629.5 |
| 10° | 2122.2 | 2060.1 | 1998.0 | 1938.1 | 1878.2 | 1824.6 | 1770.9 | 1724.9 | 1678.8 | 1634.6 |
| 12.5° | 2184.5 | 2116.3 | 2048.2 | 1980.3 | 1912.4 | 1849.1 | 1785.8 | 1733.8 | 1681.7 | 1635.2 |
| 15° | 2222.4 | 2151.3 | 2080.2 | 2006.6 | 1932.9 | 1860.1 | 1787.2 | 1726.9 | 1666.7 | 1615.1 |
| 17.5° | 2243.7 | 2171.6 | 2099.5 | 2019.2 | 1938.8 | 1854.2 | 1769.7 | 1697.2 | 1624.7 | 1564.1 |
| 20° | 2267.2 | 2192.3 | 2117.3 | 2029.0 | 1940.7 | 1838.2 | 1735.7 | 1645.9 | 1556.1 | 1485.5 |
| 22.5° | 2294.5 | 2217.9 | 2141.3 | 2042.3 | 1943.2 | 1818.5 | 1693.9 | 1585.7 | 1477.5 | 1397.2 |
| 25° | 2329.5 | 2254.5 | 2179.5 | 2066.3 | 1953.1 | 1799.1 | 1645.2 | 1518.5 | 1391.8 | 1309.5 |
| 27.5° | 2377.1 | 2305.6 | 2234.0 | 2103.9 | 1973.7 | 1786.1 | 1598.5 | 1457.0 | 1315.5 | 1240.6 |
| 30° | 2441.3 | 2372.2 | 2303.1 | 2152.6 | 2002.1 | 1780.1 | 1557.9 | 1405.7 | 1253.4 | 1190.4 |
| 32.5° | 2517.1 | 2448.7 | 2380.3 | 2203.4 | 2026.5 | 1772.6 | 1518.5 | 1361.4 | 1204.2 | 1153.5 |
| 35° | 2609.2 | 2543.7 | 2478.1 | 2261.3 | 2044.4 | 1758.4 | 1472.5 | 1317.9 | 1163.2 | 1120.9 |
| 37.5° | 2764.2 | 2680.7 | 2597.1 | 2326.1 | 2055.1 | 1734.2 | 1413.3 | 1266.6 | 1120.0 | 1083.0 |
| 40° | 2998.5 | 2876.7 | 2755.0 | 2408.4 | 2061.8 | 1700.8 | 1339.8 | 1205.5 | 1071.1 | 1037.6 |
| 42.5° | 3309.2 | 3133.4 | 2957.7 | 2516.1 | 2074.5 | 1666.3 | 1258.3 | 1138.0 | 1017.8 | 986.9 |
| 45° | 3692.9 | 3455.8 | 3218.7 | 2657.8 | 2096.8 | 1634.3 | 1171.8 | 1066.4 | 960.9 | 929.6 |
| 47.5° | 4172.7 | 3839.0 | 3505.3 | 2808.7 | 2112.2 | 1607.9 | 1103.6 | 1009.7 | 915.8 | 875.4 |
| 50° | 4801.6 | 4298.5 | 3795.4 | 2948.8 | 2102.2 | 1579.1 | 1056.0 | 972.0 | 888.1 | 835.0 |
| 52.5° | 5523.5 | 4781.2 | 4038.9 | 3039.7 | 2040.5 | 1530.4 | 1020.4 | 947.2 | 874.1 | 813.1 |
| 55° | 6292.1 | 5209.2 | 4126.3 | 3019.7 | 1913.0 | 1449.7 | 986.4 | 929.2 | 872.1 | 815.2 |
| 57.5° | 6991.1 | 5512.5 | 4033.8 | 2878.6 | 1723.5 | 1336.0 | 948.4 | 907.9 | 867.5 | 817.4 |
| 60° | 7413.6 | 5588.2 | 3762.8 | 2616.1 | 1469.4 | 1188.3 | 907.1 | 875.4 | 843.6 | 810.5 |
| 62.5° | 7199.1 | 5269.1 | 3339.1 | 2261.1 | 1183.1 | 1011.5 | 839.9 | 818.8 | 797.7 | 793.6 |
| 65° | 6769.7 | 4817.5 | 2865.4 | 1899.0 | 932.6 | 852.5 | 772.3 | 762.4 | 752.4 | 752.9 |
| 67.5° | 6194.3 | 4280.2 | 2366.0 | 1544.2 | 722.3 | 699.6 | 676.8 | 682.4 | 687.9 | 686.5 |
| 70° | 5503.1 | 3693.8 | 1884.5 | 1215.8 | 547.1 | 553.7 | 560.1 | 585.9 | 611.7 | 611.7 |
| 72.5° | 4679.4 | 3058.1 | 1436.9 | 929.5 | 422.1 | 441.7 | 461.3 | 497.9 | 534.4 | 540.6 |
| 75° | 3637.4 | 2329.5 | 1021.5 | 674.6 | 327.7 | 345.5 | 363.3 | 404.3 | 445.2 | 473.5 |
| 77.5° | 2598.9 | 1630.4 | 662.0 | 457.1 | 252.3 | 264.4 | 276.5 | 316.3 | 356.1 | 402.8 |
| 80° | 1701.0 | 1050.5 | 399.9 | 294.5 | 189.2 | 194.2 | 199.2 | 232.9 | 266.5 | 322.3 |
| 82.5° | 988.8 | 608.0 | 227.3 | 181.2 | 135.2 | 136.1 | 137.1 | 161.9 | 186.7 | 234.3 |
| 85° | 435.0 | 273.5 | 112.0 | 96.8 | 81.7 | 81.3 | 80.8 | 99.0 | 117.1 | 152.5 |
| 87.5° | 134.7 | 89.6 | 44.5 | 40.2 | 35.8 | 35.4 | 35.0 | 42.3 | 49.8 | 64.5 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

REPORT NUMBER: P946753
 CATALOG NUMBER: GALN-SB2B-760-U-SLR

CANDELA DISTRIBUTION (continued):

| 50° | | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | 100° |
|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1632.4 | 0° | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 |
| 1615.3 | 2.5° | 1603.3 | 1591.3 | 1580.5 | 1569.7 | 1560.3 | 1550.8 | 1541.3 | 1531.8 | 1524.5 | 1517.1 |
| 1601.0 | 5° | 1578.4 | 1555.6 | 1536.6 | 1517.6 | 1500.8 | 1484.0 | 1468.8 | 1453.5 | 1441.8 | 1430.0 |
| 1595.9 | 7.5° | 1565.7 | 1535.6 | 1510.5 | 1485.5 | 1464.4 | 1443.2 | 1424.5 | 1405.9 | 1392.0 | 1378.1 |
| 1598.4 | 10° | 1566.6 | 1534.8 | 1509.7 | 1484.7 | 1461.9 | 1439.1 | 1418.1 | 1397.2 | 1380.5 | 1363.8 |
| 1601.5 | 12.5° | 1575.5 | 1549.6 | 1532.9 | 1516.4 | 1498.4 | 1480.7 | 1458.9 | 1437.2 | 1415.9 | 1394.7 |
| 1588.2 | 15° | 1575.7 | 1563.3 | 1565.6 | 1567.8 | 1563.2 | 1558.6 | 1539.7 | 1520.9 | 1490.6 | 1460.2 |
| 1547.5 | 17.5° | 1552.1 | 1556.6 | 1583.9 | 1611.2 | 1625.7 | 1640.2 | 1625.0 | 1609.8 | 1569.7 | 1529.5 |
| 1481.1 | 20° | 1502.4 | 1523.7 | 1571.1 | 1618.6 | 1649.0 | 1679.3 | 1672.3 | 1665.3 | 1619.3 | 1573.5 |
| 1405.7 | 22.5° | 1437.2 | 1468.8 | 1522.9 | 1577.1 | 1616.6 | 1656.2 | 1660.4 | 1664.6 | 1620.8 | 1576.9 |
| 1332.6 | 25° | 1369.0 | 1405.3 | 1454.0 | 1502.7 | 1541.6 | 1580.5 | 1595.0 | 1609.5 | 1573.5 | 1537.7 |
| 1268.7 | 27.5° | 1303.8 | 1338.9 | 1378.9 | 1418.9 | 1450.1 | 1481.3 | 1497.4 | 1513.7 | 1488.0 | 1462.5 |
| 1212.6 | 30° | 1240.4 | 1268.3 | 1301.5 | 1334.7 | 1360.6 | 1386.5 | 1399.7 | 1412.8 | 1393.3 | 1373.8 |
| 1163.3 | 32.5° | 1179.8 | 1196.3 | 1222.8 | 1249.3 | 1274.1 | 1299.0 | 1313.6 | 1328.3 | 1310.3 | 1292.4 |
| 1116.8 | 35° | 1121.4 | 1125.9 | 1146.2 | 1166.3 | 1190.9 | 1215.5 | 1233.0 | 1250.6 | 1237.8 | 1225.1 |
| 1068.1 | 37.5° | 1063.1 | 1058.1 | 1072.6 | 1087.1 | 1111.6 | 1136.1 | 1157.8 | 1179.5 | 1173.6 | 1167.7 |
| 1014.7 | 40° | 1003.4 | 992.1 | 1002.5 | 1013.0 | 1036.7 | 1060.3 | 1085.3 | 1110.3 | 1111.7 | 1113.1 |
| 958.1 | 42.5° | 943.0 | 928.0 | 936.5 | 945.1 | 967.5 | 990.0 | 1016.9 | 1043.9 | 1051.1 | 1058.3 |
| 901.7 | 45° | 887.0 | 872.4 | 879.6 | 886.8 | 908.1 | 929.4 | 957.4 | 985.3 | 995.6 | 1006.0 |
| 851.4 | 47.5° | 839.1 | 826.8 | 833.6 | 840.3 | 861.2 | 882.0 | 909.5 | 937.1 | 949.0 | 960.9 |
| 807.1 | 50° | 796.2 | 785.4 | 795.9 | 806.5 | 826.1 | 845.7 | 870.4 | 895.1 | 910.4 | 925.7 |
| 774.1 | 52.5° | 763.3 | 752.6 | 768.5 | 784.2 | 802.3 | 820.3 | 843.2 | 866.3 | 884.4 | 902.5 |
| 756.6 | 55° | 739.5 | 722.5 | 745.0 | 767.4 | 786.9 | 806.3 | 826.5 | 846.6 | 865.7 | 885.0 |
| 746.0 | 57.5° | 721.2 | 696.4 | 720.6 | 744.8 | 767.6 | 790.4 | 810.3 | 830.3 | 849.6 | 868.9 |
| 736.1 | 60° | 704.0 | 671.8 | 693.0 | 714.2 | 740.4 | 766.6 | 786.8 | 807.1 | 826.5 | 845.9 |
| 724.6 | 62.5° | 684.4 | 644.2 | 657.7 | 671.2 | 701.7 | 732.2 | 753.9 | 775.5 | 793.3 | 811.0 |
| 700.3 | 65° | 657.6 | 614.8 | 620.0 | 625.1 | 657.8 | 690.6 | 711.3 | 731.9 | 747.6 | 763.3 |
| 657.0 | 67.5° | 621.4 | 585.8 | 584.2 | 582.5 | 612.7 | 643.0 | 662.6 | 682.1 | 695.7 | 709.2 |
| 602.0 | 70° | 576.7 | 551.3 | 545.7 | 540.1 | 566.6 | 593.2 | 610.1 | 627.0 | 639.2 | 651.4 |
| 540.7 | 72.5° | 523.3 | 506.0 | 497.7 | 489.5 | 510.4 | 531.3 | 546.6 | 561.9 | 573.8 | 585.8 |
| 471.2 | 75° | 457.8 | 444.4 | 436.5 | 428.6 | 444.1 | 459.6 | 473.5 | 487.3 | 498.2 | 509.1 |
| 401.5 | 77.5° | 390.8 | 380.1 | 372.1 | 364.1 | 376.7 | 389.3 | 401.2 | 413.1 | 424.6 | 436.0 |
| 322.1 | 80° | 313.1 | 304.1 | 297.4 | 290.6 | 301.2 | 311.6 | 321.6 | 331.7 | 340.4 | 349.0 |
| 236.9 | 82.5° | 232.5 | 228.1 | 223.4 | 218.6 | 217.7 | 216.9 | 213.3 | 209.8 | 228.4 | 246.9 |
| 156.0 | 85° | 151.3 | 146.6 | 141.3 | 135.9 | 131.4 | 126.8 | 117.1 | 107.4 | 124.8 | 142.2 |
| 68.9 | 87.5° | 67.0 | 65.1 | 64.1 | 63.1 | 63.0 | 62.8 | 55.4 | 47.9 | 55.2 | 62.5 |
| 0.0 | 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

REPORT NUMBER: P946753
 CATALOG NUMBER: GALN-SB2B-760-U-SLR

CANDELA DISTRIBUTION (continued):

| 105° | | 110° | 115° | 120° | 125° | 130° | 135° | 140° | 145° | 150° | 155° |
|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1632.4 | 0° | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 |
| 1511.2 | 2.5° | 1505.2 | 1500.6 | 1495.9 | 1491.7 | 1487.4 | 1482.0 | 1487.4 | 1491.7 | 1495.9 | 1500.6 |
| 1421.8 | 5° | 1413.6 | 1407.8 | 1402.0 | 1397.5 | 1393.1 | 1388.7 | 1393.1 | 1397.5 | 1402.0 | 1407.8 |
| 1368.3 | 7.5° | 1358.5 | 1351.8 | 1345.2 | 1341.2 | 1337.2 | 1334.2 | 1337.2 | 1341.2 | 1345.2 | 1351.8 |
| 1352.9 | 10° | 1341.8 | 1335.5 | 1329.2 | 1325.8 | 1322.4 | 1321.1 | 1322.4 | 1325.8 | 1329.2 | 1335.5 |
| 1380.6 | 12.5° | 1366.5 | 1359.4 | 1352.4 | 1349.5 | 1346.6 | 1346.1 | 1346.6 | 1349.5 | 1352.4 | 1359.4 |
| 1438.8 | 15° | 1417.4 | 1407.6 | 1397.8 | 1394.0 | 1390.3 | 1390.0 | 1390.3 | 1394.0 | 1397.8 | 1407.6 |
| 1497.9 | 17.5° | 1466.4 | 1451.8 | 1437.2 | 1432.5 | 1427.7 | 1426.9 | 1427.7 | 1432.5 | 1437.2 | 1451.8 |
| 1534.8 | 20° | 1496.1 | 1477.5 | 1458.9 | 1452.9 | 1447.0 | 1445.1 | 1447.0 | 1452.9 | 1458.9 | 1477.5 |
| 1537.1 | 22.5° | 1497.2 | 1477.6 | 1457.9 | 1451.3 | 1444.8 | 1441.9 | 1444.8 | 1451.3 | 1457.9 | 1477.6 |
| 1502.2 | 25° | 1466.9 | 1449.8 | 1432.9 | 1426.7 | 1420.5 | 1416.9 | 1420.5 | 1426.7 | 1432.9 | 1449.8 |
| 1435.0 | 27.5° | 1407.5 | 1396.1 | 1384.6 | 1381.8 | 1379.0 | 1378.1 | 1379.0 | 1381.8 | 1384.6 | 1396.1 |
| 1354.1 | 30° | 1334.3 | 1328.5 | 1322.6 | 1322.6 | 1322.6 | 1323.6 | 1322.6 | 1322.6 | 1322.6 | 1328.5 |
| 1276.6 | 32.5° | 1260.9 | 1257.1 | 1253.3 | 1253.8 | 1254.3 | 1255.3 | 1254.3 | 1253.8 | 1253.3 | 1257.1 |
| 1210.6 | 35° | 1196.1 | 1190.3 | 1184.5 | 1183.2 | 1182.0 | 1181.4 | 1182.0 | 1183.2 | 1184.5 | 1190.3 |
| 1154.4 | 37.5° | 1141.0 | 1130.4 | 1119.9 | 1114.3 | 1108.7 | 1105.6 | 1108.7 | 1114.3 | 1119.9 | 1130.4 |
| 1101.8 | 40° | 1090.4 | 1075.0 | 1059.7 | 1049.3 | 1039.1 | 1032.9 | 1039.1 | 1049.3 | 1059.7 | 1075.0 |
| 1048.7 | 42.5° | 1039.2 | 1020.1 | 1001.0 | 985.9 | 970.8 | 960.9 | 970.8 | 985.9 | 1001.0 | 1020.1 |
| 997.3 | 45° | 988.8 | 966.9 | 945.1 | 927.4 | 909.6 | 898.2 | 909.6 | 927.4 | 945.1 | 966.9 |
| 954.9 | 47.5° | 948.9 | 929.4 | 910.0 | 893.6 | 877.3 | 866.3 | 877.3 | 893.6 | 910.0 | 929.4 |
| 925.3 | 50° | 925.0 | 909.5 | 894.0 | 878.8 | 863.7 | 853.1 | 863.7 | 878.8 | 894.0 | 909.5 |
| 905.8 | 52.5° | 909.0 | 896.4 | 883.7 | 870.1 | 856.6 | 846.9 | 856.6 | 870.1 | 883.7 | 896.4 |
| 889.5 | 55° | 894.0 | 883.0 | 871.9 | 860.0 | 848.1 | 839.4 | 848.1 | 860.0 | 871.9 | 883.0 |
| 873.5 | 57.5° | 878.1 | 866.9 | 855.8 | 844.0 | 832.2 | 823.1 | 832.2 | 844.0 | 855.8 | 866.9 |
| 850.9 | 60° | 856.0 | 845.1 | 834.2 | 822.1 | 809.9 | 800.5 | 809.9 | 822.1 | 834.2 | 845.1 |
| 815.9 | 62.5° | 820.7 | 810.9 | 801.0 | 788.2 | 775.5 | 764.2 | 775.5 | 788.2 | 801.0 | 810.9 |
| 768.2 | 65° | 773.1 | 763.6 | 754.2 | 741.8 | 729.4 | 719.7 | 729.4 | 741.8 | 754.2 | 763.6 |
| 714.0 | 67.5° | 718.8 | 710.1 | 701.4 | 689.9 | 678.4 | 669.6 | 678.4 | 689.9 | 701.4 | 710.1 |
| 656.1 | 70° | 660.7 | 653.6 | 646.6 | 635.5 | 624.5 | 614.5 | 624.5 | 635.5 | 646.6 | 653.6 |
| 591.3 | 72.5° | 596.8 | 590.9 | 585.0 | 574.5 | 564.1 | 554.4 | 564.1 | 574.5 | 585.0 | 590.9 |
| 514.9 | 75° | 520.7 | 517.8 | 514.9 | 506.1 | 497.2 | 488.0 | 497.2 | 506.1 | 514.9 | 517.8 |
| 441.4 | 77.5° | 446.7 | 442.7 | 438.6 | 429.7 | 420.8 | 413.4 | 420.8 | 429.7 | 438.6 | 442.7 |
| 356.2 | 80° | 363.3 | 361.6 | 359.9 | 347.9 | 335.9 | 322.0 | 335.9 | 347.9 | 359.9 | 361.6 |
| 259.1 | 82.5° | 271.2 | 270.5 | 269.7 | 259.6 | 249.4 | 240.5 | 249.4 | 259.6 | 269.7 | 270.5 |
| 157.2 | 85° | 172.3 | 171.0 | 169.8 | 161.9 | 154.0 | 145.9 | 154.0 | 161.9 | 169.8 | 171.0 |
| 68.6 | 87.5° | 74.7 | 73.2 | 71.5 | 67.5 | 63.4 | 59.5 | 63.4 | 67.5 | 71.5 | 73.2 |
| 0.0 | 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

REPORT NUMBER: P946753
 CATALOG NUMBER: GALN-SB2B-760-U-SLR

CANDELA DISTRIBUTION (continued):

| 160° | | 165° | 170° | 175° | 180° | 185° | 190° | 195° | 200° | 205° | 210° |
|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1632.4 | 0° | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 |
| 1505.2 | 2.5° | 1511.2 | 1517.1 | 1524.5 | 1531.8 | 1541.3 | 1550.8 | 1560.3 | 1569.7 | 1580.5 | 1591.3 |
| 1413.6 | 5° | 1421.8 | 1430.0 | 1441.8 | 1453.5 | 1468.8 | 1484.0 | 1500.8 | 1517.6 | 1536.6 | 1555.6 |
| 1358.5 | 7.5° | 1368.3 | 1378.1 | 1392.0 | 1405.9 | 1424.5 | 1443.2 | 1464.4 | 1485.5 | 1510.5 | 1535.6 |
| 1341.8 | 10° | 1352.9 | 1363.8 | 1380.5 | 1397.2 | 1418.1 | 1439.1 | 1461.9 | 1484.7 | 1509.7 | 1534.8 |
| 1366.5 | 12.5° | 1380.6 | 1394.7 | 1415.9 | 1437.2 | 1458.9 | 1480.7 | 1498.4 | 1516.4 | 1532.9 | 1549.6 |
| 1417.4 | 15° | 1438.8 | 1460.2 | 1490.6 | 1520.9 | 1539.7 | 1558.6 | 1563.2 | 1567.8 | 1565.6 | 1563.3 |
| 1466.4 | 17.5° | 1497.9 | 1529.5 | 1569.7 | 1609.8 | 1625.0 | 1640.2 | 1625.7 | 1611.2 | 1583.9 | 1556.6 |
| 1496.1 | 20° | 1534.8 | 1573.5 | 1619.3 | 1665.3 | 1672.3 | 1679.3 | 1649.0 | 1618.6 | 1571.1 | 1523.7 |
| 1497.2 | 22.5° | 1537.1 | 1576.9 | 1620.8 | 1664.6 | 1660.4 | 1656.2 | 1616.6 | 1577.1 | 1522.9 | 1468.8 |
| 1466.9 | 25° | 1502.2 | 1537.7 | 1573.5 | 1609.5 | 1595.0 | 1580.5 | 1541.6 | 1502.7 | 1454.0 | 1405.3 |
| 1407.5 | 27.5° | 1435.0 | 1462.5 | 1488.0 | 1513.7 | 1497.4 | 1481.3 | 1450.1 | 1418.9 | 1378.9 | 1338.9 |
| 1334.3 | 30° | 1354.1 | 1373.8 | 1393.3 | 1412.8 | 1399.7 | 1386.5 | 1360.6 | 1334.7 | 1301.5 | 1268.3 |
| 1260.9 | 32.5° | 1276.6 | 1292.4 | 1310.3 | 1328.3 | 1313.6 | 1299.0 | 1274.1 | 1249.3 | 1222.8 | 1196.3 |
| 1196.1 | 35° | 1210.6 | 1225.1 | 1237.8 | 1250.6 | 1233.0 | 1215.5 | 1190.9 | 1166.3 | 1146.2 | 1125.9 |
| 1141.0 | 37.5° | 1154.4 | 1167.7 | 1173.6 | 1179.5 | 1157.8 | 1136.1 | 1111.6 | 1087.1 | 1072.6 | 1058.1 |
| 1090.4 | 40° | 1101.8 | 1113.1 | 1111.7 | 1110.3 | 1085.3 | 1060.3 | 1036.7 | 1013.0 | 1002.5 | 992.1 |
| 1039.2 | 42.5° | 1048.7 | 1058.3 | 1051.1 | 1043.9 | 1016.9 | 990.0 | 967.5 | 945.1 | 936.5 | 928.0 |
| 988.8 | 45° | 997.3 | 1006.0 | 995.6 | 985.3 | 957.4 | 929.4 | 908.1 | 886.8 | 879.6 | 872.4 |
| 948.9 | 47.5° | 954.9 | 960.9 | 949.0 | 937.1 | 909.5 | 882.0 | 861.2 | 840.3 | 833.6 | 826.8 |
| 925.0 | 50° | 925.3 | 925.7 | 910.4 | 895.1 | 870.4 | 845.7 | 826.1 | 806.5 | 795.9 | 785.4 |
| 909.0 | 52.5° | 905.8 | 902.5 | 884.4 | 866.3 | 843.2 | 820.3 | 802.3 | 784.2 | 768.5 | 752.6 |
| 894.0 | 55° | 889.5 | 885.0 | 865.7 | 846.6 | 826.5 | 806.3 | 786.9 | 767.4 | 745.0 | 722.5 |
| 878.1 | 57.5° | 873.5 | 868.9 | 849.6 | 830.3 | 810.3 | 790.4 | 767.6 | 744.8 | 720.6 | 696.4 |
| 856.0 | 60° | 850.9 | 845.9 | 826.5 | 807.1 | 786.8 | 766.6 | 740.4 | 714.2 | 693.0 | 671.8 |
| 820.7 | 62.5° | 815.9 | 811.0 | 793.3 | 775.5 | 753.9 | 732.2 | 701.7 | 671.2 | 657.7 | 644.2 |
| 773.1 | 65° | 768.2 | 763.3 | 747.6 | 731.9 | 711.3 | 690.6 | 657.8 | 625.1 | 620.0 | 614.8 |
| 718.8 | 67.5° | 714.0 | 709.2 | 695.7 | 682.1 | 662.6 | 643.0 | 612.7 | 582.5 | 584.2 | 585.8 |
| 660.7 | 70° | 656.1 | 651.4 | 639.2 | 627.0 | 610.1 | 593.2 | 566.6 | 540.1 | 545.7 | 551.3 |
| 596.8 | 72.5° | 591.3 | 585.8 | 573.8 | 561.9 | 546.6 | 531.3 | 510.4 | 489.5 | 497.7 | 506.0 |
| 520.7 | 75° | 514.9 | 509.1 | 498.2 | 487.3 | 473.5 | 459.6 | 444.1 | 428.6 | 436.5 | 444.4 |
| 446.7 | 77.5° | 441.4 | 436.0 | 424.6 | 413.1 | 401.2 | 389.3 | 376.7 | 364.1 | 372.1 | 380.1 |
| 363.3 | 80° | 356.2 | 349.0 | 340.4 | 331.7 | 321.6 | 311.6 | 301.2 | 290.6 | 297.4 | 304.1 |
| 271.2 | 82.5° | 259.1 | 246.9 | 228.4 | 209.8 | 213.3 | 216.9 | 217.7 | 218.6 | 223.4 | 228.1 |
| 172.3 | 85° | 157.2 | 142.2 | 124.8 | 107.4 | 117.1 | 126.8 | 131.4 | 135.9 | 141.3 | 146.6 |
| 74.7 | 87.5° | 68.6 | 62.5 | 55.2 | 47.9 | 55.4 | 62.8 | 63.0 | 63.1 | 64.1 | 65.1 |
| 0.0 | 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

REPORT NUMBER: P946753
 CATALOG NUMBER: GALN-SB2B-760-U-SLR

CANDELA DISTRIBUTION (continued):

| 215° | | 220° | 225° | 230° | 235° | 240° | 245° | 250° | 255° | 260° | 265° |
|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1632.4 | 0° | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 |
| 1603.3 | 2.5° | 1615.3 | 1630.2 | 1643.5 | 1657.3 | 1671.1 | 1685.5 | 1699.9 | 1714.2 | 1728.5 | 1742.0 |
| 1578.4 | 5° | 1601.0 | 1627.0 | 1653.3 | 1681.2 | 1709.1 | 1738.9 | 1768.8 | 1798.4 | 1828.1 | 1857.9 |
| 1565.7 | 7.5° | 1595.9 | 1629.5 | 1665.4 | 1704.3 | 1743.2 | 1787.4 | 1831.6 | 1876.9 | 1922.3 | 1971.3 |
| 1566.6 | 10° | 1598.4 | 1634.6 | 1678.8 | 1724.9 | 1770.9 | 1824.6 | 1878.2 | 1938.1 | 1998.0 | 2060.1 |
| 1575.5 | 12.5° | 1601.5 | 1635.2 | 1681.7 | 1733.8 | 1785.8 | 1849.1 | 1912.4 | 1980.3 | 2048.2 | 2116.3 |
| 1575.7 | 15° | 1588.2 | 1615.1 | 1666.7 | 1726.9 | 1787.2 | 1860.1 | 1932.9 | 2006.6 | 2080.2 | 2151.3 |
| 1552.1 | 17.5° | 1547.5 | 1564.1 | 1624.7 | 1697.2 | 1769.7 | 1854.2 | 1938.8 | 2019.2 | 2099.5 | 2171.6 |
| 1502.4 | 20° | 1481.1 | 1485.5 | 1556.1 | 1645.9 | 1735.7 | 1838.2 | 1940.7 | 2029.0 | 2117.3 | 2192.3 |
| 1437.2 | 22.5° | 1405.7 | 1397.2 | 1477.5 | 1585.7 | 1693.9 | 1818.5 | 1943.2 | 2042.3 | 2141.3 | 2217.9 |
| 1369.0 | 25° | 1332.6 | 1309.5 | 1391.8 | 1518.5 | 1645.2 | 1799.1 | 1953.1 | 2066.3 | 2179.5 | 2254.5 |
| 1303.8 | 27.5° | 1268.7 | 1240.6 | 1315.5 | 1457.0 | 1598.5 | 1786.1 | 1973.7 | 2103.9 | 2234.0 | 2305.6 |
| 1240.4 | 30° | 1212.6 | 1190.4 | 1253.4 | 1405.7 | 1557.9 | 1780.1 | 2002.1 | 2152.6 | 2303.1 | 2372.2 |
| 1179.8 | 32.5° | 1163.3 | 1153.5 | 1204.2 | 1361.4 | 1518.5 | 1772.6 | 2026.5 | 2203.4 | 2380.3 | 2448.7 |
| 1121.4 | 35° | 1116.8 | 1120.9 | 1163.2 | 1317.9 | 1472.5 | 1758.4 | 2044.4 | 2261.3 | 2478.1 | 2543.7 |
| 1063.1 | 37.5° | 1068.1 | 1083.0 | 1120.0 | 1266.6 | 1413.3 | 1734.2 | 2055.1 | 2326.1 | 2597.1 | 2680.7 |
| 1003.4 | 40° | 1014.7 | 1037.6 | 1071.1 | 1205.5 | 1339.8 | 1700.8 | 2061.8 | 2408.4 | 2755.0 | 2876.7 |
| 943.0 | 42.5° | 958.1 | 986.9 | 1017.8 | 1138.0 | 1258.3 | 1666.3 | 2074.5 | 2516.1 | 2957.7 | 3133.4 |
| 887.0 | 45° | 901.7 | 929.6 | 960.9 | 1066.4 | 1171.8 | 1634.3 | 2096.8 | 2657.8 | 3218.7 | 3455.8 |
| 839.1 | 47.5° | 851.4 | 875.4 | 915.8 | 1009.7 | 1103.6 | 1607.9 | 2112.2 | 2808.7 | 3505.3 | 3839.0 |
| 796.2 | 50° | 807.1 | 835.0 | 888.1 | 972.0 | 1056.0 | 1579.1 | 2102.2 | 2948.8 | 3795.4 | 4298.5 |
| 763.3 | 52.5° | 774.1 | 813.1 | 874.1 | 947.2 | 1020.4 | 1530.4 | 2040.5 | 3039.7 | 4038.9 | 4781.2 |
| 739.5 | 55° | 756.6 | 815.2 | 872.1 | 929.2 | 986.4 | 1449.7 | 1913.0 | 3019.7 | 4126.3 | 5209.2 |
| 721.2 | 57.5° | 746.0 | 817.4 | 867.5 | 907.9 | 948.4 | 1336.0 | 1723.5 | 2878.6 | 4033.8 | 5512.5 |
| 704.0 | 60° | 736.1 | 810.5 | 843.6 | 875.4 | 907.1 | 1188.3 | 1469.4 | 2616.1 | 3762.8 | 5588.2 |
| 684.4 | 62.5° | 724.6 | 793.6 | 797.7 | 818.8 | 839.9 | 1011.5 | 1183.1 | 2261.1 | 3339.1 | 5269.1 |
| 657.6 | 65° | 700.3 | 752.9 | 752.4 | 762.4 | 772.3 | 852.5 | 932.6 | 1899.0 | 2865.4 | 4817.5 |
| 621.4 | 67.5° | 657.0 | 686.5 | 687.9 | 682.4 | 676.8 | 699.6 | 722.3 | 1544.2 | 2366.0 | 4280.2 |
| 576.7 | 70° | 602.0 | 611.7 | 611.7 | 585.9 | 560.1 | 553.7 | 547.1 | 1215.8 | 1884.5 | 3693.8 |
| 523.3 | 72.5° | 540.7 | 540.6 | 534.4 | 497.9 | 461.3 | 441.7 | 422.1 | 929.5 | 1436.9 | 3058.1 |
| 457.8 | 75° | 471.2 | 473.5 | 445.2 | 404.3 | 363.3 | 345.5 | 327.7 | 674.6 | 1021.5 | 2329.5 |
| 390.8 | 77.5° | 401.5 | 402.8 | 356.1 | 316.3 | 276.5 | 264.4 | 252.3 | 457.1 | 662.0 | 1630.4 |
| 313.1 | 80° | 322.1 | 322.3 | 266.5 | 232.9 | 199.2 | 194.2 | 189.2 | 294.5 | 399.9 | 1050.5 |
| 232.5 | 82.5° | 236.9 | 234.3 | 186.7 | 161.9 | 137.1 | 136.1 | 135.2 | 181.2 | 227.3 | 608.0 |
| 151.3 | 85° | 156.0 | 152.5 | 117.1 | 99.0 | 80.8 | 81.3 | 81.7 | 96.8 | 112.0 | 273.5 |
| 67.0 | 87.5° | 68.9 | 64.5 | 49.8 | 42.3 | 35.0 | 35.4 | 35.8 | 40.2 | 44.5 | 89.6 |
| 0.0 | 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

REPORT NUMBER: P946753
 CATALOG NUMBER: GALN-SB2B-760-U-SLR

CANDELA DISTRIBUTION (continued):

| 270° | | 275° | 280° | 285° | 290° | 295° | 300° | 305° | 310° | 315° | 320° |
|--------|-------|--------|--------|--------|--------|--------|--------|---------|---------|---------|---------|
| 1632.4 | 0° | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 |
| 1755.4 | 2.5° | 1762.1 | 1768.8 | 1778.3 | 1787.7 | 1793.3 | 1799.0 | 1801.8 | 1804.6 | 1803.4 | 1804.6 |
| 1887.6 | 5° | 1910.9 | 1934.2 | 1957.2 | 1980.3 | 1992.9 | 2005.4 | 2013.0 | 2020.6 | 2026.4 | 2020.6 |
| 2020.4 | 7.5° | 2058.2 | 2096.0 | 2130.0 | 2164.0 | 2184.5 | 2205.0 | 2216.1 | 2227.1 | 2232.4 | 2227.1 |
| 2122.2 | 10° | 2166.9 | 2211.6 | 2251.5 | 2291.4 | 2315.6 | 2339.7 | 2350.5 | 2361.2 | 2365.2 | 2361.2 |
| 2184.5 | 12.5° | 2233.0 | 2281.4 | 2317.5 | 2353.5 | 2371.0 | 2388.5 | 2394.4 | 2400.3 | 2400.9 | 2400.3 |
| 2222.4 | 15° | 2264.3 | 2306.0 | 2328.7 | 2351.3 | 2352.0 | 2352.6 | 2346.3 | 2340.1 | 2332.7 | 2340.1 |
| 2243.7 | 17.5° | 2272.0 | 2300.2 | 2300.7 | 2301.0 | 2275.7 | 2250.3 | 2227.1 | 2203.8 | 2187.3 | 2203.8 |
| 2267.2 | 20° | 2277.0 | 2286.9 | 2257.2 | 2227.4 | 2171.4 | 2115.4 | 2074.7 | 2033.9 | 2008.8 | 2033.9 |
| 2294.5 | 22.5° | 2281.6 | 2268.6 | 2207.0 | 2145.4 | 2063.0 | 1980.6 | 1929.6 | 1878.7 | 1851.0 | 1878.7 |
| 2329.5 | 25° | 2288.8 | 2248.1 | 2154.5 | 2060.9 | 1960.9 | 1860.9 | 1807.3 | 1753.8 | 1727.6 | 1753.8 |
| 2377.1 | 27.5° | 2304.4 | 2231.5 | 2107.5 | 1983.6 | 1872.8 | 1761.9 | 1709.2 | 1656.5 | 1631.7 | 1656.5 |
| 2441.3 | 30° | 2332.8 | 2224.3 | 2071.7 | 1919.1 | 1803.6 | 1688.1 | 1639.2 | 1590.3 | 1567.2 | 1590.3 |
| 2517.1 | 32.5° | 2368.5 | 2219.9 | 2047.3 | 1874.7 | 1766.1 | 1657.5 | 1619.1 | 1580.7 | 1564.1 | 1580.7 |
| 2609.2 | 35° | 2427.3 | 2245.5 | 2065.6 | 1885.7 | 1810.3 | 1735.0 | 1726.0 | 1717.1 | 1715.7 | 1717.1 |
| 2764.2 | 37.5° | 2550.3 | 2336.3 | 2172.8 | 2009.3 | 2004.4 | 1999.6 | 2040.5 | 2081.5 | 2102.8 | 2081.5 |
| 2998.5 | 40° | 2765.8 | 2533.1 | 2411.5 | 2289.9 | 2375.8 | 2461.6 | 2561.2 | 2660.8 | 2710.4 | 2660.8 |
| 3309.2 | 42.5° | 3078.3 | 2847.4 | 2777.4 | 2707.4 | 2894.5 | 3081.7 | 3262.9 | 3444.0 | 3550.4 | 3444.0 |
| 3692.9 | 45° | 3485.5 | 3278.0 | 3247.1 | 3216.2 | 3516.0 | 3816.0 | 4113.6 | 4411.3 | 4592.0 | 4411.3 |
| 4172.7 | 47.5° | 3970.9 | 3769.1 | 3762.8 | 3756.6 | 4189.2 | 4621.6 | 5057.4 | 5493.1 | 5749.0 | 5493.1 |
| 4801.6 | 50° | 4552.3 | 4303.2 | 4304.2 | 4305.3 | 4862.8 | 5420.3 | 5995.5 | 6570.7 | 6918.4 | 6570.7 |
| 5523.5 | 52.5° | 5221.7 | 4920.0 | 4889.5 | 4858.9 | 5524.8 | 6190.7 | 6902.4 | 7614.0 | 8030.9 | 7614.0 |
| 6292.1 | 55° | 5993.9 | 5695.7 | 5576.8 | 5457.8 | 6199.0 | 6940.1 | 7788.5 | 8636.9 | 9132.7 | 8636.9 |
| 6991.1 | 57.5° | 6828.7 | 6666.3 | 6427.7 | 6189.2 | 6937.6 | 7685.9 | 8646.9 | 9607.8 | 10222.6 | 9607.8 |
| 7413.6 | 60° | 7665.8 | 7918.0 | 7621.8 | 7325.5 | 8033.7 | 8741.9 | 9770.8 | 10799.7 | 11464.1 | 10799.7 |
| 7199.1 | 62.5° | 7888.2 | 8577.2 | 8543.9 | 8510.4 | 9159.2 | 9808.0 | 10786.9 | 11765.7 | 12379.9 | 11765.7 |
| 6769.7 | 65° | 7416.4 | 8063.2 | 8191.1 | 8319.0 | 9143.5 | 9968.0 | 10917.2 | 11866.4 | 12389.3 | 11866.4 |
| 6194.3 | 67.5° | 6809.5 | 7424.6 | 7484.6 | 7544.5 | 8403.5 | 9262.5 | 10215.8 | 11169.1 | 11578.8 | 11169.1 |
| 5503.1 | 70° | 6172.2 | 6841.3 | 6868.1 | 6895.0 | 7663.2 | 8431.3 | 9251.7 | 10072.0 | 10299.7 | 10072.0 |
| 4679.4 | 72.5° | 5447.2 | 6215.0 | 6234.3 | 6253.5 | 6854.6 | 7455.6 | 8070.0 | 8684.4 | 8707.4 | 8684.4 |
| 3637.4 | 75° | 4432.1 | 5226.7 | 5298.0 | 5369.4 | 5837.0 | 6304.6 | 6737.1 | 7169.6 | 7053.7 | 7169.6 |
| 2598.9 | 77.5° | 3340.6 | 4082.5 | 4184.6 | 4286.7 | 4642.2 | 4997.6 | 5304.4 | 5611.2 | 5412.0 | 5611.2 |
| 1701.0 | 80° | 2325.0 | 2949.0 | 3075.9 | 3202.8 | 3471.3 | 3739.7 | 3900.8 | 4061.8 | 3741.4 | 4061.8 |
| 988.8 | 82.5° | 1415.4 | 1842.1 | 1983.8 | 2125.6 | 2310.4 | 2495.2 | 2562.4 | 2629.6 | 2377.8 | 2629.6 |
| 435.0 | 85° | 661.5 | 887.9 | 1008.5 | 1129.1 | 1280.9 | 1432.7 | 1470.8 | 1509.0 | 1307.3 | 1509.0 |
| 134.7 | 87.5° | 210.8 | 286.9 | 354.2 | 421.4 | 497.4 | 573.3 | 576.5 | 579.7 | 486.7 | 579.7 |
| 0.0 | 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

REPORT NUMBER: P946753
 CATALOG NUMBER: GALN-SB2B-760-U-SLR

CANDELA DISTRIBUTION (continued):

| 325° | | 330° | 335° | 340° | 345° | 350° | 355° | 360° |
|---------|-------|--------|--------|--------|--------|--------|--------|--------|
| 1632.4 | 0° | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 | 1632.4 |
| 1801.8 | 2.5° | 1799.0 | 1793.3 | 1787.7 | 1778.3 | 1768.8 | 1762.1 | 1755.4 |
| 2013.0 | 5° | 2005.4 | 1992.9 | 1980.3 | 1957.2 | 1934.2 | 1910.9 | 1887.6 |
| 2216.1 | 7.5° | 2205.0 | 2184.5 | 2164.0 | 2130.0 | 2096.0 | 2058.2 | 2020.4 |
| 2350.5 | 10° | 2339.7 | 2315.6 | 2291.4 | 2251.5 | 2211.6 | 2166.9 | 2122.2 |
| 2394.4 | 12.5° | 2388.5 | 2371.0 | 2353.5 | 2317.5 | 2281.4 | 2233.0 | 2184.5 |
| 2346.3 | 15° | 2352.6 | 2352.0 | 2351.3 | 2328.7 | 2306.0 | 2264.3 | 2222.4 |
| 2227.1 | 17.5° | 2250.3 | 2275.7 | 2301.0 | 2300.7 | 2300.2 | 2272.0 | 2243.7 |
| 2074.7 | 20° | 2115.4 | 2171.4 | 2227.4 | 2257.2 | 2286.9 | 2277.0 | 2267.2 |
| 1929.6 | 22.5° | 1980.6 | 2063.0 | 2145.4 | 2207.0 | 2268.6 | 2281.6 | 2294.5 |
| 1807.3 | 25° | 1860.9 | 1960.9 | 2060.9 | 2154.5 | 2248.1 | 2288.8 | 2329.5 |
| 1709.2 | 27.5° | 1761.9 | 1872.8 | 1983.6 | 2107.5 | 2231.5 | 2304.4 | 2377.1 |
| 1639.2 | 30° | 1688.1 | 1803.6 | 1919.1 | 2071.7 | 2224.3 | 2332.8 | 2441.3 |
| 1619.1 | 32.5° | 1657.5 | 1766.1 | 1874.7 | 2047.3 | 2219.9 | 2368.5 | 2517.1 |
| 1726.0 | 35° | 1735.0 | 1810.3 | 1885.7 | 2065.6 | 2245.5 | 2427.3 | 2609.2 |
| 2040.5 | 37.5° | 1999.6 | 2004.4 | 2009.3 | 2172.8 | 2336.3 | 2550.3 | 2764.2 |
| 2561.2 | 40° | 2461.6 | 2375.8 | 2289.9 | 2411.5 | 2533.1 | 2765.8 | 2998.5 |
| 3262.9 | 42.5° | 3081.7 | 2894.5 | 2707.4 | 2777.4 | 2847.4 | 3078.3 | 3309.2 |
| 4113.6 | 45° | 3816.0 | 3516.0 | 3216.2 | 3247.1 | 3278.0 | 3485.5 | 3692.9 |
| 5057.4 | 47.5° | 4621.6 | 4189.2 | 3756.6 | 3762.8 | 3769.1 | 3970.9 | 4172.7 |
| 5995.5 | 50° | 5420.3 | 4862.8 | 4305.3 | 4304.2 | 4303.2 | 4552.3 | 4801.6 |
| 6902.4 | 52.5° | 6190.7 | 5524.8 | 4858.9 | 4889.5 | 4920.0 | 5221.7 | 5523.5 |
| 7788.5 | 55° | 6940.1 | 6199.0 | 5457.8 | 5576.8 | 5695.7 | 5993.9 | 6292.1 |
| 8646.9 | 57.5° | 7685.9 | 6937.6 | 6189.2 | 6427.7 | 6666.3 | 6828.7 | 6991.1 |
| 9770.8 | 60° | 8741.9 | 8033.7 | 7325.5 | 7621.8 | 7918.0 | 7665.8 | 7413.6 |
| 10786.9 | 62.5° | 9808.0 | 9159.2 | 8510.4 | 8543.9 | 8577.2 | 7888.2 | 7199.1 |
| 10917.2 | 65° | 9968.0 | 9143.5 | 8319.0 | 8191.1 | 8063.2 | 7416.4 | 6769.7 |
| 10215.8 | 67.5° | 9262.5 | 8403.5 | 7544.5 | 7484.6 | 7424.6 | 6809.5 | 6194.3 |
| 9251.7 | 70° | 8431.3 | 7663.2 | 6895.0 | 6868.1 | 6841.3 | 6172.2 | 5503.1 |
| 8070.0 | 72.5° | 7455.6 | 6854.6 | 6253.5 | 6234.3 | 6215.0 | 5447.2 | 4679.4 |
| 6737.1 | 75° | 6304.6 | 5837.0 | 5369.4 | 5298.0 | 5226.7 | 4432.1 | 3637.4 |
| 5304.4 | 77.5° | 4997.6 | 4642.2 | 4286.7 | 4184.6 | 4082.5 | 3340.6 | 2598.9 |
| 3900.8 | 80° | 3739.7 | 3471.3 | 3202.8 | 3075.9 | 2949.0 | 2325.0 | 1701.0 |
| 2562.4 | 82.5° | 2495.2 | 2310.4 | 2125.6 | 1983.8 | 1842.1 | 1415.4 | 988.8 |
| 1470.8 | 85° | 1432.7 | 1280.9 | 1129.1 | 1008.5 | 887.9 | 661.5 | 435.0 |
| 576.5 | 87.5° | 573.3 | 497.4 | 421.4 | 354.2 | 286.9 | 210.8 | 134.7 |
| 0.0 | 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

(END OF REPORT)