

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P950383

Luminaire Tested: **GALN-SB4D-835-U-SLL-HSS**

Issue Date: 1/21/2025

**Test Information**

Test Method: LM-79-08  
Report Number: P950383  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/21/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: McGRAW-EDISON  
Catalog Number: GALN-SB4D-835-U-SLL-HSS  
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE  
(4) 80 CRI, 3500K, 900mA LIGHTSQUARES WITH 26 LEDS EACH AND SPILL LIGHT  
ELIMINATOR LEFT OPTICS WITH HOUSE SIDE SHIELD  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 28870 lumens  
Efficiency: N/A  
Efficacy: 98.3 lumens/watt  
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')  
IES Classification: Type IV - Short  
BUG Rating: B3 - U0 - G5  
  
Input Watts (W): 293.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



REPORT NUMBER: P950383  
 CATALOG NUMBER: GALN-SB4D-835-U-SLL-HSS

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

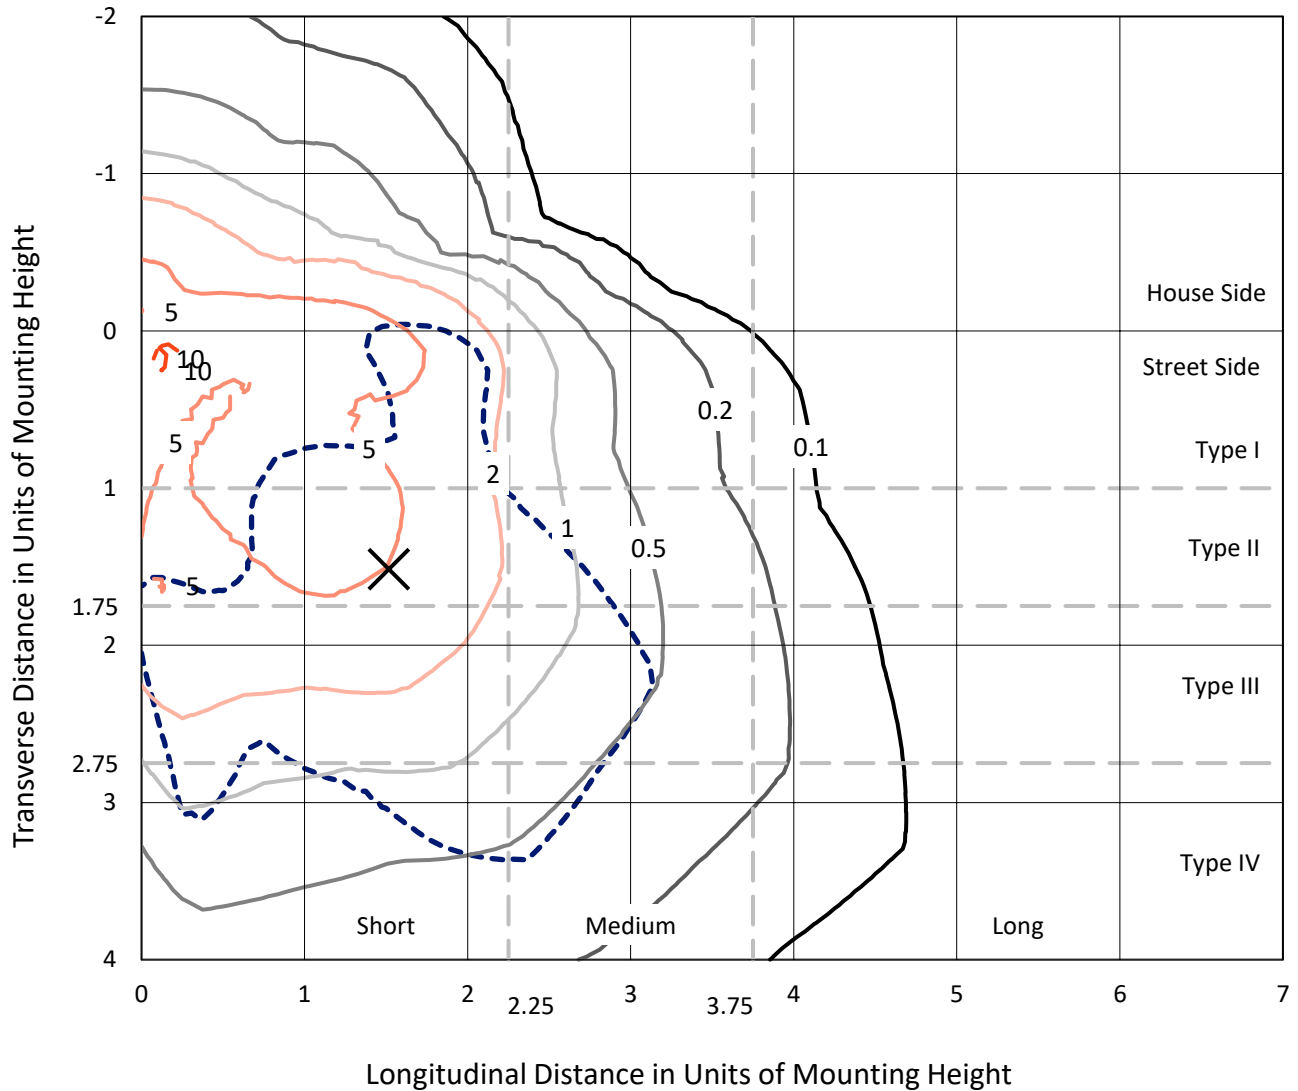

Based on 25 foot mounting height. Maximum calculated value = 10.5 fc  
 Type IV - Short - N/A

REPORT NUMBER: P950383  
CATALOG NUMBER: GALN-SB4D-835-U-SLL-HSS

### Luminous Intensity Polar Plot

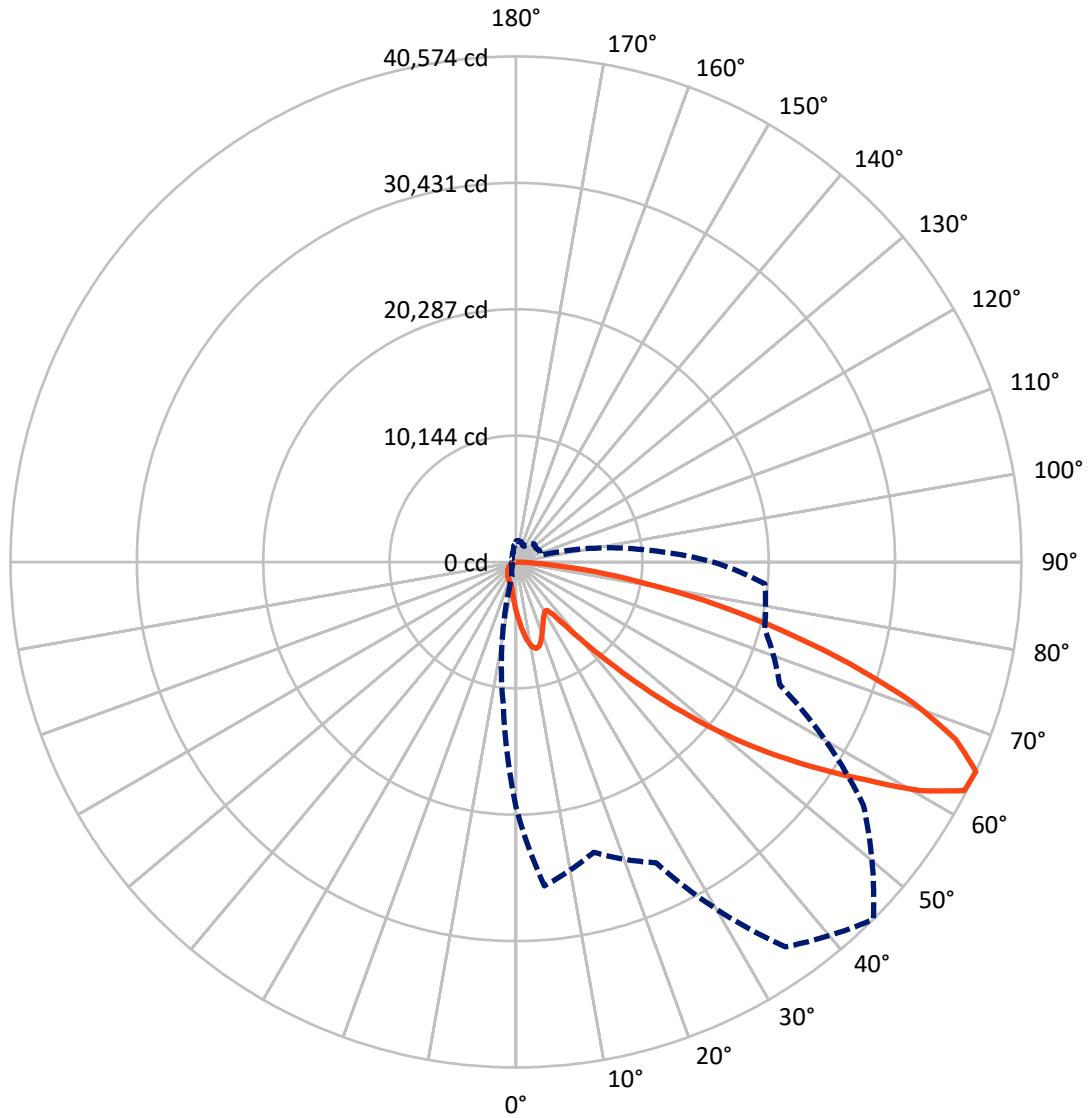

— Vertical Plane Through 45-Deg Lateral      - - - Horizontal Cone Through 65-Deg Vertical

REPORT NUMBER: P950383  
 CATALOG NUMBER: GALN-SB4D-835-U-SLL-HSS

**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	5738.5	0.0	5738.5
	% Fixture	19.9	0.0	19.9
<b>Street Side</b>	Lumens	23131.5	0.0	23131.5
	% Fixture	80.1	0.0	80.1
<b>Total</b>	Lumens	28870.0	0.0	28870.0
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	393.6	1.4
10°-20°	1179.8	4.1
20°-30°	1738.1	6.0
30°-40°	2233.0	7.7
40°-50°	3611.4	12.5
50°-60°	6333.0	21.9
60°-70°	7924.3	27.4
70°-80°	4630.6	16.0
80°-90°	826.2	2.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	28870.0	100.0
0°-180°	28870.0	100.0

**Coefficient of Utilization**



REPORT NUMBER: P950383


CATALOG NUMBER: GALN-SB4D-835-U-SLL-HSS

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	1931.7	6.7			
FM (30°-60°)	9059.8	31.4			
FH (60°-80°)	11352.6	39.3			G4/12000
FVH (80°-90°)	787.5	2.7			G5
BL (0°-30°)	1379.8	4.8	B3/2500		
BM (30°-60°)	3117.7	10.8	B3/5000		
BH (60°-80°)	1202.3	4.2	B3/2500		G3/2500
BVH (80°-90°)	38.7	0.1			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B3-U0-G5**

Type IV Short

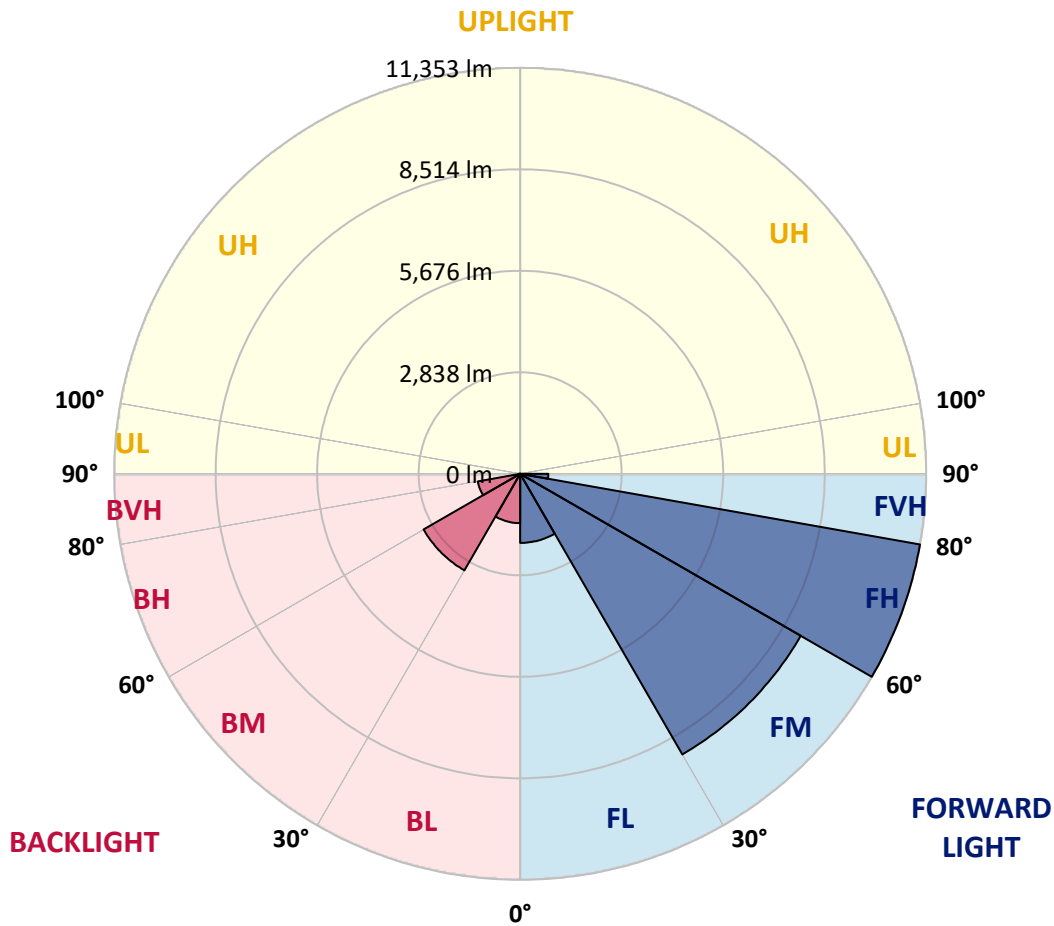

REPORT NUMBER: P950383

CATALOG NUMBER: GALN-SB4D-835-U-SLL-HSS

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°
0°	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6
2.5°	4478.9	4512.7	4588.3	4628.0	4689.7	4693.7	4693.7	4640.0	4638.0	4528.6
5°	5005.9	5085.5	5264.5	5449.4	5489.2	5499.1	5479.3	5371.9	5292.3	5079.5
7.5°	5529.0	5682.1	5954.6	6201.2	6280.8	6280.8	6233.0	6058.0	5894.9	5586.7
10°	5962.5	6155.5	6525.4	6801.8	6893.3	6873.4	6776.0	6555.2	6330.5	5956.6
12.5°	6248.9	6465.7	6871.4	7094.2	7187.7	7136.0	7024.6	6809.8	6573.1	6179.3
15°	6392.1	6618.9	6970.9	7088.2	7062.4	7008.7	6994.8	6891.3	6712.3	6344.4
17.5°	6453.8	6664.6	6909.2	6835.6	6616.9	6575.1	6714.3	6845.6	6801.8	6487.6
20°	6511.5	6688.5	6762.1	6435.9	6054.0	6016.2	6282.8	6656.7	6847.6	6620.9
22.5°	6591.0	6700.4	6549.3	6014.3	5602.6	5515.1	5809.4	6372.2	6861.5	6789.9
25°	6700.4	6730.2	6314.6	5614.5	5200.8	5113.3	5387.8	6056.0	6837.6	6972.9
27.5°	6831.7	6770.0	6089.8	5280.4	4880.6	4799.1	5073.5	5751.7	6770.0	7155.9
30°	7002.7	6821.7	5867.1	5021.8	4651.9	4592.2	4856.8	5489.2	6686.5	7388.5
32.5°	7175.7	6843.6	5660.2	4870.7	4600.2	4622.1	4838.9	5348.0	6595.0	7611.3
35°	7362.7	6913.2	5558.8	5019.8	5031.8	5222.7	5312.2	5479.3	6581.1	7913.6
37.5°	7617.3	7068.3	5680.1	5761.7	6175.4	6571.1	6497.5	6121.7	6742.2	8365.1
40°	7983.2	7340.8	6209.2	7024.6	7873.8	8516.2	8235.8	7289.1	7235.4	9015.4
42.5°	8516.2	7774.4	7147.9	8567.9	10007.8	11065.9	10314.1	8794.7	8098.6	9944.2
45°	9303.8	8476.4	8283.5	10196.8	12639.1	14305.7	12742.5	10399.7	9307.8	11350.3
47.5°	10395.7	9508.7	9347.6	11913.2	15837.1	17993.0	15435.4	11887.3	10684.1	13267.6
50°	11845.5	10898.9	10355.9	13790.6	19343.5	21752.0	18126.3	13323.2	12261.2	15610.4
52.5°	13758.8	12838.0	11531.3	15578.6	22949.2	25431.3	20829.1	14584.2	14218.2	18329.2
55°	16368.2	15755.6	13138.3	17285.0	26553.0	29132.5	23426.6	15773.5	16803.7	21559.0
57.5°	19606.0	20043.5	15455.3	19263.9	29792.8	32947.1	26035.9	17436.2	20160.9	25170.8
60°	21694.3	25745.6	19892.4	22189.5	33474.2	37260.9	29611.9	20598.4	23689.1	26465.5
62.5°	21189.1	27559.4	25206.6	25924.5	36859.2	40397.3	33116.2	23774.6	24353.4	24558.2
65°	19639.8	26095.6	24122.7	26650.5	37716.4	40574.4	34052.9	23364.9	20658.1	20049.5
67.5°	17507.8	24359.3	21547.1	24725.3	36167.1	38100.2	32308.7	20668.0	15964.4	15045.6
70°	15206.7	22438.1	19856.6	22565.4	33213.7	33788.4	29343.4	18178.0	11742.1	10161.0
72.5°	13022.9	20437.3	18699.1	20351.8	29273.8	28084.4	25483.0	15976.4	8550.0	7328.9
75°	10789.5	17485.9	17050.3	17722.6	24092.8	22121.9	21173.2	13227.8	6710.4	5302.3
77.5°	8325.3	13663.3	14665.7	14192.4	16958.9	16431.8	16411.9	9940.2	4902.5	3538.1
80°	5698.0	9522.6	11457.7	10011.8	11006.2	10737.8	12360.6	6668.6	3556.0	2130.0
82.5°	3349.2	5797.5	7975.3	4846.8	6085.9	6247.0	7360.7	3243.8	2092.3	491.2
85°	1358.4	2289.2	3118.5	1897.4	2935.5	2476.1	2794.3	910.9	582.7	11.9
87.5°	342.1	731.9	513.1	212.8	340.1	312.2	246.6	111.4	23.9	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P950383  
 CATALOG NUMBER: GALN-SB4D-835-U-SLL-HSS

**CANDELA DISTRIBUTION (continued):**

90°		95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
3997.6	0°	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6
4516.7	2.5°	4439.1	4393.4	4280.0	4166.6	4075.1	3951.8	3870.3	3772.8	3679.4	3595.8
5033.8	5°	4908.5	4757.3	4550.5	4361.5	4168.6	3981.7	3796.7	3601.8	3422.8	3313.4
5471.3	7.5°	5290.3	5023.8	4749.4	4508.7	4276.0	4057.2	3812.6	3575.9	3295.5	3146.3
5805.4	10°	5574.7	5224.7	4864.7	4588.3	4353.6	4140.8	3933.9	3695.3	3357.2	3170.2
6008.3	12.5°	5761.7	5346.0	4924.4	4608.1	4345.6	4180.5	4089.1	3995.6	3659.5	3440.7
6157.5	15°	5890.9	5431.5	4966.1	4562.4	4240.2	4118.9	4210.4	4317.8	4103.0	3850.4
6312.6	17.5°	6032.2	5542.9	4984.0	4439.1	4035.4	3983.6	4220.3	4468.9	4459.0	4208.4
6459.8	20°	6181.3	5640.4	4972.1	4240.2	3786.8	3832.5	4134.8	4423.2	4544.5	4409.3
6628.8	22.5°	6334.5	5733.8	4926.4	3981.7	3554.1	3697.3	3999.6	4252.1	4395.3	4353.6
6835.6	25°	6527.4	5865.1	4858.7	3703.2	3361.1	3560.0	3842.4	4047.3	4146.7	4144.7
7058.4	27.5°	6758.1	6040.1	4822.9	3478.5	3223.9	3404.9	3655.5	3838.5	3908.1	3908.1
7334.8	30°	7026.6	6247.0	4783.2	3331.3	3144.4	3243.8	3438.7	3617.7	3687.3	3687.3
7637.2	32.5°	7324.9	6445.8	4687.7	3241.8	3084.7	3086.7	3210.0	3373.1	3456.6	3468.5
8015.0	35°	7682.9	6658.6	4478.9	3170.2	3015.1	2933.5	2993.2	3128.4	3227.9	3253.7
8554.0	37.5°	8152.3	6919.2	4180.5	3064.8	2907.7	2772.4	2786.4	2889.8	2999.2	3038.9
9297.8	40°	8782.7	7225.5	3870.3	2913.7	2756.5	2595.4	2589.5	2665.0	2772.4	2816.2
10304.2	42.5°	9616.0	7593.4	3573.9	2768.5	2573.6	2408.5	2398.5	2458.2	2551.7	2597.4
11632.7	45°	10682.1	8044.9	3319.4	2655.1	2394.6	2231.5	2227.5	2277.2	2358.8	2406.5
13333.2	47.5°	12163.8	8496.3	3146.3	2595.4	2253.4	2086.3	2094.3	2138.0	2211.6	2245.4
15534.8	50°	14094.9	8633.6	3058.8	2595.4	2177.8	1957.0	1996.8	2032.6	2088.3	2108.2
18174.0	52.5°	15948.5	8180.1	2979.3	2611.3	2187.7	1847.6	1933.2	1959.0	2006.7	2014.7
20620.3	55°	16857.4	7032.5	2869.9	2615.3	2249.4	1754.2	1881.4	1929.2	1947.1	1945.1
22040.3	57.5°	16545.2	5686.1	2684.9	2599.4	2291.1	1694.5	1817.8	1909.3	1921.2	1903.3
21769.9	60°	15449.3	4186.5	2543.7	2482.1	2275.2	1676.6	1720.3	1865.5	1883.4	1859.6
19685.6	62.5°	13611.6	2905.7	2434.3	2223.5	2205.6	1670.6	1567.2	1770.1	1813.8	1780.0
15823.2	65°	10715.9	2052.5	2096.2	1949.1	2054.5	1638.8	1408.1	1654.7	1714.4	1662.7
11479.6	67.5°	7251.3	1481.7	1698.5	1766.1	1809.8	1567.2	1292.7	1523.5	1603.0	1535.4
7366.7	70°	3916.0	1040.2	1121.7	1487.7	1537.4	1443.9	1189.3	1390.2	1481.7	1408.1
5236.6	72.5°	2313.0	747.8	785.6	1195.3	1280.8	1270.9	1074.0	1235.1	1346.4	1258.9
3613.7	75°	1274.8	505.2	560.9	867.1	1040.2	980.5	922.8	1046.1	1159.5	1074.0
2265.3	77.5°	570.8	302.3	389.8	568.8	817.4	672.2	714.0	815.4	920.8	831.3
1260.9	80°	220.8	169.1	258.5	310.3	594.7	371.9	459.4	600.6	676.2	604.6
274.5	82.5°	27.8	75.6	111.4	121.3	346.1	196.9	266.5	377.9	371.9	322.2
0.0	85°	0.0	13.9	15.9	8.0	149.2	71.6	87.5	123.3	115.4	87.5
0.0	87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.0	0.0
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P950383  
 CATALOG NUMBER: GALN-SB4D-835-U-SLL-HSS

**CANDELA DISTRIBUTION (continued):**

185°		195°	205°	215°	225°	235°	245°	255°	265°	270°	275°
3997.6	0°	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6
3579.9	2.5°	3482.5	3410.9	3375.1	3345.2	3373.1	3389.0	3389.0	3456.6	3496.4	3512.3
3243.8	5°	3068.8	2935.5	2846.0	2792.3	2810.2	2830.1	2852.0	2937.5	2995.2	3033.0
3011.1	7.5°	2742.6	2539.8	2414.5	2348.8	2358.8	2372.7	2390.6	2474.1	2531.8	2581.5
2967.4	10°	2581.5	2295.1	2130.0	2050.5	2036.6	2028.6	2022.7	2072.4	2116.1	2155.9
3146.3	12.5°	2589.5	2189.7	1988.8	1891.4	1849.6	1801.9	1764.1	1772.1	1799.9	1849.6
3466.6	15°	2690.9	2155.9	1915.3	1793.9	1724.3	1668.6	1622.9	1613.0	1622.9	1630.8
3832.5	17.5°	2828.1	2151.9	1851.6	1700.5	1628.9	1583.1	1541.4	1527.4	1529.4	1539.4
4075.1	20°	2937.5	2140.0	1780.0	1611.0	1547.3	1507.5	1465.8	1451.9	1455.8	1457.8
4099.0	22.5°	2995.2	2122.1	1700.5	1521.5	1467.8	1428.0	1390.2	1388.2	1388.2	1400.1
3969.7	25°	2995.2	2084.3	1628.9	1435.9	1388.2	1352.4	1306.7	1314.6	1318.6	1334.5
3768.9	27.5°	2923.6	2012.7	1571.2	1362.4	1312.6	1276.8	1235.1	1245.0	1251.0	1268.9
3570.0	30°	2832.1	1927.2	1505.6	1292.7	1235.1	1209.2	1173.4	1177.4	1185.3	1205.2
3385.0	32.5°	2734.7	1825.8	1451.9	1223.1	1165.5	1145.6	1105.8	1111.8	1119.7	1141.6
3202.0	35°	2627.3	1706.4	1388.2	1159.5	1101.8	1085.9	1040.2	1044.1	1056.1	1079.9
3005.1	37.5°	2513.9	1609.0	1324.6	1097.8	1038.2	1022.3	974.5	978.5	992.4	1020.3
2798.3	40°	2402.5	1513.5	1256.9	1032.2	972.5	958.6	906.9	910.9	926.8	956.6
2589.5	42.5°	2281.2	1439.9	1169.4	964.6	900.9	887.0	839.3	845.3	863.2	893.0
2396.6	45°	2136.0	1392.2	1072.0	900.9	829.3	815.4	771.7	783.6	803.5	833.3
2231.5	47.5°	1986.9	1372.3	990.4	833.3	755.8	743.8	708.0	727.9	749.8	773.7
2090.3	50°	1843.7	1346.4	906.9	769.7	692.1	680.2	656.3	682.2	704.0	725.9
1988.8	52.5°	1680.6	1290.8	831.3	714.0	638.4	634.4	622.5	646.4	666.3	686.2
1901.3	55°	1511.5	1201.3	765.7	664.3	592.7	596.7	590.7	610.6	626.5	644.4
1821.8	57.5°	1364.3	1087.9	714.0	610.6	552.9	564.8	556.9	566.8	576.8	598.6
1726.3	60°	1215.2	952.7	656.3	546.9	513.1	527.0	505.2	503.2	507.2	513.1
1585.1	62.5°	1014.3	811.4	584.7	491.2	469.4	475.3	433.6	401.7	401.7	407.7
1388.2	65°	815.4	680.2	505.2	427.6	409.7	405.7	346.1	302.3	298.3	316.2
1159.5	67.5°	670.2	564.8	425.6	356.0	344.1	348.0	304.3	260.5	256.6	276.4
944.7	70°	554.9	455.4	340.1	274.5	286.4	304.3	260.5	218.8	212.8	230.7
767.7	72.5°	441.5	356.0	260.5	202.9	236.7	258.5	212.8	173.0	169.1	185.0
592.7	75°	324.2	254.6	177.0	147.2	183.0	202.9	155.1	123.3	117.3	131.3
395.8	77.5°	200.9	143.2	111.4	87.5	125.3	135.2	81.5	71.6	69.6	79.6
240.6	80°	93.5	61.7	53.7	29.8	45.7	53.7	33.8	37.8	39.8	47.7
121.3	82.5°	25.9	9.9	2.0	0.0	0.0	15.9	8.0	15.9	19.9	29.8
9.9	85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.0	9.9	17.9
0.0	87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.0
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P950383  
 CATALOG NUMBER: GALN-SB4D-835-U-SLL-HSS

**CANDELA DISTRIBUTION (continued):**

285°		295°	305°	315°	325°	335°	345°	355°	360°
3997.6	0°	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6	3997.6
3623.7	2.5°	3707.2	3786.8	3914.0	4045.3	4174.6	4305.8	4433.1	4478.9
3206.0	5°	3363.1	3546.1	3798.7	4069.2	4347.6	4630.0	4888.6	5005.9
2774.4	7.5°	2979.3	3241.8	3621.7	4045.3	4488.8	4932.3	5340.0	5529.0
2346.8	10°	2569.6	2901.7	3335.3	3908.1	4544.5	5157.1	5717.9	5962.5
1970.9	12.5°	2179.8	2527.8	3007.1	3693.3	4500.7	5286.3	5960.6	6248.9
1706.4	15°	1853.6	2161.9	2679.0	3438.7	4359.5	5294.3	6075.9	6392.1
1559.3	17.5°	1609.0	1809.8	2344.8	3156.3	4174.6	5220.7	6115.7	6453.8
1479.7	20°	1487.7	1543.3	1911.3	2794.3	4001.5	5151.1	6155.5	6511.5
1416.1	22.5°	1416.1	1430.0	1563.2	2326.9	3794.7	5129.2	6225.1	6591.0
1358.4	25°	1358.4	1362.4	1398.2	1843.7	3478.5	5115.3	6332.5	6700.4
1298.7	27.5°	1300.7	1300.7	1320.6	1485.7	3048.9	5055.6	6471.7	6831.7
1239.0	30°	1243.0	1243.0	1256.9	1314.6	2545.7	4938.3	6638.8	7002.7
1179.4	32.5°	1183.4	1183.4	1195.3	1237.1	2032.6	4791.1	6791.9	7175.7
1117.7	35°	1123.7	1119.7	1135.6	1179.4	1616.9	4604.2	6945.0	7362.7
1056.1	37.5°	1060.1	1058.1	1074.0	1123.7	1396.2	4387.4	7060.4	7617.3
994.4	40°	992.4	992.4	1010.3	1064.0	1332.5	4114.9	7243.4	7983.2
930.8	42.5°	930.8	926.8	946.7	1012.3	1284.8	3854.4	7571.5	8516.2
873.1	45°	871.1	863.2	881.1	962.6	1201.3	3762.9	8184.1	9303.8
817.4	47.5°	815.4	795.5	811.4	902.9	1125.7	4105.0	9186.5	10395.7
767.7	50°	769.7	731.9	745.8	843.3	1068.0	4846.8	10487.2	11845.5
721.9	52.5°	721.9	672.2	680.2	769.7	1016.3	5552.8	11897.2	13758.8
676.2	55°	672.2	616.5	620.5	696.1	942.7	5658.3	13273.5	16368.2
624.5	57.5°	616.5	564.8	564.8	628.5	889.0	4904.5	14331.6	19606.0
560.9	60°	554.9	521.1	511.1	574.8	936.7	3460.6	14454.9	21694.3
479.3	62.5°	487.3	469.4	455.4	523.1	972.5	2050.5	13462.5	21189.1
377.9	65°	409.7	405.7	395.8	574.8	819.4	1211.2	11557.2	19639.8
322.2	67.5°	344.1	338.1	338.1	602.6	622.5	761.7	9029.3	17507.8
274.5	70°	296.3	274.5	274.5	455.4	377.9	527.0	6304.6	15206.7
226.7	72.5°	248.6	224.7	208.8	364.0	282.4	385.8	3939.9	13022.9
173.0	75°	198.9	181.0	161.1	240.6	210.8	292.4	2289.2	10789.5
109.4	77.5°	143.2	135.2	113.4	177.0	153.1	210.8	1362.4	8325.3
67.6	80°	73.6	75.6	71.6	101.4	103.4	143.2	775.6	5698.0
43.8	82.5°	43.8	33.8	37.8	49.7	59.7	81.5	292.4	3349.2
31.8	85°	27.8	17.9	17.9	23.9	29.8	31.8	89.5	1358.4
15.9	87.5°	13.9	6.0	8.0	11.9	9.9	8.0	4.0	342.1
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)