

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1438453

Luminaire Tested: **GALN-SB6A-927-U-T4LG-HSS**

Issue Date: 03/27/202

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763



**Test Information**

Test Method: LM-79-08  
 Report Number: P1438453  
 Test Lab: INNOVATION CENTER(G1)  
 Issue Date: 03/27/202  
 Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
 Product Line: McGRAW-EDISON  
 Catalog Number: GALN-SB6A-927-U-T4LG-HSS  
 Description: GALLEON II AREA AND ROADWAY HIGH DENSITY LUMINAIRE 350mA 6xLight  
 Square PACKAGE 90CRI 2700K FIXTURE w/ TYPE IV LOW GLARE WITH HOUSE SIDE  
 SHIELD  
 Light Source: (156) 2700K CCT, 90 CRI LEDS  
 Ballast/Driver: ELECTRONIC DRIVER  
 Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
a	good	reflector
b	good	lens
c	good	housing
d	good	cord


**Summary**

Lumens per Lamp: N/A  
 Luminaire Lumens: 11999.4 lumens  
 Efficiency: N/A  
 Efficacy: 70.2 lumens/watt  
 Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')  
 IES Classification: Type IV - Short  
 BUG Rating: B1 - U0 - G2  
  
 Input Watts (W): 170.9  
 Input Voltage (V): 120  
 Input Current (A<sub>in</sub>): NR  
 Voltage Rise (V): NR  
 Power Factor: 0.97  
 Total Harmonic Distortion (THDi): NR  
 Frequency (hertz): 60  
 Stabilization Time: NR  
 Operation Time: NR  
 Ambient Temperature (°C): NR  
 Test Distance: 28.75 FT

REPORT NUMBER: P1438453  
 CATALOG NUMBER: GALN-SB6A-927-U-T4LG-HSS

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

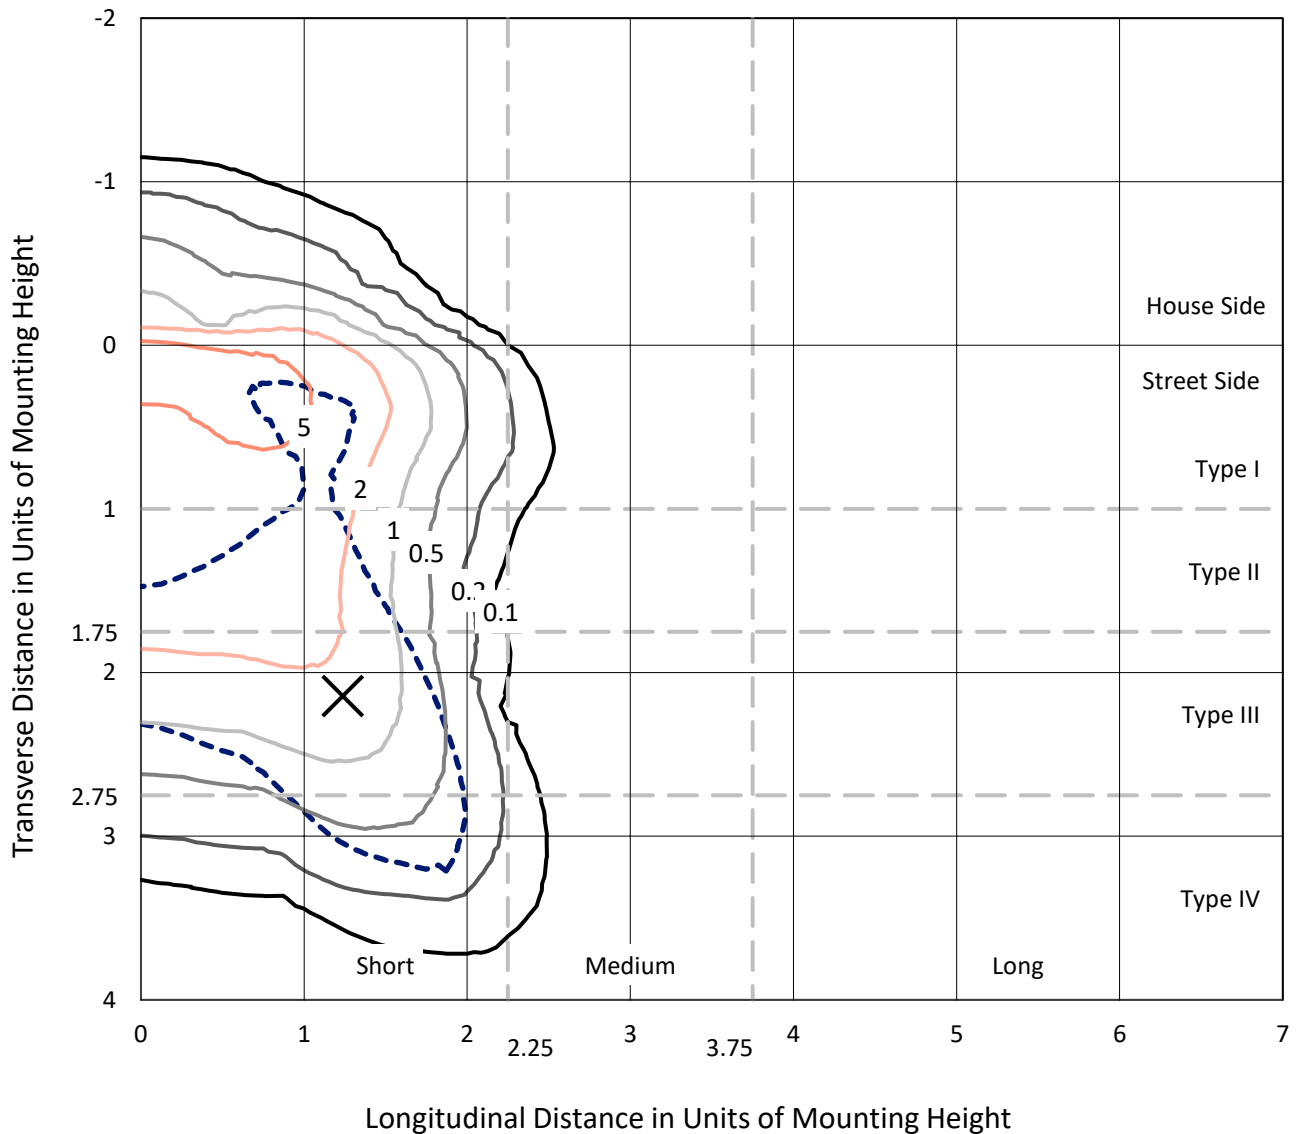

Based on 20 foot mounting height. Maximum calculated value = 9 fc  
 Type IV - Short - N/A

REPORT NUMBER: P1438453  
CATALOG NUMBER: GALN-SB6A-927-U-T4LG-HSS

### Luminous Intensity Polar Plot

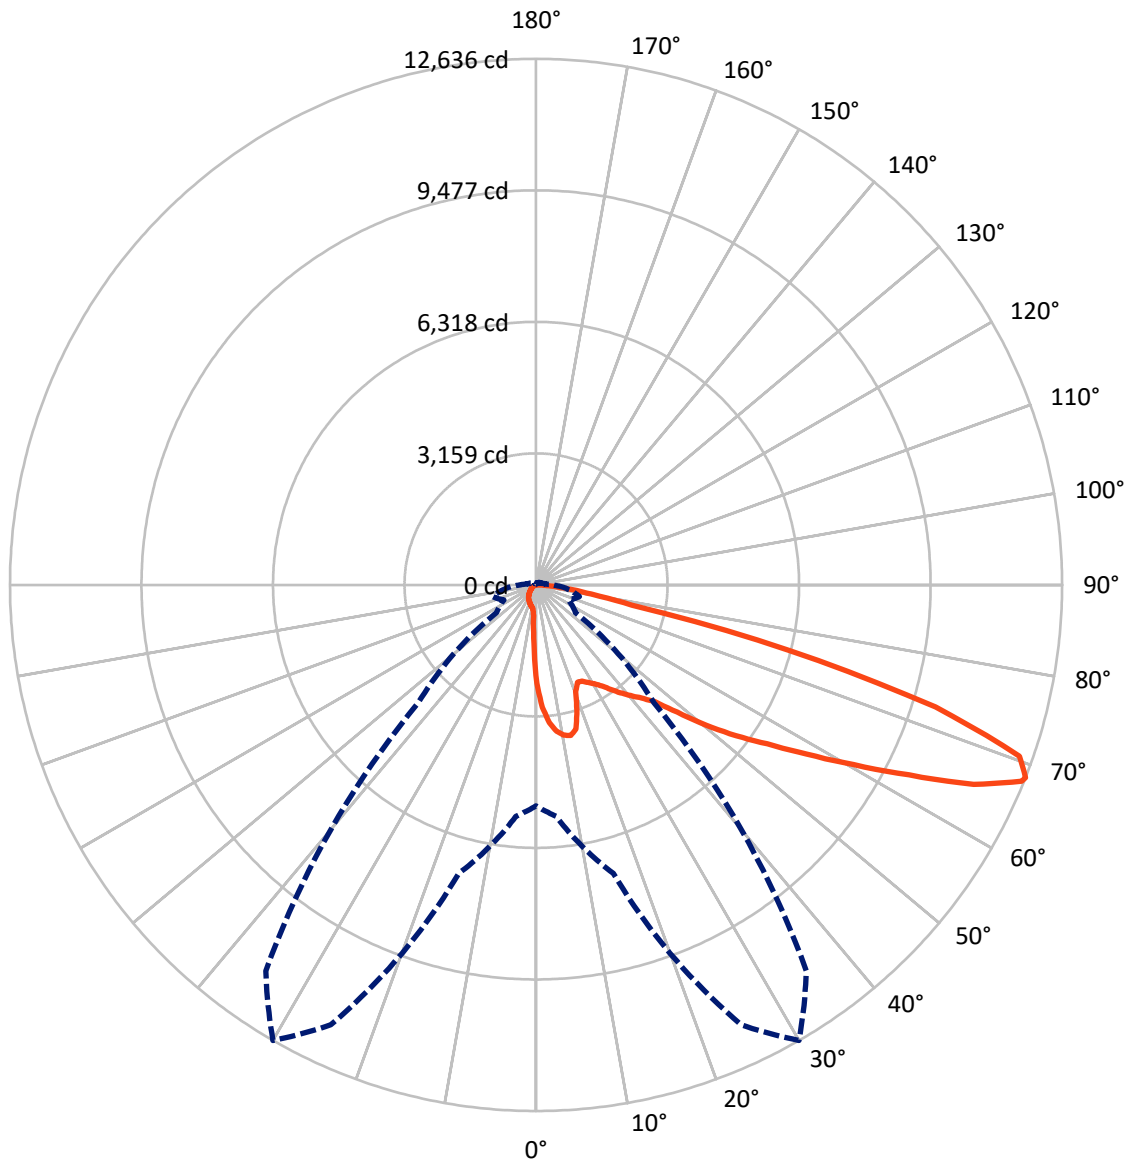

— Vertical Plane Through 30-Deg Lateral      - - - Horizontal Cone Through 68-Deg Vertical



REPORT NUMBER: P1438453  
 CATALOG NUMBER: GALN-SB6A-927-U-T4LG-HSS

**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	915.9	0.0	915.9
	% Fixture	7.6	0.0	7.6
<b>Street Side</b>	Lumens	11083.5	0.0	11083.5
	% Fixture	92.4	0.0	92.4
<b>Total</b>	Lumens	11999.4	0.0	11999.4
	% Fixture	100.0	0.0	100.0

**Coefficient of Utilization**

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	204.2	1.7
10°-20°	582.9	4.9
20°-30°	916.0	7.6
30°-40°	1436.7	12.0
40°-50°	2147.4	17.9
50°-60°	2856.7	23.8
60°-70°	2761.6	23.0
70°-80°	992.7	8.3
80°-90°	101.3	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	11999.4	100.0
0°-180°	11999.4	100.0




REPORT NUMBER: P1438453  
 CATALOG NUMBER: GALN-SB6A-927-U-T4LG-HSS

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1432.7	11.9			
FM	(30°-60°)	5894.1	49.1			
FH	(60°-80°)	3659.0	30.5			G2/5000
FVH	(80°-90°)	97.7	0.8			G1/100
BL	(0°-30°)	270.3	2.3	B1/500		
BM	(30°-60°)	546.7	4.6	B1/1000		
BH	(60°-80°)	95.3	0.8	B0/110		G0/110
BVH	(80°-90°)	3.6	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B1-U0-G2**  
 Type IV Short

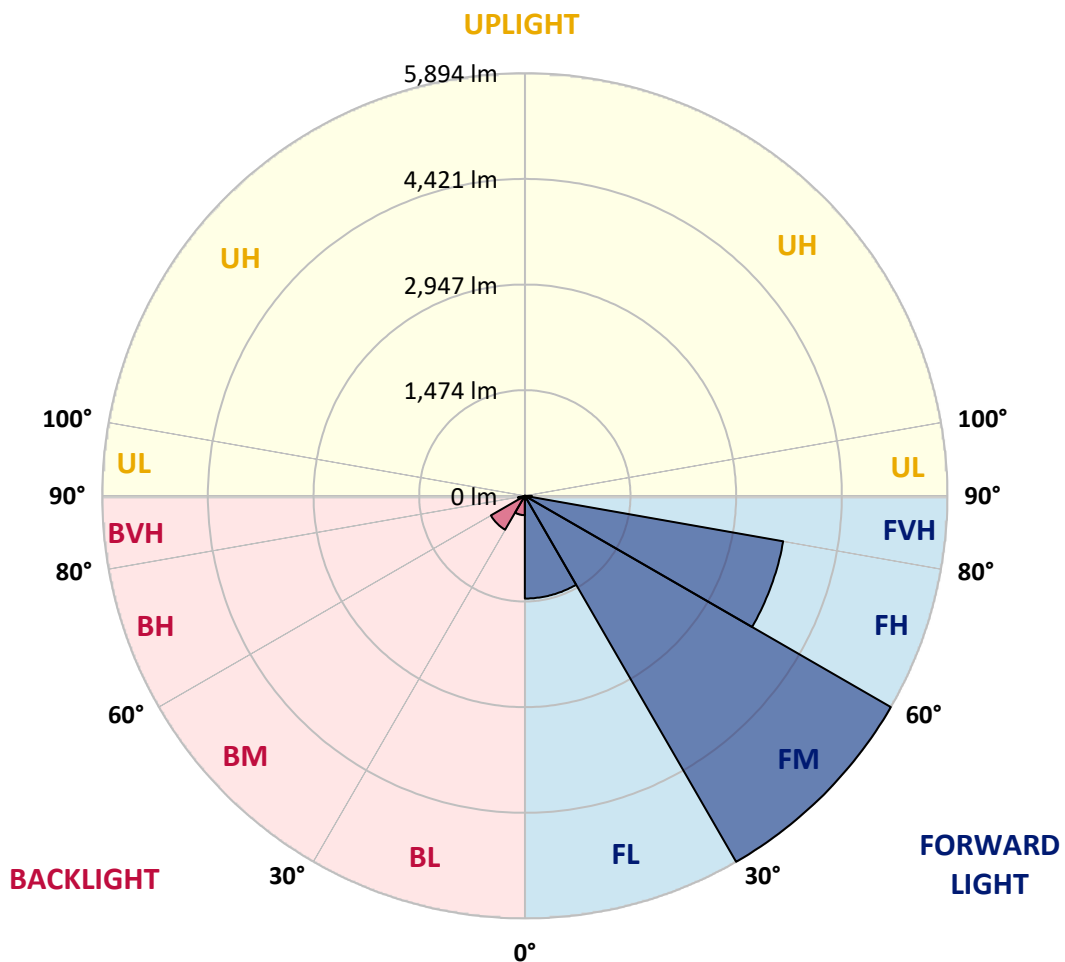



REPORT NUMBER: P1438453

CATALOG NUMBER: GALN-SB6A-927-U-T4LG-HSS

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	30°	35°	45°	55°	65°	75°	85°
0°	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1
2.5°	3024.2	3024.2	3002.6	2973.8	2941.5	2930.7	2869.6	2783.3	2693.4	2589.1	2438.0
5°	3412.5	3409.0	3365.8	3365.8	3322.6	3283.1	3222.0	3096.1	2952.3	2765.3	2502.8
7.5°	3585.2	3592.3	3574.4	3574.4	3549.2	3520.4	3484.5	3362.2	3193.2	2941.5	2567.5
10°	3646.3	3649.9	3649.9	3675.1	3667.9	3664.3	3660.7	3592.3	3416.1	3121.3	2635.8
12.5°	3498.8	3516.8	3567.2	3678.6	3714.6	3754.2	3808.1	3786.5	3664.3	3347.8	2740.1
15°	3024.2	3027.8	3168.0	3444.9	3592.3	3743.4	3951.9	3995.1	3916.0	3592.3	2848.0
17.5°	2495.6	2506.4	2617.8	2927.1	3164.4	3513.2	4034.6	4210.8	4182.1	3833.3	2948.7
20°	2276.2	2290.6	2344.6	2538.7	2718.5	3042.2	3951.9	4415.8	4426.6	4074.2	3042.2
22.5°	2225.9	2236.7	2279.8	2430.9	2542.3	2758.1	3671.5	4577.6	4703.5	4351.1	3153.6
25°	2211.5	2222.3	2287.0	2452.4	2556.7	2736.5	3416.1	4663.9	5030.7	4638.8	3261.5
27.5°	2200.7	2215.1	2319.4	2531.5	2653.8	2826.4	3369.4	4681.9	5343.6	4944.4	3437.7
30°	2215.1	2236.7	2373.3	2614.2	2754.5	2948.7	3480.9	4699.9	5688.8	5293.2	3660.7
32.5°	2272.6	2290.6	2456.0	2725.7	2887.5	3106.9	3671.5	4807.8	6016.0	5649.2	3872.8
35°	2337.4	2362.5	2560.3	2883.9	3078.1	3326.2	3930.4	5019.9	6328.9	5987.2	4092.2
37.5°	2416.5	2445.2	2682.6	3063.7	3286.7	3567.2	4210.8	5314.8	6605.7	6264.1	4311.5
40°	2524.3	2556.7	2822.8	3254.3	3495.3	3775.7	4487.7	5606.1	6817.9	6429.5	4455.4
42.5°	2948.7	2991.8	3103.3	3441.3	3711.0	3998.7	4761.0	5883.0	6897.0	6483.5	4484.1
45°	3739.8	3782.9	3754.2	3818.9	3998.7	4268.4	5059.5	6149.1	6907.8	6469.1	4469.8
47.5°	4534.5	4584.8	4559.7	4523.7	4563.2	4692.7	5393.9	6318.1	6850.3	6461.9	4469.8
50°	5293.2	5264.5	5268.1	5257.3	5293.2	5361.5	5717.5	6350.4	6835.9	6530.2	4509.3
52.5°	5699.6	5713.9	5803.8	5936.9	6016.0	6084.3	6087.9	6400.8	6731.6	6415.2	4462.6
55°	6098.7	6127.5	6336.0	6562.6	6738.8	6868.2	6458.3	6368.4	6109.5	6030.4	4218.0
57.5°	6548.2	6587.8	6882.6	7350.1	7659.4	7727.7	6825.1	5764.3	5171.0	5480.2	3743.4
60°	7166.7	7213.5	7605.4	8306.6	8766.9	8626.7	6853.9	4804.2	4106.6	4548.9	3088.9
62.5°	7652.2	7745.7	8454.1	9547.2	10054.2	9608.4	6318.1	3682.2	2869.6	3196.8	2254.7
65°	7134.3	7314.1	8468.4	10967.6	11553.8	10762.6	5476.6	2513.6	1618.2	2067.7	1442.0
67.5°	5767.9	6019.6	7519.1	11658.0	12582.2	11370.4	4311.5	1334.1	927.8	1201.0	758.7
68°	5307.6	5580.9	7170.3	11658.0	12636.1	11316.4	4002.3	1154.3	855.8	1078.8	658.1
70°	3667.9	3862.0	5512.6	11003.6	12319.7	10316.8	2635.8	661.7	643.7	740.8	435.1
72.5°	1798.0	2006.5	2948.7	8720.2	10036.3	7929.0	1201.0	438.7	489.0	543.0	341.6
75°	715.6	758.7	1161.5	4300.7	6271.3	5059.5	629.3	330.8	420.7	424.3	269.7
77.5°	409.9	435.1	643.7	1582.2	2351.7	2261.8	406.3	237.3	334.4	305.7	176.2
80°	230.1	233.7	363.2	834.3	1344.9	1204.6	276.9	172.6	255.3	215.8	118.7
82.5°	115.1	129.5	230.1	460.3	748.0	765.9	147.4	122.3	205.0	154.6	97.1
85°	82.7	89.9	165.4	255.3	345.2	517.8	89.9	61.1	154.6	104.3	68.3
87.5°	43.2	53.9	104.3	125.9	140.2	176.2	43.2	28.8	86.3	61.1	36.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1438453

CATALOG NUMBER: GALN-SB6A-927-U-T4LG-HSS

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1	2366.1
2.5°	2366.1	2283.4	2114.4	1916.6	1762.0	1603.8	1474.3	1352.1	1294.5	1287.3	1301.7
5°	2355.3	2175.5	1790.8	1413.2	1104.0	888.2	769.5	708.4	676.0	661.7	665.2
7.5°	2333.8	2060.5	1445.6	956.5	715.6	622.1	593.3	582.5	578.9	578.9	578.9
10°	2312.2	1905.8	1107.5	701.2	586.1	561.0	553.8	553.8	550.2	550.2	553.8
12.5°	2301.4	1762.0	859.4	586.1	546.6	535.8	528.6	525.0	525.0	525.0	528.6
15°	2276.2	1603.8	694.0	543.0	521.4	507.0	503.4	499.8	499.8	499.8	499.8
17.5°	2254.7	1449.2	604.1	514.2	496.2	481.9	478.3	474.7	474.7	478.3	478.3
20°	2222.3	1301.7	543.0	485.5	471.1	456.7	453.1	449.5	453.1	453.1	453.1
22.5°	2182.7	1179.5	507.0	463.9	445.9	431.5	431.5	431.5	431.5	431.5	435.1
25°	2157.6	1093.2	481.9	438.7	420.7	409.9	406.3	406.3	413.5	413.5	417.1
27.5°	2197.1	1071.6	485.5	431.5	399.1	388.4	384.8	384.8	392.0	395.6	399.1
30°	2315.8	1111.1	528.6	453.1	384.8	366.8	363.2	363.2	374.0	377.6	381.2
32.5°	2452.4	1193.9	593.3	481.9	374.0	345.2	338.0	338.0	348.8	352.4	356.0
35°	2639.4	1323.3	679.6	507.0	381.2	323.6	309.3	309.3	316.4	323.6	327.2
37.5°	2880.3	1535.5	780.3	525.0	381.2	298.5	280.5	276.9	284.1	284.1	287.7
40°	3132.1	1812.4	884.6	525.0	363.2	273.3	255.3	244.5	248.1	244.5	248.1
42.5°	3272.3	2035.3	974.5	492.6	341.6	248.1	230.1	215.8	212.2	205.0	208.6
45°	3351.4	2136.0	949.3	456.7	320.0	230.1	208.6	190.6	183.4	172.6	172.6
47.5°	3351.4	2146.8	812.7	427.9	298.5	215.8	187.0	169.0	158.2	147.4	151.0
50°	3311.9	2049.7	643.7	399.1	273.3	201.4	169.0	154.6	140.2	133.0	133.0
52.5°	3146.4	1733.2	492.6	363.2	244.5	183.4	151.0	136.6	122.3	118.7	118.7
55°	2862.4	1273.0	399.1	327.2	219.4	169.0	136.6	125.9	111.5	104.3	104.3
57.5°	2326.6	870.2	330.8	294.9	194.2	151.0	122.3	111.5	93.5	86.3	86.3
60°	1726.1	568.2	280.5	258.9	165.4	136.6	107.9	93.5	79.1	71.9	68.3
62.5°	1165.1	384.8	233.7	205.0	140.2	118.7	93.5	79.1	61.1	46.7	46.7
65°	726.4	298.5	194.2	161.8	122.3	104.3	79.1	61.1	43.2	32.4	28.8
67.5°	417.1	240.9	158.2	125.9	104.3	82.7	61.1	50.3	36.0	25.2	21.6
68°	384.8	230.1	147.4	118.7	97.1	79.1	57.5	46.7	32.4	21.6	21.6
70°	312.8	205.0	125.9	97.1	82.7	64.7	50.3	39.6	25.2	14.4	14.4
72.5°	276.9	172.6	107.9	75.5	57.5	53.9	39.6	28.8	18.0	10.8	7.2
75°	226.5	136.6	86.3	57.5	39.6	39.6	28.8	18.0	7.2	0.0	0.0
77.5°	147.4	100.7	68.3	36.0	21.6	25.2	18.0	7.2	0.0	0.0	0.0
80°	97.1	75.5	46.7	18.0	10.8	10.8	3.6	0.0	0.0	0.0	0.0
82.5°	68.3	50.3	28.8	7.2	3.6	3.6	0.0	0.0	0.0	0.0	0.0
85°	43.2	21.6	10.8	3.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	18.0	7.2	3.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



LM-79-08: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

McGRAW-EDISON

Report Number: SP1-2106-271-1

Luminaire Tested: GFLD-SA1-A-927-U-WR-X-BK

Test Date: 06/16/2021

**Test Information**

Test Method: LM-79-08  
 Report Number: SP1-2106-271-1  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1  
 Measurement Geometry: 4π  
 Issue Date: 06/16/2021  
 Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
 Product Line: MCGRAW-EDISON  
 Catalog Number: **GFLD-SA1-A-927-U-WR-X-BK**  
 Description: MCGRAW EDISON

N6, BLACK

**Spectral Parameters**

CCT (K): 2747  
 CIE u': 0.2598  
 CIE v': 0.5293  
 Duv: 0.0020  
 CIE x: 0.4594  
 CIE y: 0.4160  
 CIE z: 0.1246  
 Peak Wavelength (nm): 624  
 Dominant Wavelength (nm): 583  
 Purity: 63  
 Rf: 93.1  
 Rg: 98.2

CRI (Ra): 92.5  
 R1: 92.3  
 R2: 95.5  
 R3: 97.5  
 R4: 93.1  
 R5: 91.8  
 R6: 95.1  
 R7: 92.9  
 R8: 81.7  
 R9: 58.3  
 R10: 88.5  
 R11: 93.7  
 R12: 84.9  
 R13: 93.0  
 R14: 97.8



**Test Conditions**  
 Stabilization Time: 198M  
 Operation Time: 12H  
 Room Temperature (°C) / RH%: 24.3/43%  
 Sphere Temperature (°C): 24.2

REPORT NUMBER: SP1-2106-271-1

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	1/31/2021	7/31/2021
Power Meter	XITRON 2801 IN0071	12/1/2020	12/1/2021
AC Power Source	CHROMA 61603 IN0063	12/1/2020	12/1/2021
DC Power Source	AGILENT E3634A IN0208	12/1/2020	12/1/2021
Sphere Thermometer	ONSET IN0085	12/1/2020	12/1/2021
Room Thermometer	ONSET IN0046	12/1/2020	12/1/2021

REPORT NUMBER: SP1-2106-271-1

**CIE 1931 Chromaticity Diagram**



**CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles**



Point lies inside the ANSI 2700K 4-step quadrangle

REPORT NUMBER: SP1-2106-271-1

**Photopic Flux vs. Wavelength**



#####

λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)
360	649	NR	490	9819	NR	620	37806	NR	750	3792	NR	880	778	NR
365	535	NR	495	10995	NR	625	38173	NR	755	3383	NR	885	829	NR
370	546	NR	500	12186	NR	630	37677	NR	760	3071	NR	890	745	NR
375	624	NR	505	13274	NR	635	36852	NR	765	2656	NR	895	648	NR
380	611	NR	510	14396	NR	640	35711	NR	770	2297	NR	900	661	NR
385	569	NR	515	15467	NR	645	34820	NR	775	2076	NR	905	740	NR
390	512	NR	520	16543	NR	650	33278	NR	780	1860	NR	910	635	NR
395	465	NR	525	17716	NR	655	31397	NR	785	1717	NR	915	683	NR
400	418	NR	530	18837	NR	660	29663	NR	790	1494	NR	920	620	NR
405	411	NR	535	19916	NR	665	27479	NR	795	1276	NR	925	580	NR
410	439	NR	540	20679	NR	670	25115	NR	800	1183	NR	930	717	NR
415	565	NR	545	21563	NR	675	22916	NR	805	1161	NR	935	780	NR
420	866	NR	550	22521	NR	680	20799	NR	810	1065	NR	940	630	NR
425	1393	NR	555	23411	NR	685	18810	NR	815	970	NR	945	433	NR
430	2399	NR	560	24238	NR	690	16831	NR	820	1013	NR	950	676	NR
435	4305	NR	565	25148	NR	695	14867	NR	825	970	NR	955	802	NR
440	7544	NR	570	26216	NR	700	13210	NR	830	769	NR	960	645	NR
445	11003	NR	575	27219	NR	705	11593	NR	835	894	NR	965	620	NR
450	11015	NR	580	28466	NR	710	10403	NR	840	893	NR	970	474	NR
455	8956	NR	585	29834	NR	715	9162	NR	845	864	NR	975	478	NR
460	8133	NR	590	31413	NR	720	8146	NR	850	828	NR	980	905	NR
465	7252	NR	595	32655	NR	725	7155	NR	855	921	NR	985	639	NR
470	6556	NR	600	34084	NR	730	6272	NR	860	633	NR	990	838	NR
475	6915	NR	605	35555	NR	735	5418	NR	865	816	NR	995	621	NR
480	7734	NR	610	36593	NR	740	4870	NR	870	767	NR	1000	903	NR
485	8748	NR	615	37350	NR	745	4295	NR	875	601	NR			

REPORT NUMBER: SP1-2106-271-1

**Scotopic Flux vs. Wavelength**



**Scotopic Lumens: 2290.1**

**S/P: 1.28**

λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)
360	649	NR	490	9819	NR	620	37806	NR	750	3792	NR	880	778	NR
365	535	NR	495	10995	NR	625	38173	NR	755	3383	NR	885	829	NR
370	546	NR	500	12186	NR	630	37677	NR	760	3071	NR	890	745	NR
375	624	NR	505	13274	NR	635	36852	NR	765	2656	NR	895	648	NR
380	611	NR	510	14396	NR	640	35711	NR	770	2297	NR	900	661	NR
385	569	NR	515	15467	NR	645	34820	NR	775	2076	NR	905	740	NR
390	512	NR	520	16543	NR	650	33278	NR	780	1860	NR	910	635	NR
395	465	NR	525	17716	NR	655	31397	NR	785	1717	NR	915	683	NR
400	418	NR	530	18837	NR	660	29663	NR	790	1494	NR	920	620	NR
405	411	NR	535	19916	NR	665	27479	NR	795	1276	NR	925	580	NR
410	439	NR	540	20679	NR	670	25115	NR	800	1183	NR	930	717	NR
415	565	NR	545	21563	NR	675	22916	NR	805	1161	NR	935	780	NR
420	866	NR	550	22521	NR	680	20799	NR	810	1065	NR	940	630	NR
425	1393	NR	555	23411	NR	685	18810	NR	815	970	NR	945	433	NR
430	2399	NR	560	24238	NR	690	16831	NR	820	1013	NR	950	676	NR
435	4305	NR	565	25148	NR	695	14867	NR	825	970	NR	955	802	NR
440	7544	NR	570	26216	NR	700	13210	NR	830	769	NR	960	645	NR
445	11003	NR	575	27219	NR	705	11593	NR	835	894	NR	965	620	NR
450	11015	NR	580	28466	NR	710	10403	NR	840	893	NR	970	474	NR
455	8956	NR	585	29834	NR	715	9162	NR	845	864	NR	975	478	NR
460	8133	NR	590	31413	NR	720	8146	NR	850	828	NR	980	905	NR
465	7252	NR	595	32655	NR	725	7155	NR	855	921	NR	985	639	NR
470	6556	NR	600	34084	NR	730	6272	NR	860	633	NR	990	838	NR
475	6915	NR	605	35555	NR	735	5418	NR	865	816	NR	995	621	NR
480	7734	NR	610	36593	NR	740	4870	NR	870	767	NR	1000	903	NR
485	8748	NR	615	37350	NR	745	4295	NR	875	601	NR			

REPORT NUMBER: SP1-2106-271-1

**Melanopic Flux vs. Wavelength**



**Melanopic Lumens: 849.3 S/P: 0.48**

λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)
360	649	NR	490	9819	NR	620	37806	NR	750	3792	NR	880	778	NR
365	535	NR	495	10995	NR	625	38173	NR	755	3383	NR	885	829	NR
370	546	NR	500	12186	NR	630	37677	NR	760	3071	NR	890	745	NR
375	624	NR	505	13274	NR	635	36852	NR	765	2656	NR	895	648	NR
380	611	NR	510	14396	NR	640	35711	NR	770	2297	NR	900	661	NR
385	569	NR	515	15467	NR	645	34820	NR	775	2076	NR	905	740	NR
390	512	NR	520	16543	NR	650	33278	NR	780	1860	NR	910	635	NR
395	465	NR	525	17716	NR	655	31397	NR	785	1717	NR	915	683	NR
400	418	NR	530	18837	NR	660	29663	NR	790	1494	NR	920	620	NR
405	411	NR	535	19916	NR	665	27479	NR	795	1276	NR	925	580	NR
410	439	NR	540	20679	NR	670	25115	NR	800	1183	NR	930	717	NR
415	565	NR	545	21563	NR	675	22916	NR	805	1161	NR	935	780	NR
420	866	NR	550	22521	NR	680	20799	NR	810	1065	NR	940	630	NR
425	1393	NR	555	23411	NR	685	18810	NR	815	970	NR	945	433	NR
430	2399	NR	560	24238	NR	690	16831	NR	820	1013	NR	950	676	NR
435	4305	NR	565	25148	NR	695	14867	NR	825	970	NR	955	802	NR
440	7544	NR	570	26216	NR	700	13210	NR	830	769	NR	960	645	NR
445	11003	NR	575	27219	NR	705	11593	NR	835	894	NR	965	620	NR
450	11015	NR	580	28466	NR	710	10403	NR	840	893	NR	970	474	NR
455	8956	NR	585	29834	NR	715	9162	NR	845	864	NR	975	478	NR
460	8133	NR	590	31413	NR	720	8146	NR	850	828	NR	980	905	NR
465	7252	NR	595	32655	NR	725	7155	NR	855	921	NR	985	639	NR
470	6556	NR	600	34084	NR	730	6272	NR	860	633	NR	990	838	NR
475	6915	NR	605	35555	NR	735	5418	NR	865	816	NR	995	621	NR
480	7734	NR	610	36593	NR	740	4870	NR	870	767	NR	1000	903	NR
485	8748	NR	615	37350	NR	745	4295	NR	875	601	NR			

REPORT NUMBER: SP1-2106-271-1

TM-30-18

**Summary**

$R_f = 93.1$   
 $R_g = 98.2$   
 CIE  $R_a = 92.5$   
 $R_9 = 58.3$



**Color Vector Graphics**



REPORT NUMBER: SP1-2106-271-1

TM-30-18

**Individual Sample Fidelity Index ( $R_{f,i}$ )**




CES01 = 86	CES26 = 94	CES51 = 98	CES76 = 91
CES02 = 64	CES27 = 95	CES52 = 98	CES77 = 91
CES03 = 32	CES28 = 97	CES53 = 96	CES78 = 90
CES04 = 70	CES29 = 95	CES54 = 96	CES79 = 94
CES05 = 51	CES30 = 98	CES55 = 96	CES80 = 94
CES06 = 52	CES31 = 96	CES56 = 95	CES81 = 83
CES07 = 44	CES32 = 91	CES57 = 94	CES82 = 97
CES08 = 43	CES33 = 97	CES58 = 95	CES83 = 96
CES09 = 29	CES34 = 96	CES59 = 97	CES84 = 96
CES10 = 76	CES35 = 98	CES60 = 96	CES85 = 85
CES11 = 59	CES36 = 91	CES61 = 95	CES86 = 84
CES12 = 66	CES37 = 95	CES62 = 95	CES87 = 93
CES13 = 44	CES38 = 96	CES63 = 94	CES88 = 95
CES14 = 74	CES39 = 99	CES64 = 93	CES89 = 86
CES15 = 72	CES40 = 98	CES65 = 90	CES90 = 96
CES16 = 48	CES41 = 98	CES66 = 91	CES91 = 86
CES17 = 50	CES42 = 97	CES67 = 91	CES92 = 83
CES18 = 57	CES43 = 97	CES68 = 92	CES93 = 90
CES19 = 72	CES44 = 99	CES69 = 94	CES94 = 80
CES20 = 68	CES45 = 99	CES70 = 90	CES95 = 87
CES21 = 87	CES46 = 96	CES71 = 90	CES96 = 93
CES22 = 79	CES47 = 94	CES72 = 96	CES97 = 96
CES23 = 92	CES48 = 93	CES73 = 87	CES98 = 94
CES24 = 91	CES49 = 97	CES74 = 92	CES99 = 91
CES25 = 72	CES50 = 98	CES75 = 90	



REPORT NUMBER: SP1-2106-271-1

TM-30-18

Color Rendition by Hue-Angle Bin

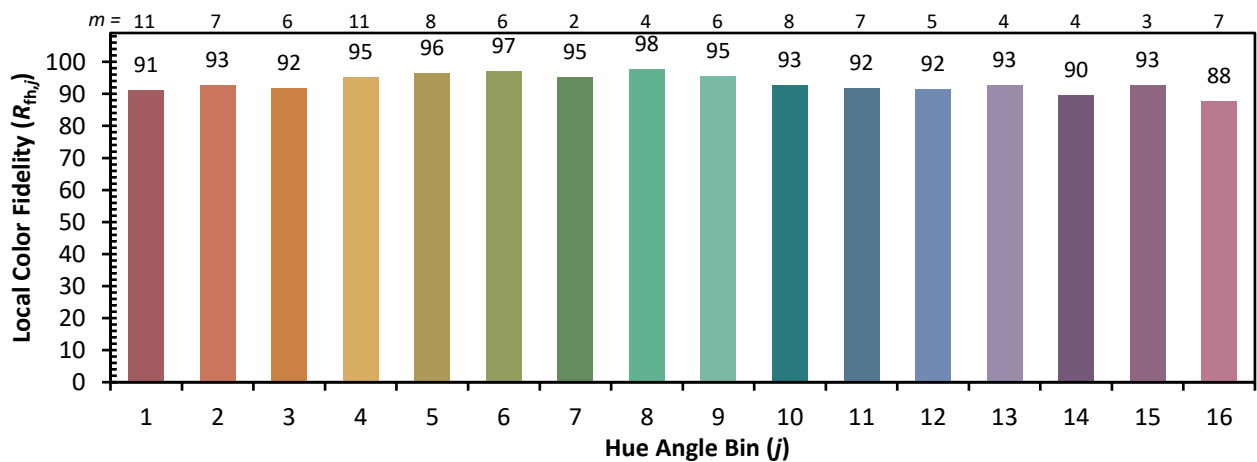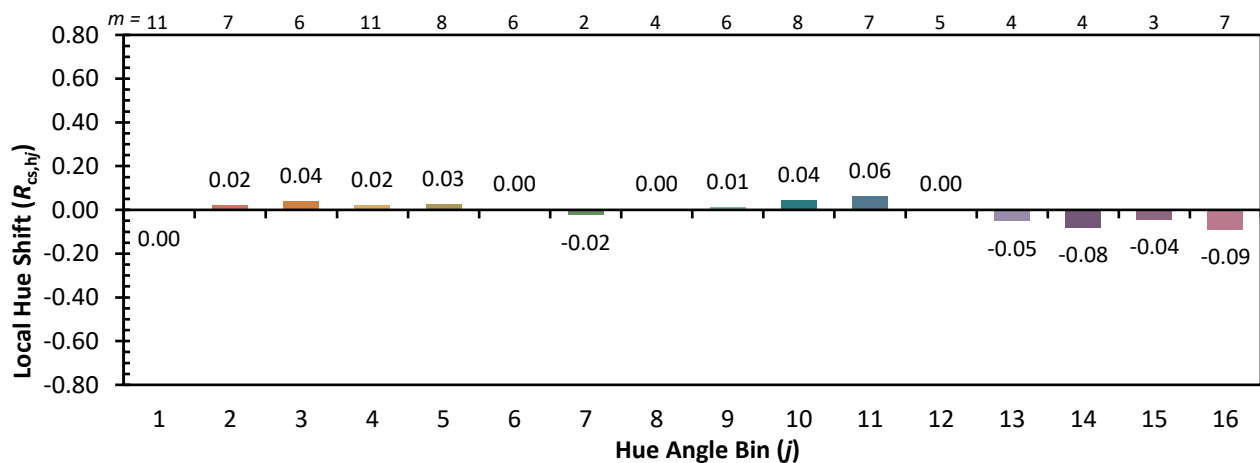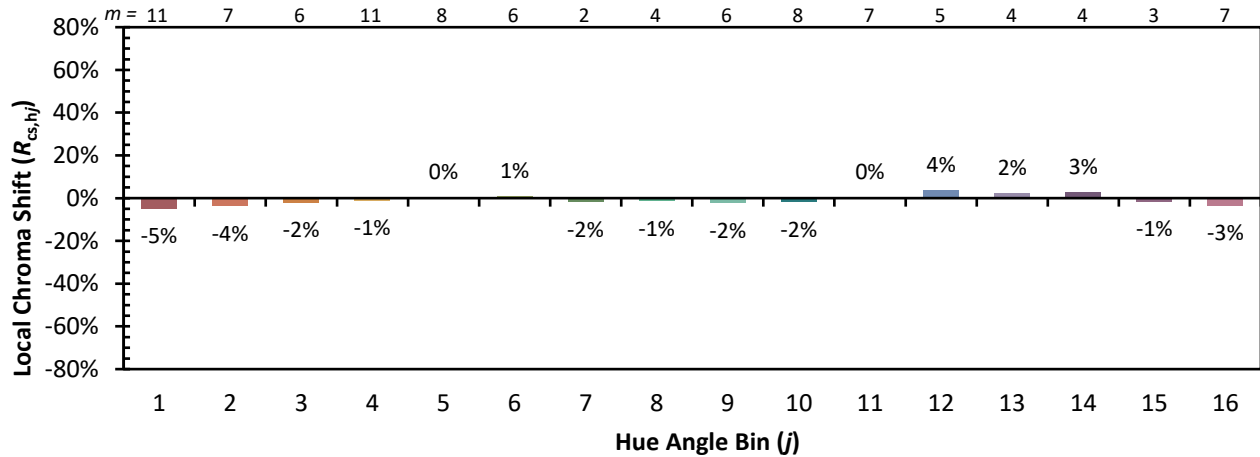

REPORT NUMBER: SP1-2106-271-1

TM-30-18

Measure Comparisons



(END OF REPORT)