Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1389879

Luminaire Tested: **GSS-SA3A-722-U-RBC**

Issue Date: 02/18/2026

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P1389879 |
| Test Lab: | INNOVATION CENTER(G3) |
| Issue Date: | 02/18/2026 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | GSS-SA3A-722-U-RBC |
| Description: | GALLEON SLIM SITE LUMINAIRE 615mA 3xLight Square PACKAGE 70CRI 2200K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL |
| Light Source: | (42) 2200K CCT, 70 CRI LEDS |
| Ballast/Driver: | ELECTRONIC DRIVER |

Luminaire Equipment:

| Sample No. | Condition | Description |
|---|---|---|
| a | good | reflector |
| b | good | lens |
| c | good | housing |
| d | good | cord |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 7051.7 lumens |
| Efficiency: | N/A |
| Efficacy: | 88.1 lumens/watt |
| Luminous Opening: | Rectangular (W 1.5' x L: 0.5' x H: 0') |
| IES Classification: | Type III - Short |
| BUG Rating: | B0 - U0 - G2 |


| | |
|---|---|
| Input Watts (W): | 80 |
| Input Voltage (V): | 120 |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | 0.97 |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 28.75 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

## Iso-Footcandle Lines of Horizontal Illumination

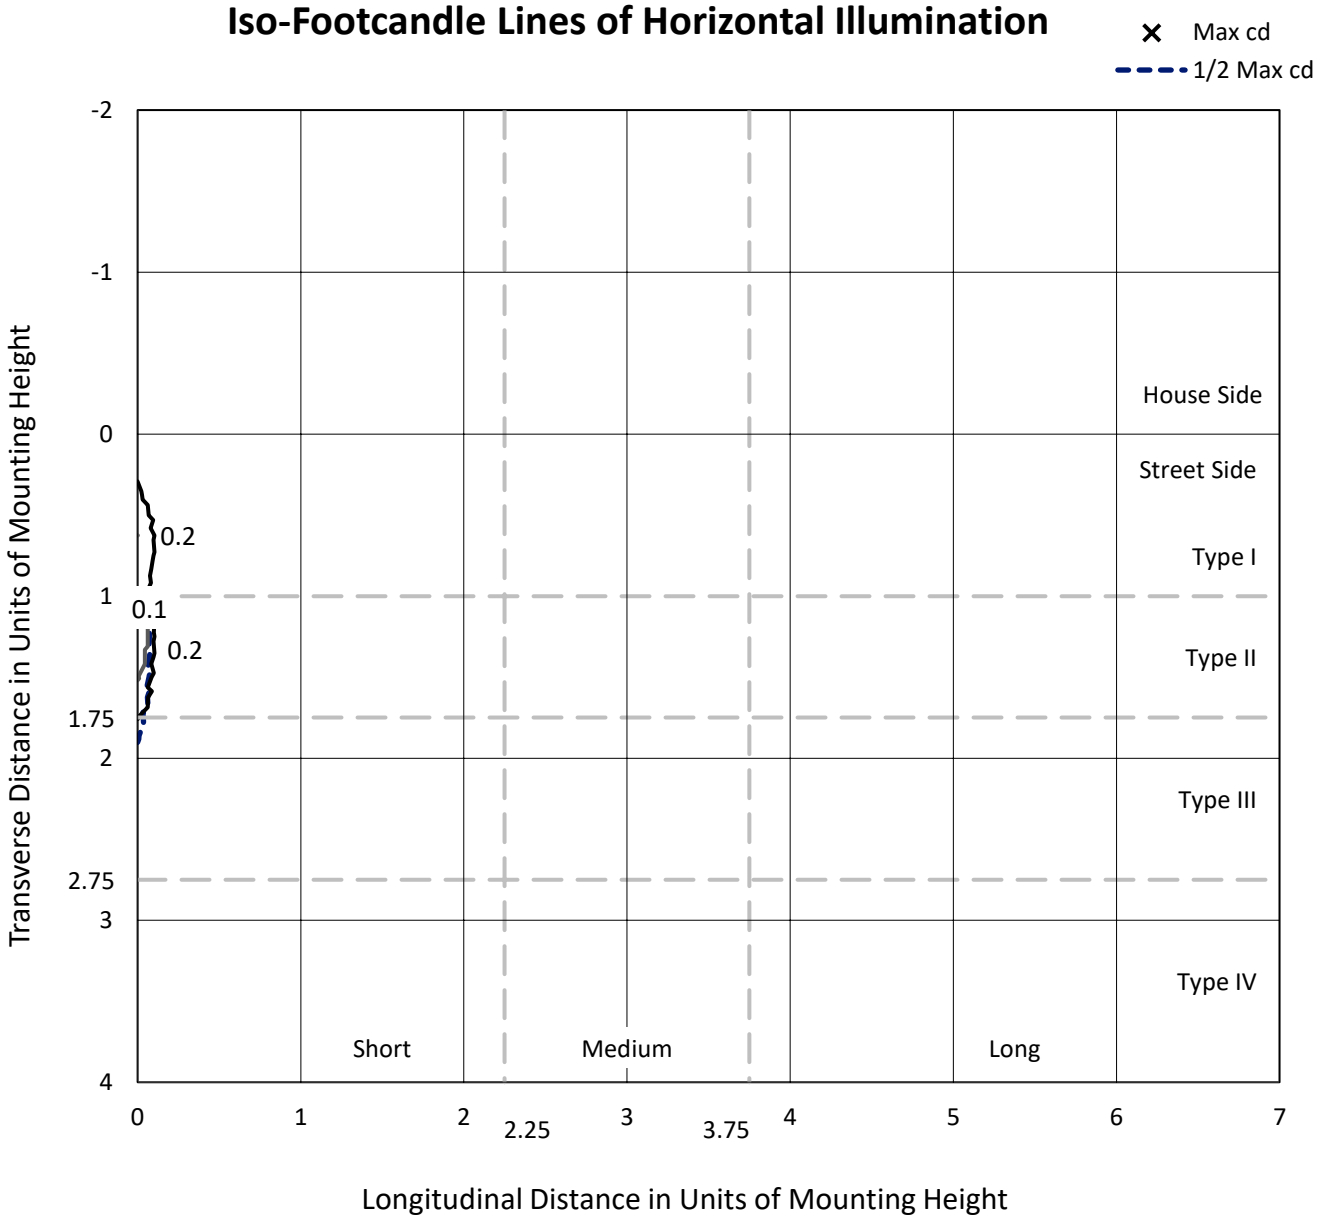



Based on 20 foot mounting height. Maximum calculated value = 0.3 fc
Type III - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

## Luminous Intensity Polar Plot

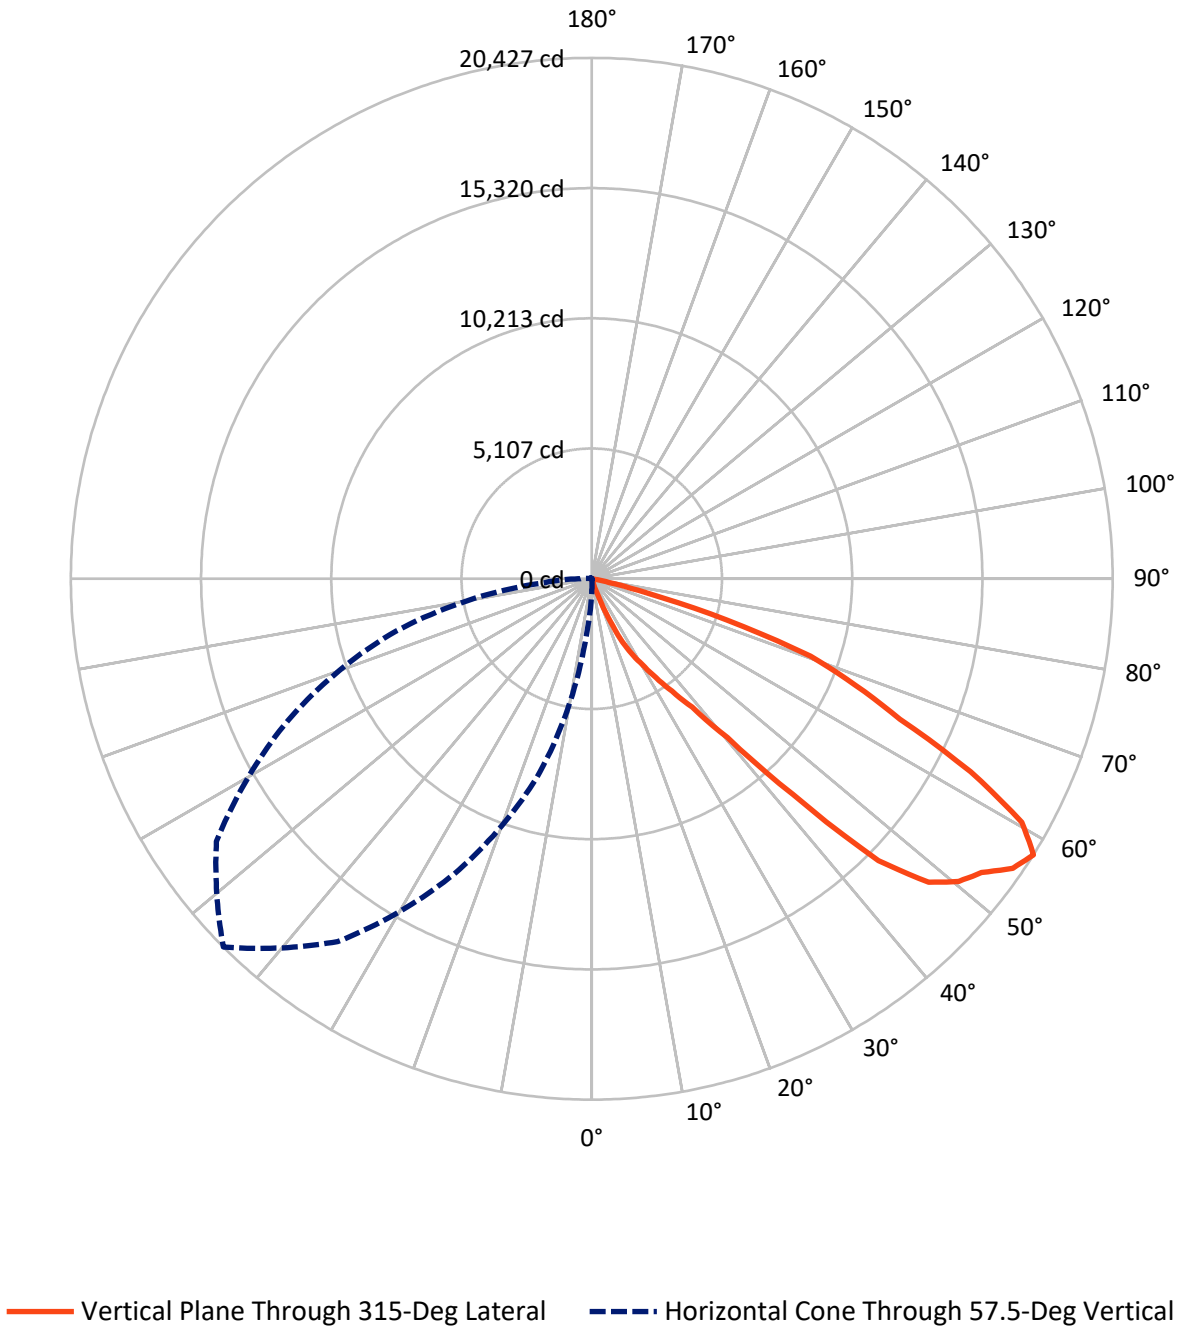

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 50.3 | 0.0 | 50.3 |
| | % Fixture | 0.7 | 0.0 | 0.7 |
| **Street Side** | Lumens | 7001.4 | 0.0 | 7001.4 |
| | % Fixture | 99.3 | 0.0 | 99.3 |
| **Total** | Lumens | 7051.7 | 0.0 | 7051.7 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 2.4 | 0.0 |
| 10°-20° | 11.9 | 0.2 |
| 20°-30° | 152.6 | 2.2 |
| 30°-40° | 475.9 | 6.7 |
| 40°-50° | 1554.4 | 22.0 |
| 50°-60° | 2494.9 | 35.4 |
| 60°-70° | 1915.6 | 27.2 |
| 70°-80° | 436.2 | 6.2 |
| 80°-90° | 7.8 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 7051.7 | 100.0 |
| 0°-180° | 7051.7 | 100.0 |

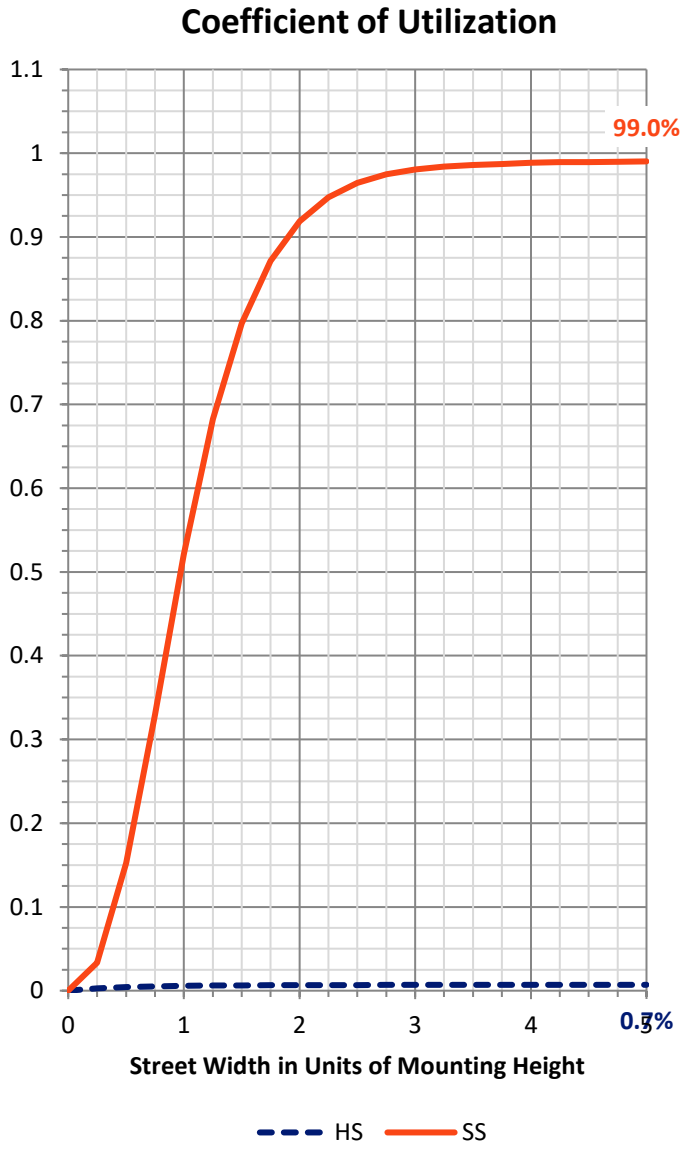

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 159.7 | 2.3 | | | |
| FM | (30°-60°) | 4503.9 | 63.9 | | | |
| FH | (60°-80°) | 2332.2 | 33.1 | | | G2/5000 |
| FVH | (80°-90°) | 5.5 | 0.1 | | | G0/10 |
| BL | (0°-30°) | 7.2 | 0.1 | B0/110 | | |
| BM | (30°-60°) | 21.2 | 0.3 | B0/220 | | |
| BH | (60°-80°) | 19.6 | 0.3 | B0/110 | | G0/110 |
| BVH | (80°-90°) | 2.2 | 0.0 | | | G0/10 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B0-U0-G2**
Type III Short

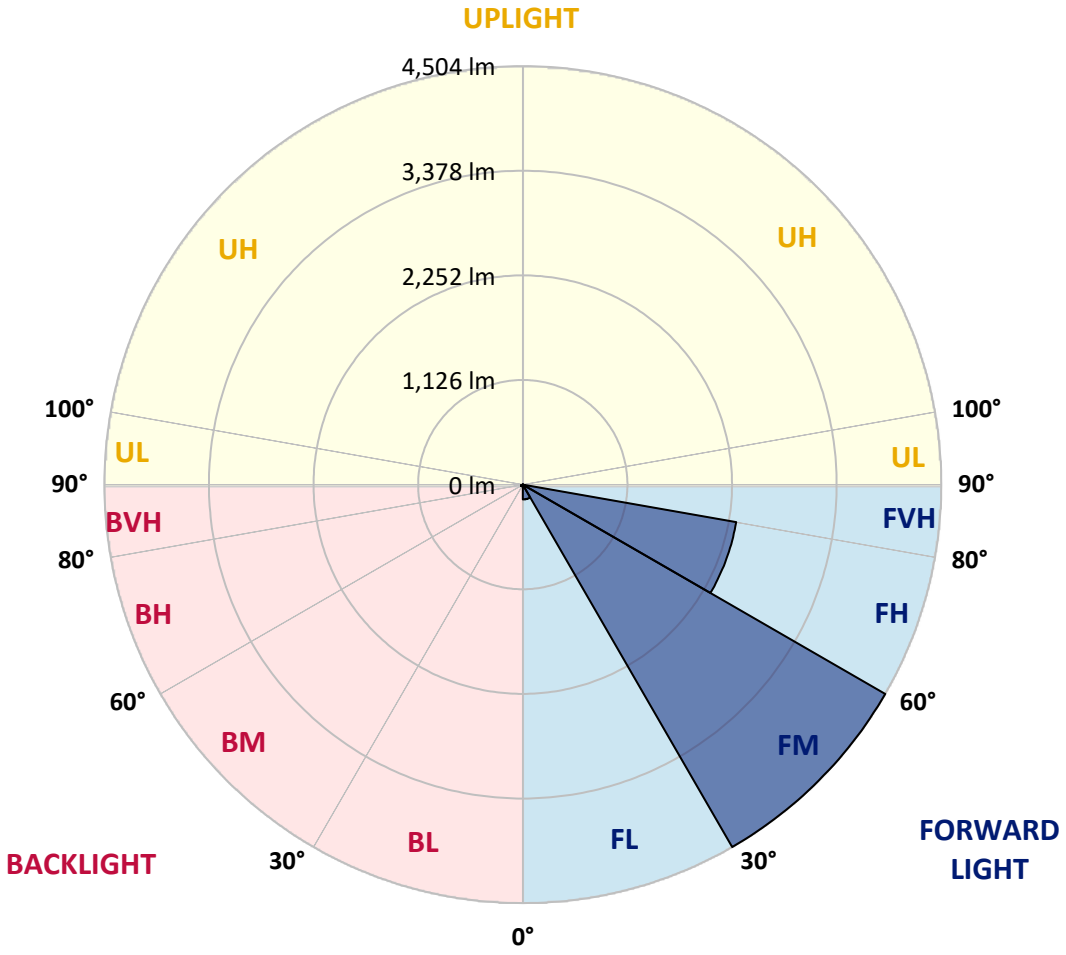

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 23.9 | 23.9 | 23.9 | 23.9 | 23.9 | 21.7 | 21.7 | 21.7 | 21.7 | 21.7 | 21.7 |
| 5° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 23.9 | 23.9 | 23.9 | 23.9 | 21.7 | 21.7 |
| 7.5° | 30.4 | 30.4 | 28.2 | 28.2 | 28.2 | 26.0 | 26.0 | 26.0 | 26.0 | 23.9 | 23.9 |
| 10° | 34.7 | 34.7 | 32.5 | 32.5 | 30.4 | 30.4 | 28.2 | 28.2 | 26.0 | 26.0 | 23.9 |
| 12.5° | 39.0 | 39.0 | 36.9 | 34.7 | 34.7 | 32.5 | 30.4 | 28.2 | 28.2 | 26.0 | 23.9 |
| 15° | 43.4 | 41.2 | 39.0 | 36.9 | 36.9 | 34.7 | 32.5 | 30.4 | 30.4 | 28.2 | 26.0 |
| 17.5° | 47.7 | 45.6 | 43.4 | 41.2 | 39.0 | 34.7 | 32.5 | 30.4 | 30.4 | 28.2 | 26.0 |
| 20° | 52.1 | 47.7 | 43.4 | 41.2 | 39.0 | 34.7 | 32.5 | 30.4 | 30.4 | 28.2 | 26.0 |
| 22.5° | 58.6 | 54.2 | 47.7 | 45.6 | 41.2 | 39.0 | 34.7 | 32.5 | 30.4 | 28.2 | 26.0 |
| 25° | 67.2 | 58.6 | 52.1 | 47.7 | 43.4 | 39.0 | 34.7 | 32.5 | 30.4 | 28.2 | 26.0 |
| 27.5° | 82.4 | 69.4 | 58.6 | 54.2 | 47.7 | 43.4 | 36.9 | 34.7 | 32.5 | 30.4 | 28.2 |
| 30° | 110.6 | 86.8 | 62.9 | 56.4 | 52.1 | 45.6 | 39.0 | 36.9 | 32.5 | 30.4 | 26.0 |
| 32.5° | 136.7 | 106.3 | 75.9 | 67.2 | 58.6 | 47.7 | 39.0 | 36.9 | 32.5 | 30.4 | 26.0 |
| 35° | 136.7 | 108.5 | 80.3 | 69.4 | 60.7 | 49.9 | 39.0 | 36.9 | 32.5 | 30.4 | 26.0 |
| 37.5° | 134.5 | 106.3 | 78.1 | 69.4 | 60.7 | 49.9 | 41.2 | 36.9 | 34.7 | 30.4 | 26.0 |
| 40° | 141.0 | 104.1 | 69.4 | 62.9 | 56.4 | 47.7 | 41.2 | 36.9 | 34.7 | 30.4 | 26.0 |
| 42.5° | 154.0 | 110.6 | 67.2 | 60.7 | 56.4 | 49.9 | 43.4 | 39.0 | 34.7 | 30.4 | 26.0 |
| 45° | 193.1 | 130.1 | 69.4 | 62.9 | 56.4 | 47.7 | 41.2 | 39.0 | 34.7 | 32.5 | 28.2 |
| 47.5° | 349.2 | 210.4 | 71.6 | 62.9 | 56.4 | 47.7 | 39.0 | 36.9 | 34.7 | 30.4 | 28.2 |
| 50° | 546.6 | 310.2 | 73.7 | 65.1 | 56.4 | 47.7 | 39.0 | 36.9 | 34.7 | 32.5 | 30.4 |
| 52.5° | 594.3 | 338.4 | 82.4 | 71.6 | 60.7 | 49.9 | 39.0 | 36.9 | 34.7 | 32.5 | 30.4 |
| 55° | 535.8 | 314.5 | 95.4 | 82.4 | 67.2 | 54.2 | 39.0 | 36.9 | 34.7 | 32.5 | 30.4 |
| 57.5° | *453.3* | *279.8* | *106.3* | *91.1* | *73.7* | *58.6* | *41.2* | *39.0* | *36.9* | *34.7* | *32.5* |
| 60° | 340.5 | 232.1 | 123.6 | 104.1 | 86.8 | 67.2 | 47.7 | 45.6 | 43.4 | 39.0 | 36.9 |
| 62.5° | 277.6 | 206.1 | 136.7 | 117.1 | 95.4 | 75.9 | 54.2 | 52.1 | 49.9 | 45.6 | 43.4 |
| 65° | 245.1 | 195.2 | 145.3 | 123.6 | 101.9 | 78.1 | 56.4 | 54.2 | 52.1 | 49.9 | 47.7 |
| 67.5° | 227.8 | 188.7 | 151.8 | 128.0 | 106.3 | 82.4 | 58.6 | 56.4 | 54.2 | 52.1 | 49.9 |
| 70° | 219.1 | 184.4 | 149.7 | 128.0 | 106.3 | 84.6 | 62.9 | 60.7 | 56.4 | 54.2 | 49.9 |
| 72.5° | 203.9 | 175.7 | 147.5 | 130.1 | 110.6 | 93.3 | 73.7 | 67.2 | 60.7 | 52.1 | 45.6 |
| 75° | 182.2 | 156.2 | 130.1 | 119.3 | 108.5 | 95.4 | 84.6 | 73.7 | 62.9 | 49.9 | 39.0 |
| 77.5° | 132.3 | 121.5 | 110.6 | 104.1 | 97.6 | 88.9 | 82.4 | 71.6 | 60.7 | 47.7 | 36.9 |
| 80° | 52.1 | 58.6 | 62.9 | 62.9 | 65.1 | 65.1 | 65.1 | 56.4 | 47.7 | 39.0 | 30.4 |
| 82.5° | 15.2 | 15.2 | 15.2 | 17.4 | 19.5 | 21.7 | 23.9 | 21.7 | 21.7 | 19.5 | 17.4 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 21.7 | 21.7 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 |
| 5° | 21.7 | 21.7 | 19.5 | 19.5 | 19.5 | 19.5 | 17.4 | 17.4 | 17.4 | 17.4 | 17.4 |
| 7.5° | 23.9 | 21.7 | 21.7 | 19.5 | 19.5 | 19.5 | 17.4 | 17.4 | 17.4 | 17.4 | 17.4 |
| 10° | 23.9 | 21.7 | 21.7 | 19.5 | 19.5 | 19.5 | 17.4 | 17.4 | 17.4 | 17.4 | 15.2 |
| 12.5° | 23.9 | 23.9 | 21.7 | 21.7 | 21.7 | 19.5 | 19.5 | 17.4 | 17.4 | 17.4 | 15.2 |
| 15° | 23.9 | 23.9 | 21.7 | 19.5 | 19.5 | 19.5 | 17.4 | 17.4 | 17.4 | 17.4 | 15.2 |
| 17.5° | 23.9 | 23.9 | 21.7 | 19.5 | 19.5 | 17.4 | 17.4 | 15.2 | 15.2 | 15.2 | 13.0 |
| 20° | 23.9 | 23.9 | 21.7 | 19.5 | 19.5 | 17.4 | 17.4 | 15.2 | 15.2 | 15.2 | 13.0 |
| 22.5° | 23.9 | 23.9 | 21.7 | 19.5 | 19.5 | 17.4 | 17.4 | 15.2 | 15.2 | 13.0 | 13.0 |
| 25° | 23.9 | 23.9 | 21.7 | 19.5 | 17.4 | 17.4 | 15.2 | 13.0 | 13.0 | 10.8 | 10.8 |
| 27.5° | 26.0 | 23.9 | 21.7 | 19.5 | 17.4 | 17.4 | 15.2 | 13.0 | 10.8 | 10.8 | 8.7 |
| 30° | 23.9 | 23.9 | 21.7 | 19.5 | 17.4 | 15.2 | 13.0 | 10.8 | 8.7 | 8.7 | 6.5 |
| 32.5° | 23.9 | 23.9 | 21.7 | 19.5 | 17.4 | 15.2 | 13.0 | 10.8 | 8.7 | 8.7 | 6.5 |
| 35° | 23.9 | 21.7 | 19.5 | 17.4 | 15.2 | 13.0 | 10.8 | 8.7 | 6.5 | 6.5 | 4.3 |
| 37.5° | 23.9 | 21.7 | 19.5 | 17.4 | 15.2 | 13.0 | 10.8 | 8.7 | 6.5 | 4.3 | 2.2 |
| 40° | 23.9 | 21.7 | 19.5 | 17.4 | 15.2 | 13.0 | 8.7 | 6.5 | 4.3 | 4.3 | 2.2 |
| 42.5° | 23.9 | 21.7 | 19.5 | 17.4 | 15.2 | 13.0 | 10.8 | 8.7 | 6.5 | 4.3 | 2.2 |
| 45° | 26.0 | 23.9 | 19.5 | 17.4 | 15.2 | 15.2 | 13.0 | 10.8 | 8.7 | 6.5 | 2.2 |
| 47.5° | 26.0 | 21.7 | 19.5 | 15.2 | 15.2 | 15.2 | 13.0 | 13.0 | 10.8 | 6.5 | 4.3 |
| 50° | 28.2 | 23.9 | 21.7 | 17.4 | 15.2 | 15.2 | 13.0 | 10.8 | 8.7 | 6.5 | 2.2 |
| 52.5° | 28.2 | 26.0 | 21.7 | 19.5 | 17.4 | 13.0 | 10.8 | 6.5 | 4.3 | 4.3 | 2.2 |
| 55° | 28.2 | 28.2 | 26.0 | 23.9 | 19.5 | 15.2 | 8.7 | 4.3 | 4.3 | 2.2 | 2.2 |
| 57.5° | *30.4* | *30.4* | *28.2* | *26.0* | *19.5* | *13.0* | *6.5* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 34.7 | 32.5 | 30.4 | 28.2 | 21.7 | 15.2 | 6.5 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 39.0 | 34.7 | 30.4 | 26.0 | 19.5 | 13.0 | 6.5 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 41.2 | 34.7 | 28.2 | 21.7 | 17.4 | 10.8 | 6.5 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 43.4 | 34.7 | 28.2 | 19.5 | 15.2 | 10.8 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 41.2 | 32.5 | 23.9 | 15.2 | 10.8 | 8.7 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 36.9 | 30.4 | 21.7 | 13.0 | 10.8 | 6.5 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 32.5 | 26.0 | 17.4 | 10.8 | 8.7 | 6.5 | 2.2 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 30.4 | 21.7 | 15.2 | 6.5 | 4.3 | 4.3 | 2.2 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 23.9 | 17.4 | 8.7 | 2.2 | 2.2 | 2.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 13.0 | 8.7 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 19.5 | 19.5 | 19.5 | 17.4 | 17.4 | 17.4 | 17.4 | 17.4 | 17.4 | 17.4 | 17.4 |
| 5° | 17.4 | 17.4 | 17.4 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 |
| 7.5° | 17.4 | 17.4 | 17.4 | 15.2 | 15.2 | 15.2 | 15.2 | 13.0 | 13.0 | 13.0 | 13.0 |
| 10° | 15.2 | 15.2 | 15.2 | 13.0 | 13.0 | 13.0 | 13.0 | 10.8 | 10.8 | 10.8 | 10.8 |
| 12.5° | 15.2 | 15.2 | 15.2 | 13.0 | 13.0 | 13.0 | 13.0 | 10.8 | 10.8 | 10.8 | 10.8 |
| 15° | 15.2 | 15.2 | 15.2 | 13.0 | 13.0 | 13.0 | 10.8 | 10.8 | 8.7 | 8.7 | 8.7 |
| 17.5° | 13.0 | 13.0 | 13.0 | 10.8 | 10.8 | 10.8 | 10.8 | 8.7 | 8.7 | 8.7 | 6.5 |
| 20° | 13.0 | 13.0 | 13.0 | 10.8 | 10.8 | 8.7 | 8.7 | 6.5 | 4.3 | 4.3 | 4.3 |
| 22.5° | 10.8 | 10.8 | 8.7 | 8.7 | 6.5 | 6.5 | 4.3 | 4.3 | 2.2 | 2.2 | 2.2 |
| 25° | 8.7 | 8.7 | 6.5 | 6.5 | 4.3 | 4.3 | 2.2 | 2.2 | 0.0 | 0.0 | 0.0 |
| 27.5° | 6.5 | 4.3 | 4.3 | 2.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 4.3 | 4.3 | 2.2 | 2.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 4.3 | 4.3 | 2.2 | 2.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 2.2 | 2.2 | 2.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 17.4 | 17.4 | 17.4 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 |
| 5° | 13.0 | 13.0 | 13.0 | 13.0 | 13.0 | 13.0 | 13.0 | 13.0 | 13.0 | 13.0 | 13.0 |
| 7.5° | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 8.7 | 8.7 | 8.7 |
| 10° | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 6.5 | 6.5 | 6.5 |
| 12.5° | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 6.5 | 6.5 | 6.5 | 4.3 | 4.3 | 4.3 |
| 15° | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 4.3 | 4.3 | 4.3 | 2.2 | 2.2 | 2.2 |
| 17.5° | 6.5 | 4.3 | 4.3 | 4.3 | 4.3 | 2.2 | 2.2 | 2.2 | 0.0 | 0.0 | 0.0 |
| 20° | 2.2 | 2.2 | 2.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 | 15.2 |
| 5° | 13.0 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 |
| 7.5° | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 |
| 10° | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| 12.5° | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 2.2 | 2.2 |
| 15° | 2.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 15.2 | 17.4 | 17.4 | 17.4 | 17.4 | 19.5 | 19.5 | 19.5 | 21.7 | 21.7 | 23.9 |
| 5° | 10.8 | 13.0 | 13.0 | 13.0 | 13.0 | 15.2 | 15.2 | 15.2 | 17.4 | 17.4 | 19.5 |
| 7.5° | 8.7 | 10.8 | 10.8 | 10.8 | 10.8 | 13.0 | 13.0 | 13.0 | 15.2 | 15.2 | 17.4 |
| 10° | 6.5 | 6.5 | 6.5 | 6.5 | 8.7 | 8.7 | 10.8 | 10.8 | 13.0 | 13.0 | 15.2 |
| 12.5° | 2.2 | 4.3 | 4.3 | 4.3 | 4.3 | 6.5 | 6.5 | 6.5 | 8.7 | 10.8 | 10.8 |
| 15° | 0.0 | 2.2 | 2.2 | 2.2 | 2.2 | 4.3 | 4.3 | 4.3 | 6.5 | 8.7 | 8.7 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 4.3 | 4.3 | 6.5 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 23.9 | 26.0 | 26.0 | 28.2 | 28.2 | 30.4 | 30.4 | 32.5 | 32.5 | 32.5 | 34.7 |
| 5° | 19.5 | 21.7 | 23.9 | 23.9 | 26.0 | 28.2 | 28.2 | 30.4 | 30.4 | 30.4 | 32.5 |
| 7.5° | 17.4 | 19.5 | 21.7 | 21.7 | 23.9 | 26.0 | 26.0 | 28.2 | 28.2 | 28.2 | 30.4 |
| 10° | 15.2 | 17.4 | 19.5 | 19.5 | 21.7 | 23.9 | 23.9 | 26.0 | 26.0 | 28.2 | 28.2 |
| 12.5° | 13.0 | 15.2 | 17.4 | 17.4 | 19.5 | 21.7 | 21.7 | 23.9 | 26.0 | 26.0 | 28.2 |
| 15° | 10.8 | 13.0 | 15.2 | 15.2 | 17.4 | 19.5 | 21.7 | 23.9 | 23.9 | 26.0 | 26.0 |
| 17.5° | 6.5 | 8.7 | 10.8 | 13.0 | 15.2 | 17.4 | 19.5 | 21.7 | 21.7 | 23.9 | 26.0 |
| 20° | 4.3 | 6.5 | 8.7 | 10.8 | 13.0 | 15.2 | 15.2 | 17.4 | 19.5 | 21.7 | 21.7 |
| 22.5° | 2.2 | 4.3 | 6.5 | 6.5 | 8.7 | 10.8 | 13.0 | 15.2 | 15.2 | 17.4 | 19.5 |
| 25° | 0.0 | 2.2 | 4.3 | 4.3 | 6.5 | 8.7 | 8.7 | 10.8 | 13.0 | 15.2 | 15.2 |
| 27.5° | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 | 6.5 | 8.7 | 10.8 | 10.8 | 13.0 | 13.0 |
| 30° | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 | 6.5 | 6.5 | 8.7 | 8.7 | 10.8 | 13.0 |
| 32.5° | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 4.3 | 6.5 | 8.7 | 8.7 | 10.8 | 10.8 |
| 35° | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 4.3 | 4.3 | 6.5 | 6.5 | 8.7 | 8.7 |
| 37.5° | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 4.3 | 4.3 | 6.5 | 6.5 | 8.7 | 8.7 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 4.3 | 6.5 | 6.5 | 6.5 | 8.7 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 | 6.5 | 6.5 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 | 6.5 | 6.5 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 | 6.5 | 6.5 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 | 6.5 | 6.5 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 | 4.3 | 6.5 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 | 4.3 | 6.5 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *2.2* | *2.2* | *2.2* | *4.3* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 4.3 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 4.3 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 4.3 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 4.3 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 4.3 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 4.3 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 2.2 | 2.2 | 4.3 | 4.3 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 | 4.3 | 6.5 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 | 4.3 | 6.5 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 | 2.2 | 4.3 | 4.3 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 34.7 | 34.7 | 34.7 | 34.7 | 34.7 | 34.7 | 34.7 | 34.7 | 32.5 | 32.5 | 32.5 |
| 5° | 32.5 | 32.5 | 32.5 | 32.5 | 32.5 | 32.5 | 32.5 | 32.5 | 30.4 | 30.4 | 30.4 |
| 7.5° | 30.4 | 30.4 | 30.4 | 32.5 | 32.5 | 32.5 | 32.5 | 32.5 | 30.4 | 30.4 | 30.4 |
| 10° | 30.4 | 30.4 | 30.4 | 32.5 | 32.5 | 32.5 | 32.5 | 32.5 | 30.4 | 30.4 | 30.4 |
| 12.5° | 28.2 | 28.2 | 28.2 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 |
| 15° | 28.2 | 28.2 | 28.2 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 |
| 17.5° | 26.0 | 28.2 | 28.2 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 |
| 20° | 23.9 | 23.9 | 26.0 | 26.0 | 28.2 | 28.2 | 28.2 | 30.4 | 30.4 | 30.4 | 30.4 |
| 22.5° | 19.5 | 21.7 | 23.9 | 23.9 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 25° | 17.4 | 17.4 | 19.5 | 21.7 | 21.7 | 23.9 | 23.9 | 23.9 | 23.9 | 23.9 | 23.9 |
| 27.5° | 15.2 | 15.2 | 17.4 | 17.4 | 19.5 | 19.5 | 19.5 | 21.7 | 21.7 | 21.7 | 21.7 |
| 30° | 13.0 | 15.2 | 15.2 | 17.4 | 17.4 | 17.4 | 19.5 | 19.5 | 21.7 | 21.7 | 21.7 |
| 32.5° | 13.0 | 13.0 | 15.2 | 15.2 | 17.4 | 17.4 | 17.4 | 19.5 | 19.5 | 19.5 | 19.5 |
| 35° | 10.8 | 10.8 | 13.0 | 13.0 | 15.2 | 15.2 | 17.4 | 17.4 | 19.5 | 19.5 | 19.5 |
| 37.5° | 10.8 | 10.8 | 13.0 | 13.0 | 15.2 | 15.2 | 15.2 | 17.4 | 17.4 | 17.4 | 19.5 |
| 40° | 8.7 | 8.7 | 10.8 | 10.8 | 13.0 | 13.0 | 15.2 | 15.2 | 17.4 | 17.4 | 19.5 |
| 42.5° | 8.7 | 8.7 | 10.8 | 10.8 | 13.0 | 13.0 | 15.2 | 15.2 | 17.4 | 17.4 | 19.5 |
| 45° | 8.7 | 8.7 | 10.8 | 10.8 | 13.0 | 13.0 | 15.2 | 15.2 | 17.4 | 17.4 | 19.5 |
| 47.5° | 8.7 | 8.7 | 10.8 | 10.8 | 13.0 | 13.0 | 13.0 | 15.2 | 15.2 | 15.2 | 17.4 |
| 50° | 8.7 | 8.7 | 8.7 | 10.8 | 10.8 | 10.8 | 13.0 | 13.0 | 15.2 | 15.2 | 17.4 |
| 52.5° | 6.5 | 6.5 | 6.5 | 8.7 | 8.7 | 8.7 | 10.8 | 10.8 | 13.0 | 13.0 | 15.2 |
| 55° | 6.5 | 6.5 | 6.5 | 8.7 | 8.7 | 8.7 | 8.7 | 10.8 | 10.8 | 10.8 | 13.0 |
| 57.5° | *4.3* | *4.3* | *4.3* | *6.5* | *6.5* | *6.5* | *6.5* | *8.7* | *8.7* | *8.7* | *10.8* |
| 60° | 4.3 | 4.3 | 4.3 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 8.7 |
| 62.5° | 4.3 | 4.3 | 4.3 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 8.7 |
| 65° | 4.3 | 4.3 | 4.3 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 8.7 |
| 67.5° | 4.3 | 4.3 | 4.3 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 8.7 |
| 70° | 4.3 | 4.3 | 4.3 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 8.7 |
| 72.5° | 4.3 | 4.3 | 4.3 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 8.7 |
| 75° | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| 77.5° | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| 80° | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| 82.5° | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| 85° | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| 87.5° | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 32.5 | 32.5 | 32.5 | 32.5 | 32.5 | 30.4 | 30.4 | 30.4 | 32.5 | 32.5 | 32.5 |
| 5° | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 |
| 7.5° | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 28.2 | 28.2 | 28.2 | 30.4 | 30.4 | 30.4 |
| 10° | 30.4 | 28.2 | 28.2 | 28.2 | 28.2 | 28.2 | 28.2 | 28.2 | 30.4 | 30.4 | 30.4 |
| 12.5° | 30.4 | 28.2 | 28.2 | 28.2 | 28.2 | 28.2 | 28.2 | 28.2 | 30.4 | 30.4 | 30.4 |
| 15° | 30.4 | 28.2 | 28.2 | 28.2 | 28.2 | 28.2 | 28.2 | 30.4 | 30.4 | 32.5 | 32.5 |
| 17.5° | 28.2 | 28.2 | 26.0 | 26.0 | 28.2 | 28.2 | 28.2 | 28.2 | 30.4 | 30.4 | 30.4 |
| 20° | 28.2 | 28.2 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 28.2 | 28.2 | 30.4 | 30.4 |
| 22.5° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 28.2 | 28.2 | 30.4 | 30.4 |
| 25° | 23.9 | 23.9 | 23.9 | 23.9 | 26.0 | 26.0 | 26.0 | 28.2 | 30.4 | 30.4 | 32.5 |
| 27.5° | 23.9 | 23.9 | 23.9 | 23.9 | 26.0 | 26.0 | 26.0 | 28.2 | 30.4 | 30.4 | 32.5 |
| 30° | 23.9 | 23.9 | 23.9 | 23.9 | 26.0 | 26.0 | 26.0 | 28.2 | 30.4 | 30.4 | 32.5 |
| 32.5° | 21.7 | 21.7 | 21.7 | 23.9 | 23.9 | 26.0 | 26.0 | 28.2 | 30.4 | 30.4 | 32.5 |
| 35° | 21.7 | 21.7 | 21.7 | 23.9 | 23.9 | 26.0 | 26.0 | 28.2 | 30.4 | 30.4 | 32.5 |
| 37.5° | 19.5 | 21.7 | 21.7 | 23.9 | 26.0 | 26.0 | 28.2 | 30.4 | 32.5 | 32.5 | 34.7 |
| 40° | 19.5 | 21.7 | 21.7 | 23.9 | 26.0 | 26.0 | 28.2 | 30.4 | 32.5 | 32.5 | 34.7 |
| 42.5° | 19.5 | 21.7 | 21.7 | 23.9 | 26.0 | 26.0 | 28.2 | 30.4 | 32.5 | 34.7 | 36.9 |
| 45° | 21.7 | 21.7 | 23.9 | 26.0 | 26.0 | 28.2 | 28.2 | 30.4 | 32.5 | 34.7 | 36.9 |
| 47.5° | 21.7 | 23.9 | 26.0 | 26.0 | 28.2 | 28.2 | 28.2 | 30.4 | 34.7 | 36.9 | 39.0 |
| 50° | 19.5 | 21.7 | 23.9 | 26.0 | 26.0 | 28.2 | 28.2 | 30.4 | 34.7 | 36.9 | 39.0 |
| 52.5° | 17.4 | 17.4 | 19.5 | 21.7 | 26.0 | 28.2 | 30.4 | 32.5 | 36.9 | 39.0 | 41.2 |
| 55° | 15.2 | 15.2 | 17.4 | 21.7 | 26.0 | 30.4 | 34.7 | 36.9 | 39.0 | 39.0 | 41.2 |
| 57.5° | *13.0* | *13.0* | *15.2* | *21.7* | *28.2* | *34.7* | *41.2* | *41.2* | *43.4* | *43.4* | *43.4* |
| 60° | 10.8 | 10.8 | 13.0 | 19.5 | 28.2 | 34.7 | 41.2 | 43.4 | 45.6 | 45.6 | 47.7 |
| 62.5° | 10.8 | 10.8 | 13.0 | 19.5 | 26.0 | 30.4 | 36.9 | 41.2 | 45.6 | 49.9 | 54.2 |
| 65° | 8.7 | 10.8 | 10.8 | 17.4 | 21.7 | 28.2 | 32.5 | 39.0 | 45.6 | 52.1 | 58.6 |
| 67.5° | 8.7 | 10.8 | 10.8 | 15.2 | 21.7 | 26.0 | 30.4 | 36.9 | 45.6 | 52.1 | 58.6 |
| 70° | 10.8 | 10.8 | 13.0 | 17.4 | 19.5 | 23.9 | 26.0 | 34.7 | 41.2 | 49.9 | 56.4 |
| 72.5° | 8.7 | 10.8 | 10.8 | 15.2 | 17.4 | 21.7 | 23.9 | 32.5 | 39.0 | 47.7 | 54.2 |
| 75° | 8.7 | 8.7 | 8.7 | 13.0 | 15.2 | 19.5 | 21.7 | 28.2 | 36.9 | 43.4 | 49.9 |
| 77.5° | 6.5 | 6.5 | 6.5 | 10.8 | 13.0 | 17.4 | 19.5 | 26.0 | 34.7 | 41.2 | 47.7 |
| 80° | 6.5 | 6.5 | 6.5 | 8.7 | 10.8 | 10.8 | 13.0 | 19.5 | 28.2 | 34.7 | 41.2 |
| 82.5° | 6.5 | 4.3 | 4.3 | 6.5 | 6.5 | 8.7 | 8.7 | 13.0 | 17.4 | 21.7 | 26.0 |
| 85° | 6.5 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 |
| 87.5° | 6.5 | 4.3 | 4.3 | 4.3 | 4.3 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 32.5 | 32.5 | 32.5 | 32.5 | 32.5 | 34.7 | 34.7 | 34.7 | 34.7 | 34.7 | 34.7 |
| 5° | 32.5 | 32.5 | 34.7 | 34.7 | 34.7 | 36.9 | 36.9 | 36.9 | 36.9 | 36.9 | 36.9 |
| 7.5° | 32.5 | 32.5 | 34.7 | 34.7 | 34.7 | 36.9 | 36.9 | 36.9 | 39.0 | 39.0 | 41.2 |
| 10° | 32.5 | 32.5 | 34.7 | 34.7 | 36.9 | 36.9 | 39.0 | 39.0 | 41.2 | 41.2 | 43.4 |
| 12.5° | 32.5 | 34.7 | 34.7 | 36.9 | 39.0 | 41.2 | 41.2 | 43.4 | 45.6 | 45.6 | 47.7 |
| 15° | 34.7 | 34.7 | 36.9 | 36.9 | 39.0 | 41.2 | 43.4 | 45.6 | 47.7 | 49.9 | 52.1 |
| 17.5° | 32.5 | 34.7 | 36.9 | 39.0 | 41.2 | 43.4 | 45.6 | 47.7 | 52.1 | 54.2 | 58.6 |
| 20° | 32.5 | 34.7 | 36.9 | 39.0 | 41.2 | 45.6 | 47.7 | 49.9 | 54.2 | 58.6 | 65.1 |
| 22.5° | 32.5 | 34.7 | 36.9 | 39.0 | 43.4 | 47.7 | 49.9 | 54.2 | 60.7 | 65.1 | 73.7 |
| 25° | 34.7 | 36.9 | 39.0 | 41.2 | 45.6 | 49.9 | 54.2 | 58.6 | 67.2 | 73.7 | 93.3 |
| 27.5° | 34.7 | 39.0 | 41.2 | 43.4 | 47.7 | 54.2 | 58.6 | 62.9 | 75.9 | 86.8 | 130.1 |
| 30° | 34.7 | 39.0 | 41.2 | 43.4 | 49.9 | 56.4 | 62.9 | 69.4 | 91.1 | 110.6 | 184.4 |
| 32.5° | 34.7 | 39.0 | 41.2 | 43.4 | 52.1 | 62.9 | 71.6 | 80.3 | 108.5 | 136.7 | 223.4 |
| 35° | 36.9 | 39.0 | 43.4 | 45.6 | 56.4 | 67.2 | 75.9 | 86.8 | 112.8 | 138.8 | 242.9 |
| 37.5° | 39.0 | 41.2 | 45.6 | 47.7 | 56.4 | 65.1 | 73.7 | 82.4 | 110.6 | 136.7 | 266.8 |
| 40° | 39.0 | 43.4 | 45.6 | 49.9 | 56.4 | 65.1 | 71.6 | 78.1 | 108.5 | 138.8 | 308.0 |
| 42.5° | 41.2 | 45.6 | 47.7 | 52.1 | 58.6 | 65.1 | 69.4 | 75.9 | 115.0 | 154.0 | 401.3 |
| 45° | 41.2 | 43.4 | 47.7 | 49.9 | 56.4 | 62.9 | 69.4 | 75.9 | 145.3 | 212.6 | 637.7 |
| 47.5° | 41.2 | 43.4 | 45.6 | 47.7 | 56.4 | 65.1 | 71.6 | 80.3 | 214.7 | 349.2 | 1054.2 |
| 50° | 41.2 | 43.4 | 43.4 | 45.6 | 54.2 | 65.1 | 73.7 | 82.4 | 279.8 | 475.0 | 1520.5 |
| 52.5° | 43.4 | 45.6 | 45.6 | 47.7 | 58.6 | 69.4 | 80.3 | 91.1 | 321.0 | 551.0 | 1650.7 |
| 55° | 43.4 | 45.6 | 45.6 | 47.7 | 65.1 | 82.4 | 97.6 | 115.0 | 338.4 | 559.6 | 1516.2 |
| 57.5° | *45.6* | *47.7* | *49.9* | *52.1* | *69.4* | *88.9* | *106.3* | *123.6* | *323.2* | *522.8* | *1242.9* |
| 60° | 52.1 | 54.2 | 58.6 | 60.7 | 80.3 | 99.8 | 117.1 | 136.7 | 258.1 | 379.6 | 978.3 |
| 62.5° | 58.6 | 60.7 | 65.1 | 67.2 | 86.8 | 106.3 | 125.8 | 145.3 | 227.8 | 308.0 | 728.8 |
| 65° | 60.7 | 65.1 | 67.2 | 69.4 | 88.9 | 110.6 | 130.1 | 149.7 | 208.2 | 264.6 | 540.1 |
| 67.5° | 62.9 | 67.2 | 69.4 | 73.7 | 93.3 | 112.8 | 132.3 | 151.8 | 197.4 | 240.8 | 401.3 |
| 70° | 62.9 | 67.2 | 73.7 | 78.1 | 95.4 | 112.8 | 128.0 | 145.3 | 182.2 | 216.9 | 308.0 |
| 72.5° | 62.9 | 71.6 | 80.3 | 88.9 | 101.9 | 115.0 | 125.8 | 138.8 | 167.0 | 193.1 | 238.6 |
| 75° | 62.9 | 75.9 | 86.8 | 99.8 | 106.3 | 112.8 | 119.3 | 125.8 | 145.3 | 162.7 | 188.7 |
| 77.5° | 60.7 | 71.6 | 84.6 | 95.4 | 97.6 | 99.8 | 101.9 | 104.1 | 104.1 | 104.1 | 104.1 |
| 80° | 49.9 | 60.7 | 69.4 | 78.1 | 73.7 | 67.2 | 62.9 | 56.4 | 52.1 | 47.7 | 52.1 |
| 82.5° | 26.0 | 28.2 | 28.2 | 28.2 | 26.0 | 26.0 | 23.9 | 21.7 | 21.7 | 19.5 | 19.5 |
| 85° | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 |
| 87.5° | 2.2 | 2.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 34.7 | 34.7 | 34.7 | 34.7 | 34.7 | 34.7 | 34.7 | 32.5 | 32.5 | 32.5 | 32.5 |
| 5° | 36.9 | 36.9 | 36.9 | 36.9 | 36.9 | 36.9 | 36.9 | 34.7 | 34.7 | 34.7 | 34.7 |
| 7.5° | 41.2 | 41.2 | 41.2 | 41.2 | 41.2 | 41.2 | 41.2 | 41.2 | 41.2 | 41.2 | 41.2 |
| 10° | 43.4 | 45.6 | 45.6 | 47.7 | 47.7 | 47.7 | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 |
| 12.5° | 49.9 | 52.1 | 52.1 | 54.2 | 54.2 | 56.4 | 56.4 | 58.6 | 58.6 | 58.6 | 60.7 |
| 15° | 54.2 | 56.4 | 58.6 | 60.7 | 62.9 | 67.2 | 69.4 | 73.7 | 75.9 | 78.1 | 80.3 |
| 17.5° | 62.9 | 67.2 | 73.7 | 78.1 | 82.4 | 91.1 | 99.8 | 106.3 | 115.0 | 125.8 | 138.8 |
| 20° | 69.4 | 84.6 | 97.6 | 112.8 | 125.8 | 164.9 | 203.9 | 242.9 | 282.0 | 334.0 | 386.1 |
| 22.5° | 82.4 | 130.1 | 180.0 | 227.8 | 275.5 | 403.5 | 529.3 | 655.1 | 783.0 | 904.5 | 1026.0 |
| 25° | 112.8 | 214.7 | 318.9 | 420.8 | 522.8 | 737.5 | 950.1 | 1162.6 | 1377.4 | 1583.4 | 1791.7 |
| 27.5° | 171.4 | 336.2 | 501.1 | 665.9 | 830.8 | 1112.8 | 1392.6 | 1672.4 | 1954.4 | 2203.8 | 2451.1 |
| 30° | 258.1 | 470.7 | 683.3 | 895.8 | 1108.4 | 1472.8 | 1837.2 | 2201.6 | 2566.1 | 2809.0 | 3051.9 |
| 32.5° | 308.0 | 585.7 | 863.3 | 1138.8 | 1416.4 | 1813.4 | 2210.3 | 2609.4 | 3006.4 | 3284.0 | 3561.7 |
| 35° | 344.9 | 689.8 | 1032.5 | 1377.4 | 1720.1 | 2162.6 | 2605.1 | 3049.8 | 3492.3 | 3824.1 | 4156.0 |
| 37.5° | 394.8 | 809.1 | 1221.2 | 1635.5 | 2047.6 | 2524.8 | 3002.0 | 3481.4 | 3958.6 | 4368.6 | 4780.7 |
| 40° | 475.0 | 967.4 | 1459.8 | 1950.0 | 2442.4 | 3041.1 | 3639.8 | 4238.4 | 4837.1 | 5381.5 | 5926.0 |
| 42.5° | 648.6 | 1297.1 | 1947.9 | 2596.4 | 3245.0 | 4140.8 | 5034.5 | 5928.2 | 6824.0 | 7594.0 | 8364.1 |
| 45° | 1062.9 | 2071.5 | 3080.1 | 4088.8 | 5097.4 | 6168.9 | 7238.3 | 8309.8 | 9381.4 | 10520.2 | 11658.9 |
| 47.5° | 1759.1 | 3149.5 | 4539.9 | 5928.2 | 7318.6 | 8422.6 | 9524.5 | 10626.4 | 11730.5 | 12793.4 | 13856.2 |
| 50° | 2566.1 | 4062.7 | 5559.4 | 7056.1 | 8552.8 | 9539.7 | 10524.5 | 11509.3 | 12496.2 | 13539.5 | 14580.7 |
| 52.5° | 2750.4 | 4247.1 | 5743.8 | 7238.3 | 8735.0 | 9730.6 | 10726.2 | 11724.0 | 12719.6 | 13739.1 | 14760.8 |
| 55° | 2470.6 | 3954.3 | 5435.8 | 6919.4 | 8400.9 | 9494.2 | 10587.4 | 11680.6 | 12773.9 | 13917.0 | 15060.1 |
| 57.5° | *1963.0* | *3461.9* | *4958.6* | *6457.4* | *7954.1* | *9251.2* | *10546.2* | *11843.3* | *13140.4* | *14346.5* | *15552.5* |
| 60° | 1576.9 | 3106.2 | 4635.4 | 6164.6 | 7693.8 | 9077.7 | 10459.4 | 11841.1 | 13225.0 | 14251.0 | 15277.0 |
| 62.5° | 1149.6 | 2663.7 | 4177.7 | 5691.7 | 7205.8 | 8446.5 | 9687.2 | 10930.1 | 12170.8 | 12899.7 | 13628.5 |
| 65° | 815.6 | 2153.9 | 3492.3 | 4828.4 | 6166.8 | 7027.9 | 7889.0 | 8750.2 | 9611.3 | 10242.5 | 10873.7 |
| 67.5° | 561.8 | 1505.4 | 2446.7 | 3390.3 | 4331.7 | 5064.9 | 5795.8 | 6529.0 | 7262.2 | 7793.6 | 8327.2 |
| 70° | 399.1 | 913.2 | 1427.3 | 1939.2 | 2453.3 | 3101.8 | 3750.4 | 4398.9 | 5047.5 | 5696.1 | 6346.8 |
| 72.5° | 284.2 | 509.7 | 733.2 | 958.7 | 1182.2 | 1746.1 | 2310.1 | 2876.2 | 3440.2 | 3832.8 | 4227.6 |
| 75° | 214.7 | 275.5 | 334.0 | 394.8 | 453.3 | 590.0 | 726.6 | 863.3 | 1000.0 | 1138.8 | 1277.6 |
| 77.5° | 101.9 | 112.8 | 121.5 | 132.3 | 141.0 | 175.7 | 210.4 | 245.1 | 279.8 | 338.4 | 396.9 |
| 80° | 54.2 | 58.6 | 62.9 | 67.2 | 71.6 | 73.7 | 75.9 | 78.1 | 80.3 | 86.8 | 95.4 |
| 82.5° | 19.5 | 21.7 | 21.7 | 23.9 | 23.9 | 21.7 | 21.7 | 19.5 | 17.4 | 19.5 | 19.5 |
| 85° | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | *26.0* | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 30.4 | 30.4 | 30.4 | 30.4 | 28.2 | *28.2* | 28.2 | 28.2 | 26.0 | 26.0 | 26.0 |
| 5° | 34.7 | 34.7 | 34.7 | 34.7 | 32.5 | *32.5* | 32.5 | 32.5 | 30.4 | 30.4 | 30.4 |
| 7.5° | 41.2 | 41.2 | 41.2 | 41.2 | 39.0 | *39.0* | 39.0 | 39.0 | 36.9 | 36.9 | 36.9 |
| 10° | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 | *49.9* | 49.9 | 49.9 | 47.7 | 47.7 | 47.7 |
| 12.5° | 60.7 | 60.7 | 60.7 | 60.7 | 60.7 | *60.7* | 60.7 | 60.7 | 58.6 | 58.6 | 58.6 |
| 15° | 80.3 | 82.4 | 84.6 | 86.8 | 86.8 | *88.9* | 86.8 | 84.6 | 82.4 | 80.3 | 78.1 |
| 17.5° | 149.7 | 160.5 | 164.9 | 167.0 | 171.4 | *173.5* | 171.4 | 167.0 | 164.9 | 160.5 | 149.7 |
| 20° | 436.0 | 488.0 | 524.9 | 561.8 | 598.7 | *635.5* | 613.9 | 592.2 | 570.5 | 548.8 | 492.4 |
| 22.5° | 1147.5 | 1268.9 | 1353.5 | 1438.1 | 1522.7 | *1607.3* | 1548.7 | 1490.2 | 1429.4 | 1370.9 | 1227.7 |
| 25° | 1997.7 | 2203.8 | 2312.3 | 2422.9 | 2531.3 | *2639.8* | 2540.0 | 2440.2 | 2338.3 | 2238.5 | 2039.0 |
| 27.5° | 2700.5 | 2947.8 | 3041.1 | 3132.2 | 3225.5 | *3316.6* | 3227.6 | 3140.9 | 3051.9 | 2963.0 | 2730.9 |
| 30° | 3294.9 | 3537.8 | 3628.9 | 3720.0 | 3811.1 | *3902.2* | 3802.4 | 3700.5 | 3600.7 | 3498.8 | 3268.8 |
| 32.5° | 3837.1 | 4114.8 | 4240.6 | 4366.4 | 4492.2 | *4618.0* | 4468.4 | 4318.7 | 4169.0 | 4019.4 | 3756.9 |
| 35° | 4487.9 | 4819.7 | 4967.2 | 5116.9 | 5264.4 | *5411.9* | 5234.0 | 5054.0 | 4876.1 | 4696.1 | 4364.2 |
| 37.5° | 5190.7 | 5600.6 | 5798.0 | 5995.4 | 6192.8 | *6390.2* | 6168.9 | 5947.7 | 5726.4 | 5505.2 | 5082.2 |
| 40° | 6470.4 | 7014.9 | 7307.7 | 7598.4 | 7891.2 | *8181.9* | 7850.0 | 7515.9 | 7184.1 | 6850.0 | 6268.7 |
| 42.5° | 9131.9 | 9902.0 | 10318.4 | 10734.9 | 11151.4 | *11567.8* | 11084.1 | 10598.2 | 10114.5 | 9628.7 | 8826.1 |
| 45° | 12797.7 | 13936.5 | 14396.3 | 14854.0 | 15313.9 | *15771.6* | 15224.9 | 14678.3 | 14129.5 | 13582.9 | 12504.9 |
| 47.5° | 14919.1 | 15982.0 | 16433.1 | 16884.3 | 17333.3 | *17784.5* | 17270.4 | 16756.3 | 16242.3 | 15728.2 | 14676.2 |
| 50° | 15624.1 | 16665.2 | 17162.0 | 17660.8 | 18157.6 | *18654.3* | 18066.5 | 17476.5 | 16888.6 | 16298.7 | 15287.8 |
| 52.5° | 15780.2 | 16799.7 | 17385.4 | 17971.0 | 18554.5 | *19140.2* | 18461.2 | 17782.3 | 17101.2 | 16422.3 | 15420.2 |
| 55° | 16201.0 | 17344.2 | 18018.8 | 18691.2 | 19365.8 | *20038.2* | 19246.5 | 18452.6 | 17660.8 | 16867.0 | 15767.2 |
| 57.5° | *16758.5* | *17964.5* | *18580.5* | *19196.6* | *19810.4* | *20426.5* | *19660.8* | *18897.2* | *18131.5* | *17365.8* | *16218.4* |
| 60° | 16300.8 | 17326.8 | 17840.9 | 18352.8 | 18866.9 | *19378.8* | 18686.8 | 17997.1 | 17305.1 | 16613.2 | 15656.6 |
| 62.5° | 14355.1 | 15084.0 | 15480.9 | 15877.8 | 16272.6 | *16669.6* | 16101.3 | 15533.0 | 14964.7 | 14396.3 | 13702.2 |
| 65° | 11502.8 | 12134.0 | 12420.3 | 12704.4 | 12990.8 | *13274.9* | 12880.1 | 12485.4 | 12088.4 | 11693.6 | 11110.2 |
| 67.5° | 8858.6 | 9390.1 | 9832.6 | 10272.9 | 10715.4 | *11155.7* | 10676.3 | 10197.0 | 9715.4 | 9236.0 | 8676.4 |
| 70° | 6995.4 | 7643.9 | 8008.3 | 8372.7 | 8737.2 | *9101.6* | 8685.1 | 8268.6 | 7850.0 | 7433.5 | 6847.9 |
| 72.5° | 4620.2 | 5012.8 | 5142.9 | 5275.3 | 5405.4 | *5535.6* | 5383.7 | 5234.0 | 5082.2 | 4930.4 | 4559.5 |
| 75° | 1414.3 | 1553.1 | 1707.1 | 1863.3 | 2017.3 | *2171.3* | 2032.5 | 1893.6 | 1754.8 | 1616.0 | 1490.2 |
| 77.5° | 453.3 | 511.9 | 557.5 | 603.0 | 646.4 | *691.9* | 694.1 | 696.3 | 696.3 | 698.5 | 631.2 |
| 80° | 101.9 | 108.5 | 108.5 | 108.5 | 106.3 | *106.3* | 117.1 | 125.8 | 136.7 | 145.3 | 136.7 |
| 82.5° | 21.7 | 21.7 | 21.7 | 21.7 | 21.7 | *21.7* | 21.7 | 21.7 | 19.5 | 19.5 | 19.5 |
| 85° | 2.2 | 2.2 | 2.2 | 2.2 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 |
| 2.5° | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 26.0 | 23.9 | 23.9 |
| 5° | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 30.4 | 28.2 | 28.2 |
| 7.5° | 36.9 | 36.9 | 36.9 | 36.9 | 36.9 | 34.7 | 34.7 | 34.7 | 34.7 | 32.5 | 32.5 |
| 10° | 47.7 | 45.6 | 45.6 | 45.6 | 43.4 | 43.4 | 41.2 | 41.2 | 39.0 | 39.0 | 36.9 |
| 12.5° | 58.6 | 56.4 | 56.4 | 54.2 | 54.2 | 52.1 | 49.9 | 47.7 | 45.6 | 43.4 | 41.2 |
| 15° | 75.9 | 73.7 | 71.6 | 69.4 | 65.1 | 62.9 | 58.6 | 56.4 | 54.2 | 52.1 | 49.9 |
| 17.5° | 138.8 | 128.0 | 117.1 | 106.3 | 97.6 | 86.8 | 75.9 | 71.6 | 65.1 | 60.7 | 54.2 |
| 20° | 438.2 | 381.8 | 325.4 | 275.5 | 225.6 | 173.5 | 123.6 | 108.5 | 93.3 | 78.1 | 62.9 |
| 22.5° | 1086.7 | 943.6 | 800.4 | 676.8 | 553.1 | 429.5 | 305.8 | 249.4 | 193.1 | 136.7 | 80.3 |
| 25° | 1839.4 | 1637.7 | 1438.1 | 1221.2 | 1006.5 | 789.6 | 572.6 | 459.9 | 344.9 | 229.9 | 117.1 |
| 27.5° | 2498.8 | 2266.7 | 2034.6 | 1748.3 | 1462.0 | 1173.5 | 887.2 | 713.6 | 537.9 | 362.2 | 188.7 |
| 30° | 3041.1 | 2811.2 | 2581.2 | 2229.8 | 1876.3 | 1524.9 | 1171.3 | 945.7 | 720.1 | 492.4 | 266.8 |
| 32.5° | 3494.4 | 3232.0 | 2969.5 | 2583.4 | 2199.5 | 1813.4 | 1427.3 | 1147.5 | 869.8 | 590.0 | 310.2 |
| 35° | 4030.2 | 3698.3 | 3364.3 | 2952.2 | 2542.2 | 2130.1 | 1717.9 | 1377.4 | 1034.7 | 691.9 | 351.4 |
| 37.5° | 4659.2 | 4236.3 | 3813.3 | 3366.4 | 2921.8 | 2474.9 | 2028.1 | 1624.7 | 1223.4 | 819.9 | 416.5 |
| 40° | 5689.6 | 5108.2 | 4526.9 | 3991.2 | 3453.2 | 2917.4 | 2379.5 | 1913.2 | 1446.8 | 978.3 | 511.9 |
| 42.5° | 8023.5 | 7220.9 | 6418.4 | 5615.8 | 4811.1 | 4008.5 | 3203.8 | 2568.2 | 1934.8 | 1299.3 | 663.7 |
| 45° | 11426.8 | 10348.8 | 9270.8 | 8194.9 | 7119.0 | 6043.1 | 4967.2 | 3980.3 | 2993.4 | 2004.3 | 1017.3 |
| 47.5° | 13624.1 | 12572.1 | 11520.1 | 10489.8 | 9461.6 | 8431.3 | 7401.0 | 6012.8 | 4624.5 | 3234.1 | 1845.9 |
| 50° | 14279.2 | 13268.4 | 12257.6 | 11337.9 | 10420.4 | 9500.7 | 8581.0 | 7112.5 | 5646.2 | 4177.7 | 2709.2 |
| 52.5° | 14418.0 | 13413.7 | 12411.6 | 11489.7 | 10570.0 | 9648.2 | 8726.3 | 7264.3 | 5802.4 | 4338.2 | 2876.2 |
| 55° | 14667.5 | 13567.7 | 12468.0 | 11433.3 | 10398.7 | 9361.9 | 8327.2 | 6867.4 | 5407.6 | 3947.8 | 2488.0 |
| 57.5° | *15070.9* | *13921.3* | *12773.9* | *11541.8* | *10309.8* | *9077.7* | *7845.7* | *6372.8* | *4900.0* | *3427.2* | *1954.4* |
| 60° | 14700.0 | 13741.3 | 12784.7 | 11457.2 | 10127.5 | 8800.1 | 7470.4 | 5973.7 | 4474.9 | 2976.0 | 1479.3 |
| 62.5° | 13005.9 | 12311.8 | 11615.6 | 10437.7 | 9259.9 | 8082.1 | 6904.3 | 5446.6 | 3989.0 | 2531.3 | 1073.7 |
| 65° | 10524.5 | 9941.0 | 9355.3 | 8422.6 | 7489.9 | 6555.0 | 5622.3 | 4394.6 | 3169.1 | 1941.3 | 713.6 |
| 67.5° | 8116.8 | 7557.2 | 6997.5 | 6262.2 | 5526.9 | 4791.6 | 4056.2 | 3162.6 | 2268.9 | 1373.0 | 479.4 |
| 70° | 6262.2 | 5676.5 | 5090.9 | 4429.3 | 3767.7 | 3106.2 | 2444.6 | 1924.0 | 1405.6 | 885.0 | 364.4 |
| 72.5° | 4188.5 | 3817.6 | 3446.7 | 2897.9 | 2349.1 | 1800.4 | 1251.6 | 1013.0 | 774.4 | 533.6 | 295.0 |
| 75° | 1362.2 | 1236.4 | 1108.4 | 958.7 | 809.1 | 657.2 | 507.6 | 440.3 | 370.9 | 301.5 | 234.3 |
| 77.5° | 561.8 | 494.6 | 425.1 | 362.2 | 297.2 | 234.3 | 169.2 | 158.3 | 147.5 | 136.7 | 125.8 |
| 80° | 125.8 | 117.1 | 106.3 | 99.8 | 93.3 | 86.8 | 80.3 | 75.9 | 69.4 | 65.1 | 58.6 |
| 82.5° | 17.4 | 17.4 | 15.2 | 17.4 | 19.5 | 21.7 | 23.9 | 21.7 | 21.7 | 19.5 | 17.4 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 0° | 26.0 | 26.0 |
| 2.5° | 23.9 | 23.9 |
| 5° | 28.2 | 26.0 |
| 7.5° | 32.5 | 30.4 |
| 10° | 36.9 | 34.7 |
| 12.5° | 41.2 | 39.0 |
| 15° | 47.7 | 43.4 |
| 17.5° | 52.1 | 47.7 |
| 20° | 58.6 | 52.1 |
| 22.5° | 69.4 | 58.6 |
| 25° | 91.1 | 67.2 |
| 27.5° | 134.5 | 82.4 |
| 30° | 188.7 | 110.6 |
| 32.5° | 223.4 | 136.7 |
| 35° | 242.9 | 136.7 |
| 37.5° | 275.5 | 134.5 |
| 40° | 325.4 | 141.0 |
| 42.5° | 407.8 | 154.0 |
| 45° | 605.2 | 193.1 |
| 47.5° | 1097.6 | 349.2 |
| 50° | 1626.8 | 546.6 |
| 52.5° | 1735.3 | 594.3 |
| 55° | 1511.9 | 535.8 |
| 57.5° | *1203.9* | *453.3* |
| 60° | 908.9 | 340.5 |
| 62.5° | 674.6 | 277.6 |
| 65° | 479.4 | 245.1 |
| 67.5° | 353.6 | 227.8 |
| 70° | 290.7 | 219.1 |
| 72.5° | 249.4 | 203.9 |
| 75° | 208.2 | 182.2 |
| 77.5° | 130.1 | 132.3 |
| 80° | 56.4 | 52.1 |
| 82.5° | 17.4 | 15.2 |
| 85° | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389879
CATALOG NUMBER: GSS-SA3A-722-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 112.5° | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-2

Test Date: 10/09/2024

Luminaire Tested: GSS-SB1A-722-U-5WQ

Data in this report applies to families of products including GSS-SB1A-722-U-5WQ

Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04


## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-184-2 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 10/15/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | McGraw-Edison |
| Catalog Number: | **GSS-SB1A-722-U-5WQ** |
| Description: | GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI 2200K CCT 26 LEDS |

## Spectral Parameters

| | |
|---|---|
| CCT (K): | 2160 |
| CIE u': | 0.2927 |
| CIE v': | 0.5388 |
| Duv: | 0.0015 |
| CIE x: | 0.5130 |
| CIE y: | 0.4197 |
| CIE z: | 0.0674 |
| Peak Wavelength (nm): | 609 |
| Dominant Wavelength (nm): | 587 |
| Purity: | 79.96089 |
| Rf: | 70.6 |
| Rg: | 97.6 |

| | |
|---|---|
| CRI (Ra): | 71.9 |
| R1: | 68.7 |
| R2: | 82.6 |
| R3: | 95.5 |
| R4: | 66.4 |
| R5: | 65.4 |
| R6: | 75.9 |
| R7: | 77.2 |
| R8: | 43.5 |
| R9: | -17.8 |
| R10: | 60.5 |
| R11: | 60.2 |
| R12: | 48.2 |
| R13: | 70.7 |
| R14: | 96.8 |
| R15: | 61.8 |

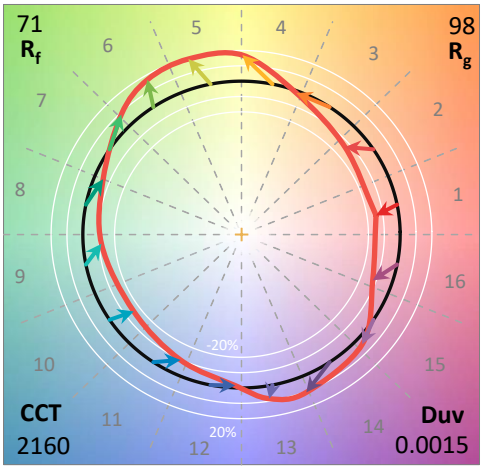


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 21M |
| Operation Time: | 1H 21M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-184-2


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-184-2

## CIE 1931 Chromaticity Diagram

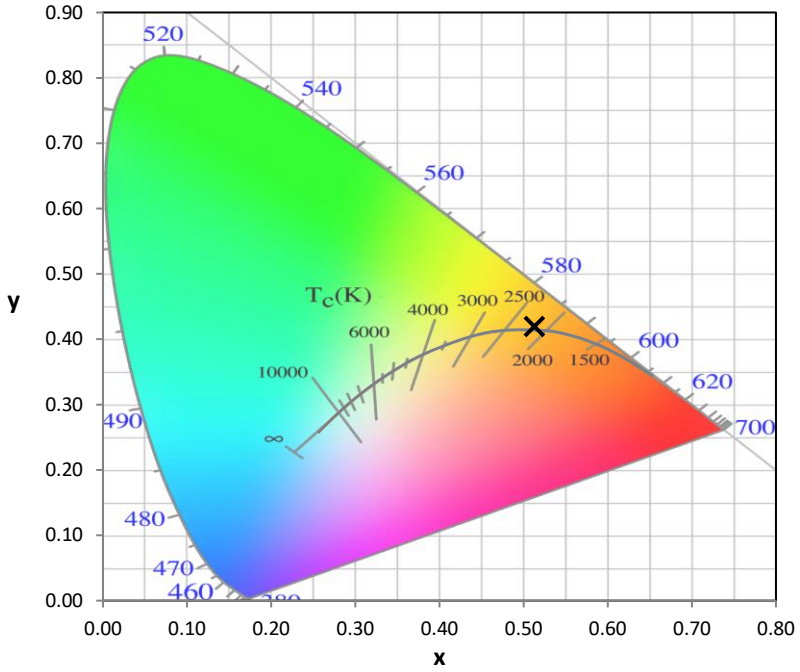


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

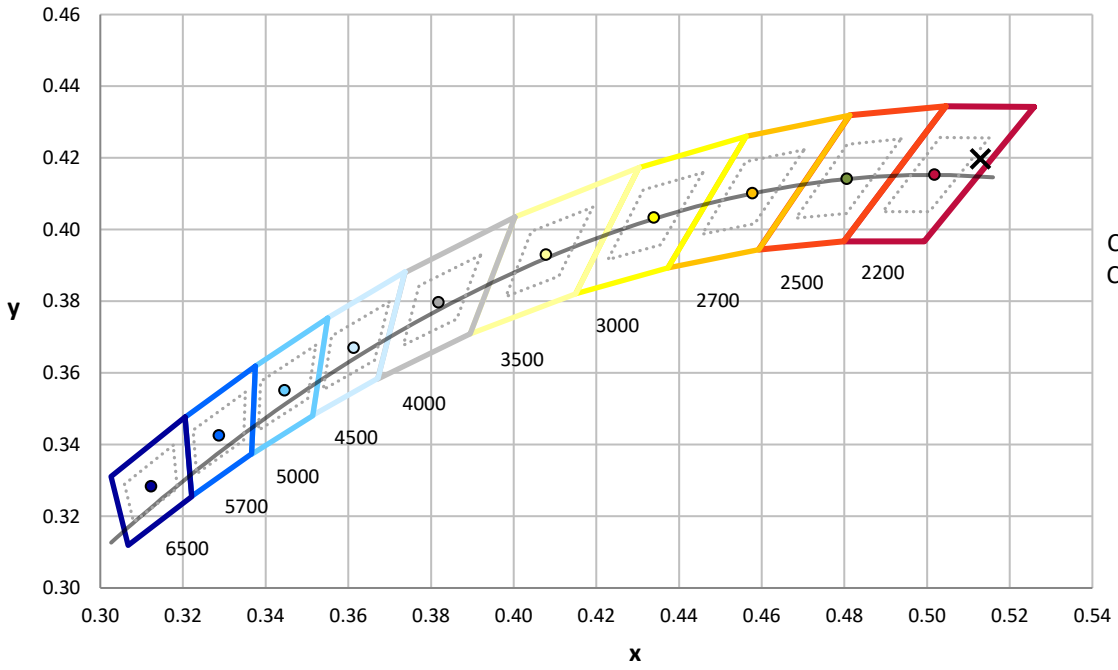



CCT = 2160K
CIE x = 0.5130
CIE y = 0.4197
Duv = 0.0015

Point lies inside the ANSI 2200K 7-step quadrangle

REPORT NUMBER: SP1-2407-184-2

## Photopic Flux vs. Wavelength

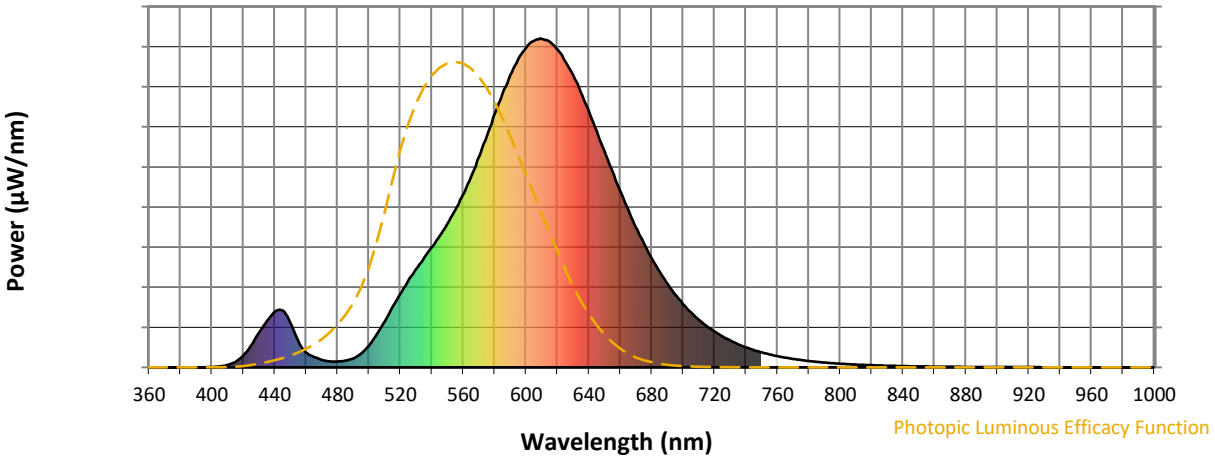



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 27 | NR | 620 | 966 | NR | 750 | 46 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 42 | NR | 625 | 930 | NR | 755 | 39 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 67 | NR | 630 | 888 | NR | 760 | 34 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 101 | NR | 635 | 835 | NR | 765 | 30 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 139 | NR | 640 | 778 | NR | 770 | 26 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 183 | NR | 645 | 717 | NR | 775 | 22 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 224 | NR | 650 | 656 | NR | 780 | 19 | NR | 910 | 1 | NR |
| 395 | 0 | NR | 525 | 262 | NR | 655 | 595 | NR | 785 | 17 | NR | 915 | 1 | NR |
| 400 | 1 | NR | 530 | 299 | NR | 660 | 536 | NR | 790 | 15 | NR | 920 | 1 | NR |
| 405 | 3 | NR | 535 | 332 | NR | 665 | 480 | NR | 795 | 13 | NR | 925 | 1 | NR |
| 410 | 7 | NR | 540 | 365 | NR | 670 | 425 | NR | 800 | 11 | NR | 930 | 1 | NR |
| 415 | 17 | NR | 545 | 400 | NR | 675 | 376 | NR | 805 | 10 | NR | 935 | 0 | NR |
| 420 | 36 | NR | 550 | 437 | NR | 680 | 332 | NR | 810 | 8 | NR | 940 | 0 | NR |
| 425 | 67 | NR | 555 | 479 | NR | 685 | 291 | NR | 815 | 8 | NR | 945 | 0 | NR |
| 430 | 105 | NR | 560 | 525 | NR | 690 | 255 | NR | 820 | 7 | NR | 950 | 0 | NR |
| 435 | 141 | NR | 565 | 579 | NR | 695 | 221 | NR | 825 | 6 | NR | 955 | 0 | NR |
| 440 | 169 | NR | 570 | 639 | NR | 700 | 192 | NR | 830 | 5 | NR | 960 | 0 | NR |
| 445 | 173 | NR | 575 | 703 | NR | 705 | 167 | NR | 835 | 4 | NR | 965 | 0 | NR |
| 450 | 136 | NR | 580 | 769 | NR | 710 | 144 | NR | 840 | 4 | NR | 970 | 0 | NR |
| 455 | 80 | NR | 585 | 832 | NR | 715 | 125 | NR | 845 | 3 | NR | 975 | 0 | NR |
| 460 | 45 | NR | 590 | 890 | NR | 720 | 109 | NR | 850 | 3 | NR | 980 | 0 | NR |
| 465 | 32 | NR | 595 | 937 | NR | 725 | 94 | NR | 855 | 3 | NR | 985 | 0 | NR |
| 470 | 23 | NR | 600 | 972 | NR | 730 | 81 | NR | 860 | 2 | NR | 990 | 0 | NR |
| 475 | 18 | NR | 605 | 992 | NR | 735 | 70 | NR | 865 | 2 | NR | 995 | 0 | NR |
| 480 | 18 | NR | 610 | 998 | NR | 740 | 61 | NR | 870 | 2 | NR | 1000 | 0 | NR |
| 485 | 20 | NR | 615 | 990 | NR | 745 | 53 | NR | 875 | 2 | NR | | | |

REPORT NUMBER: SP1-2407-184-2

## Scotopic Flux vs. Wavelength

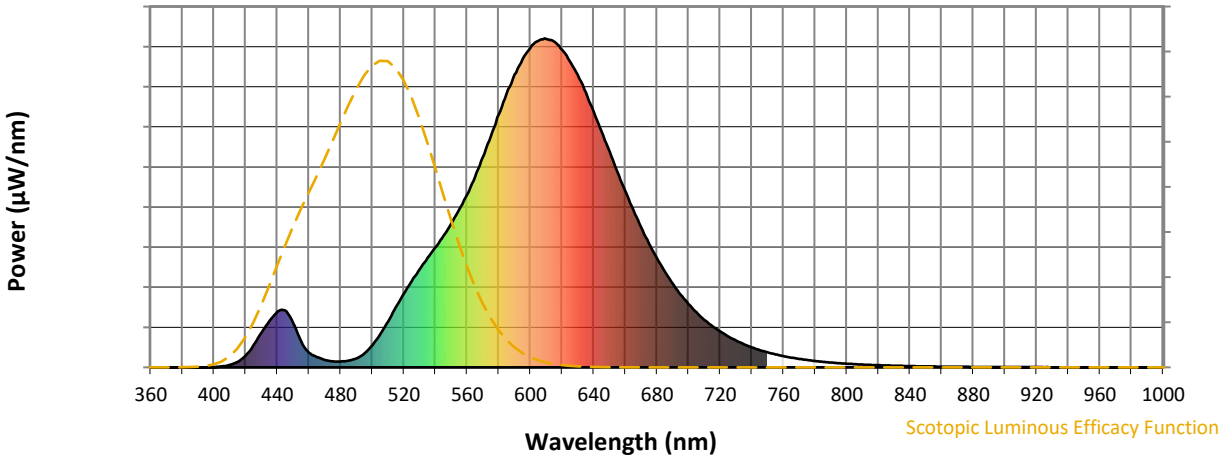



**Scotopic Lumens: NR** **S/P: 0.8**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 27 | NR | 620 | 966 | NR | 750 | 46 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 42 | NR | 625 | 930 | NR | 755 | 39 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 67 | NR | 630 | 888 | NR | 760 | 34 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 101 | NR | 635 | 835 | NR | 765 | 30 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 139 | NR | 640 | 778 | NR | 770 | 26 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 183 | NR | 645 | 717 | NR | 775 | 22 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 224 | NR | 650 | 656 | NR | 780 | 19 | NR | 910 | 1 | NR |
| 395 | 0 | NR | 525 | 262 | NR | 655 | 595 | NR | 785 | 17 | NR | 915 | 1 | NR |
| 400 | 1 | NR | 530 | 299 | NR | 660 | 536 | NR | 790 | 15 | NR | 920 | 1 | NR |
| 405 | 3 | NR | 535 | 332 | NR | 665 | 480 | NR | 795 | 13 | NR | 925 | 1 | NR |
| 410 | 7 | NR | 540 | 365 | NR | 670 | 425 | NR | 800 | 11 | NR | 930 | 1 | NR |
| 415 | 17 | NR | 545 | 400 | NR | 675 | 376 | NR | 805 | 10 | NR | 935 | 0 | NR |
| 420 | 36 | NR | 550 | 437 | NR | 680 | 332 | NR | 810 | 8 | NR | 940 | 0 | NR |
| 425 | 67 | NR | 555 | 479 | NR | 685 | 291 | NR | 815 | 8 | NR | 945 | 0 | NR |
| 430 | 105 | NR | 560 | 525 | NR | 690 | 255 | NR | 820 | 7 | NR | 950 | 0 | NR |
| 435 | 141 | NR | 565 | 579 | NR | 695 | 221 | NR | 825 | 6 | NR | 955 | 0 | NR |
| 440 | 169 | NR | 570 | 639 | NR | 700 | 192 | NR | 830 | 5 | NR | 960 | 0 | NR |
| 445 | 173 | NR | 575 | 703 | NR | 705 | 167 | NR | 835 | 4 | NR | 965 | 0 | NR |
| 450 | 136 | NR | 580 | 769 | NR | 710 | 144 | NR | 840 | 4 | NR | 970 | 0 | NR |
| 455 | 80 | NR | 585 | 832 | NR | 715 | 125 | NR | 845 | 3 | NR | 975 | 0 | NR |
| 460 | 45 | NR | 590 | 890 | NR | 720 | 109 | NR | 850 | 3 | NR | 980 | 0 | NR |
| 465 | 32 | NR | 595 | 937 | NR | 725 | 94 | NR | 855 | 3 | NR | 985 | 0 | NR |
| 470 | 23 | NR | 600 | 972 | NR | 730 | 81 | NR | 860 | 2 | NR | 990 | 0 | NR |
| 475 | 18 | NR | 605 | 992 | NR | 735 | 70 | NR | 865 | 2 | NR | 995 | 0 | NR |
| 480 | 18 | NR | 610 | 998 | NR | 740 | 61 | NR | 870 | 2 | NR | 1000 | 0 | NR |
| 485 | 20 | NR | 615 | 990 | NR | 745 | 53 | NR | 875 | 2 | NR | | | |

REPORT NUMBER: SP1-2407-184-2

## Melanopic Flux vs. Wavelength

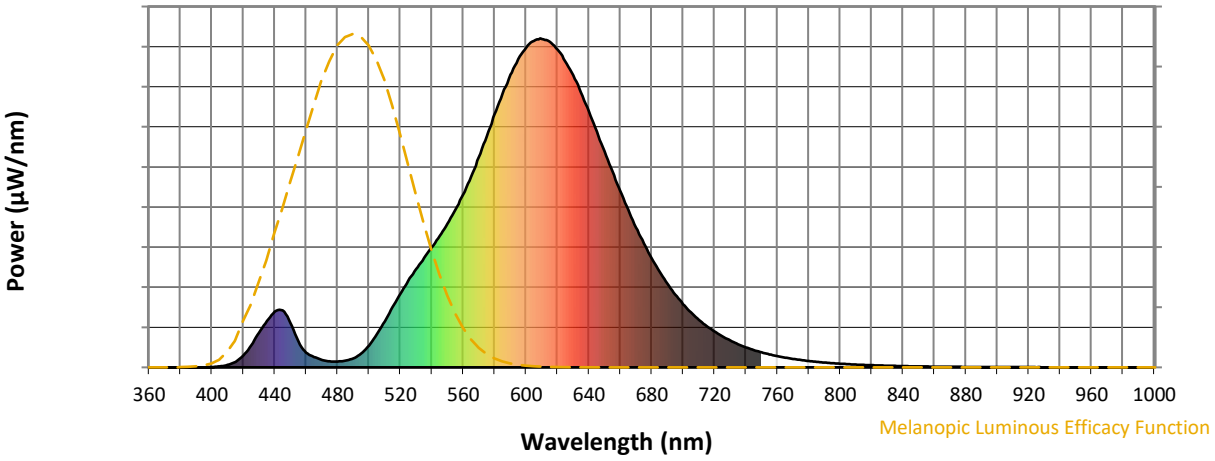


**Melanopic Lumens: NR** **M/P: 1.21**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 27 | NR | 620 | 966 | NR | 750 | 46 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 42 | NR | 625 | 930 | NR | 755 | 39 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 67 | NR | 630 | 888 | NR | 760 | 34 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 101 | NR | 635 | 835 | NR | 765 | 30 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 139 | NR | 640 | 778 | NR | 770 | 26 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 183 | NR | 645 | 717 | NR | 775 | 22 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 224 | NR | 650 | 656 | NR | 780 | 19 | NR | 910 | 1 | NR |
| 395 | 0 | NR | 525 | 262 | NR | 655 | 595 | NR | 785 | 17 | NR | 915 | 1 | NR |
| 400 | 1 | NR | 530 | 299 | NR | 660 | 536 | NR | 790 | 15 | NR | 920 | 1 | NR |
| 405 | 3 | NR | 535 | 332 | NR | 665 | 480 | NR | 795 | 13 | NR | 925 | 1 | NR |
| 410 | 7 | NR | 540 | 365 | NR | 670 | 425 | NR | 800 | 11 | NR | 930 | 1 | NR |
| 415 | 17 | NR | 545 | 400 | NR | 675 | 376 | NR | 805 | 10 | NR | 935 | 0 | NR |
| 420 | 36 | NR | 550 | 437 | NR | 680 | 332 | NR | 810 | 8 | NR | 940 | 0 | NR |
| 425 | 67 | NR | 555 | 479 | NR | 685 | 291 | NR | 815 | 8 | NR | 945 | 0 | NR |
| 430 | 105 | NR | 560 | 525 | NR | 690 | 255 | NR | 820 | 7 | NR | 950 | 0 | NR |
| 435 | 141 | NR | 565 | 579 | NR | 695 | 221 | NR | 825 | 6 | NR | 955 | 0 | NR |
| 440 | 169 | NR | 570 | 639 | NR | 700 | 192 | NR | 830 | 5 | NR | 960 | 0 | NR |
| 445 | 173 | NR | 575 | 703 | NR | 705 | 167 | NR | 835 | 4 | NR | 965 | 0 | NR |
| 450 | 136 | NR | 580 | 769 | NR | 710 | 144 | NR | 840 | 4 | NR | 970 | 0 | NR |
| 455 | 80 | NR | 585 | 832 | NR | 715 | 125 | NR | 845 | 3 | NR | 975 | 0 | NR |
| 460 | 45 | NR | 590 | 890 | NR | 720 | 109 | NR | 850 | 3 | NR | 980 | 0 | NR |
| 465 | 32 | NR | 595 | 937 | NR | 725 | 94 | NR | 855 | 3 | NR | 985 | 0 | NR |
| 470 | 23 | NR | 600 | 972 | NR | 730 | 81 | NR | 860 | 2 | NR | 990 | 0 | NR |
| 475 | 18 | NR | 605 | 992 | NR | 735 | 70 | NR | 865 | 2 | NR | 995 | 0 | NR |
| 480 | 18 | NR | 610 | 998 | NR | 740 | 61 | NR | 870 | 2 | NR | 1000 | 0 | NR |
| 485 | 20 | NR | 615 | 990 | NR | 745 | 53 | NR | 875 | 2 | NR | | | |


REPORT NUMBER: SP1-2407-184-2

# TM-30-18


## Summary


$R_f$ = 70.6
$R_g$ = 97.6
CIE $R_a$ = 71.9
$R_9$ = -17.8


## Spectral Power Distribution Comparison

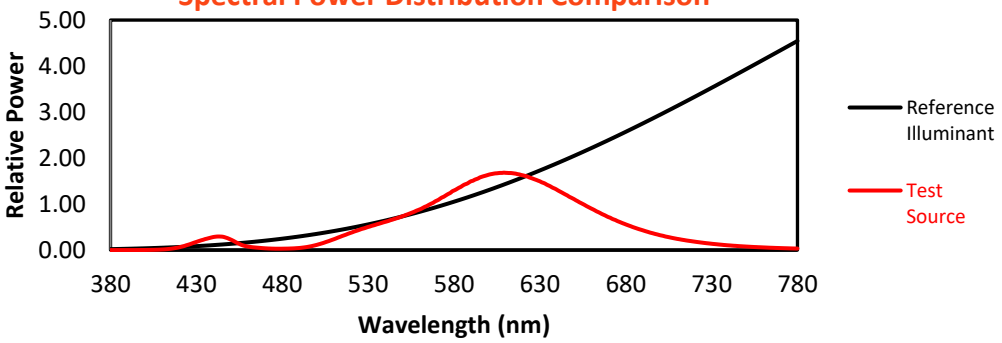



## Color Vector Graphics

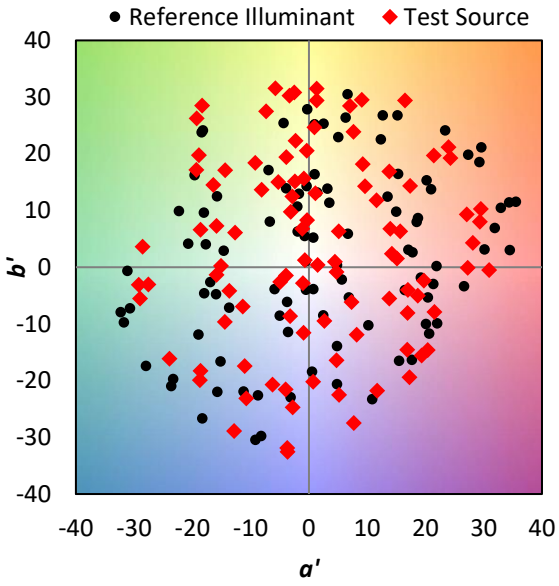

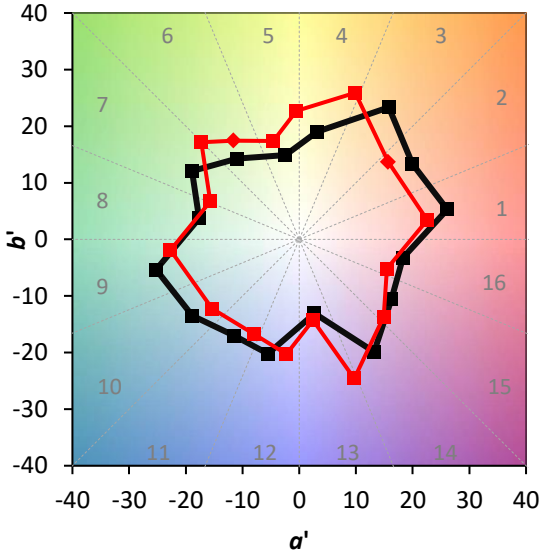


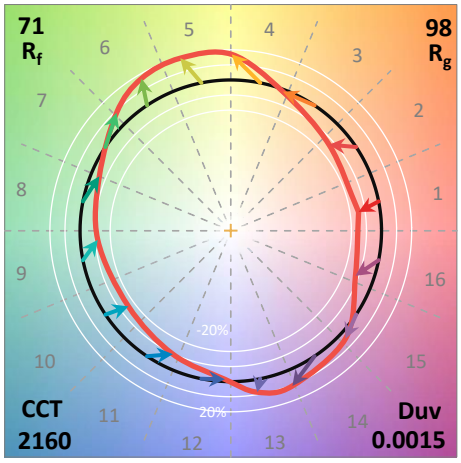
REPORT NUMBER: SP1-2407-184-2
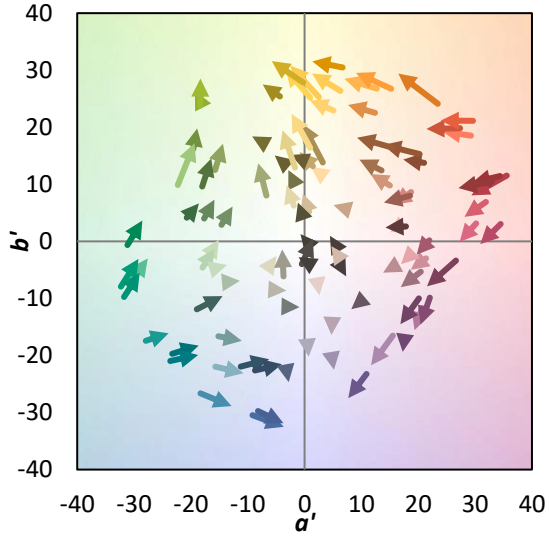
# TM-30-18

**Individual Sample Fidelity Index ($R_{f,i}$)**


| | | | |
|---|---|---|---|
| CES01 = 87 | CES26 = 60 | CES51 = 74 | CES76 = 58 |
| CES02 = 65 | CES27 = 77 | CES52 = 77 | CES77 = 82 |
| CES03 = 32 | CES28 = 85 | CES53 = 65 | CES78 = 65 |
| CES04 = 72 | CES29 = 50 | CES54 = 77 | CES79 = 86 |
| CES05 = 52 | CES30 = 49 | CES55 = 74 | CES80 = 85 |
| CES06 = 53 | CES31 = 55 | CES56 = 64 | CES81 = 61 |
| CES07 = 44 | CES32 = 55 | CES57 = 60 | CES82 = 93 |
| CES08 = 43 | CES33 = 55 | CES58 = 64 | CES83 = 83 |
| CES09 = 29 | CES34 = 75 | CES59 = 84 | CES84 = 93 |
| CES10 = 79 | CES35 = 88 | CES60 = 89 | CES85 = 81 |
| CES11 = 62 | CES36 = 78 | CES61 = 84 | CES86 = 55 |
| CES12 = 68 | CES37 = 82 | CES62 = 68 | CES87 = 79 |
| CES13 = 45 | CES38 = 54 | CES63 = 68 | CES88 = 72 |
| CES14 = 75 | CES39 = 90 | CES64 = 69 | CES89 = 62 |
| CES15 = 72 | CES40 = 86 | CES65 = 66 | CES90 = 67 |
| CES16 = 49 | CES41 = 75 | CES66 = 64 | CES91 = 89 |
| CES17 = 51 | CES42 = 83 | CES67 = 63 | CES92 = 67 |
| CES18 = 57 | CES43 = 68 | CES68 = 71 | CES93 = 78 |
| CES19 = 74 | CES44 = 98 | CES69 = 81 | CES94 = 52 |
| CES20 = 68 | CES45 = 76 | CES70 = 65 | CES95 = 76 |
| CES21 = 89 | CES46 = 68 | CES71 = 64 | CES96 = 78 |
| CES22 = 81 | CES47 = 60 | CES72 = 88 | CES97 = 76 |
| CES23 = 92 | CES48 = 47 | CES73 = 59 | CES98 = 71 |
| CES24 = 92 | CES49 = 65 | CES74 = 85 | CES99 = 65 |
| CES25 = 74 | CES50 = 74 | CES75 = 66 | |

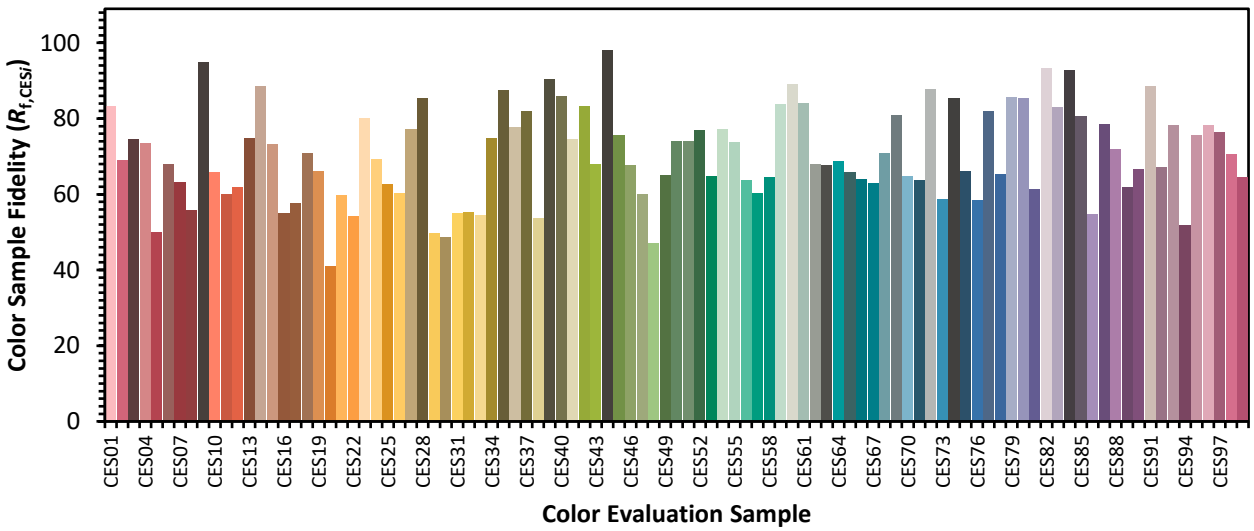



REPORT NUMBER: SP1-2407-184-2

**TM-30-18**

## Color Rendition by Hue-Angle Bin

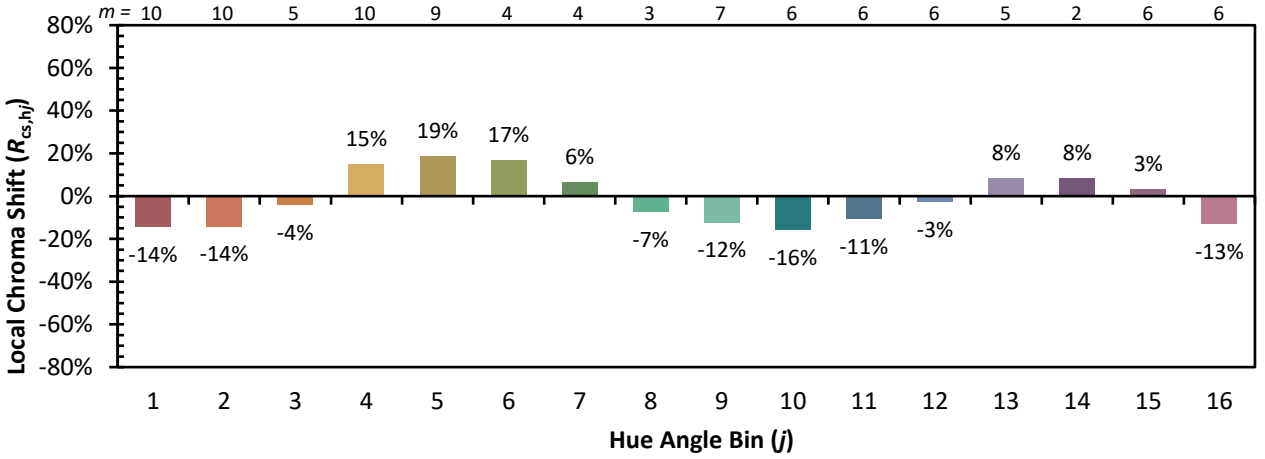

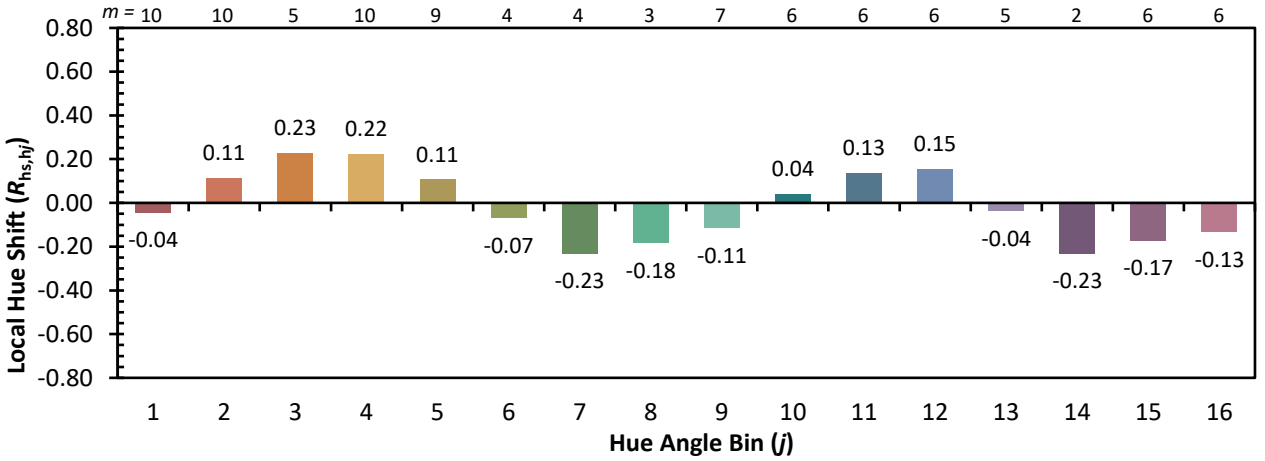


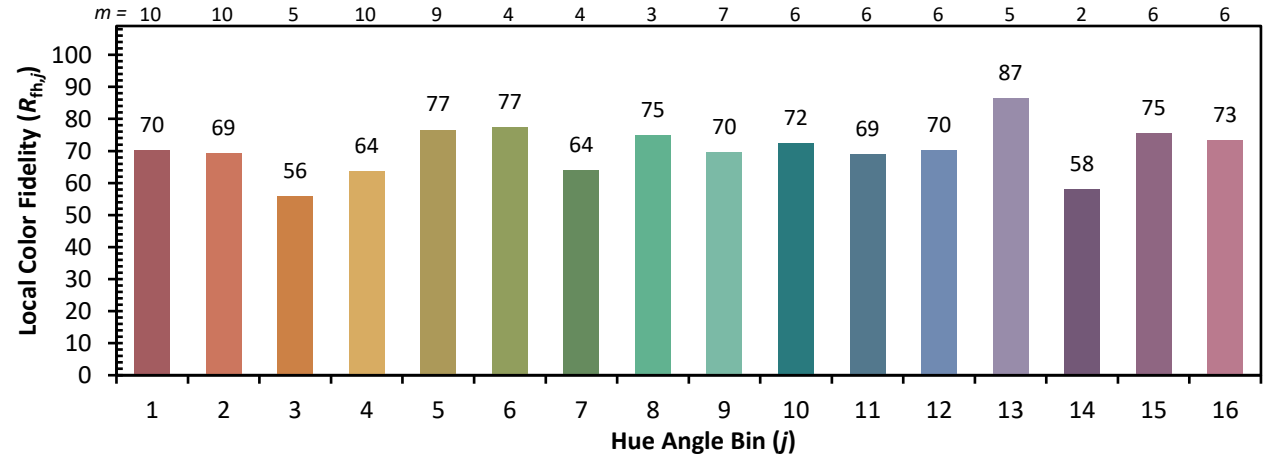
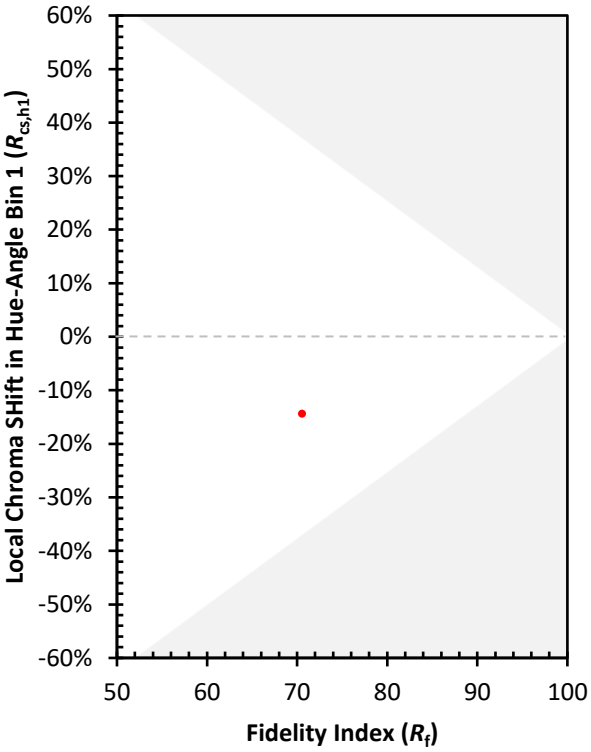



REPORT NUMBER: SP1-2407-184-2

# TM-30-18

## Measure Comparisons

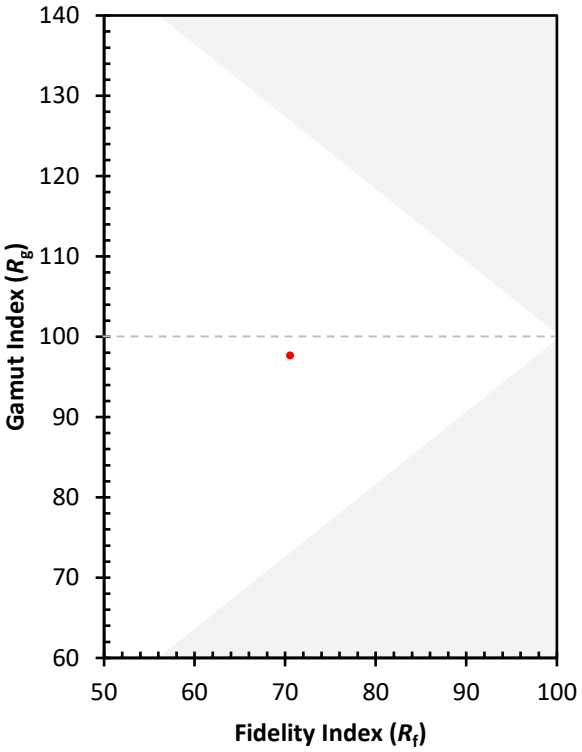


(END OF REPORT)