Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1389902

Luminaire Tested: **GSS-SA2D-727-U-RBC**

Issue Date: 02/18/2026

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P1389902 |
| Test Lab: | INNOVATION CENTER(G3) |
| Issue Date: | 02/18/2026 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | GSS-SA2D-727-U-RBC |
| Description: | GALLEON SLIM SITE LUMINAIRE 1200mA 2xLight Square PACKAGE 70CRI 2700K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL |
| Light Source: | (28) 2700K CCT, 70 CRI LEDS |
| Ballast/Driver: | ELECTRONIC DRIVER |

Luminaire Equipment:

| Sample No. | Condition | Description |
|---|---|---|
| a | good | reflector |
| b | good | lens |
| c | good | housing |
| d | good | cord |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 9065.7 lumens |
| Efficiency: | N/A |
| Efficacy: | 84.7 lumens/watt |
| Luminous Opening: | Rectangular (W 1' x L: 0.5' x H: 0') |
| IES Classification: | Type III - Short |
| BUG Rating: | B0 - U0 - G2 |


| | |
|---|---|
| Input Watts (W): | 107 |
| Input Voltage (V): | 120 |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | 0.97 |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 28.75 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

## Iso-Footcandle Lines of Horizontal Illumination

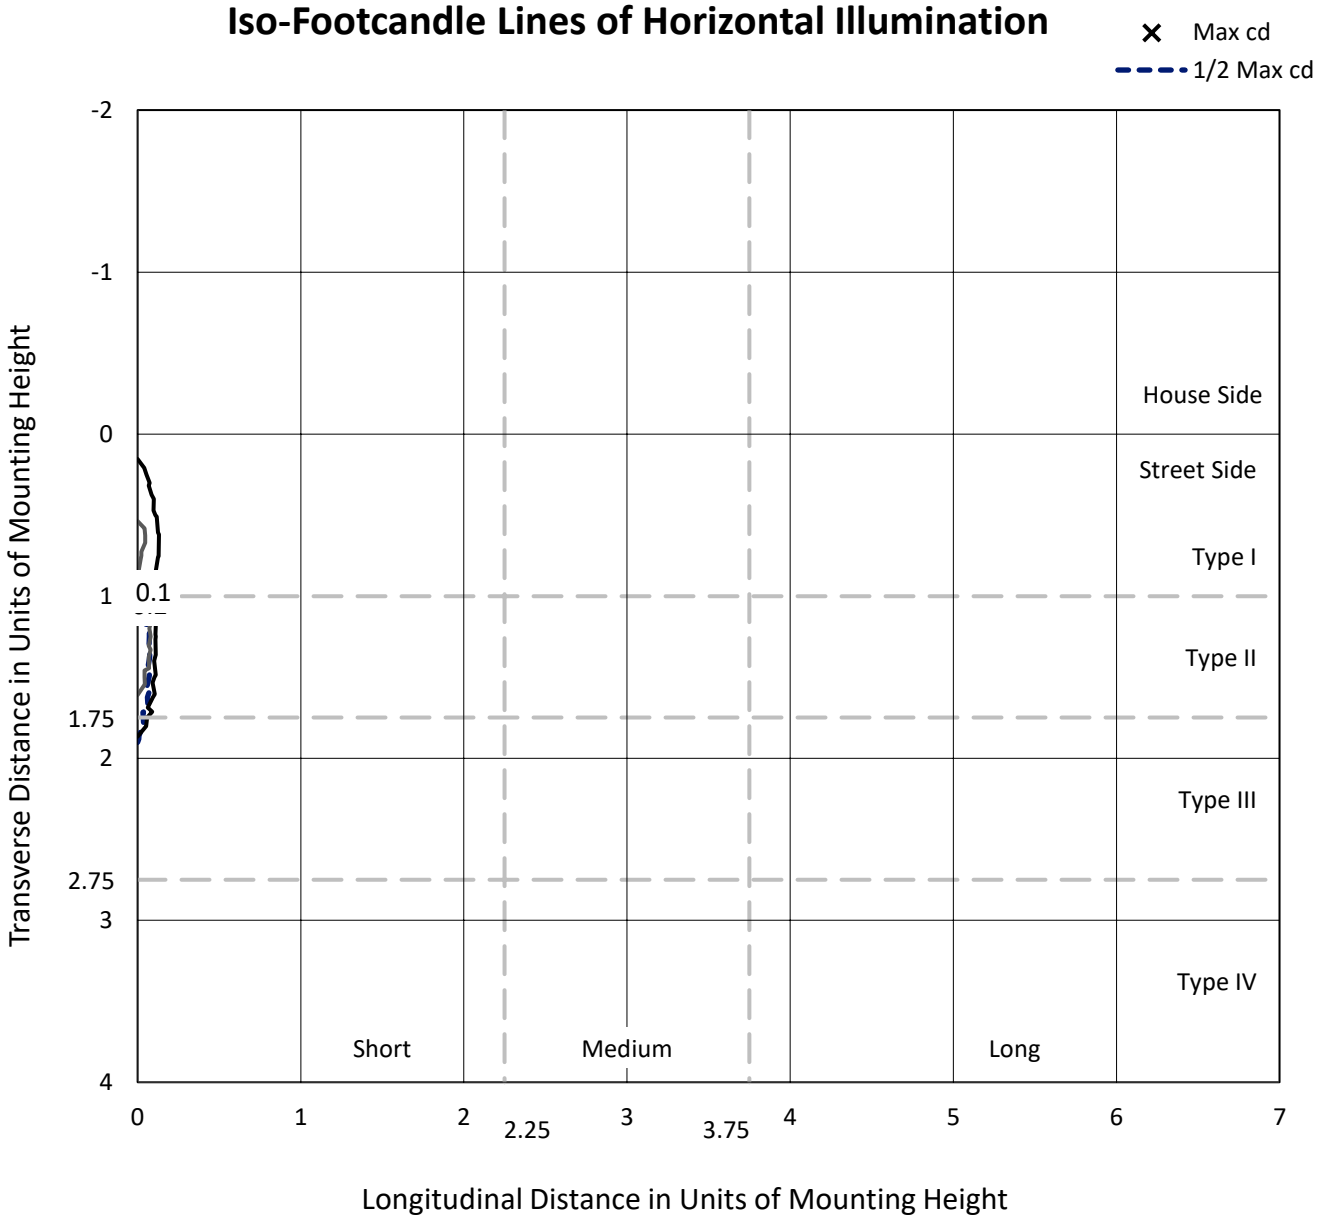



Based on 20 foot mounting height. Maximum calculated value = 0.4 fc
Type III - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

## Luminous Intensity Polar Plot

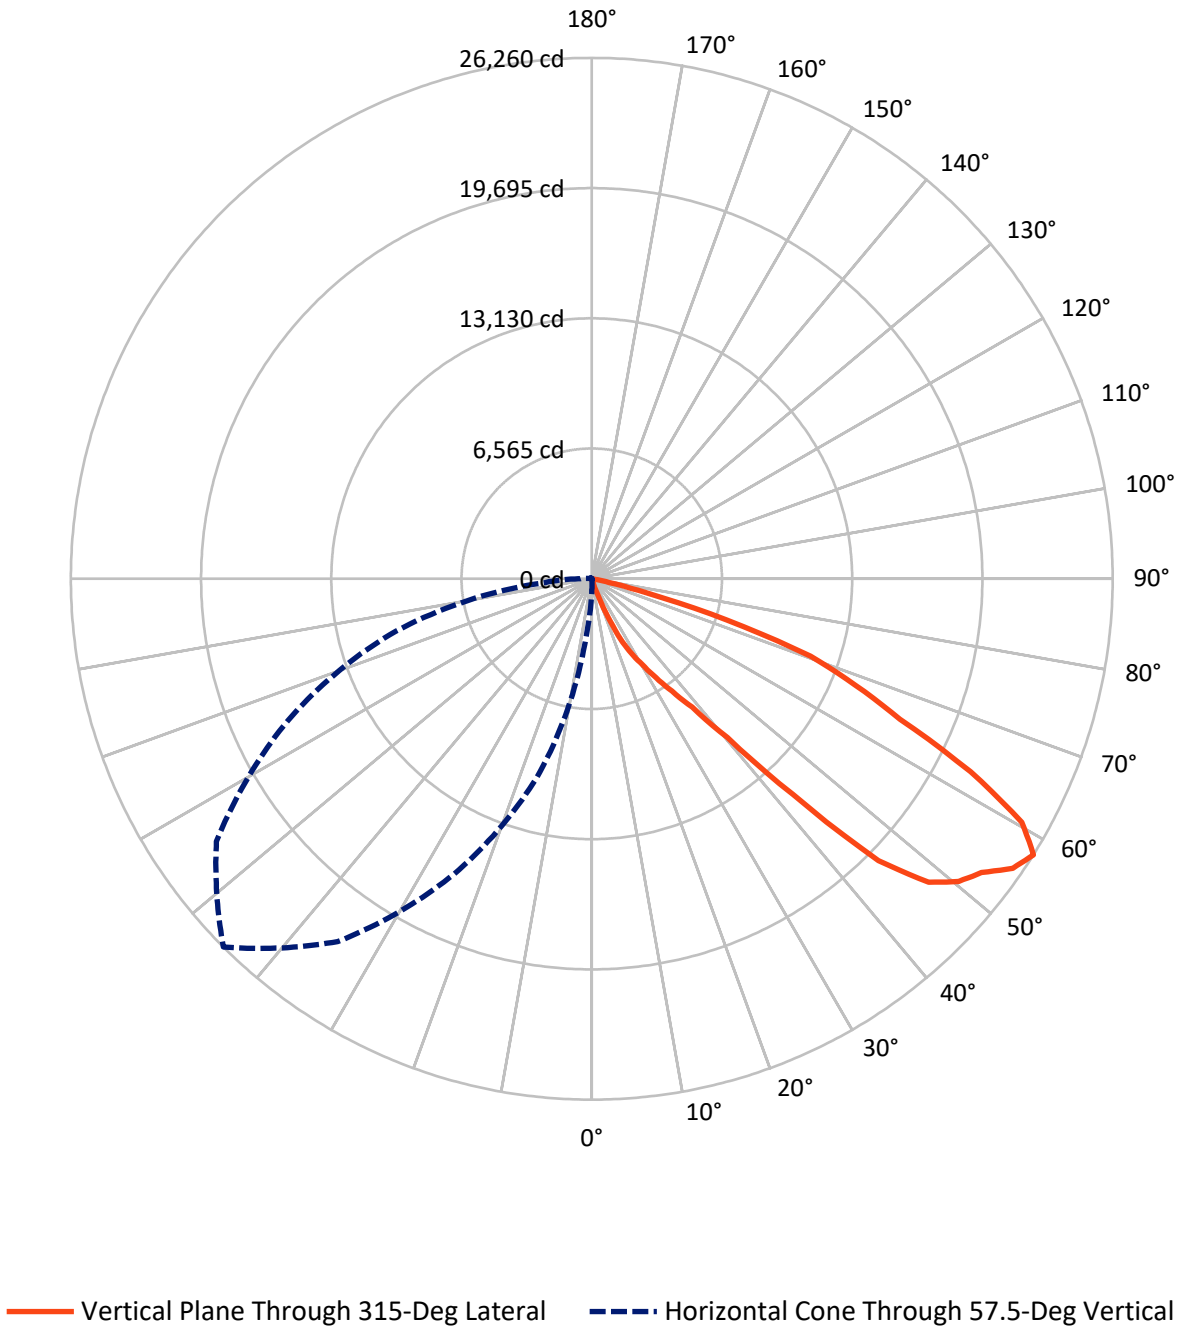

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 64.7 | 0.0 | 64.7 |
| | % Fixture | 0.7 | 0.0 | 0.7 |
| **Street Side** | Lumens | 9000.9 | 0.0 | 9000.9 |
| | % Fixture | 99.3 | 0.0 | 99.3 |
| **Total** | Lumens | 9065.7 | 0.0 | 9065.7 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 3.1 | 0.0 |
| 10°-20° | 15.3 | 0.2 |
| 20°-30° | 196.2 | 2.2 |
| 30°-40° | 611.8 | 6.7 |
| 40°-50° | 1998.3 | 22.0 |
| 50°-60° | 3207.4 | 35.4 |
| 60°-70° | 2462.7 | 27.2 |
| 70°-80° | 560.8 | 6.2 |
| 80°-90° | 10.0 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 9065.7 | 100.0 |
| 0°-180° | 9065.7 | 100.0 |

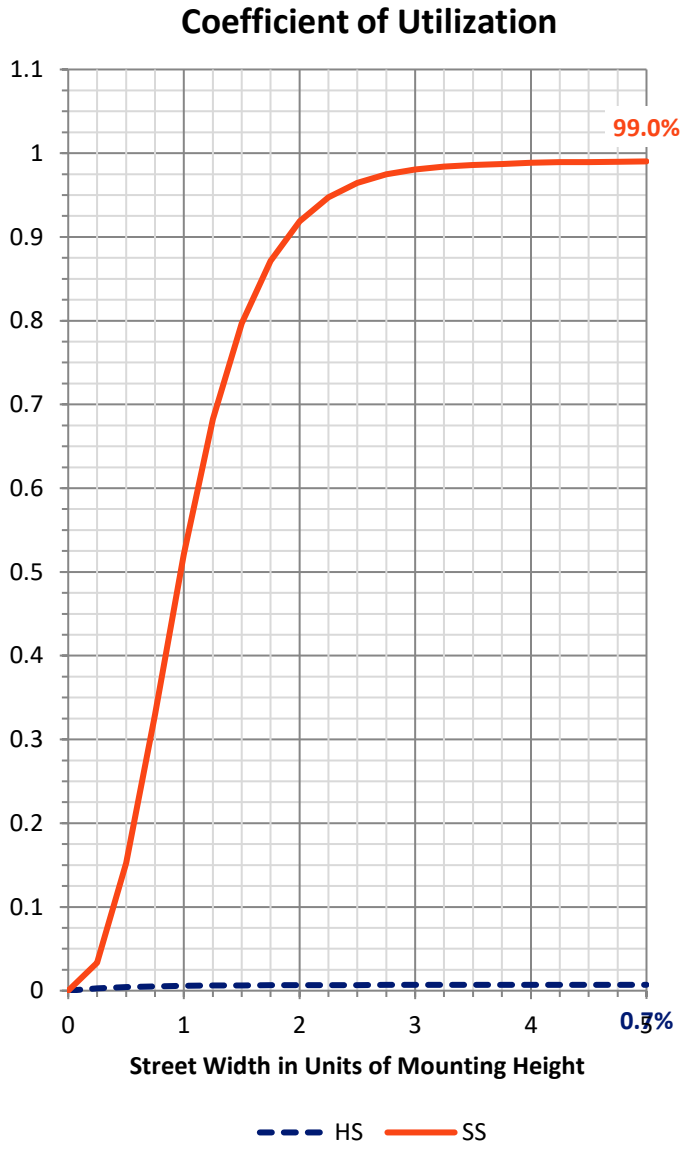

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 205.3 | 2.3 | | | |
| FM | (30°-60°) | 5790.2 | 63.9 | | | |
| FH | (60°-80°) | 2998.3 | 33.1 | | | G2/5000 |
| FVH | (80°-90°) | 7.1 | 0.1 | | | G0/10 |
| BL | (0°-30°) | 9.3 | 0.1 | B0/110 | | |
| BM | (30°-60°) | 27.3 | 0.3 | B0/220 | | |
| BH | (60°-80°) | 25.2 | 0.3 | B0/110 | | G0/110 |
| BVH | (80°-90°) | 2.9 | 0.0 | | | G0/10 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B0-U0-G2**
Type III Short

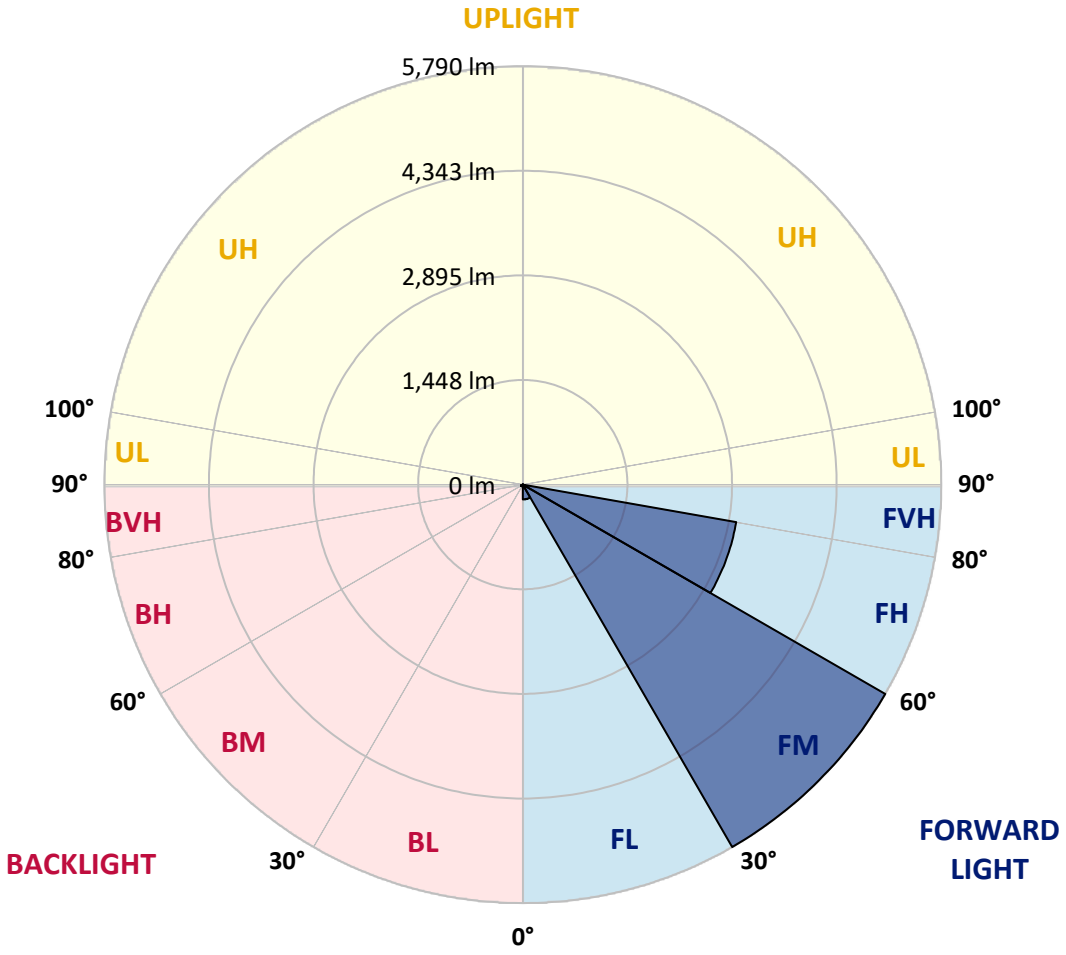

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 30.7 | 30.7 | 30.7 | 30.7 | 30.7 | 27.9 | 27.9 | 27.9 | 27.9 | 27.9 | 27.9 |
| 5° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 30.7 | 30.7 | 30.7 | 30.7 | 27.9 | 27.9 |
| 7.5° | 39.0 | 39.0 | 36.3 | 36.3 | 36.3 | 33.5 | 33.5 | 33.5 | 33.5 | 30.7 | 30.7 |
| 10° | 44.6 | 44.6 | 41.8 | 41.8 | 39.0 | 39.0 | 36.3 | 36.3 | 33.5 | 33.5 | 30.7 |
| 12.5° | 50.2 | 50.2 | 47.4 | 44.6 | 44.6 | 41.8 | 39.0 | 36.3 | 36.3 | 33.5 | 30.7 |
| 15° | 55.8 | 53.0 | 50.2 | 47.4 | 47.4 | 44.6 | 41.8 | 39.0 | 39.0 | 36.3 | 33.5 |
| 17.5° | 61.3 | 58.6 | 55.8 | 53.0 | 50.2 | 44.6 | 41.8 | 39.0 | 39.0 | 36.3 | 33.5 |
| 20° | 66.9 | 61.3 | 55.8 | 53.0 | 50.2 | 44.6 | 41.8 | 39.0 | 39.0 | 36.3 | 33.5 |
| 22.5° | 75.3 | 69.7 | 61.3 | 58.6 | 53.0 | 50.2 | 44.6 | 41.8 | 39.0 | 36.3 | 33.5 |
| 25° | 86.4 | 75.3 | 66.9 | 61.3 | 55.8 | 50.2 | 44.6 | 41.8 | 39.0 | 36.3 | 33.5 |
| 27.5° | 106.0 | 89.2 | 75.3 | 69.7 | 61.3 | 55.8 | 47.4 | 44.6 | 41.8 | 39.0 | 36.3 |
| 30° | 142.2 | 111.5 | 80.9 | 72.5 | 66.9 | 58.6 | 50.2 | 47.4 | 41.8 | 39.0 | 33.5 |
| 32.5° | 175.7 | 136.6 | 97.6 | 86.4 | 75.3 | 61.3 | 50.2 | 47.4 | 41.8 | 39.0 | 33.5 |
| 35° | 175.7 | 139.4 | 103.2 | 89.2 | 78.1 | 64.1 | 50.2 | 47.4 | 41.8 | 39.0 | 33.5 |
| 37.5° | 172.9 | 136.6 | 100.4 | 89.2 | 78.1 | 64.1 | 53.0 | 47.4 | 44.6 | 39.0 | 33.5 |
| 40° | 181.3 | 133.9 | 89.2 | 80.9 | 72.5 | 61.3 | 53.0 | 47.4 | 44.6 | 39.0 | 33.5 |
| 42.5° | 198.0 | 142.2 | 86.4 | 78.1 | 72.5 | 64.1 | 55.8 | 50.2 | 44.6 | 39.0 | 33.5 |
| 45° | 248.2 | 167.3 | 89.2 | 80.9 | 72.5 | 61.3 | 53.0 | 50.2 | 44.6 | 41.8 | 36.3 |
| 47.5° | 449.0 | 270.5 | 92.0 | 80.9 | 72.5 | 61.3 | 50.2 | 47.4 | 44.6 | 39.0 | 36.3 |
| 50° | 702.7 | 398.8 | 94.8 | 83.7 | 72.5 | 61.3 | 50.2 | 47.4 | 44.6 | 41.8 | 39.0 |
| 52.5° | 764.1 | 435.0 | 106.0 | 92.0 | 78.1 | 64.1 | 50.2 | 47.4 | 44.6 | 41.8 | 39.0 |
| 55° | 688.8 | 404.3 | 122.7 | 106.0 | 86.4 | 69.7 | 50.2 | 47.4 | 44.6 | 41.8 | 39.0 |
| 57.5° | *582.8* | *359.7* | *136.6* | *117.1* | *94.8* | *75.3* | *53.0* | *50.2* | *47.4* | *44.6* | *41.8* |
| 60° | 437.8 | 298.4 | 158.9 | 133.9 | 111.5 | 86.4 | 61.3 | 58.6 | 55.8 | 50.2 | 47.4 |
| 62.5° | 356.9 | 264.9 | 175.7 | 150.6 | 122.7 | 97.6 | 69.7 | 66.9 | 64.1 | 58.6 | 55.8 |
| 65° | 315.1 | 251.0 | 186.8 | 158.9 | 131.1 | 100.4 | 72.5 | 69.7 | 66.9 | 64.1 | 61.3 |
| 67.5° | 292.8 | 242.6 | 195.2 | 164.5 | 136.6 | 106.0 | 75.3 | 72.5 | 69.7 | 66.9 | 64.1 |
| 70° | 281.6 | 237.0 | 192.4 | 164.5 | 136.6 | 108.8 | 80.9 | 78.1 | 72.5 | 69.7 | 64.1 |
| 72.5° | 262.1 | 225.9 | 189.6 | 167.3 | 142.2 | 119.9 | 94.8 | 86.4 | 78.1 | 66.9 | 58.6 |
| 75° | 234.2 | 200.8 | 167.3 | 153.4 | 139.4 | 122.7 | 108.8 | 94.8 | 80.9 | 64.1 | 50.2 |
| 77.5° | 170.1 | 156.2 | 142.2 | 133.9 | 125.5 | 114.3 | 106.0 | 92.0 | 78.1 | 61.3 | 47.4 |
| 80° | 66.9 | 75.3 | 80.9 | 80.9 | 83.7 | 83.7 | 83.7 | 72.5 | 61.3 | 50.2 | 39.0 |
| 82.5° | 19.5 | 19.5 | 19.5 | 22.3 | 25.1 | 27.9 | 30.7 | 27.9 | 27.9 | 25.1 | 22.3 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 27.9 | 27.9 | 25.1 | 25.1 | 25.1 | 25.1 | 25.1 | 25.1 | 25.1 | 25.1 | 25.1 |
| 5° | 27.9 | 27.9 | 25.1 | 25.1 | 25.1 | 25.1 | 22.3 | 22.3 | 22.3 | 22.3 | 22.3 |
| 7.5° | 30.7 | 27.9 | 27.9 | 25.1 | 25.1 | 25.1 | 22.3 | 22.3 | 22.3 | 22.3 | 22.3 |
| 10° | 30.7 | 27.9 | 27.9 | 25.1 | 25.1 | 25.1 | 22.3 | 22.3 | 22.3 | 22.3 | 19.5 |
| 12.5° | 30.7 | 30.7 | 27.9 | 27.9 | 27.9 | 25.1 | 25.1 | 22.3 | 22.3 | 22.3 | 19.5 |
| 15° | 30.7 | 30.7 | 27.9 | 25.1 | 25.1 | 25.1 | 22.3 | 22.3 | 22.3 | 22.3 | 19.5 |
| 17.5° | 30.7 | 30.7 | 27.9 | 25.1 | 25.1 | 22.3 | 22.3 | 19.5 | 19.5 | 19.5 | 16.7 |
| 20° | 30.7 | 30.7 | 27.9 | 25.1 | 25.1 | 22.3 | 22.3 | 19.5 | 19.5 | 19.5 | 16.7 |
| 22.5° | 30.7 | 30.7 | 27.9 | 25.1 | 25.1 | 22.3 | 22.3 | 19.5 | 19.5 | 16.7 | 16.7 |
| 25° | 30.7 | 30.7 | 27.9 | 25.1 | 22.3 | 22.3 | 19.5 | 16.7 | 16.7 | 13.9 | 13.9 |
| 27.5° | 33.5 | 30.7 | 27.9 | 25.1 | 22.3 | 22.3 | 19.5 | 16.7 | 13.9 | 13.9 | 11.2 |
| 30° | 30.7 | 30.7 | 27.9 | 25.1 | 22.3 | 19.5 | 16.7 | 13.9 | 11.2 | 11.2 | 8.4 |
| 32.5° | 30.7 | 30.7 | 27.9 | 25.1 | 22.3 | 19.5 | 16.7 | 13.9 | 11.2 | 11.2 | 8.4 |
| 35° | 30.7 | 27.9 | 25.1 | 22.3 | 19.5 | 16.7 | 13.9 | 11.2 | 8.4 | 8.4 | 5.6 |
| 37.5° | 30.7 | 27.9 | 25.1 | 22.3 | 19.5 | 16.7 | 13.9 | 11.2 | 8.4 | 5.6 | 2.8 |
| 40° | 30.7 | 27.9 | 25.1 | 22.3 | 19.5 | 16.7 | 11.2 | 8.4 | 5.6 | 5.6 | 2.8 |
| 42.5° | 30.7 | 27.9 | 25.1 | 22.3 | 19.5 | 16.7 | 13.9 | 11.2 | 8.4 | 5.6 | 2.8 |
| 45° | 33.5 | 30.7 | 25.1 | 22.3 | 19.5 | 19.5 | 16.7 | 13.9 | 11.2 | 8.4 | 2.8 |
| 47.5° | 33.5 | 27.9 | 25.1 | 19.5 | 19.5 | 19.5 | 16.7 | 16.7 | 13.9 | 8.4 | 5.6 |
| 50° | 36.3 | 30.7 | 27.9 | 22.3 | 19.5 | 19.5 | 16.7 | 13.9 | 11.2 | 8.4 | 2.8 |
| 52.5° | 36.3 | 33.5 | 27.9 | 25.1 | 22.3 | 16.7 | 13.9 | 8.4 | 5.6 | 5.6 | 2.8 |
| 55° | 36.3 | 36.3 | 33.5 | 30.7 | 25.1 | 19.5 | 11.2 | 5.6 | 5.6 | 2.8 | 2.8 |
| 57.5° | *39.0* | *39.0* | *36.3* | *33.5* | *25.1* | *16.7* | *8.4* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 44.6 | 41.8 | 39.0 | 36.3 | 27.9 | 19.5 | 8.4 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 50.2 | 44.6 | 39.0 | 33.5 | 25.1 | 16.7 | 8.4 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 53.0 | 44.6 | 36.3 | 27.9 | 22.3 | 13.9 | 8.4 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 55.8 | 44.6 | 36.3 | 25.1 | 19.5 | 13.9 | 5.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 53.0 | 41.8 | 30.7 | 19.5 | 13.9 | 11.2 | 5.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 47.4 | 39.0 | 27.9 | 16.7 | 13.9 | 8.4 | 5.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 41.8 | 33.5 | 22.3 | 13.9 | 11.2 | 8.4 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 39.0 | 27.9 | 19.5 | 8.4 | 5.6 | 5.6 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 30.7 | 22.3 | 11.2 | 2.8 | 2.8 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 16.7 | 11.2 | 5.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 25.1 | 25.1 | 25.1 | 22.3 | 22.3 | 22.3 | 22.3 | 22.3 | 22.3 | 22.3 | 22.3 |
| 5° | 22.3 | 22.3 | 22.3 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 |
| 7.5° | 22.3 | 22.3 | 22.3 | 19.5 | 19.5 | 19.5 | 19.5 | 16.7 | 16.7 | 16.7 | 16.7 |
| 10° | 19.5 | 19.5 | 19.5 | 16.7 | 16.7 | 16.7 | 16.7 | 13.9 | 13.9 | 13.9 | 13.9 |
| 12.5° | 19.5 | 19.5 | 19.5 | 16.7 | 16.7 | 16.7 | 16.7 | 13.9 | 13.9 | 13.9 | 13.9 |
| 15° | 19.5 | 19.5 | 19.5 | 16.7 | 16.7 | 16.7 | 13.9 | 13.9 | 11.2 | 11.2 | 11.2 |
| 17.5° | 16.7 | 16.7 | 16.7 | 13.9 | 13.9 | 13.9 | 13.9 | 11.2 | 11.2 | 11.2 | 8.4 |
| 20° | 16.7 | 16.7 | 16.7 | 13.9 | 13.9 | 11.2 | 11.2 | 8.4 | 5.6 | 5.6 | 5.6 |
| 22.5° | 13.9 | 13.9 | 11.2 | 11.2 | 8.4 | 8.4 | 5.6 | 5.6 | 2.8 | 2.8 | 2.8 |
| 25° | 11.2 | 11.2 | 8.4 | 8.4 | 5.6 | 5.6 | 2.8 | 2.8 | 0.0 | 0.0 | 0.0 |
| 27.5° | 8.4 | 5.6 | 5.6 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 5.6 | 5.6 | 2.8 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 5.6 | 5.6 | 2.8 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 2.8 | 2.8 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 22.3 | 22.3 | 22.3 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 |
| 5° | 16.7 | 16.7 | 16.7 | 16.7 | 16.7 | 16.7 | 16.7 | 16.7 | 16.7 | 16.7 | 16.7 |
| 7.5° | 13.9 | 13.9 | 13.9 | 13.9 | 13.9 | 13.9 | 13.9 | 13.9 | 11.2 | 11.2 | 11.2 |
| 10° | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 8.4 | 8.4 | 8.4 |
| 12.5° | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 8.4 | 8.4 | 8.4 | 5.6 | 5.6 | 5.6 |
| 15° | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 5.6 | 5.6 | 5.6 | 2.8 | 2.8 | 2.8 |
| 17.5° | 8.4 | 5.6 | 5.6 | 5.6 | 5.6 | 2.8 | 2.8 | 2.8 | 0.0 | 0.0 | 0.0 |
| 20° | 2.8 | 2.8 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 | 19.5 |
| 5° | 16.7 | 13.9 | 13.9 | 13.9 | 13.9 | 13.9 | 13.9 | 13.9 | 13.9 | 13.9 | 13.9 |
| 7.5° | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 |
| 10° | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 |
| 12.5° | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 2.8 | 2.8 |
| 15° | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 19.5 | 22.3 | 22.3 | 22.3 | 22.3 | 25.1 | 25.1 | 25.1 | 27.9 | 27.9 | 30.7 |
| 5° | 13.9 | 16.7 | 16.7 | 16.7 | 16.7 | 19.5 | 19.5 | 19.5 | 22.3 | 22.3 | 25.1 |
| 7.5° | 11.2 | 13.9 | 13.9 | 13.9 | 13.9 | 16.7 | 16.7 | 16.7 | 19.5 | 19.5 | 22.3 |
| 10° | 8.4 | 8.4 | 8.4 | 8.4 | 11.2 | 11.2 | 13.9 | 13.9 | 16.7 | 16.7 | 19.5 |
| 12.5° | 2.8 | 5.6 | 5.6 | 5.6 | 5.6 | 8.4 | 8.4 | 8.4 | 11.2 | 13.9 | 13.9 |
| 15° | 0.0 | 2.8 | 2.8 | 2.8 | 2.8 | 5.6 | 5.6 | 5.6 | 8.4 | 11.2 | 11.2 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 5.6 | 5.6 | 8.4 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 30.7 | 33.5 | 33.5 | 36.3 | 36.3 | 39.0 | 39.0 | 41.8 | 41.8 | 41.8 | 44.6 |
| 5° | 25.1 | 27.9 | 30.7 | 30.7 | 33.5 | 36.3 | 36.3 | 39.0 | 39.0 | 39.0 | 41.8 |
| 7.5° | 22.3 | 25.1 | 27.9 | 27.9 | 30.7 | 33.5 | 33.5 | 36.3 | 36.3 | 36.3 | 39.0 |
| 10° | 19.5 | 22.3 | 25.1 | 25.1 | 27.9 | 30.7 | 30.7 | 33.5 | 33.5 | 36.3 | 36.3 |
| 12.5° | 16.7 | 19.5 | 22.3 | 22.3 | 25.1 | 27.9 | 27.9 | 30.7 | 33.5 | 33.5 | 36.3 |
| 15° | 13.9 | 16.7 | 19.5 | 19.5 | 22.3 | 25.1 | 27.9 | 30.7 | 30.7 | 33.5 | 33.5 |
| 17.5° | 8.4 | 11.2 | 13.9 | 16.7 | 19.5 | 22.3 | 25.1 | 27.9 | 27.9 | 30.7 | 33.5 |
| 20° | 5.6 | 8.4 | 11.2 | 13.9 | 16.7 | 19.5 | 19.5 | 22.3 | 25.1 | 27.9 | 27.9 |
| 22.5° | 2.8 | 5.6 | 8.4 | 8.4 | 11.2 | 13.9 | 16.7 | 19.5 | 19.5 | 22.3 | 25.1 |
| 25° | 0.0 | 2.8 | 5.6 | 5.6 | 8.4 | 11.2 | 11.2 | 13.9 | 16.7 | 19.5 | 19.5 |
| 27.5° | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 | 8.4 | 11.2 | 13.9 | 13.9 | 16.7 | 16.7 |
| 30° | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 | 8.4 | 8.4 | 11.2 | 11.2 | 13.9 | 16.7 |
| 32.5° | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 5.6 | 8.4 | 11.2 | 11.2 | 13.9 | 13.9 |
| 35° | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 5.6 | 5.6 | 8.4 | 8.4 | 11.2 | 11.2 |
| 37.5° | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 5.6 | 5.6 | 8.4 | 8.4 | 11.2 | 11.2 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 5.6 | 8.4 | 8.4 | 8.4 | 11.2 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 | 8.4 | 8.4 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 | 8.4 | 8.4 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 | 8.4 | 8.4 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 | 8.4 | 8.4 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 | 5.6 | 8.4 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 | 5.6 | 8.4 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *2.8* | *2.8* | *2.8* | *5.6* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 5.6 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 5.6 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 5.6 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 5.6 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 5.6 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 5.6 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 2.8 | 2.8 | 5.6 | 5.6 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 | 5.6 | 8.4 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 | 5.6 | 8.4 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.8 | 2.8 | 5.6 | 5.6 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 41.8 | 41.8 | 41.8 |
| 5° | 41.8 | 41.8 | 41.8 | 41.8 | 41.8 | 41.8 | 41.8 | 41.8 | 39.0 | 39.0 | 39.0 |
| 7.5° | 39.0 | 39.0 | 39.0 | 41.8 | 41.8 | 41.8 | 41.8 | 41.8 | 39.0 | 39.0 | 39.0 |
| 10° | 39.0 | 39.0 | 39.0 | 41.8 | 41.8 | 41.8 | 41.8 | 41.8 | 39.0 | 39.0 | 39.0 |
| 12.5° | 36.3 | 36.3 | 36.3 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 |
| 15° | 36.3 | 36.3 | 36.3 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 |
| 17.5° | 33.5 | 36.3 | 36.3 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 |
| 20° | 30.7 | 30.7 | 33.5 | 33.5 | 36.3 | 36.3 | 36.3 | 39.0 | 39.0 | 39.0 | 39.0 |
| 22.5° | 25.1 | 27.9 | 30.7 | 30.7 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 25° | 22.3 | 22.3 | 25.1 | 27.9 | 27.9 | 30.7 | 30.7 | 30.7 | 30.7 | 30.7 | 30.7 |
| 27.5° | 19.5 | 19.5 | 22.3 | 22.3 | 25.1 | 25.1 | 25.1 | 27.9 | 27.9 | 27.9 | 27.9 |
| 30° | 16.7 | 19.5 | 19.5 | 22.3 | 22.3 | 22.3 | 25.1 | 25.1 | 27.9 | 27.9 | 27.9 |
| 32.5° | 16.7 | 16.7 | 19.5 | 19.5 | 22.3 | 22.3 | 22.3 | 25.1 | 25.1 | 25.1 | 25.1 |
| 35° | 13.9 | 13.9 | 16.7 | 16.7 | 19.5 | 19.5 | 22.3 | 22.3 | 25.1 | 25.1 | 25.1 |
| 37.5° | 13.9 | 13.9 | 16.7 | 16.7 | 19.5 | 19.5 | 19.5 | 22.3 | 22.3 | 22.3 | 25.1 |
| 40° | 11.2 | 11.2 | 13.9 | 13.9 | 16.7 | 16.7 | 19.5 | 19.5 | 22.3 | 22.3 | 25.1 |
| 42.5° | 11.2 | 11.2 | 13.9 | 13.9 | 16.7 | 16.7 | 19.5 | 19.5 | 22.3 | 22.3 | 25.1 |
| 45° | 11.2 | 11.2 | 13.9 | 13.9 | 16.7 | 16.7 | 19.5 | 19.5 | 22.3 | 22.3 | 25.1 |
| 47.5° | 11.2 | 11.2 | 13.9 | 13.9 | 16.7 | 16.7 | 16.7 | 19.5 | 19.5 | 19.5 | 22.3 |
| 50° | 11.2 | 11.2 | 11.2 | 13.9 | 13.9 | 13.9 | 16.7 | 16.7 | 19.5 | 19.5 | 22.3 |
| 52.5° | 8.4 | 8.4 | 8.4 | 11.2 | 11.2 | 11.2 | 13.9 | 13.9 | 16.7 | 16.7 | 19.5 |
| 55° | 8.4 | 8.4 | 8.4 | 11.2 | 11.2 | 11.2 | 11.2 | 13.9 | 13.9 | 13.9 | 16.7 |
| 57.5° | *5.6* | *5.6* | *5.6* | *8.4* | *8.4* | *8.4* | *8.4* | *11.2* | *11.2* | *11.2* | *13.9* |
| 60° | 5.6 | 5.6 | 5.6 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 11.2 |
| 62.5° | 5.6 | 5.6 | 5.6 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 11.2 |
| 65° | 5.6 | 5.6 | 5.6 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 11.2 |
| 67.5° | 5.6 | 5.6 | 5.6 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 11.2 |
| 70° | 5.6 | 5.6 | 5.6 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 11.2 |
| 72.5° | 5.6 | 5.6 | 5.6 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 11.2 |
| 75° | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 |
| 77.5° | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 |
| 80° | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 |
| 82.5° | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 |
| 85° | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 |
| 87.5° | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 | 8.4 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 41.8 | 41.8 | 41.8 | 41.8 | 41.8 | 39.0 | 39.0 | 39.0 | 41.8 | 41.8 | 41.8 |
| 5° | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 |
| 7.5° | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 36.3 | 36.3 | 36.3 | 39.0 | 39.0 | 39.0 |
| 10° | 39.0 | 36.3 | 36.3 | 36.3 | 36.3 | 36.3 | 36.3 | 36.3 | 39.0 | 39.0 | 39.0 |
| 12.5° | 39.0 | 36.3 | 36.3 | 36.3 | 36.3 | 36.3 | 36.3 | 36.3 | 39.0 | 39.0 | 39.0 |
| 15° | 39.0 | 36.3 | 36.3 | 36.3 | 36.3 | 36.3 | 36.3 | 39.0 | 39.0 | 41.8 | 41.8 |
| 17.5° | 36.3 | 36.3 | 33.5 | 33.5 | 36.3 | 36.3 | 36.3 | 36.3 | 39.0 | 39.0 | 39.0 |
| 20° | 36.3 | 36.3 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 36.3 | 36.3 | 39.0 | 39.0 |
| 22.5° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 36.3 | 36.3 | 39.0 | 39.0 |
| 25° | 30.7 | 30.7 | 30.7 | 30.7 | 33.5 | 33.5 | 33.5 | 36.3 | 39.0 | 39.0 | 41.8 |
| 27.5° | 30.7 | 30.7 | 30.7 | 30.7 | 33.5 | 33.5 | 33.5 | 36.3 | 39.0 | 39.0 | 41.8 |
| 30° | 30.7 | 30.7 | 30.7 | 30.7 | 33.5 | 33.5 | 33.5 | 36.3 | 39.0 | 39.0 | 41.8 |
| 32.5° | 27.9 | 27.9 | 27.9 | 30.7 | 30.7 | 33.5 | 33.5 | 36.3 | 39.0 | 39.0 | 41.8 |
| 35° | 27.9 | 27.9 | 27.9 | 30.7 | 30.7 | 33.5 | 33.5 | 36.3 | 39.0 | 39.0 | 41.8 |
| 37.5° | 25.1 | 27.9 | 27.9 | 30.7 | 33.5 | 33.5 | 36.3 | 39.0 | 41.8 | 41.8 | 44.6 |
| 40° | 25.1 | 27.9 | 27.9 | 30.7 | 33.5 | 33.5 | 36.3 | 39.0 | 41.8 | 41.8 | 44.6 |
| 42.5° | 25.1 | 27.9 | 27.9 | 30.7 | 33.5 | 33.5 | 36.3 | 39.0 | 41.8 | 44.6 | 47.4 |
| 45° | 27.9 | 27.9 | 30.7 | 33.5 | 33.5 | 36.3 | 36.3 | 39.0 | 41.8 | 44.6 | 47.4 |
| 47.5° | 27.9 | 30.7 | 33.5 | 33.5 | 36.3 | 36.3 | 36.3 | 39.0 | 44.6 | 47.4 | 50.2 |
| 50° | 25.1 | 27.9 | 30.7 | 33.5 | 33.5 | 36.3 | 36.3 | 39.0 | 44.6 | 47.4 | 50.2 |
| 52.5° | 22.3 | 22.3 | 25.1 | 27.9 | 33.5 | 36.3 | 39.0 | 41.8 | 47.4 | 50.2 | 53.0 |
| 55° | 19.5 | 19.5 | 22.3 | 27.9 | 33.5 | 39.0 | 44.6 | 47.4 | 50.2 | 50.2 | 53.0 |
| 57.5° | *16.7* | *16.7* | *19.5* | *27.9* | *36.3* | *44.6* | *53.0* | *53.0* | *55.8* | *55.8* | *55.8* |
| 60° | 13.9 | 13.9 | 16.7 | 25.1 | 36.3 | 44.6 | 53.0 | 55.8 | 58.6 | 58.6 | 61.3 |
| 62.5° | 13.9 | 13.9 | 16.7 | 25.1 | 33.5 | 39.0 | 47.4 | 53.0 | 58.6 | 64.1 | 69.7 |
| 65° | 11.2 | 13.9 | 13.9 | 22.3 | 27.9 | 36.3 | 41.8 | 50.2 | 58.6 | 66.9 | 75.3 |
| 67.5° | 11.2 | 13.9 | 13.9 | 19.5 | 27.9 | 33.5 | 39.0 | 47.4 | 58.6 | 66.9 | 75.3 |
| 70° | 13.9 | 13.9 | 16.7 | 22.3 | 25.1 | 30.7 | 33.5 | 44.6 | 53.0 | 64.1 | 72.5 |
| 72.5° | 11.2 | 13.9 | 13.9 | 19.5 | 22.3 | 27.9 | 30.7 | 41.8 | 50.2 | 61.3 | 69.7 |
| 75° | 11.2 | 11.2 | 11.2 | 16.7 | 19.5 | 25.1 | 27.9 | 36.3 | 47.4 | 55.8 | 64.1 |
| 77.5° | 8.4 | 8.4 | 8.4 | 13.9 | 16.7 | 22.3 | 25.1 | 33.5 | 44.6 | 53.0 | 61.3 |
| 80° | 8.4 | 8.4 | 8.4 | 11.2 | 13.9 | 13.9 | 16.7 | 25.1 | 36.3 | 44.6 | 53.0 |
| 82.5° | 8.4 | 5.6 | 5.6 | 8.4 | 8.4 | 11.2 | 11.2 | 16.7 | 22.3 | 27.9 | 33.5 |
| 85° | 8.4 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 |
| 87.5° | 8.4 | 5.6 | 5.6 | 5.6 | 5.6 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 41.8 | 41.8 | 41.8 | 41.8 | 41.8 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 |
| 5° | 41.8 | 41.8 | 44.6 | 44.6 | 44.6 | 47.4 | 47.4 | 47.4 | 47.4 | 47.4 | 47.4 |
| 7.5° | 41.8 | 41.8 | 44.6 | 44.6 | 44.6 | 47.4 | 47.4 | 47.4 | 50.2 | 50.2 | 53.0 |
| 10° | 41.8 | 41.8 | 44.6 | 44.6 | 47.4 | 47.4 | 50.2 | 50.2 | 53.0 | 53.0 | 55.8 |
| 12.5° | 41.8 | 44.6 | 44.6 | 47.4 | 50.2 | 53.0 | 53.0 | 55.8 | 58.6 | 58.6 | 61.3 |
| 15° | 44.6 | 44.6 | 47.4 | 47.4 | 50.2 | 53.0 | 55.8 | 58.6 | 61.3 | 64.1 | 66.9 |
| 17.5° | 41.8 | 44.6 | 47.4 | 50.2 | 53.0 | 55.8 | 58.6 | 61.3 | 66.9 | 69.7 | 75.3 |
| 20° | 41.8 | 44.6 | 47.4 | 50.2 | 53.0 | 58.6 | 61.3 | 64.1 | 69.7 | 75.3 | 83.7 |
| 22.5° | 41.8 | 44.6 | 47.4 | 50.2 | 55.8 | 61.3 | 64.1 | 69.7 | 78.1 | 83.7 | 94.8 |
| 25° | 44.6 | 47.4 | 50.2 | 53.0 | 58.6 | 64.1 | 69.7 | 75.3 | 86.4 | 94.8 | 119.9 |
| 27.5° | 44.6 | 50.2 | 53.0 | 55.8 | 61.3 | 69.7 | 75.3 | 80.9 | 97.6 | 111.5 | 167.3 |
| 30° | 44.6 | 50.2 | 53.0 | 55.8 | 64.1 | 72.5 | 80.9 | 89.2 | 117.1 | 142.2 | 237.0 |
| 32.5° | 44.6 | 50.2 | 53.0 | 55.8 | 66.9 | 80.9 | 92.0 | 103.2 | 139.4 | 175.7 | 287.2 |
| 35° | 47.4 | 50.2 | 55.8 | 58.6 | 72.5 | 86.4 | 97.6 | 111.5 | 145.0 | 178.5 | 312.3 |
| 37.5° | 50.2 | 53.0 | 58.6 | 61.3 | 72.5 | 83.7 | 94.8 | 106.0 | 142.2 | 175.7 | 343.0 |
| 40° | 50.2 | 55.8 | 58.6 | 64.1 | 72.5 | 83.7 | 92.0 | 100.4 | 139.4 | 178.5 | 396.0 |
| 42.5° | 53.0 | 58.6 | 61.3 | 66.9 | 75.3 | 83.7 | 89.2 | 97.6 | 147.8 | 198.0 | 515.9 |
| 45° | 53.0 | 55.8 | 61.3 | 64.1 | 72.5 | 80.9 | 89.2 | 97.6 | 186.8 | 273.3 | 819.8 |
| 47.5° | 53.0 | 55.8 | 58.6 | 61.3 | 72.5 | 83.7 | 92.0 | 103.2 | 276.1 | 449.0 | 1355.3 |
| 50° | 53.0 | 55.8 | 55.8 | 58.6 | 69.7 | 83.7 | 94.8 | 106.0 | 359.7 | 610.7 | 1954.8 |
| 52.5° | 55.8 | 58.6 | 58.6 | 61.3 | 75.3 | 89.2 | 103.2 | 117.1 | 412.7 | 708.3 | 2122.1 |
| 55° | 55.8 | 58.6 | 58.6 | 61.3 | 83.7 | 106.0 | 125.5 | 147.8 | 435.0 | 719.5 | 1949.2 |
| 57.5° | *58.6* | *61.3* | *64.1* | *66.9* | *89.2* | *114.3* | *136.6* | *158.9* | *415.5* | *672.1* | *1597.9* |
| 60° | 66.9 | 69.7 | 75.3 | 78.1 | 103.2 | 128.3 | 150.6 | 175.7 | 331.8 | 488.0 | 1257.7 |
| 62.5° | 75.3 | 78.1 | 83.7 | 86.4 | 111.5 | 136.6 | 161.7 | 186.8 | 292.8 | 396.0 | 937.0 |
| 65° | 78.1 | 83.7 | 86.4 | 89.2 | 114.3 | 142.2 | 167.3 | 192.4 | 267.7 | 340.2 | 694.4 |
| 67.5° | 80.9 | 86.4 | 89.2 | 94.8 | 119.9 | 145.0 | 170.1 | 195.2 | 253.8 | 309.5 | 515.9 |
| 70° | 80.9 | 86.4 | 94.8 | 100.4 | 122.7 | 145.0 | 164.5 | 186.8 | 234.2 | 278.9 | 396.0 |
| 72.5° | 80.9 | 92.0 | 103.2 | 114.3 | 131.1 | 147.8 | 161.7 | 178.5 | 214.7 | 248.2 | 306.7 |
| 75° | 80.9 | 97.6 | 111.5 | 128.3 | 136.6 | 145.0 | 153.4 | 161.7 | 186.8 | 209.1 | 242.6 |
| 77.5° | 78.1 | 92.0 | 108.8 | 122.7 | 125.5 | 128.3 | 131.1 | 133.9 | 133.9 | 133.9 | 133.9 |
| 80° | 64.1 | 78.1 | 89.2 | 100.4 | 94.8 | 86.4 | 80.9 | 72.5 | 66.9 | 61.3 | 66.9 |
| 82.5° | 33.5 | 36.3 | 36.3 | 36.3 | 33.5 | 33.5 | 30.7 | 27.9 | 27.9 | 25.1 | 25.1 |
| 85° | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 5.6 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 |
| 87.5° | 2.8 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 41.8 | 41.8 | 41.8 | 41.8 |
| 5° | 47.4 | 47.4 | 47.4 | 47.4 | 47.4 | 47.4 | 47.4 | 44.6 | 44.6 | 44.6 | 44.6 |
| 7.5° | 53.0 | 53.0 | 53.0 | 53.0 | 53.0 | 53.0 | 53.0 | 53.0 | 53.0 | 53.0 | 53.0 |
| 10° | 55.8 | 58.6 | 58.6 | 61.3 | 61.3 | 61.3 | 64.1 | 64.1 | 64.1 | 64.1 | 64.1 |
| 12.5° | 64.1 | 66.9 | 66.9 | 69.7 | 69.7 | 72.5 | 72.5 | 75.3 | 75.3 | 75.3 | 78.1 |
| 15° | 69.7 | 72.5 | 75.3 | 78.1 | 80.9 | 86.4 | 89.2 | 94.8 | 97.6 | 100.4 | 103.2 |
| 17.5° | 80.9 | 86.4 | 94.8 | 100.4 | 106.0 | 117.1 | 128.3 | 136.6 | 147.8 | 161.7 | 178.5 |
| 20° | 89.2 | 108.8 | 125.5 | 145.0 | 161.7 | 211.9 | 262.1 | 312.3 | 362.5 | 429.4 | 496.4 |
| 22.5° | 106.0 | 167.3 | 231.5 | 292.8 | 354.2 | 518.7 | 680.4 | 842.2 | 1006.7 | 1162.8 | 1319.0 |
| 25° | 145.0 | 276.1 | 409.9 | 541.0 | 672.1 | 948.1 | 1221.4 | 1494.7 | 1770.8 | 2035.7 | 2303.4 |
| 27.5° | 220.3 | 432.2 | 644.2 | 856.1 | 1068.0 | 1430.5 | 1790.3 | 2150.0 | 2512.5 | 2833.2 | 3151.1 |
| 30° | 331.8 | 605.1 | 878.4 | 1151.7 | 1425.0 | 1893.5 | 2361.9 | 2830.4 | 3298.9 | 3611.2 | 3923.6 |
| 32.5° | 396.0 | 752.9 | 1109.9 | 1464.0 | 1821.0 | 2331.3 | 2841.6 | 3354.7 | 3865.0 | 4221.9 | 4578.9 |
| 35° | 443.4 | 886.8 | 1327.4 | 1770.8 | 2211.4 | 2780.2 | 3349.1 | 3920.8 | 4489.6 | 4916.3 | 5342.9 |
| 37.5° | 507.5 | 1040.1 | 1570.0 | 2102.6 | 2632.4 | 3245.9 | 3859.4 | 4475.7 | 5089.2 | 5616.2 | 6146.1 |
| 40° | 610.7 | 1243.7 | 1876.7 | 2506.9 | 3140.0 | 3909.6 | 4679.3 | 5448.9 | 6218.6 | 6918.5 | 7618.4 |
| 42.5° | 833.8 | 1667.6 | 2504.2 | 3337.9 | 4171.7 | 5323.4 | 6472.3 | 7621.2 | 8772.9 | 9762.9 | 10752.8 |
| 45° | 1366.4 | 2663.1 | 3959.8 | 5256.5 | 6553.2 | 7930.8 | 9305.5 | 10683.1 | 12060.7 | 13524.7 | 14988.7 |
| 47.5° | 2261.6 | 4049.0 | 5836.5 | 7621.2 | 9408.7 | 10828.1 | 12244.7 | 13661.3 | 15080.7 | 16447.1 | 17813.5 |
| 50° | 3298.9 | 5223.0 | 7147.2 | 9071.3 | 10995.4 | 12264.2 | 13530.3 | 14796.3 | 16065.1 | 17406.4 | 18744.9 |
| 52.5° | 3535.9 | 5460.1 | 7384.2 | 9305.5 | 11229.7 | 12509.6 | 13789.6 | 15072.4 | 16352.3 | 17663.0 | 18976.4 |
| 55° | 3176.2 | 5083.6 | 6988.2 | 8895.6 | 10800.2 | 12205.7 | 13611.1 | 15016.6 | 16422.0 | 17891.6 | 19361.2 |
| 57.5° | *2523.7* | *4450.6* | *6374.7* | *8301.6* | *10225.8* | *11893.4* | *13558.2* | *15225.7* | *16893.3* | *18443.8* | *19994.2* |
| 60° | 2027.3 | 3993.3 | 5959.2 | 7925.2 | 9891.1 | 11670.3 | 13446.6 | 15222.9 | 17002.1 | 18321.1 | 19640.1 |
| 62.5° | 1478.0 | 3424.4 | 5370.8 | 7317.3 | 9263.7 | 10858.8 | 12453.9 | 14051.7 | 15646.8 | 16583.8 | 17520.7 |
| 65° | 1048.5 | 2769.1 | 4489.6 | 6207.4 | 7928.0 | 9035.0 | 10142.1 | 11249.2 | 12356.3 | 13167.7 | 13979.2 |
| 67.5° | 722.2 | 1935.3 | 3145.5 | 4358.6 | 5568.8 | 6511.4 | 7451.1 | 8393.7 | 9336.2 | 10019.4 | 10705.4 |
| 70° | 513.1 | 1174.0 | 1834.9 | 2493.0 | 3153.9 | 3987.7 | 4821.5 | 5655.3 | 6489.1 | 7322.9 | 8159.4 |
| 72.5° | 365.3 | 655.3 | 942.5 | 1232.6 | 1519.8 | 2244.8 | 2969.9 | 3697.7 | 4422.7 | 4927.4 | 5435.0 |
| 75° | 276.1 | 354.2 | 429.4 | 507.5 | 582.8 | 758.5 | 934.2 | 1109.9 | 1285.5 | 1464.0 | 1642.5 |
| 77.5° | 131.1 | 145.0 | 156.2 | 170.1 | 181.3 | 225.9 | 270.5 | 315.1 | 359.7 | 435.0 | 510.3 |
| 80° | 69.7 | 75.3 | 80.9 | 86.4 | 92.0 | 94.8 | 97.6 | 100.4 | 103.2 | 111.5 | 122.7 |
| 82.5° | 25.1 | 27.9 | 27.9 | 30.7 | 30.7 | 27.9 | 27.9 | 25.1 | 22.3 | 25.1 | 25.1 |
| 85° | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 39.0 | 39.0 | 39.0 | 39.0 | 36.3 | 36.3 | 36.3 | 36.3 | 33.5 | 33.5 | 33.5 |
| 5° | 44.6 | 44.6 | 44.6 | 44.6 | 41.8 | 41.8 | 41.8 | 41.8 | 39.0 | 39.0 | 39.0 |
| 7.5° | 53.0 | 53.0 | 53.0 | 53.0 | 50.2 | 50.2 | 50.2 | 50.2 | 47.4 | 47.4 | 47.4 |
| 10° | 64.1 | 64.1 | 64.1 | 64.1 | 64.1 | 64.1 | 64.1 | 64.1 | 61.3 | 61.3 | 61.3 |
| 12.5° | 78.1 | 78.1 | 78.1 | 78.1 | 78.1 | 78.1 | 78.1 | 78.1 | 75.3 | 75.3 | 75.3 |
| 15° | 103.2 | 106.0 | 108.8 | 111.5 | 111.5 | 114.3 | 111.5 | 108.8 | 106.0 | 103.2 | 100.4 |
| 17.5° | 192.4 | 206.4 | 211.9 | 214.7 | 220.3 | 223.1 | 220.3 | 214.7 | 211.9 | 206.4 | 192.4 |
| 20° | 560.5 | 627.4 | 674.8 | 722.2 | 769.7 | 817.1 | 789.2 | 761.3 | 733.4 | 705.5 | 633.0 |
| 22.5° | 1475.2 | 1631.3 | 1740.1 | 1848.8 | 1957.6 | 2066.3 | 1991.1 | 1915.8 | 1837.7 | 1762.4 | 1578.3 |
| 25° | 2568.3 | 2833.2 | 2972.6 | 3114.9 | 3254.3 | 3393.7 | 3265.4 | 3137.2 | 3006.1 | 2877.8 | 2621.3 |
| 27.5° | 3471.8 | 3789.7 | 3909.6 | 4026.7 | 4146.6 | 4263.8 | 4149.4 | 4037.9 | 3923.6 | 3809.2 | 3510.8 |
| 30° | 4235.9 | 4548.2 | 4665.3 | 4782.4 | 4899.6 | 5016.7 | 4888.4 | 4757.3 | 4629.1 | 4498.0 | 4202.4 |
| 32.5° | 4933.0 | 5290.0 | 5451.7 | 5613.4 | 5775.2 | 5936.9 | 5744.5 | 5552.1 | 5359.7 | 5167.3 | 4829.8 |
| 35° | 5769.6 | 6196.3 | 6385.9 | 6578.3 | 6767.9 | 6957.5 | 6728.9 | 6497.4 | 6268.8 | 6037.3 | 5610.7 |
| 37.5° | 6673.1 | 7200.2 | 7453.9 | 7707.7 | 7961.4 | 8215.2 | 7930.8 | 7646.3 | 7361.9 | 7077.5 | 6533.7 |
| 40° | 8318.4 | 9018.3 | 9394.8 | 9768.5 | 10144.9 | 10518.6 | 10091.9 | 9662.5 | 9235.8 | 8806.4 | 8059.0 |
| 42.5° | 11740.0 | 12729.9 | 13265.3 | 13800.8 | 14336.2 | 14871.6 | 14249.7 | 13625.1 | 13003.2 | 12378.6 | 11346.8 |
| 45° | 16452.7 | 17916.7 | 18507.9 | 19096.3 | 19687.5 | 20275.9 | 19573.2 | 18870.4 | 18164.9 | 17462.2 | 16076.3 |
| 47.5° | 19180.0 | 20546.4 | 21126.4 | 21706.4 | 22283.7 | 22863.7 | 22202.8 | 21541.9 | 20881.0 | 20220.1 | 18867.6 |
| 50° | 20086.3 | 21424.8 | 22063.4 | 22704.7 | 23343.3 | 23981.9 | 23226.2 | 22467.7 | 21712.0 | 20953.5 | 19654.0 |
| 52.5° | 20287.0 | 21597.7 | 22350.6 | 23103.5 | 23853.6 | 24606.6 | 23733.7 | 22860.9 | 21985.3 | 21112.5 | 19824.1 |
| 55° | 20828.0 | 22297.6 | 23164.9 | 24029.3 | 24896.6 | 25761.0 | 24743.2 | 23722.6 | 22704.7 | 21684.1 | 20270.3 |
| 57.5° | 21544.7 | 23095.1 | 23887.1 | 24679.1 | 25468.2 | 26260.2 | 25275.8 | 24294.2 | 23309.9 | 22325.5 | 20850.3 |
| 60° | 20956.3 | 22275.3 | 22936.2 | 23594.3 | 24255.2 | 24913.3 | 24023.8 | 23137.0 | 22247.4 | 21357.9 | 20128.1 |
| 62.5° | 18454.9 | 19391.9 | 19902.2 | 20412.5 | 20920.0 | 21430.4 | 20699.7 | 19969.1 | 19238.5 | 18507.9 | 17615.6 |
| 65° | 14787.9 | 15599.4 | 15967.5 | 16332.8 | 16700.9 | 17066.2 | 16558.7 | 16051.2 | 15540.8 | 15033.3 | 14283.2 |
| 67.5° | 11388.6 | 12071.8 | 12640.7 | 13206.8 | 13775.7 | 14341.7 | 13725.5 | 13109.2 | 12490.1 | 11873.8 | 11154.4 |
| 70° | 8993.2 | 9827.0 | 10295.5 | 10764.0 | 11232.5 | 11700.9 | 11165.5 | 10630.1 | 10091.9 | 9556.5 | 8803.6 |
| 72.5° | 5939.7 | 6444.4 | 6611.8 | 6781.9 | 6949.2 | 7116.5 | 6921.3 | 6728.9 | 6533.7 | 6338.5 | 5861.6 |
| 75° | 1818.2 | 1996.6 | 2194.6 | 2395.4 | 2593.4 | 2791.4 | 2612.9 | 2434.4 | 2256.0 | 2077.5 | 1915.8 |
| 77.5° | 582.8 | 658.1 | 716.7 | 775.2 | 831.0 | 889.6 | 892.4 | 895.1 | 895.1 | 897.9 | 811.5 |
| 80° | 131.1 | 139.4 | 139.4 | 139.4 | 136.6 | 136.6 | 150.6 | 161.7 | 175.7 | 186.8 | 175.7 |
| 82.5° | 27.9 | 27.9 | 27.9 | 27.9 | 27.9 | 27.9 | 27.9 | 27.9 | 25.1 | 25.1 | 25.1 |
| 85° | 2.8 | 2.8 | 2.8 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 |
| 2.5° | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 33.5 | 30.7 | 30.7 |
| 5° | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 39.0 | 36.3 | 36.3 |
| 7.5° | 47.4 | 47.4 | 47.4 | 47.4 | 47.4 | 44.6 | 44.6 | 44.6 | 44.6 | 41.8 | 41.8 |
| 10° | 61.3 | 58.6 | 58.6 | 58.6 | 55.8 | 55.8 | 53.0 | 53.0 | 50.2 | 50.2 | 47.4 |
| 12.5° | 75.3 | 72.5 | 72.5 | 69.7 | 69.7 | 66.9 | 64.1 | 61.3 | 58.6 | 55.8 | 53.0 |
| 15° | 97.6 | 94.8 | 92.0 | 89.2 | 83.7 | 80.9 | 75.3 | 72.5 | 69.7 | 66.9 | 64.1 |
| 17.5° | 178.5 | 164.5 | 150.6 | 136.6 | 125.5 | 111.5 | 97.6 | 92.0 | 83.7 | 78.1 | 69.7 |
| 20° | 563.3 | 490.8 | 418.3 | 354.2 | 290.0 | 223.1 | 158.9 | 139.4 | 119.9 | 100.4 | 80.9 |
| 22.5° | 1397.1 | 1213.0 | 1029.0 | 870.0 | 711.1 | 552.1 | 393.2 | 320.7 | 248.2 | 175.7 | 103.2 |
| 25° | 2364.7 | 2105.4 | 1848.8 | 1570.0 | 1293.9 | 1015.0 | 736.2 | 591.2 | 443.4 | 295.6 | 150.6 |
| 27.5° | 3212.5 | 2914.1 | 2615.7 | 2247.6 | 1879.5 | 1508.6 | 1140.5 | 917.4 | 691.6 | 465.7 | 242.6 |
| 30° | 3909.6 | 3614.0 | 3318.4 | 2866.7 | 2412.1 | 1960.4 | 1505.8 | 1215.8 | 925.8 | 633.0 | 343.0 |
| 32.5° | 4492.4 | 4155.0 | 3817.6 | 3321.2 | 2827.6 | 2331.3 | 1834.9 | 1475.2 | 1118.2 | 758.5 | 398.8 |
| 35° | 5181.2 | 4754.6 | 4325.1 | 3795.3 | 3268.2 | 2738.4 | 2208.6 | 1770.8 | 1330.2 | 889.6 | 451.8 |
| 37.5° | 5989.9 | 5446.1 | 4902.4 | 4327.9 | 3756.2 | 3181.8 | 2607.3 | 2088.7 | 1572.8 | 1054.1 | 535.4 |
| 40° | 7314.5 | 6567.1 | 5819.8 | 5131.0 | 4439.4 | 3750.7 | 3059.1 | 2459.5 | 1860.0 | 1257.7 | 658.1 |
| 42.5° | 10315.0 | 9283.2 | 8251.5 | 7219.7 | 6185.1 | 5153.3 | 4118.8 | 3301.7 | 2487.4 | 1670.4 | 853.3 |
| 45° | 14690.3 | 13304.4 | 11918.5 | 10535.3 | 9152.2 | 7769.0 | 6385.9 | 5117.1 | 3848.3 | 2576.7 | 1307.9 |
| 47.5° | 17515.2 | 16162.7 | 14810.2 | 13485.6 | 12163.9 | 10839.3 | 9514.7 | 7730.0 | 5945.3 | 4157.8 | 2373.1 |
| 50° | 18357.3 | 17057.8 | 15758.4 | 14576.0 | 13396.4 | 12214.0 | 11031.7 | 9143.8 | 7258.7 | 5370.8 | 3483.0 |
| 52.5° | 18535.8 | 17244.7 | 15956.3 | 14771.2 | 13588.8 | 12403.7 | 11218.5 | 9339.0 | 7459.5 | 5577.2 | 3697.7 |
| 55° | 18856.5 | 17442.7 | 16028.8 | 14698.7 | 13368.5 | 12035.6 | 10705.4 | 8828.7 | 6952.0 | 5075.2 | 3198.5 |
| 57.5° | *19375.2* | *17897.2* | *16422.0* | *14838.1* | *13254.2* | *11670.3* | *10086.4* | *8192.9* | *6299.4* | *4406.0* | *2512.5* |
| 60° | 18898.3 | 17665.8 | 16436.0 | 14729.4 | 13020.0 | 11313.3 | 9603.9 | 7679.8 | 5752.9 | 3826.0 | 1901.8 |
| 62.5° | 16720.4 | 15828.1 | 14932.9 | 13418.7 | 11904.5 | 10390.3 | 8876.1 | 7002.2 | 5128.2 | 3254.3 | 1380.4 |
| 65° | 13530.3 | 12780.1 | 12027.2 | 10828.1 | 9629.0 | 8427.1 | 7228.0 | 5649.7 | 4074.1 | 2495.8 | 917.4 |
| 67.5° | 10434.9 | 9715.5 | 8996.0 | 8050.7 | 7105.3 | 6160.0 | 5214.7 | 4065.8 | 2916.9 | 1765.2 | 616.3 |
| 70° | 8050.7 | 7297.8 | 6544.8 | 5694.3 | 4843.8 | 3993.3 | 3142.7 | 2473.5 | 1807.0 | 1137.7 | 468.5 |
| 72.5° | 5384.8 | 4907.9 | 4431.1 | 3725.6 | 3020.0 | 2314.5 | 1609.0 | 1302.3 | 995.5 | 686.0 | 379.2 |
| 75° | 1751.2 | 1589.5 | 1425.0 | 1232.6 | 1040.1 | 844.9 | 652.5 | 566.1 | 476.8 | 387.6 | 301.2 |
| 77.5° | 722.2 | 635.8 | 546.6 | 465.7 | 382.0 | 301.2 | 217.5 | 203.6 | 189.6 | 175.7 | 161.7 |
| 80° | 161.7 | 150.6 | 136.6 | 128.3 | 119.9 | 111.5 | 103.2 | 97.6 | 89.2 | 83.7 | 75.3 |
| 82.5° | 22.3 | 22.3 | 19.5 | 22.3 | 25.1 | 27.9 | 30.7 | 27.9 | 27.9 | 25.1 | 22.3 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 0° | 33.5 | 33.5 |
| 2.5° | 30.7 | 30.7 |
| 5° | 36.3 | 33.5 |
| 7.5° | 41.8 | 39.0 |
| 10° | 47.4 | 44.6 |
| 12.5° | 53.0 | 50.2 |
| 15° | 61.3 | 55.8 |
| 17.5° | 66.9 | 61.3 |
| 20° | 75.3 | 66.9 |
| 22.5° | 89.2 | 75.3 |
| 25° | 117.1 | 86.4 |
| 27.5° | 172.9 | 106.0 |
| 30° | 242.6 | 142.2 |
| 32.5° | 287.2 | 175.7 |
| 35° | 312.3 | 175.7 |
| 37.5° | 354.2 | 172.9 |
| 40° | 418.3 | 181.3 |
| 42.5° | 524.3 | 198.0 |
| 45° | 778.0 | 248.2 |
| 47.5° | 1411.0 | 449.0 |
| 50° | 2091.4 | 702.7 |
| 52.5° | 2230.9 | 764.1 |
| 55° | 1943.7 | 688.8 |
| 57.5° | *1547.7* | *582.8* |
| 60° | 1168.4 | 437.8 |
| 62.5° | 867.3 | 356.9 |
| 65° | 616.3 | 315.1 |
| 67.5° | 454.5 | 292.8 |
| 70° | 373.7 | 281.6 |
| 72.5° | 320.7 | 262.1 |
| 75° | 267.7 | 234.2 |
| 77.5° | 167.3 | 170.1 |
| 80° | 72.5 | 66.9 |
| 82.5° | 22.3 | 19.5 |
| 85° | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389902
CATALOG NUMBER: GSS-SA2D-727-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 112.5° | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-3

Test Date: 10/09/2024

Luminaire Tested: GSS-SB1A-727-U-5WQ

Data in this report applies to families of products including GSS-SB1A-727-U-5WQ

Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04


## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-184-3 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 10/15/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | McGraw-Edison |
| Catalog Number: | **GSS-SB1A-727-U-5WQ** |
| Description: | GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI 2700K CCT 26 LEDS |

## Spectral Parameters

| | |
|---|---|
| CCT (K): | 2672 |
| CIE u': | 0.2638 |
| CIE v': | 0.5276 |
| Duv: | -0.0002 |
| CIE x: | 0.4619 |
| CIE y: | 0.4106 |
| CIE z: | 0.1275 |
| Peak Wavelength (nm): | 601 |
| Dominant Wavelength (nm): | 584 |
| Purity: | 61.88407 |
| Rf: | 67.9 |
| Rg: | 98.6 |

| | |
|---|---|
| CRI (Ra): | 71.1 |
| R1: | 68.3 |
| R2: | 79.8 |
| R3: | 91.2 |
| R4: | 69.4 |
| R5: | 66.5 |
| R6: | 72.6 |
| R7: | 77.0 |
| R8: | 44.1 |
| R9: | -27.8 |
| R10: | 54.4 |
| R11: | 65.8 |
| R12: | 45.6 |
| R13: | 69.8 |
| R14: | 94.5 |
| R15: | 60.1 |

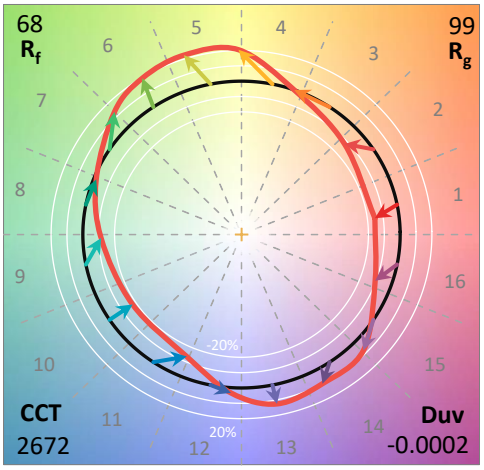


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 21M |
| Operation Time: | 1H 21M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-184-3


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-184-3

## CIE 1931 Chromaticity Diagram

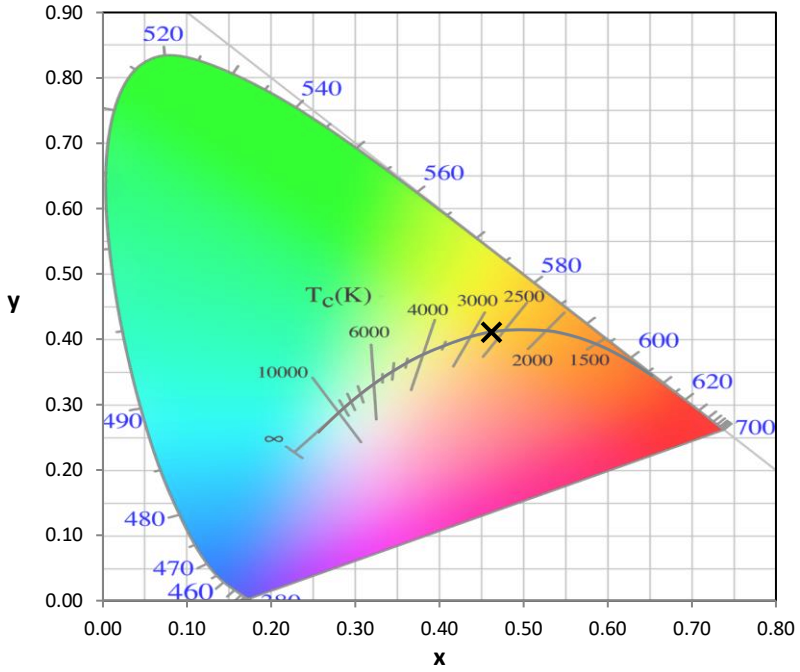


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

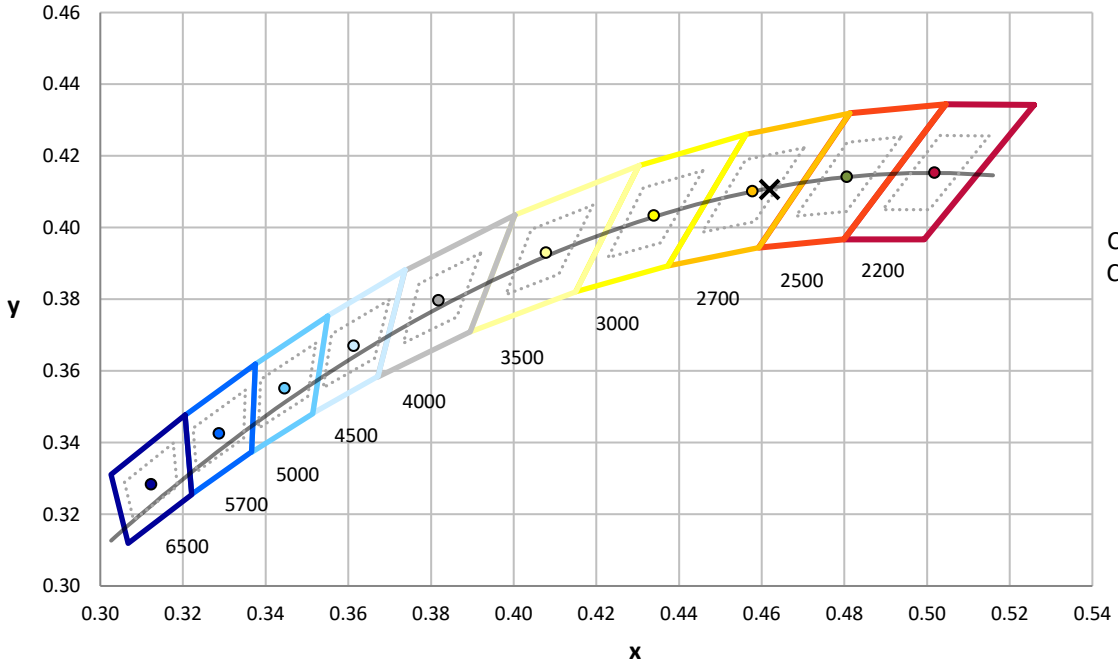



CCT = 2672K
CIE x = 0.4619
CIE y = 0.4106
Duv = -0.0002

Point lies inside the ANSI 2700K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-3

## Photopic Flux vs. Wavelength

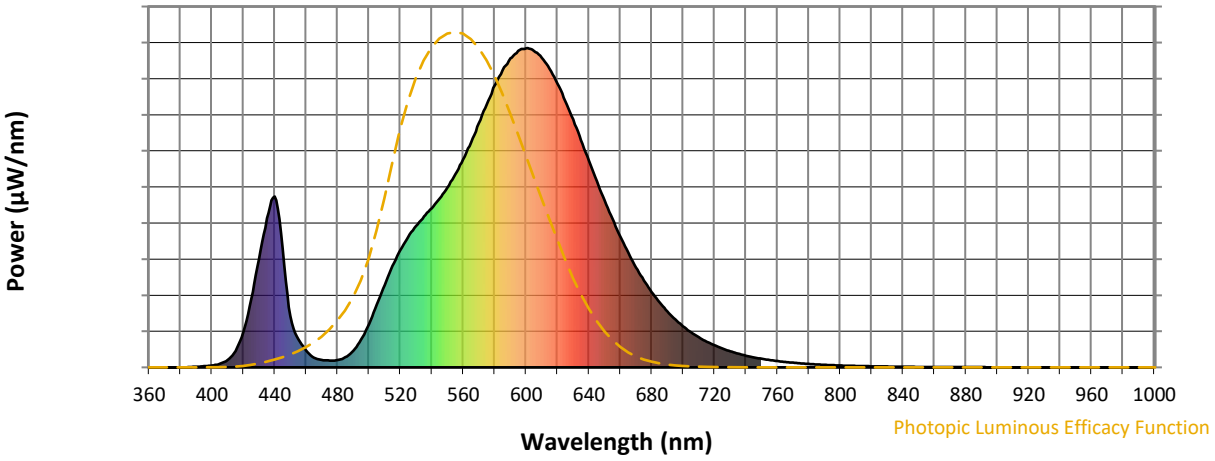



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 52 | NR | 620 | 888 | NR | 750 | 27 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 87 | NR | 625 | 834 | NR | 755 | 23 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 135 | NR | 630 | 776 | NR | 760 | 20 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 196 | NR | 635 | 712 | NR | 765 | 17 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 258 | NR | 640 | 648 | NR | 770 | 15 | NR | 900 | 0 | NR |
| 385 | 1 | NR | 515 | 317 | NR | 645 | 583 | NR | 775 | 12 | NR | 905 | 0 | NR |
| 390 | 2 | NR | 520 | 368 | NR | 650 | 523 | NR | 780 | 11 | NR | 910 | 0 | NR |
| 395 | 4 | NR | 525 | 408 | NR | 655 | 465 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 6 | NR | 530 | 443 | NR | 660 | 410 | NR | 790 | 8 | NR | 920 | 0 | NR |
| 405 | 11 | NR | 535 | 473 | NR | 665 | 360 | NR | 795 | 7 | NR | 925 | 0 | NR |
| 410 | 23 | NR | 540 | 498 | NR | 670 | 313 | NR | 800 | 6 | NR | 930 | 0 | NR |
| 415 | 51 | NR | 545 | 530 | NR | 675 | 272 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 111 | NR | 550 | 563 | NR | 680 | 236 | NR | 810 | 4 | NR | 940 | 0 | NR |
| 425 | 214 | NR | 555 | 605 | NR | 685 | 203 | NR | 815 | 4 | NR | 945 | 0 | NR |
| 430 | 339 | NR | 560 | 651 | NR | 690 | 175 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 467 | NR | 565 | 705 | NR | 695 | 150 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 535 | NR | 570 | 765 | NR | 700 | 128 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 372 | NR | 575 | 824 | NR | 705 | 110 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 160 | NR | 580 | 882 | NR | 710 | 94 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 89 | NR | 585 | 930 | NR | 715 | 80 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 53 | NR | 590 | 968 | NR | 720 | 69 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 31 | NR | 595 | 991 | NR | 725 | 59 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 23 | NR | 600 | 999 | NR | 730 | 50 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 21 | NR | 605 | 992 | NR | 735 | 43 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 23 | NR | 610 | 969 | NR | 740 | 36 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 32 | NR | 615 | 935 | NR | 745 | 31 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-3

## Scotopic Flux vs. Wavelength

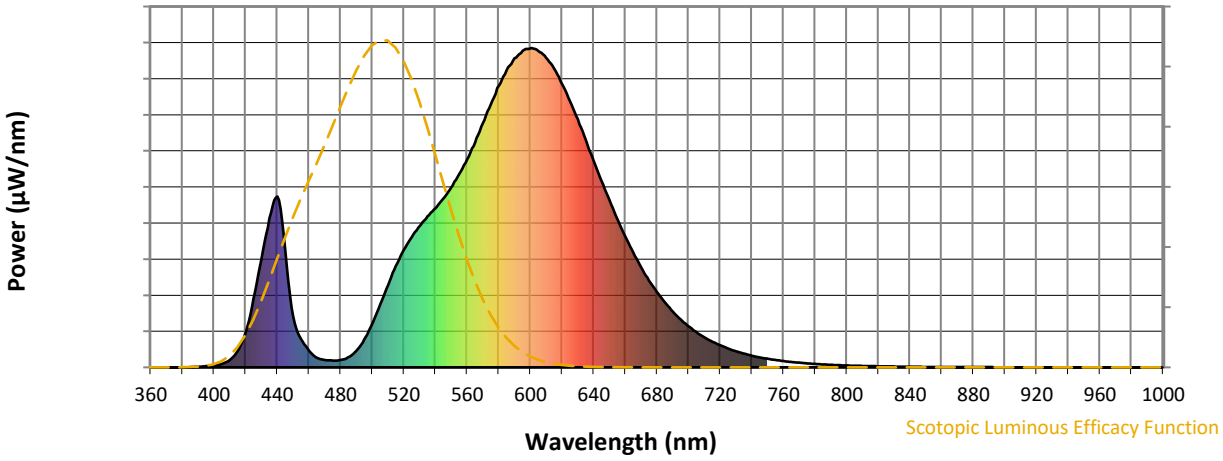



**Scotopic Lumens: NR** **S/P: 1.02**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 52 | NR | 620 | 888 | NR | 750 | 27 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 87 | NR | 625 | 834 | NR | 755 | 23 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 135 | NR | 630 | 776 | NR | 760 | 20 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 196 | NR | 635 | 712 | NR | 765 | 17 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 258 | NR | 640 | 648 | NR | 770 | 15 | NR | 900 | 0 | NR |
| 385 | 1 | NR | 515 | 317 | NR | 645 | 583 | NR | 775 | 12 | NR | 905 | 0 | NR |
| 390 | 2 | NR | 520 | 368 | NR | 650 | 523 | NR | 780 | 11 | NR | 910 | 0 | NR |
| 395 | 4 | NR | 525 | 408 | NR | 655 | 465 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 6 | NR | 530 | 443 | NR | 660 | 410 | NR | 790 | 8 | NR | 920 | 0 | NR |
| 405 | 11 | NR | 535 | 473 | NR | 665 | 360 | NR | 795 | 7 | NR | 925 | 0 | NR |
| 410 | 23 | NR | 540 | 498 | NR | 670 | 313 | NR | 800 | 6 | NR | 930 | 0 | NR |
| 415 | 51 | NR | 545 | 530 | NR | 675 | 272 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 111 | NR | 550 | 563 | NR | 680 | 236 | NR | 810 | 4 | NR | 940 | 0 | NR |
| 425 | 214 | NR | 555 | 605 | NR | 685 | 203 | NR | 815 | 4 | NR | 945 | 0 | NR |
| 430 | 339 | NR | 560 | 651 | NR | 690 | 175 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 467 | NR | 565 | 705 | NR | 695 | 150 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 535 | NR | 570 | 765 | NR | 700 | 128 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 372 | NR | 575 | 824 | NR | 705 | 110 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 160 | NR | 580 | 882 | NR | 710 | 94 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 89 | NR | 585 | 930 | NR | 715 | 80 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 53 | NR | 590 | 968 | NR | 720 | 69 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 31 | NR | 595 | 991 | NR | 725 | 59 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 23 | NR | 600 | 999 | NR | 730 | 50 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 21 | NR | 605 | 992 | NR | 735 | 43 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 23 | NR | 610 | 969 | NR | 740 | 36 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 32 | NR | 615 | 935 | NR | 745 | 31 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-3

## Melanopic Flux vs. Wavelength

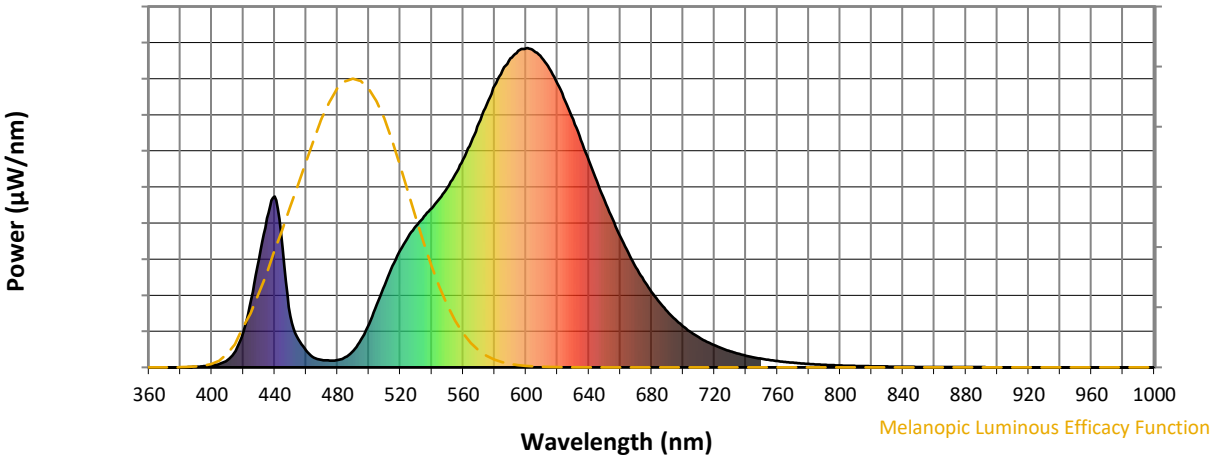


**Melanopic Lumens: NR** **M/P: 1.71**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 52 | NR | 620 | 888 | NR | 750 | 27 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 87 | NR | 625 | 834 | NR | 755 | 23 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 135 | NR | 630 | 776 | NR | 760 | 20 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 196 | NR | 635 | 712 | NR | 765 | 17 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 258 | NR | 640 | 648 | NR | 770 | 15 | NR | 900 | 0 | NR |
| 385 | 1 | NR | 515 | 317 | NR | 645 | 583 | NR | 775 | 12 | NR | 905 | 0 | NR |
| 390 | 2 | NR | 520 | 368 | NR | 650 | 523 | NR | 780 | 11 | NR | 910 | 0 | NR |
| 395 | 4 | NR | 525 | 408 | NR | 655 | 465 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 6 | NR | 530 | 443 | NR | 660 | 410 | NR | 790 | 8 | NR | 920 | 0 | NR |
| 405 | 11 | NR | 535 | 473 | NR | 665 | 360 | NR | 795 | 7 | NR | 925 | 0 | NR |
| 410 | 23 | NR | 540 | 498 | NR | 670 | 313 | NR | 800 | 6 | NR | 930 | 0 | NR |
| 415 | 51 | NR | 545 | 530 | NR | 675 | 272 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 111 | NR | 550 | 563 | NR | 680 | 236 | NR | 810 | 4 | NR | 940 | 0 | NR |
| 425 | 214 | NR | 555 | 605 | NR | 685 | 203 | NR | 815 | 4 | NR | 945 | 0 | NR |
| 430 | 339 | NR | 560 | 651 | NR | 690 | 175 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 467 | NR | 565 | 705 | NR | 695 | 150 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 535 | NR | 570 | 765 | NR | 700 | 128 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 372 | NR | 575 | 824 | NR | 705 | 110 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 160 | NR | 580 | 882 | NR | 710 | 94 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 89 | NR | 585 | 930 | NR | 715 | 80 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 53 | NR | 590 | 968 | NR | 720 | 69 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 31 | NR | 595 | 991 | NR | 725 | 59 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 23 | NR | 600 | 999 | NR | 730 | 50 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 21 | NR | 605 | 992 | NR | 735 | 43 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 23 | NR | 610 | 969 | NR | 740 | 36 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 32 | NR | 615 | 935 | NR | 745 | 31 | NR | 875 | 1 | NR | | | |


REPORT NUMBER: SP1-2407-184-3

# TM-30-18


## Summary


$R_f$ = 67.9
$R_g$ = 98.6
CIE $R_a$ = 71.1
$R_9$ = -27.8


## Spectral Power Distribution Comparison

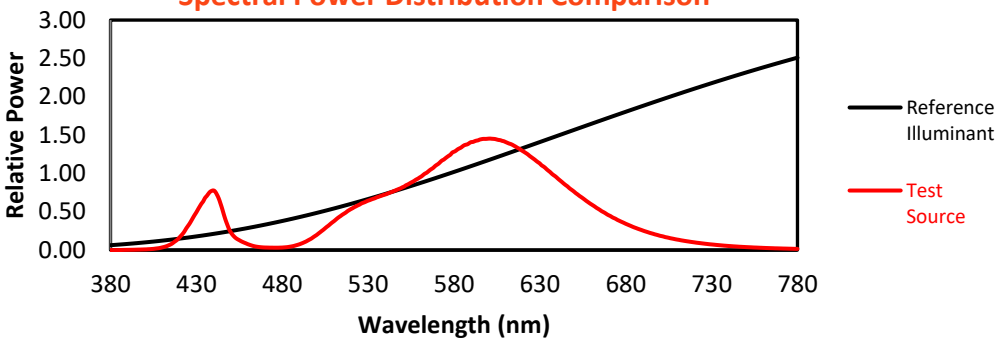



## Color Vector Graphics

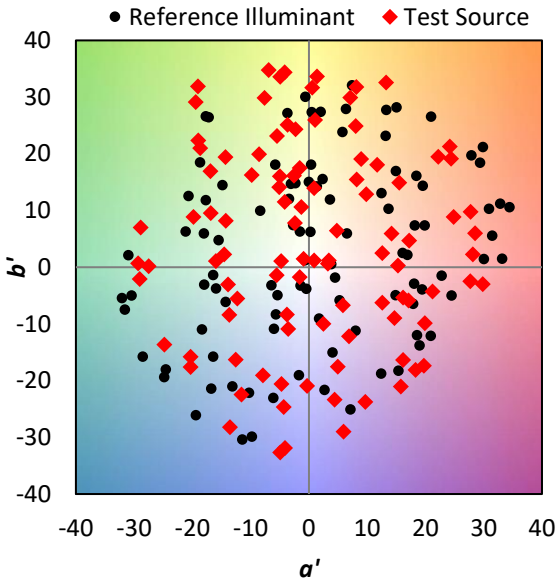

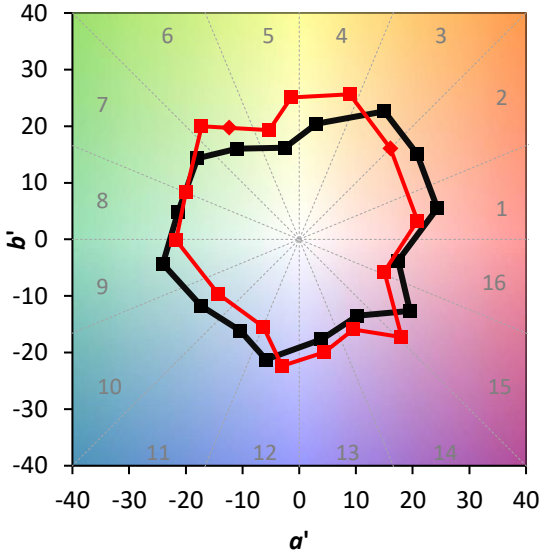


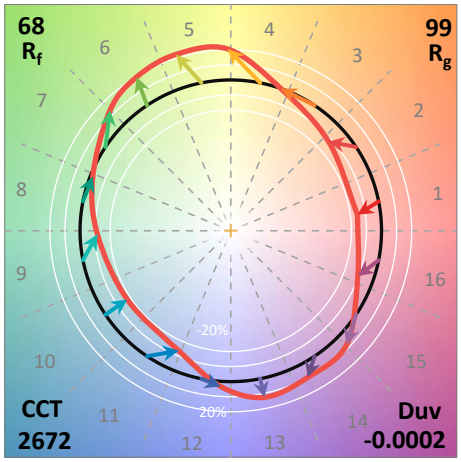
REPORT NUMBER: SP1-2407-184-3
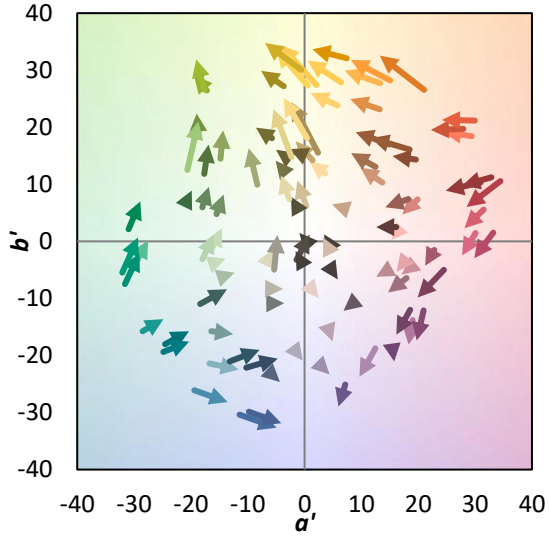
# TM-30-18

**Individual Sample Fidelity Index ($R_{f,i}$)**


| | | | |
|---|---|---|---|
| CES01 = 86 | CES26 = 53 | CES51 = 75 | CES76 = 51 |
| CES02 = 63 | CES27 = 70 | CES52 = 80 | CES77 = 79 |
| CES03 = 31 | CES28 = 81 | CES53 = 64 | CES78 = 58 |
| CES04 = 71 | CES29 = 37 | CES54 = 73 | CES79 = 82 |
| CES05 = 50 | CES30 = 33 | CES55 = 69 | CES80 = 82 |
| CES06 = 52 | CES31 = 44 | CES56 = 60 | CES81 = 69 |
| CES07 = 42 | CES32 = 47 | CES57 = 54 | CES82 = 92 |
| CES08 = 41 | CES33 = 45 | CES58 = 59 | CES83 = 82 |
| CES09 = 29 | CES34 = 67 | CES59 = 85 | CES84 = 92 |
| CES10 = 77 | CES35 = 84 | CES60 = 86 | CES85 = 87 |
| CES11 = 60 | CES36 = 68 | CES61 = 86 | CES86 = 60 |
| CES12 = 66 | CES37 = 77 | CES62 = 59 | CES87 = 79 |
| CES13 = 44 | CES38 = 40 | CES63 = 66 | CES88 = 70 |
| CES14 = 74 | CES39 = 88 | CES64 = 69 | CES89 = 66 |
| CES15 = 72 | CES40 = 82 | CES65 = 64 | CES90 = 64 |
| CES16 = 48 | CES41 = 70 | CES66 = 65 | CES91 = 81 |
| CES17 = 51 | CES42 = 76 | CES67 = 64 | CES92 = 69 |
| CES18 = 57 | CES43 = 63 | CES68 = 73 | CES93 = 81 |
| CES19 = 73 | CES44 = 97 | CES69 = 83 | CES94 = 53 |
| CES20 = 67 | CES45 = 74 | CES70 = 64 | CES95 = 77 |
| CES21 = 88 | CES46 = 67 | CES71 = 60 | CES96 = 79 |
| CES22 = 80 | CES47 = 55 | CES72 = 87 | CES97 = 78 |
| CES23 = 92 | CES48 = 42 | CES73 = 57 | CES98 = 69 |
| CES24 = 92 | CES49 = 65 | CES74 = 84 | CES99 = 60 |
| CES25 = 73 | CES50 = 74 | CES75 = 60 | |

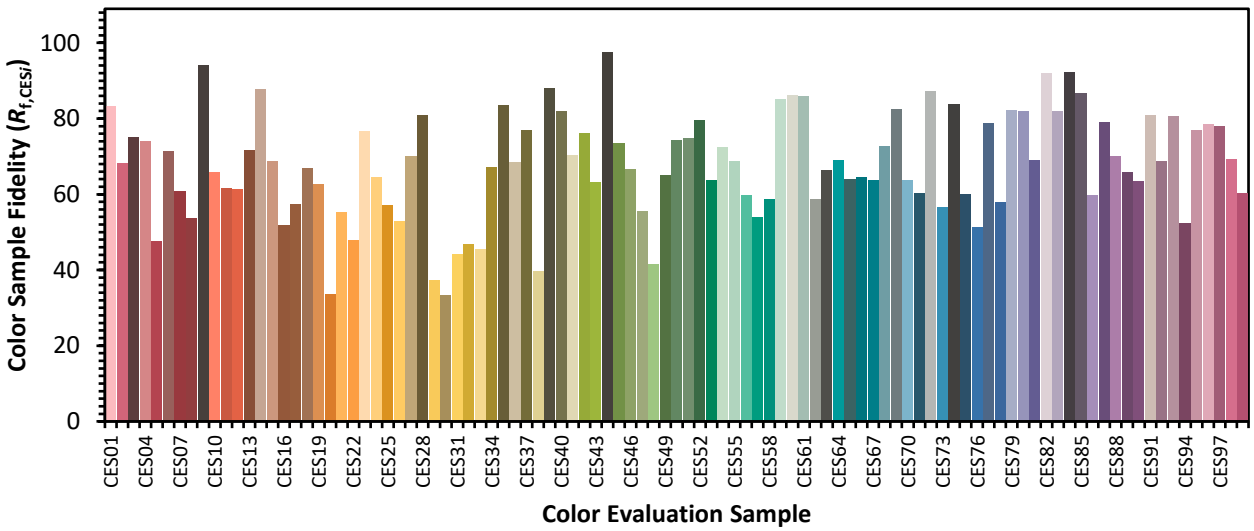



REPORT NUMBER: SP1-2407-184-3

**TM-30-18**

## Color Rendition by Hue-Angle Bin

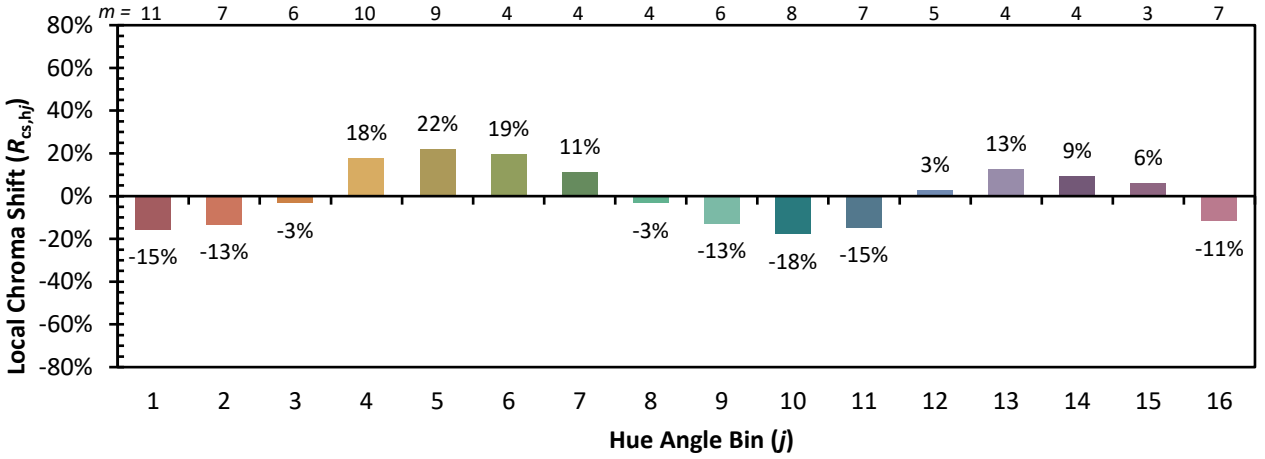

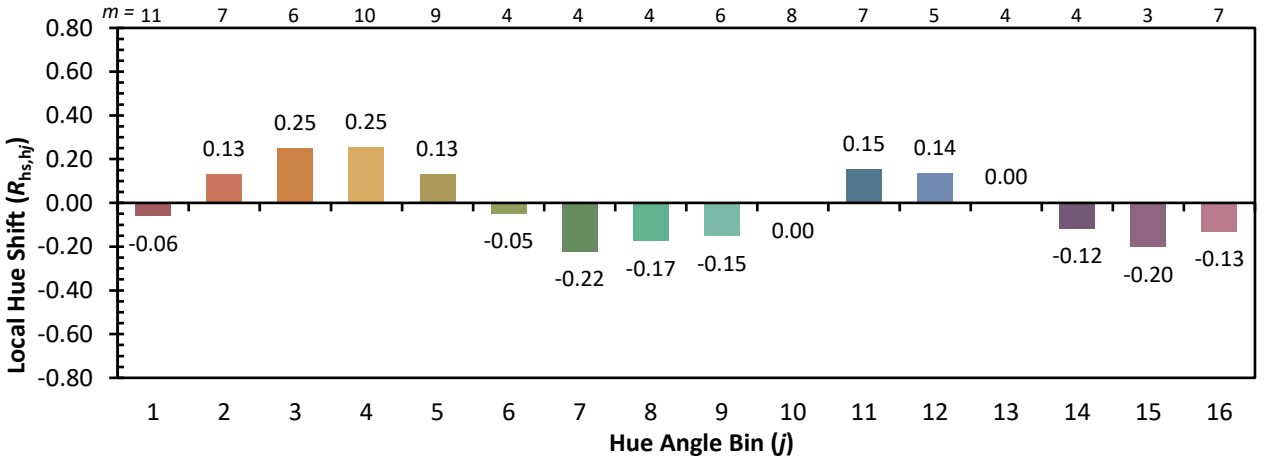


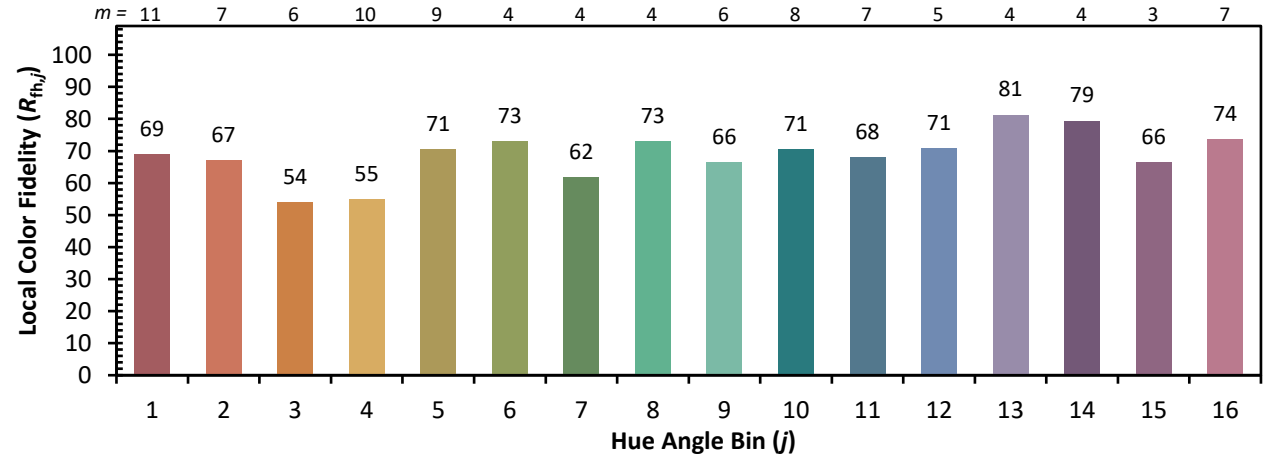
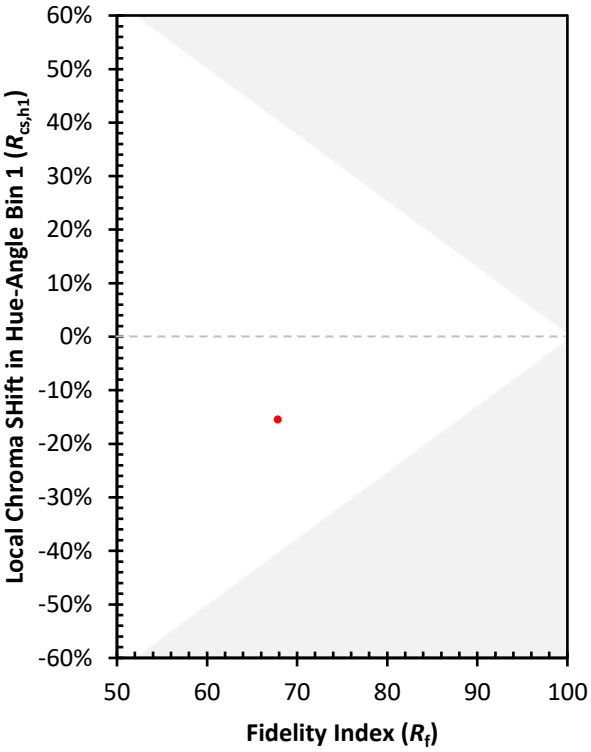



REPORT NUMBER: SP1-2407-184-3

# TM-30-18

## Measure Comparisons

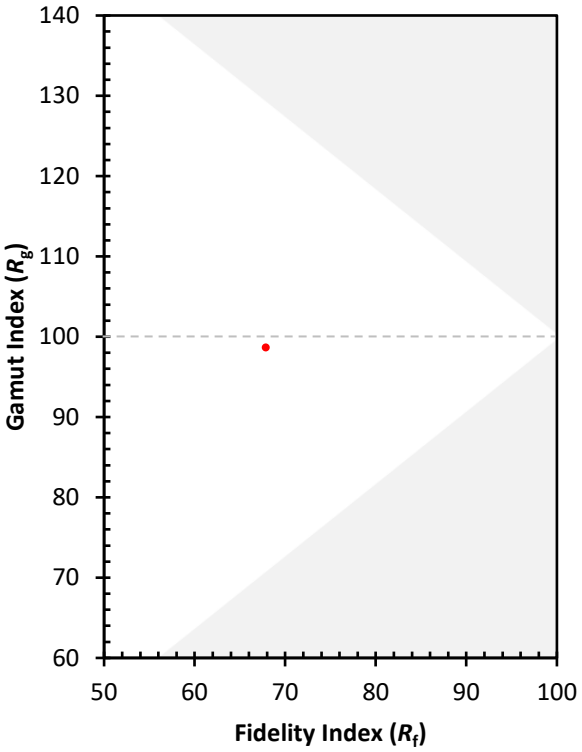


(END OF REPORT)