Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1389927

Luminaire Tested: **GSS-SA3A-730-U-RBC**

Issue Date: 02/18/2026

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P1389927 |
| Test Lab: | INNOVATION CENTER(G3) |
| Issue Date: | 02/18/2026 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | GSS-SA3A-730-U-RBC |
| Description: | GALLEON SLIM SITE LUMINAIRE 615mA 3xLight Square PACKAGE 70CRI 3000K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL |
| Light Source: | (42) 3000K CCT, 70 CRI LEDS |
| Ballast/Driver: | ELECTRONIC DRIVER |

Luminaire Equipment:

| Sample No. | Condition | Description |
|---|---|---|
| a | good | reflector |
| b | good | lens |
| c | good | housing |
| d | good | cord |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 8532.5 lumens |
| Efficiency: | N/A |
| Efficacy: | 106.7 lumens/watt |
| Luminous Opening: | Rectangular (W 1.5' x L: 0.5' x H: 0') |
| IES Classification: | Type III - Short |
| BUG Rating: | B0 - U0 - G2 |


| | |
|---|---|
| Input Watts (W): | 80 |
| Input Voltage (V): | 120 |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | 0.97 |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 28.75 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

## Iso-Footcandle Lines of Horizontal Illumination

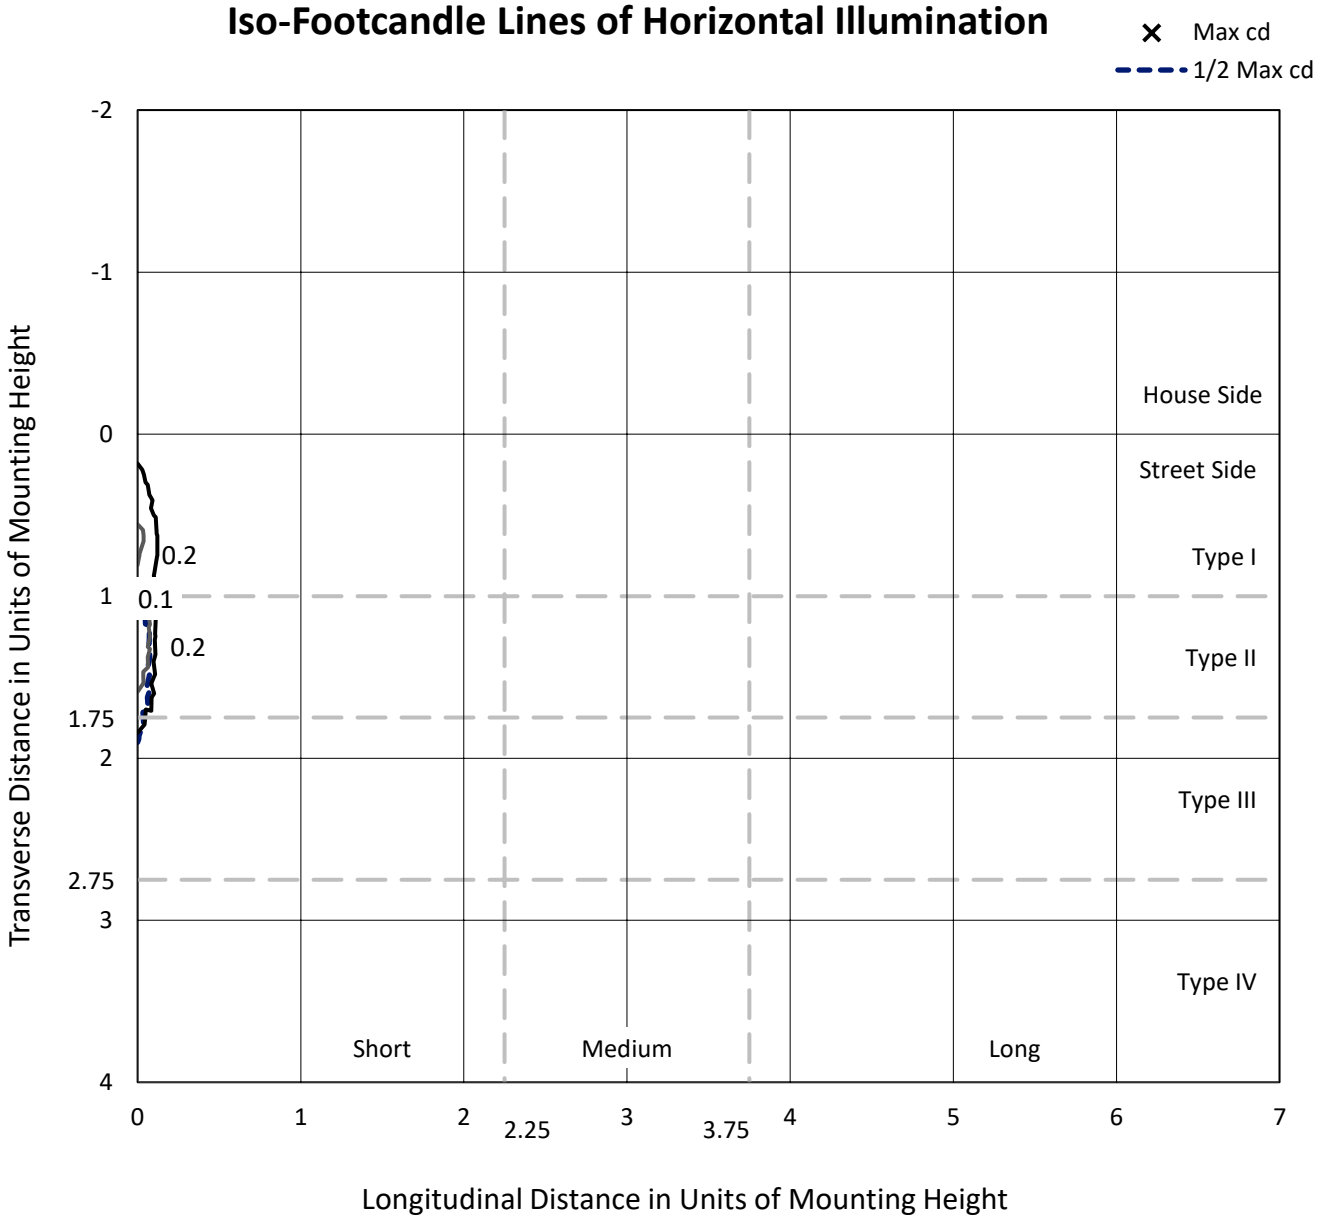



Based on 20 foot mounting height. Maximum calculated value = 0.4 fc
Type III - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

## Luminous Intensity Polar Plot

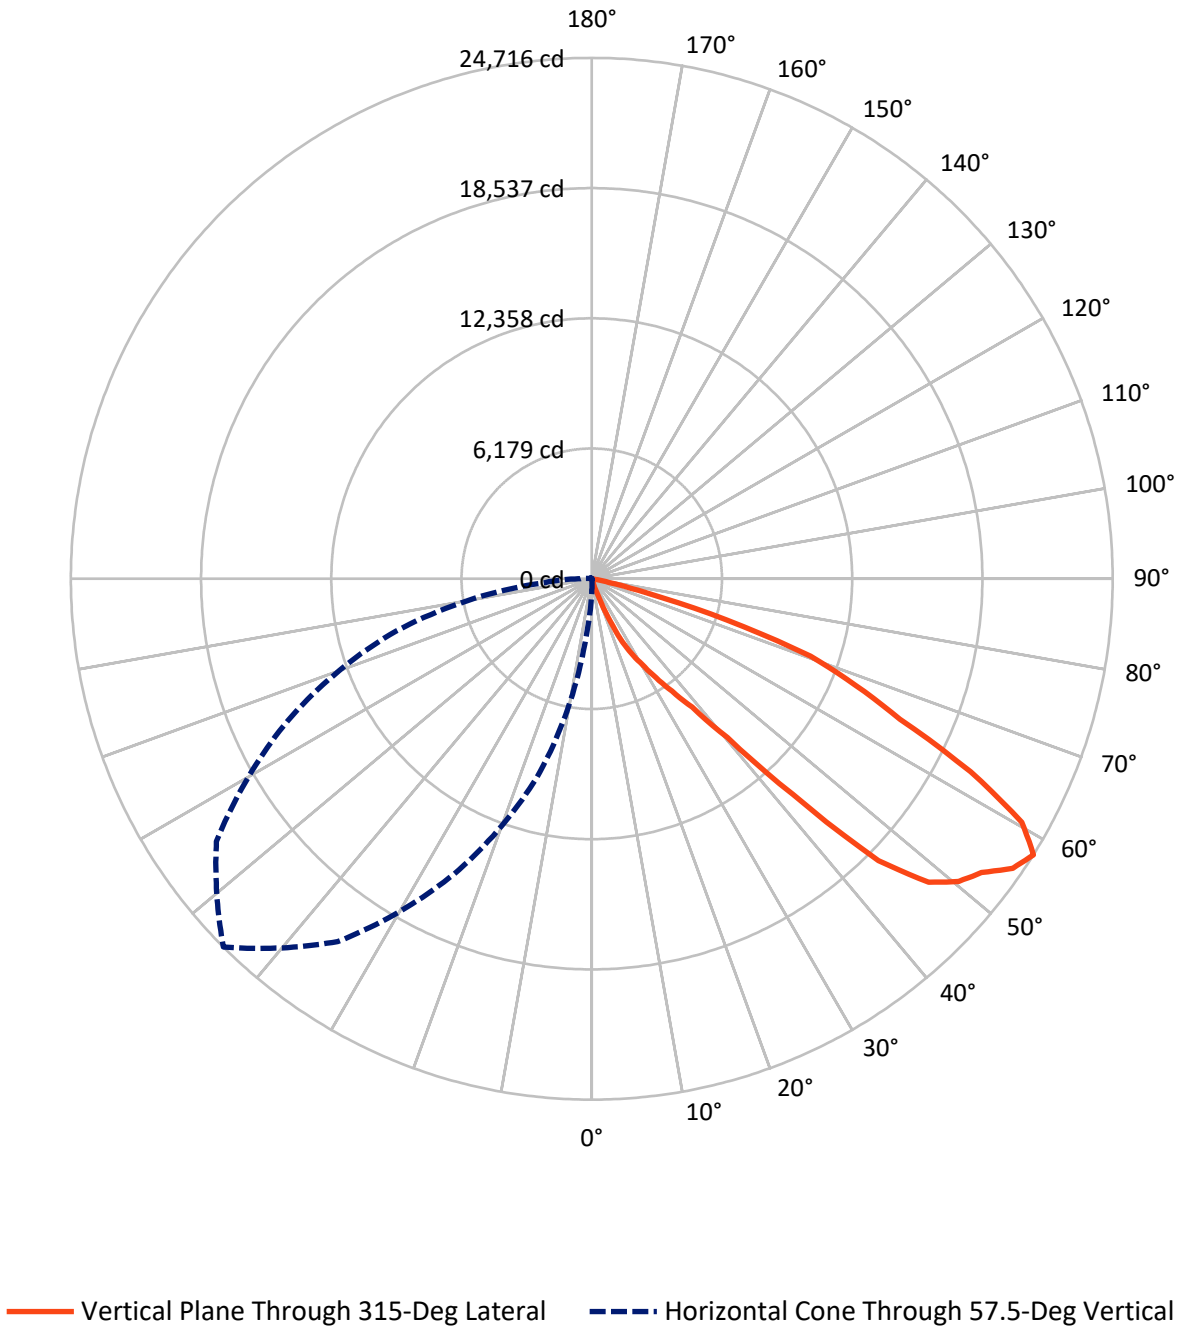

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 60.9 | 0.0 | 60.9 |
| | % Fixture | 0.7 | 0.0 | 0.7 |
| **Street Side** | Lumens | 8471.6 | 0.0 | 8471.6 |
| | % Fixture | 99.3 | 0.0 | 99.3 |
| **Total** | Lumens | 8532.5 | 0.0 | 8532.5 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 3.0 | 0.0 |
| 10°-20° | 14.4 | 0.2 |
| 20°-30° | 184.7 | 2.2 |
| 30°-40° | 575.8 | 6.7 |
| 40°-50° | 1880.8 | 22.0 |
| 50°-60° | 3018.8 | 35.4 |
| 60°-70° | 2317.9 | 27.2 |
| 70°-80° | 527.8 | 6.2 |
| 80°-90° | 9.4 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 8532.5 | 100.0 |
| 0°-180° | 8532.5 | 100.0 |

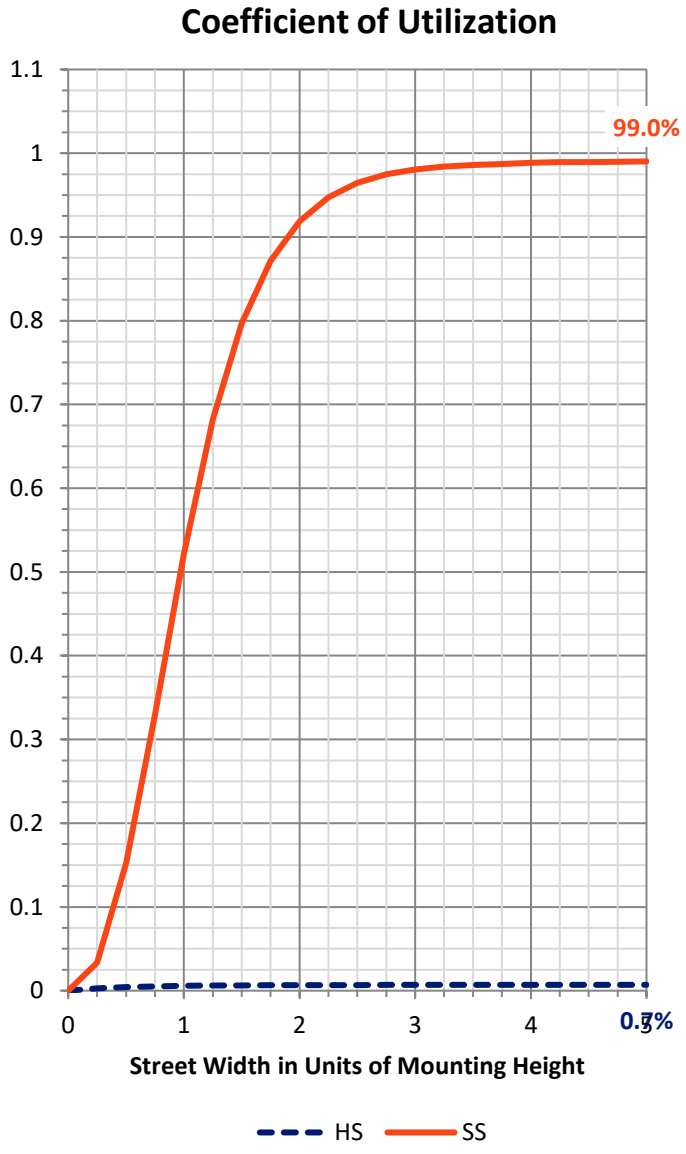

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 193.3 | 2.3 | | | |
| FM | (30°-60°) | 5449.7 | 63.9 | | | |
| FH | (60°-80°) | 2821.9 | 33.1 | | | G2/5000 |
| FVH | (80°-90°) | 6.7 | 0.1 | | | G0/10 |
| BL | (0°-30°) | 8.8 | 0.1 | B0/110 | | |
| BM | (30°-60°) | 25.7 | 0.3 | B0/220 | | |
| BH | (60°-80°) | 23.8 | 0.3 | B0/110 | | G0/110 |
| BVH | (80°-90°) | 2.7 | 0.0 | | | G0/10 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B0-U0-G2**
Type III Short

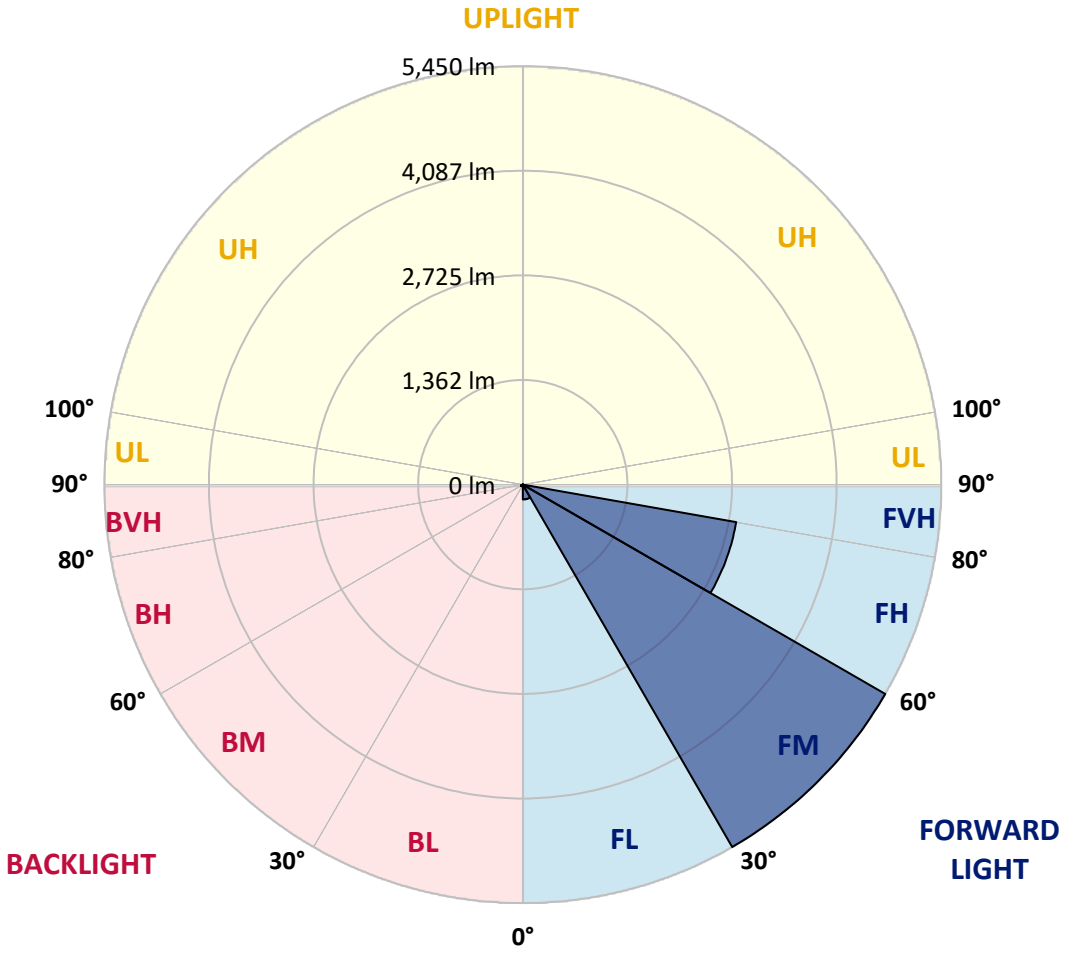

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 28.9 | 28.9 | 28.9 | 28.9 | 28.9 | 26.2 | 26.2 | 26.2 | 26.2 | 26.2 | 26.2 |
| 5° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 28.9 | 28.9 | 28.9 | 28.9 | 26.2 | 26.2 |
| 7.5° | 36.7 | 36.7 | 34.1 | 34.1 | 34.1 | 31.5 | 31.5 | 31.5 | 31.5 | 28.9 | 28.9 |
| 10° | 42.0 | 42.0 | 39.4 | 39.4 | 36.7 | 36.7 | 34.1 | 34.1 | 31.5 | 31.5 | 28.9 |
| 12.5° | 47.2 | 47.2 | 44.6 | 42.0 | 42.0 | 39.4 | 36.7 | 34.1 | 34.1 | 31.5 | 28.9 |
| 15° | 52.5 | 49.9 | 47.2 | 44.6 | 44.6 | 42.0 | 39.4 | 36.7 | 36.7 | 34.1 | 31.5 |
| 17.5° | 57.7 | 55.1 | 52.5 | 49.9 | 47.2 | 42.0 | 39.4 | 36.7 | 36.7 | 34.1 | 31.5 |
| 20° | 63.0 | 57.7 | 52.5 | 49.9 | 47.2 | 42.0 | 39.4 | 36.7 | 36.7 | 34.1 | 31.5 |
| 22.5° | 70.9 | 65.6 | 57.7 | 55.1 | 49.9 | 47.2 | 42.0 | 39.4 | 36.7 | 34.1 | 31.5 |
| 25° | 81.4 | 70.9 | 63.0 | 57.7 | 52.5 | 47.2 | 42.0 | 39.4 | 36.7 | 34.1 | 31.5 |
| 27.5° | 99.7 | 84.0 | 70.9 | 65.6 | 57.7 | 52.5 | 44.6 | 42.0 | 39.4 | 36.7 | 34.1 |
| 30° | 133.9 | 105.0 | 76.1 | 68.2 | 63.0 | 55.1 | 47.2 | 44.6 | 39.4 | 36.7 | 31.5 |
| 32.5° | 165.3 | 128.6 | 91.9 | 81.4 | 70.9 | 57.7 | 47.2 | 44.6 | 39.4 | 36.7 | 31.5 |
| 35° | 165.3 | 131.2 | 97.1 | 84.0 | 73.5 | 60.4 | 47.2 | 44.6 | 39.4 | 36.7 | 31.5 |
| 37.5° | 162.7 | 128.6 | 94.5 | 84.0 | 73.5 | 60.4 | 49.9 | 44.6 | 42.0 | 36.7 | 31.5 |
| 40° | 170.6 | 126.0 | 84.0 | 76.1 | 68.2 | 57.7 | 49.9 | 44.6 | 42.0 | 36.7 | 31.5 |
| 42.5° | 186.3 | 133.9 | 81.4 | 73.5 | 68.2 | 60.4 | 52.5 | 47.2 | 42.0 | 36.7 | 31.5 |
| 45° | 233.6 | 157.5 | 84.0 | 76.1 | 68.2 | 57.7 | 49.9 | 47.2 | 42.0 | 39.4 | 34.1 |
| 47.5° | 422.6 | 254.6 | 86.6 | 76.1 | 68.2 | 57.7 | 47.2 | 44.6 | 42.0 | 36.7 | 34.1 |
| 50° | 661.4 | 375.3 | 89.2 | 78.7 | 68.2 | 57.7 | 47.2 | 44.6 | 42.0 | 39.4 | 36.7 |
| 52.5° | 719.1 | 409.4 | 99.7 | 86.6 | 73.5 | 60.4 | 47.2 | 44.6 | 42.0 | 39.4 | 36.7 |
| 55° | 648.3 | 380.6 | 115.5 | 99.7 | 81.4 | 65.6 | 47.2 | 44.6 | 42.0 | 39.4 | 36.7 |
| 57.5° | *548.5* | *338.6* | *128.6* | *110.2* | *89.2* | *70.9* | *49.9* | *47.2* | *44.6* | *42.0* | *39.4* |
| 60° | 412.1 | 280.8 | 149.6 | 126.0 | 105.0 | 81.4 | 57.7 | 55.1 | 52.5 | 47.2 | 44.6 |
| 62.5° | 335.9 | 249.3 | 165.3 | 141.7 | 115.5 | 91.9 | 65.6 | 63.0 | 60.4 | 55.1 | 52.5 |
| 65° | 296.6 | 236.2 | 175.8 | 149.6 | 123.4 | 94.5 | 68.2 | 65.6 | 63.0 | 60.4 | 57.7 |
| 67.5° | 275.6 | 228.3 | 183.7 | 154.9 | 128.6 | 99.7 | 70.9 | 68.2 | 65.6 | 63.0 | 60.4 |
| 70° | 265.1 | 223.1 | 181.1 | 154.9 | 128.6 | 102.4 | 76.1 | 73.5 | 68.2 | 65.6 | 60.4 |
| 72.5° | 246.7 | 212.6 | 178.5 | 157.5 | 133.9 | 112.9 | 89.2 | 81.4 | 73.5 | 63.0 | 55.1 |
| 75° | 220.5 | 189.0 | 157.5 | 144.4 | 131.2 | 115.5 | 102.4 | 89.2 | 76.1 | 60.4 | 47.2 |
| 77.5° | 160.1 | 147.0 | 133.9 | 126.0 | 118.1 | 107.6 | 99.7 | 86.6 | 73.5 | 57.7 | 44.6 |
| 80° | 63.0 | 70.9 | 76.1 | 76.1 | 78.7 | 78.7 | 78.7 | 68.2 | 57.7 | 47.2 | 36.7 |
| 82.5° | 18.4 | 18.4 | 18.4 | 21.0 | 23.6 | 26.2 | 28.9 | 26.2 | 26.2 | 23.6 | 21.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 26.2 | 26.2 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 |
| 5° | 26.2 | 26.2 | 23.6 | 23.6 | 23.6 | 23.6 | 21.0 | 21.0 | 21.0 | 21.0 | 21.0 |
| 7.5° | 28.9 | 26.2 | 26.2 | 23.6 | 23.6 | 23.6 | 21.0 | 21.0 | 21.0 | 21.0 | 21.0 |
| 10° | 28.9 | 26.2 | 26.2 | 23.6 | 23.6 | 23.6 | 21.0 | 21.0 | 21.0 | 21.0 | 18.4 |
| 12.5° | 28.9 | 28.9 | 26.2 | 26.2 | 26.2 | 23.6 | 23.6 | 21.0 | 21.0 | 21.0 | 18.4 |
| 15° | 28.9 | 28.9 | 26.2 | 23.6 | 23.6 | 23.6 | 21.0 | 21.0 | 21.0 | 21.0 | 18.4 |
| 17.5° | 28.9 | 28.9 | 26.2 | 23.6 | 23.6 | 21.0 | 21.0 | 18.4 | 18.4 | 18.4 | 15.7 |
| 20° | 28.9 | 28.9 | 26.2 | 23.6 | 23.6 | 21.0 | 21.0 | 18.4 | 18.4 | 18.4 | 15.7 |
| 22.5° | 28.9 | 28.9 | 26.2 | 23.6 | 23.6 | 21.0 | 21.0 | 18.4 | 18.4 | 15.7 | 15.7 |
| 25° | 28.9 | 28.9 | 26.2 | 23.6 | 21.0 | 21.0 | 18.4 | 15.7 | 15.7 | 13.1 | 13.1 |
| 27.5° | 31.5 | 28.9 | 26.2 | 23.6 | 21.0 | 21.0 | 18.4 | 15.7 | 13.1 | 13.1 | 10.5 |
| 30° | 28.9 | 28.9 | 26.2 | 23.6 | 21.0 | 18.4 | 15.7 | 13.1 | 10.5 | 10.5 | 7.9 |
| 32.5° | 28.9 | 28.9 | 26.2 | 23.6 | 21.0 | 18.4 | 15.7 | 13.1 | 10.5 | 10.5 | 7.9 |
| 35° | 28.9 | 26.2 | 23.6 | 21.0 | 18.4 | 15.7 | 13.1 | 10.5 | 7.9 | 7.9 | 5.2 |
| 37.5° | 28.9 | 26.2 | 23.6 | 21.0 | 18.4 | 15.7 | 13.1 | 10.5 | 7.9 | 5.2 | 2.6 |
| 40° | 28.9 | 26.2 | 23.6 | 21.0 | 18.4 | 15.7 | 10.5 | 7.9 | 5.2 | 5.2 | 2.6 |
| 42.5° | 28.9 | 26.2 | 23.6 | 21.0 | 18.4 | 15.7 | 13.1 | 10.5 | 7.9 | 5.2 | 2.6 |
| 45° | 31.5 | 28.9 | 23.6 | 21.0 | 18.4 | 18.4 | 15.7 | 13.1 | 10.5 | 7.9 | 2.6 |
| 47.5° | 31.5 | 26.2 | 23.6 | 18.4 | 18.4 | 18.4 | 15.7 | 15.7 | 13.1 | 7.9 | 5.2 |
| 50° | 34.1 | 28.9 | 26.2 | 21.0 | 18.4 | 18.4 | 15.7 | 13.1 | 10.5 | 7.9 | 2.6 |
| 52.5° | 34.1 | 31.5 | 26.2 | 23.6 | 21.0 | 15.7 | 13.1 | 7.9 | 5.2 | 5.2 | 2.6 |
| 55° | 34.1 | 34.1 | 31.5 | 28.9 | 23.6 | 18.4 | 10.5 | 5.2 | 5.2 | 2.6 | 2.6 |
| 57.5° | *36.7* | *36.7* | *34.1* | *31.5* | *23.6* | *15.7* | *7.9* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 42.0 | 39.4 | 36.7 | 34.1 | 26.2 | 18.4 | 7.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 47.2 | 42.0 | 36.7 | 31.5 | 23.6 | 15.7 | 7.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 49.9 | 42.0 | 34.1 | 26.2 | 21.0 | 13.1 | 7.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 52.5 | 42.0 | 34.1 | 23.6 | 18.4 | 13.1 | 5.2 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 49.9 | 39.4 | 28.9 | 18.4 | 13.1 | 10.5 | 5.2 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 44.6 | 36.7 | 26.2 | 15.7 | 13.1 | 7.9 | 5.2 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 39.4 | 31.5 | 21.0 | 13.1 | 10.5 | 7.9 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 36.7 | 26.2 | 18.4 | 7.9 | 5.2 | 5.2 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 28.9 | 21.0 | 10.5 | 2.6 | 2.6 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 15.7 | 10.5 | 5.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 23.6 | 23.6 | 23.6 | 21.0 | 21.0 | 21.0 | 21.0 | 21.0 | 21.0 | 21.0 | 21.0 |
| 5° | 21.0 | 21.0 | 21.0 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 |
| 7.5° | 21.0 | 21.0 | 21.0 | 18.4 | 18.4 | 18.4 | 18.4 | 15.7 | 15.7 | 15.7 | 15.7 |
| 10° | 18.4 | 18.4 | 18.4 | 15.7 | 15.7 | 15.7 | 15.7 | 13.1 | 13.1 | 13.1 | 13.1 |
| 12.5° | 18.4 | 18.4 | 18.4 | 15.7 | 15.7 | 15.7 | 15.7 | 13.1 | 13.1 | 13.1 | 13.1 |
| 15° | 18.4 | 18.4 | 18.4 | 15.7 | 15.7 | 15.7 | 13.1 | 13.1 | 10.5 | 10.5 | 10.5 |
| 17.5° | 15.7 | 15.7 | 15.7 | 13.1 | 13.1 | 13.1 | 13.1 | 10.5 | 10.5 | 10.5 | 7.9 |
| 20° | 15.7 | 15.7 | 15.7 | 13.1 | 13.1 | 10.5 | 10.5 | 7.9 | 5.2 | 5.2 | 5.2 |
| 22.5° | 13.1 | 13.1 | 10.5 | 10.5 | 7.9 | 7.9 | 5.2 | 5.2 | 2.6 | 2.6 | 2.6 |
| 25° | 10.5 | 10.5 | 7.9 | 7.9 | 5.2 | 5.2 | 2.6 | 2.6 | 0.0 | 0.0 | 0.0 |
| 27.5° | 7.9 | 5.2 | 5.2 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 5.2 | 5.2 | 2.6 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 5.2 | 5.2 | 2.6 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 2.6 | 2.6 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 21.0 | 21.0 | 21.0 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 |
| 5° | 15.7 | 15.7 | 15.7 | 15.7 | 15.7 | 15.7 | 15.7 | 15.7 | 15.7 | 15.7 | 15.7 |
| 7.5° | 13.1 | 13.1 | 13.1 | 13.1 | 13.1 | 13.1 | 13.1 | 13.1 | 10.5 | 10.5 | 10.5 |
| 10° | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 7.9 | 7.9 | 7.9 |
| 12.5° | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 7.9 | 7.9 | 7.9 | 5.2 | 5.2 | 5.2 |
| 15° | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 5.2 | 5.2 | 5.2 | 2.6 | 2.6 | 2.6 |
| 17.5° | 7.9 | 5.2 | 5.2 | 5.2 | 5.2 | 2.6 | 2.6 | 2.6 | 0.0 | 0.0 | 0.0 |
| 20° | 2.6 | 2.6 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 | 18.4 |
| 5° | 15.7 | 13.1 | 13.1 | 13.1 | 13.1 | 13.1 | 13.1 | 13.1 | 13.1 | 13.1 | 13.1 |
| 7.5° | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 |
| 10° | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 |
| 12.5° | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 2.6 | 2.6 |
| 15° | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 18.4 | 21.0 | 21.0 | 21.0 | 21.0 | 23.6 | 23.6 | 23.6 | 26.2 | 26.2 | 28.9 |
| 5° | 13.1 | 15.7 | 15.7 | 15.7 | 15.7 | 18.4 | 18.4 | 18.4 | 21.0 | 21.0 | 23.6 |
| 7.5° | 10.5 | 13.1 | 13.1 | 13.1 | 13.1 | 15.7 | 15.7 | 15.7 | 18.4 | 18.4 | 21.0 |
| 10° | 7.9 | 7.9 | 7.9 | 7.9 | 10.5 | 10.5 | 13.1 | 13.1 | 15.7 | 15.7 | 18.4 |
| 12.5° | 2.6 | 5.2 | 5.2 | 5.2 | 5.2 | 7.9 | 7.9 | 7.9 | 10.5 | 13.1 | 13.1 |
| 15° | 0.0 | 2.6 | 2.6 | 2.6 | 2.6 | 5.2 | 5.2 | 5.2 | 7.9 | 10.5 | 10.5 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 5.2 | 5.2 | 7.9 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 28.9 | 31.5 | 31.5 | 34.1 | 34.1 | 36.7 | 36.7 | 39.4 | 39.4 | 39.4 | 42.0 |
| 5° | 23.6 | 26.2 | 28.9 | 28.9 | 31.5 | 34.1 | 34.1 | 36.7 | 36.7 | 36.7 | 39.4 |
| 7.5° | 21.0 | 23.6 | 26.2 | 26.2 | 28.9 | 31.5 | 31.5 | 34.1 | 34.1 | 34.1 | 36.7 |
| 10° | 18.4 | 21.0 | 23.6 | 23.6 | 26.2 | 28.9 | 28.9 | 31.5 | 31.5 | 34.1 | 34.1 |
| 12.5° | 15.7 | 18.4 | 21.0 | 21.0 | 23.6 | 26.2 | 26.2 | 28.9 | 31.5 | 31.5 | 34.1 |
| 15° | 13.1 | 15.7 | 18.4 | 18.4 | 21.0 | 23.6 | 26.2 | 28.9 | 28.9 | 31.5 | 31.5 |
| 17.5° | 7.9 | 10.5 | 13.1 | 15.7 | 18.4 | 21.0 | 23.6 | 26.2 | 26.2 | 28.9 | 31.5 |
| 20° | 5.2 | 7.9 | 10.5 | 13.1 | 15.7 | 18.4 | 18.4 | 21.0 | 23.6 | 26.2 | 26.2 |
| 22.5° | 2.6 | 5.2 | 7.9 | 7.9 | 10.5 | 13.1 | 15.7 | 18.4 | 18.4 | 21.0 | 23.6 |
| 25° | 0.0 | 2.6 | 5.2 | 5.2 | 7.9 | 10.5 | 10.5 | 13.1 | 15.7 | 18.4 | 18.4 |
| 27.5° | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 | 7.9 | 10.5 | 13.1 | 13.1 | 15.7 | 15.7 |
| 30° | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 | 7.9 | 7.9 | 10.5 | 10.5 | 13.1 | 15.7 |
| 32.5° | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 5.2 | 7.9 | 10.5 | 10.5 | 13.1 | 13.1 |
| 35° | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 5.2 | 5.2 | 7.9 | 7.9 | 10.5 | 10.5 |
| 37.5° | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 5.2 | 5.2 | 7.9 | 7.9 | 10.5 | 10.5 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 5.2 | 7.9 | 7.9 | 7.9 | 10.5 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 | 7.9 | 7.9 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 | 7.9 | 7.9 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 | 7.9 | 7.9 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 | 7.9 | 7.9 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 | 5.2 | 7.9 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 | 5.2 | 7.9 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *2.6* | *2.6* | *2.6* | *5.2* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 5.2 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 5.2 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 5.2 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 5.2 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 5.2 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 5.2 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 2.6 | 2.6 | 5.2 | 5.2 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 | 5.2 | 7.9 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 | 5.2 | 7.9 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.6 | 2.6 | 5.2 | 5.2 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 42.0 | 42.0 | 42.0 | 42.0 | 42.0 | 42.0 | 42.0 | 42.0 | 39.4 | 39.4 | 39.4 |
| 5° | 39.4 | 39.4 | 39.4 | 39.4 | 39.4 | 39.4 | 39.4 | 39.4 | 36.7 | 36.7 | 36.7 |
| 7.5° | 36.7 | 36.7 | 36.7 | 39.4 | 39.4 | 39.4 | 39.4 | 39.4 | 36.7 | 36.7 | 36.7 |
| 10° | 36.7 | 36.7 | 36.7 | 39.4 | 39.4 | 39.4 | 39.4 | 39.4 | 36.7 | 36.7 | 36.7 |
| 12.5° | 34.1 | 34.1 | 34.1 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 |
| 15° | 34.1 | 34.1 | 34.1 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 |
| 17.5° | 31.5 | 34.1 | 34.1 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 |
| 20° | 28.9 | 28.9 | 31.5 | 31.5 | 34.1 | 34.1 | 34.1 | 36.7 | 36.7 | 36.7 | 36.7 |
| 22.5° | 23.6 | 26.2 | 28.9 | 28.9 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 25° | 21.0 | 21.0 | 23.6 | 26.2 | 26.2 | 28.9 | 28.9 | 28.9 | 28.9 | 28.9 | 28.9 |
| 27.5° | 18.4 | 18.4 | 21.0 | 21.0 | 23.6 | 23.6 | 23.6 | 26.2 | 26.2 | 26.2 | 26.2 |
| 30° | 15.7 | 18.4 | 18.4 | 21.0 | 21.0 | 21.0 | 23.6 | 23.6 | 26.2 | 26.2 | 26.2 |
| 32.5° | 15.7 | 15.7 | 18.4 | 18.4 | 21.0 | 21.0 | 21.0 | 23.6 | 23.6 | 23.6 | 23.6 |
| 35° | 13.1 | 13.1 | 15.7 | 15.7 | 18.4 | 18.4 | 21.0 | 21.0 | 23.6 | 23.6 | 23.6 |
| 37.5° | 13.1 | 13.1 | 15.7 | 15.7 | 18.4 | 18.4 | 18.4 | 21.0 | 21.0 | 21.0 | 23.6 |
| 40° | 10.5 | 10.5 | 13.1 | 13.1 | 15.7 | 15.7 | 18.4 | 18.4 | 21.0 | 21.0 | 23.6 |
| 42.5° | 10.5 | 10.5 | 13.1 | 13.1 | 15.7 | 15.7 | 18.4 | 18.4 | 21.0 | 21.0 | 23.6 |
| 45° | 10.5 | 10.5 | 13.1 | 13.1 | 15.7 | 15.7 | 18.4 | 18.4 | 21.0 | 21.0 | 23.6 |
| 47.5° | 10.5 | 10.5 | 13.1 | 13.1 | 15.7 | 15.7 | 15.7 | 18.4 | 18.4 | 18.4 | 21.0 |
| 50° | 10.5 | 10.5 | 10.5 | 13.1 | 13.1 | 13.1 | 15.7 | 15.7 | 18.4 | 18.4 | 21.0 |
| 52.5° | 7.9 | 7.9 | 7.9 | 10.5 | 10.5 | 10.5 | 13.1 | 13.1 | 15.7 | 15.7 | 18.4 |
| 55° | 7.9 | 7.9 | 7.9 | 10.5 | 10.5 | 10.5 | 10.5 | 13.1 | 13.1 | 13.1 | 15.7 |
| 57.5° | *5.2* | *5.2* | *5.2* | *7.9* | *7.9* | *7.9* | *7.9* | *10.5* | *10.5* | *10.5* | *13.1* |
| 60° | 5.2 | 5.2 | 5.2 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 10.5 |
| 62.5° | 5.2 | 5.2 | 5.2 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 10.5 |
| 65° | 5.2 | 5.2 | 5.2 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 10.5 |
| 67.5° | 5.2 | 5.2 | 5.2 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 10.5 |
| 70° | 5.2 | 5.2 | 5.2 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 10.5 |
| 72.5° | 5.2 | 5.2 | 5.2 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 10.5 |
| 75° | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 |
| 77.5° | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 |
| 80° | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 |
| 82.5° | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 |
| 85° | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 |
| 87.5° | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 | 7.9 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 39.4 | 39.4 | 39.4 | 39.4 | 39.4 | 36.7 | 36.7 | 36.7 | 39.4 | 39.4 | 39.4 |
| 5° | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 |
| 7.5° | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 34.1 | 34.1 | 34.1 | 36.7 | 36.7 | 36.7 |
| 10° | 36.7 | 34.1 | 34.1 | 34.1 | 34.1 | 34.1 | 34.1 | 34.1 | 36.7 | 36.7 | 36.7 |
| 12.5° | 36.7 | 34.1 | 34.1 | 34.1 | 34.1 | 34.1 | 34.1 | 34.1 | 36.7 | 36.7 | 36.7 |
| 15° | 36.7 | 34.1 | 34.1 | 34.1 | 34.1 | 34.1 | 34.1 | 36.7 | 36.7 | 39.4 | 39.4 |
| 17.5° | 34.1 | 34.1 | 31.5 | 31.5 | 34.1 | 34.1 | 34.1 | 34.1 | 36.7 | 36.7 | 36.7 |
| 20° | 34.1 | 34.1 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 34.1 | 34.1 | 36.7 | 36.7 |
| 22.5° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 34.1 | 34.1 | 36.7 | 36.7 |
| 25° | 28.9 | 28.9 | 28.9 | 28.9 | 31.5 | 31.5 | 31.5 | 34.1 | 36.7 | 36.7 | 39.4 |
| 27.5° | 28.9 | 28.9 | 28.9 | 28.9 | 31.5 | 31.5 | 31.5 | 34.1 | 36.7 | 36.7 | 39.4 |
| 30° | 28.9 | 28.9 | 28.9 | 28.9 | 31.5 | 31.5 | 31.5 | 34.1 | 36.7 | 36.7 | 39.4 |
| 32.5° | 26.2 | 26.2 | 26.2 | 28.9 | 28.9 | 31.5 | 31.5 | 34.1 | 36.7 | 36.7 | 39.4 |
| 35° | 26.2 | 26.2 | 26.2 | 28.9 | 28.9 | 31.5 | 31.5 | 34.1 | 36.7 | 36.7 | 39.4 |
| 37.5° | 23.6 | 26.2 | 26.2 | 28.9 | 31.5 | 31.5 | 34.1 | 36.7 | 39.4 | 39.4 | 42.0 |
| 40° | 23.6 | 26.2 | 26.2 | 28.9 | 31.5 | 31.5 | 34.1 | 36.7 | 39.4 | 39.4 | 42.0 |
| 42.5° | 23.6 | 26.2 | 26.2 | 28.9 | 31.5 | 31.5 | 34.1 | 36.7 | 39.4 | 42.0 | 44.6 |
| 45° | 26.2 | 26.2 | 28.9 | 31.5 | 31.5 | 34.1 | 34.1 | 36.7 | 39.4 | 42.0 | 44.6 |
| 47.5° | 26.2 | 28.9 | 31.5 | 31.5 | 34.1 | 34.1 | 34.1 | 36.7 | 42.0 | 44.6 | 47.2 |
| 50° | 23.6 | 26.2 | 28.9 | 31.5 | 31.5 | 34.1 | 34.1 | 36.7 | 42.0 | 44.6 | 47.2 |
| 52.5° | 21.0 | 21.0 | 23.6 | 26.2 | 31.5 | 34.1 | 36.7 | 39.4 | 44.6 | 47.2 | 49.9 |
| 55° | 18.4 | 18.4 | 21.0 | 26.2 | 31.5 | 36.7 | 42.0 | 44.6 | 47.2 | 47.2 | 49.9 |
| 57.5° | *15.7* | *15.7* | *18.4* | *26.2* | *34.1* | *42.0* | *49.9* | *49.9* | *52.5* | *52.5* | *52.5* |
| 60° | 13.1 | 13.1 | 15.7 | 23.6 | 34.1 | 42.0 | 49.9 | 52.5 | 55.1 | 55.1 | 57.7 |
| 62.5° | 13.1 | 13.1 | 15.7 | 23.6 | 31.5 | 36.7 | 44.6 | 49.9 | 55.1 | 60.4 | 65.6 |
| 65° | 10.5 | 13.1 | 13.1 | 21.0 | 26.2 | 34.1 | 39.4 | 47.2 | 55.1 | 63.0 | 70.9 |
| 67.5° | 10.5 | 13.1 | 13.1 | 18.4 | 26.2 | 31.5 | 36.7 | 44.6 | 55.1 | 63.0 | 70.9 |
| 70° | 13.1 | 13.1 | 15.7 | 21.0 | 23.6 | 28.9 | 31.5 | 42.0 | 49.9 | 60.4 | 68.2 |
| 72.5° | 10.5 | 13.1 | 13.1 | 18.4 | 21.0 | 26.2 | 28.9 | 39.4 | 47.2 | 57.7 | 65.6 |
| 75° | 10.5 | 10.5 | 10.5 | 15.7 | 18.4 | 23.6 | 26.2 | 34.1 | 44.6 | 52.5 | 60.4 |
| 77.5° | 7.9 | 7.9 | 7.9 | 13.1 | 15.7 | 21.0 | 23.6 | 31.5 | 42.0 | 49.9 | 57.7 |
| 80° | 7.9 | 7.9 | 7.9 | 10.5 | 13.1 | 13.1 | 15.7 | 23.6 | 34.1 | 42.0 | 49.9 |
| 82.5° | 7.9 | 5.2 | 5.2 | 7.9 | 7.9 | 10.5 | 10.5 | 15.7 | 21.0 | 26.2 | 31.5 |
| 85° | 7.9 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 |
| 87.5° | 7.9 | 5.2 | 5.2 | 5.2 | 5.2 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 39.4 | 39.4 | 39.4 | 39.4 | 39.4 | 42.0 | 42.0 | 42.0 | 42.0 | 42.0 | 42.0 |
| 5° | 39.4 | 39.4 | 42.0 | 42.0 | 42.0 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 |
| 7.5° | 39.4 | 39.4 | 42.0 | 42.0 | 42.0 | 44.6 | 44.6 | 44.6 | 47.2 | 47.2 | 49.9 |
| 10° | 39.4 | 39.4 | 42.0 | 42.0 | 44.6 | 44.6 | 47.2 | 47.2 | 49.9 | 49.9 | 52.5 |
| 12.5° | 39.4 | 42.0 | 42.0 | 44.6 | 47.2 | 49.9 | 49.9 | 52.5 | 55.1 | 55.1 | 57.7 |
| 15° | 42.0 | 42.0 | 44.6 | 44.6 | 47.2 | 49.9 | 52.5 | 55.1 | 57.7 | 60.4 | 63.0 |
| 17.5° | 39.4 | 42.0 | 44.6 | 47.2 | 49.9 | 52.5 | 55.1 | 57.7 | 63.0 | 65.6 | 70.9 |
| 20° | 39.4 | 42.0 | 44.6 | 47.2 | 49.9 | 55.1 | 57.7 | 60.4 | 65.6 | 70.9 | 78.7 |
| 22.5° | 39.4 | 42.0 | 44.6 | 47.2 | 52.5 | 57.7 | 60.4 | 65.6 | 73.5 | 78.7 | 89.2 |
| 25° | 42.0 | 44.6 | 47.2 | 49.9 | 55.1 | 60.4 | 65.6 | 70.9 | 81.4 | 89.2 | 112.9 |
| 27.5° | 42.0 | 47.2 | 49.9 | 52.5 | 57.7 | 65.6 | 70.9 | 76.1 | 91.9 | 105.0 | 157.5 |
| 30° | 42.0 | 47.2 | 49.9 | 52.5 | 60.4 | 68.2 | 76.1 | 84.0 | 110.2 | 133.9 | 223.1 |
| 32.5° | 42.0 | 47.2 | 49.9 | 52.5 | 63.0 | 76.1 | 86.6 | 97.1 | 131.2 | 165.3 | 270.3 |
| 35° | 44.6 | 47.2 | 52.5 | 55.1 | 68.2 | 81.4 | 91.9 | 105.0 | 136.5 | 168.0 | 294.0 |
| 37.5° | 47.2 | 49.9 | 55.1 | 57.7 | 68.2 | 78.7 | 89.2 | 99.7 | 133.9 | 165.3 | 322.8 |
| 40° | 47.2 | 52.5 | 55.1 | 60.4 | 68.2 | 78.7 | 86.6 | 94.5 | 131.2 | 168.0 | 372.7 |
| 42.5° | 49.9 | 55.1 | 57.7 | 63.0 | 70.9 | 78.7 | 84.0 | 91.9 | 139.1 | 186.3 | 485.5 |
| 45° | 49.9 | 52.5 | 57.7 | 60.4 | 68.2 | 76.1 | 84.0 | 91.9 | 175.8 | 257.2 | 771.6 |
| 47.5° | 49.9 | 52.5 | 55.1 | 57.7 | 68.2 | 78.7 | 86.6 | 97.1 | 259.8 | 422.6 | 1275.6 |
| 50° | 49.9 | 52.5 | 52.5 | 55.1 | 65.6 | 78.7 | 89.2 | 99.7 | 338.6 | 574.8 | 1839.8 |
| 52.5° | 52.5 | 55.1 | 55.1 | 57.7 | 70.9 | 84.0 | 97.1 | 110.2 | 388.4 | 666.6 | 1997.3 |
| 55° | 52.5 | 55.1 | 55.1 | 57.7 | 78.7 | 99.7 | 118.1 | 139.1 | 409.4 | 677.1 | 1834.6 |
| 57.5° | *55.1* | *57.7* | *60.4* | *63.0* | *84.0* | *107.6* | *128.6* | *149.6* | *391.1* | *632.5* | *1503.9* |
| 60° | 63.0 | 65.6 | 70.9 | 73.5 | 97.1 | 120.7 | 141.7 | 165.3 | 312.3 | 459.3 | 1183.7 |
| 62.5° | 70.9 | 73.5 | 78.7 | 81.4 | 105.0 | 128.6 | 152.2 | 175.8 | 275.6 | 372.7 | 881.9 |
| 65° | 73.5 | 78.7 | 81.4 | 84.0 | 107.6 | 133.9 | 157.5 | 181.1 | 252.0 | 320.2 | 653.5 |
| 67.5° | 76.1 | 81.4 | 84.0 | 89.2 | 112.9 | 136.5 | 160.1 | 183.7 | 238.8 | 291.3 | 485.5 |
| 70° | 76.1 | 81.4 | 89.2 | 94.5 | 115.5 | 136.5 | 154.9 | 175.8 | 220.5 | 262.5 | 372.7 |
| 72.5° | 76.1 | 86.6 | 97.1 | 107.6 | 123.4 | 139.1 | 152.2 | 168.0 | 202.1 | 233.6 | 288.7 |
| 75° | 76.1 | 91.9 | 105.0 | 120.7 | 128.6 | 136.5 | 144.4 | 152.2 | 175.8 | 196.8 | 228.3 |
| 77.5° | 73.5 | 86.6 | 102.4 | 115.5 | 118.1 | 120.7 | 123.4 | 126.0 | 126.0 | 126.0 | 126.0 |
| 80° | 60.4 | 73.5 | 84.0 | 94.5 | 89.2 | 81.4 | 76.1 | 68.2 | 63.0 | 57.7 | 63.0 |
| 82.5° | 31.5 | 34.1 | 34.1 | 34.1 | 31.5 | 31.5 | 28.9 | 26.2 | 26.2 | 23.6 | 23.6 |
| 85° | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 |
| 87.5° | 2.6 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 42.0 | 42.0 | 42.0 | 42.0 | 42.0 | 42.0 | 42.0 | 39.4 | 39.4 | 39.4 | 39.4 |
| 5° | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 42.0 | 42.0 | 42.0 | 42.0 |
| 7.5° | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 |
| 10° | 52.5 | 55.1 | 55.1 | 57.7 | 57.7 | 57.7 | 60.4 | 60.4 | 60.4 | 60.4 | 60.4 |
| 12.5° | 60.4 | 63.0 | 63.0 | 65.6 | 65.6 | 68.2 | 68.2 | 70.9 | 70.9 | 70.9 | 73.5 |
| 15° | 65.6 | 68.2 | 70.9 | 73.5 | 76.1 | 81.4 | 84.0 | 89.2 | 91.9 | 94.5 | 97.1 |
| 17.5° | 76.1 | 81.4 | 89.2 | 94.5 | 99.7 | 110.2 | 120.7 | 128.6 | 139.1 | 152.2 | 168.0 |
| 20° | 84.0 | 102.4 | 118.1 | 136.5 | 152.2 | 199.5 | 246.7 | 294.0 | 341.2 | 404.2 | 467.2 |
| 22.5° | 99.7 | 157.5 | 217.8 | 275.6 | 333.3 | 488.2 | 640.4 | 792.6 | 947.5 | 1094.5 | 1241.4 |
| 25° | 136.5 | 259.8 | 385.8 | 509.2 | 632.5 | 892.4 | 1149.6 | 1406.8 | 1666.6 | 1915.9 | 2167.9 |
| 27.5° | 207.3 | 406.8 | 606.3 | 805.7 | 1005.2 | 1346.4 | 1685.0 | 2023.6 | 2364.8 | 2666.6 | 2965.8 |
| 30° | 312.3 | 569.5 | 826.7 | 1084.0 | 1341.2 | 1782.1 | 2223.0 | 2664.0 | 3104.9 | 3398.8 | 3692.8 |
| 32.5° | 372.7 | 708.6 | 1044.6 | 1377.9 | 1713.9 | 2194.2 | 2674.5 | 3157.4 | 3637.7 | 3973.6 | 4309.6 |
| 35° | 417.3 | 834.6 | 1249.3 | 1666.6 | 2081.3 | 2616.7 | 3152.1 | 3690.2 | 4225.6 | 4627.1 | 5028.7 |
| 37.5° | 477.7 | 979.0 | 1477.6 | 1978.9 | 2477.6 | 3055.0 | 3632.4 | 4212.5 | 4789.9 | 5285.9 | 5784.6 |
| 40° | 574.8 | 1170.6 | 1766.3 | 2359.5 | 2955.3 | 3679.7 | 4404.1 | 5128.4 | 5852.8 | 6511.6 | 7170.4 |
| 42.5° | 784.8 | 1569.5 | 2356.9 | 3141.6 | 3926.4 | 5010.3 | 6091.7 | 7173.0 | 8257.0 | 9188.7 | 10120.4 |
| 45° | 1286.0 | 2506.5 | 3726.9 | 4947.3 | 6167.8 | 7464.3 | 8758.3 | 10054.8 | 11351.3 | 12729.3 | 14107.2 |
| 47.5° | 2128.5 | 3810.9 | 5493.3 | 7173.0 | 8855.4 | 10191.3 | 11524.6 | 12857.9 | 14193.8 | 15479.8 | 16765.9 |
| 50° | 3104.9 | 4915.9 | 6726.8 | 8537.8 | 10348.8 | 11542.9 | 12734.5 | 13926.1 | 15120.3 | 16382.7 | 17642.5 |
| 52.5° | 3328.0 | 5138.9 | 6949.9 | 8758.3 | 10569.2 | 11773.9 | 12978.6 | 14185.9 | 15390.6 | 16624.1 | 17860.3 |
| 55° | 2989.4 | 4784.6 | 6577.2 | 8372.4 | 10165.0 | 11487.8 | 12810.6 | 14133.4 | 15456.2 | 16839.4 | 18222.5 |
| 57.5° | *2375.3* | *4188.8* | *5999.8* | *7813.4* | *9624.4* | *11193.9* | *12760.7* | *14330.3* | *15899.8* | *17359.0* | *18818.3* |
| 60° | 1908.1 | 3758.4 | 5608.7 | 7459.1 | 9309.4 | 10983.9 | 12655.8 | 14327.6 | 16002.1 | 17243.5 | 18485.0 |
| 62.5° | 1391.0 | 3223.0 | 5055.0 | 6886.9 | 8718.9 | 10220.1 | 11721.4 | 13225.3 | 14726.6 | 15608.4 | 16490.3 |
| 65° | 986.8 | 2606.2 | 4225.6 | 5842.3 | 7461.7 | 8503.7 | 9545.6 | 10587.6 | 11629.6 | 12393.3 | 13157.1 |
| 67.5° | 679.8 | 1821.5 | 2960.5 | 4102.2 | 5241.3 | 6128.4 | 7012.9 | 7900.0 | 8787.1 | 9430.1 | 10075.8 |
| 70° | 482.9 | 1105.0 | 1727.0 | 2346.4 | 2968.4 | 3753.2 | 4537.9 | 5322.7 | 6107.4 | 6892.2 | 7679.5 |
| 72.5° | 343.8 | 616.8 | 887.1 | 1160.1 | 1430.4 | 2112.8 | 2795.2 | 3480.2 | 4162.6 | 4637.6 | 5115.3 |
| 75° | 259.8 | 333.3 | 404.2 | 477.7 | 548.5 | 713.9 | 879.2 | 1044.6 | 1209.9 | 1377.9 | 1545.9 |
| 77.5° | 123.4 | 136.5 | 147.0 | 160.1 | 170.6 | 212.6 | 254.6 | 296.6 | 338.6 | 409.4 | 480.3 |
| 80° | 65.6 | 70.9 | 76.1 | 81.4 | 86.6 | 89.2 | 91.9 | 94.5 | 97.1 | 105.0 | 115.5 |
| 82.5° | 23.6 | 26.2 | 26.2 | 28.9 | 28.9 | 26.2 | 26.2 | 23.6 | 21.0 | 23.6 | 23.6 |
| 85° | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | *31.5* | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 36.7 | 36.7 | 36.7 | 36.7 | 34.1 | *34.1* | 34.1 | 34.1 | 31.5 | 31.5 | 31.5 |
| 5° | 42.0 | 42.0 | 42.0 | 42.0 | 39.4 | *39.4* | 39.4 | 39.4 | 36.7 | 36.7 | 36.7 |
| 7.5° | 49.9 | 49.9 | 49.9 | 49.9 | 47.2 | *47.2* | 47.2 | 47.2 | 44.6 | 44.6 | 44.6 |
| 10° | 60.4 | 60.4 | 60.4 | 60.4 | 60.4 | *60.4* | 60.4 | 60.4 | 57.7 | 57.7 | 57.7 |
| 12.5° | 73.5 | 73.5 | 73.5 | 73.5 | 73.5 | *73.5* | 73.5 | 73.5 | 70.9 | 70.9 | 70.9 |
| 15° | 97.1 | 99.7 | 102.4 | 105.0 | 105.0 | *107.6* | 105.0 | 102.4 | 99.7 | 97.1 | 94.5 |
| 17.5° | 181.1 | 194.2 | 199.5 | 202.1 | 207.3 | *210.0* | 207.3 | 202.1 | 199.5 | 194.2 | 181.1 |
| 20° | 527.5 | 590.5 | 635.2 | 679.8 | 724.4 | *769.0* | 742.8 | 716.5 | 690.3 | 664.0 | 595.8 |
| 22.5° | 1388.4 | 1535.4 | 1637.7 | 1740.1 | 1842.5 | *1944.8* | 1874.0 | 1803.1 | 1729.6 | 1658.7 | 1485.5 |
| 25° | 2417.2 | 2666.6 | 2797.8 | 2931.7 | 3062.9 | *3194.1* | 3073.4 | 2952.7 | 2829.3 | 2708.6 | 2467.1 |
| 27.5° | 3267.6 | 3566.8 | 3679.7 | 3789.9 | 3902.8 | *4013.0* | 3905.4 | 3800.4 | 3692.8 | 3585.2 | 3304.4 |
| 30° | 3986.7 | 4280.7 | 4390.9 | 4501.2 | 4611.4 | *4721.6* | 4600.9 | 4477.5 | 4356.8 | 4233.5 | 3955.3 |
| 32.5° | 4642.9 | 4978.8 | 5131.1 | 5283.3 | 5435.5 | *5587.7* | 5406.7 | 5225.6 | 5044.5 | 4863.4 | 4545.8 |
| 35° | 5430.3 | 5831.8 | 6010.3 | 6191.4 | 6369.9 | *6548.3* | 6333.1 | 6115.3 | 5900.1 | 5682.2 | 5280.7 |
| 37.5° | 6280.6 | 6776.7 | 7015.5 | 7254.4 | 7493.2 | *7732.0* | 7464.3 | 7196.6 | 6928.9 | 6661.2 | 6149.4 |
| 40° | 7829.1 | 8487.9 | 8842.2 | 9193.9 | 9548.3 | *9899.9* | 9498.4 | 9094.2 | 8692.6 | 8288.5 | 7585.1 |
| 42.5° | 11049.5 | 11981.2 | 12485.2 | 12989.1 | 13493.0 | *13996.9* | 13411.6 | 12823.7 | 12238.5 | 11650.5 | 10679.5 |
| 45° | 15485.1 | 16863.0 | 17419.4 | 17973.2 | 18529.6 | *19083.4* | 18422.0 | 17760.6 | 17096.6 | 16435.2 | 15130.8 |
| 47.5° | 18051.9 | 19338.0 | 19883.9 | 20429.8 | 20973.1 | *21519.0* | 20897.0 | 20274.9 | 19652.9 | 19030.9 | 17758.0 |
| 50° | 18904.9 | 20164.7 | 20765.7 | 21369.4 | 21970.4 | *22571.5* | 21860.2 | 21146.3 | 20435.0 | 19721.2 | 18498.1 |
| 52.5° | 19093.9 | 20327.4 | 21036.1 | 21744.7 | 22450.7 | *23159.4* | 22337.9 | 21516.4 | 20692.3 | 19870.8 | 18658.2 |
| 55° | 19603.1 | 20986.2 | 21802.5 | 22616.1 | 23432.3 | *24245.9* | 23288.0 | 22327.4 | 21369.4 | 20408.8 | 19078.1 |
| 57.5° | *20277.6* | *21736.8* | *22482.2* | *23227.6* | *23970.4* | *24715.8* | *23789.3* | *22865.4* | *21938.9* | *21012.5* | *19624.0* |
| 60° | 19723.8 | 20965.2 | 21587.2 | 22206.6 | 22828.7 | *23448.1* | 22610.8 | 21776.2 | 20939.0 | 20101.7 | 18944.3 |
| 62.5° | 17369.5 | 18251.4 | 18731.7 | 19212.0 | 19689.7 | *20170.0* | 19482.3 | 18794.7 | 18107.0 | 17419.4 | 16579.5 |
| 65° | 13918.2 | 14681.9 | 15028.4 | 15372.2 | 15718.7 | *16062.5* | 15584.8 | 15107.1 | 14626.8 | 14149.2 | 13443.1 |
| 67.5° | 10718.8 | 11361.8 | 11897.3 | 12430.1 | 12965.5 | *13498.3* | 12918.2 | 12338.2 | 11755.5 | 11175.5 | 10498.4 |
| 70° | 8464.3 | 9249.0 | 9690.0 | 10130.9 | 10571.8 | *11012.8* | 10508.9 | 10004.9 | 9498.4 | 8994.5 | 8285.8 |
| 72.5° | 5590.4 | 6065.4 | 6222.9 | 6383.0 | 6540.5 | *6697.9* | 6514.2 | 6333.1 | 6149.4 | 5965.7 | 5516.9 |
| 75° | 1711.2 | 1879.2 | 2065.6 | 2254.5 | 2440.9 | *2627.2* | 2459.2 | 2291.3 | 2123.3 | 1955.3 | 1803.1 |
| 77.5° | 548.5 | 619.4 | 674.5 | 729.6 | 782.1 | *837.2* | 839.9 | 842.5 | 842.5 | 845.1 | 763.8 |
| 80° | 123.4 | 131.2 | 131.2 | 131.2 | 128.6 | *128.6* | 141.7 | 152.2 | 165.3 | 175.8 | 165.3 |
| 82.5° | 26.2 | 26.2 | 26.2 | 26.2 | 26.2 | *26.2* | 26.2 | 26.2 | 23.6 | 23.6 | 23.6 |
| 85° | 2.6 | 2.6 | 2.6 | 2.6 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 |
| 2.5° | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 31.5 | 28.9 | 28.9 |
| 5° | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 36.7 | 34.1 | 34.1 |
| 7.5° | 44.6 | 44.6 | 44.6 | 44.6 | 44.6 | 42.0 | 42.0 | 42.0 | 42.0 | 39.4 | 39.4 |
| 10° | 57.7 | 55.1 | 55.1 | 55.1 | 52.5 | 52.5 | 49.9 | 49.9 | 47.2 | 47.2 | 44.6 |
| 12.5° | 70.9 | 68.2 | 68.2 | 65.6 | 65.6 | 63.0 | 60.4 | 57.7 | 55.1 | 52.5 | 49.9 |
| 15° | 91.9 | 89.2 | 86.6 | 84.0 | 78.7 | 76.1 | 70.9 | 68.2 | 65.6 | 63.0 | 60.4 |
| 17.5° | 168.0 | 154.9 | 141.7 | 128.6 | 118.1 | 105.0 | 91.9 | 86.6 | 78.7 | 73.5 | 65.6 |
| 20° | 530.2 | 461.9 | 393.7 | 333.3 | 273.0 | 210.0 | 149.6 | 131.2 | 112.9 | 94.5 | 76.1 |
| 22.5° | 1314.9 | 1141.7 | 968.5 | 818.9 | 669.3 | 519.7 | 370.1 | 301.8 | 233.6 | 165.3 | 97.1 |
| 25° | 2225.7 | 1981.6 | 1740.1 | 1477.6 | 1217.8 | 955.4 | 692.9 | 556.4 | 417.3 | 278.2 | 141.7 |
| 27.5° | 3023.5 | 2742.7 | 2461.9 | 2115.4 | 1769.0 | 1419.9 | 1073.5 | 863.5 | 650.9 | 438.3 | 228.3 |
| 30° | 3679.7 | 3401.5 | 3123.3 | 2698.1 | 2270.3 | 1845.1 | 1417.3 | 1144.3 | 871.4 | 595.8 | 322.8 |
| 32.5° | 4228.2 | 3910.6 | 3593.1 | 3125.9 | 2661.3 | 2194.2 | 1727.0 | 1388.4 | 1052.5 | 713.9 | 375.3 |
| 35° | 4876.5 | 4474.9 | 4070.7 | 3572.1 | 3076.0 | 2577.3 | 2078.7 | 1666.6 | 1251.9 | 837.2 | 425.2 |
| 37.5° | 5637.6 | 5125.8 | 4614.0 | 4073.4 | 3535.3 | 2994.7 | 2454.0 | 1965.8 | 1480.3 | 992.1 | 503.9 |
| 40° | 6884.3 | 6180.9 | 5477.5 | 4829.2 | 4178.3 | 3530.1 | 2879.2 | 2314.9 | 1750.6 | 1183.7 | 619.4 |
| 42.5° | 9708.4 | 8737.3 | 7766.2 | 6795.1 | 5821.3 | 4850.2 | 3876.5 | 3107.5 | 2341.1 | 1572.1 | 803.1 |
| 45° | 13826.3 | 12521.9 | 11217.5 | 9915.7 | 8613.9 | 7312.1 | 6010.3 | 4816.1 | 3621.9 | 2425.1 | 1230.9 |
| 47.5° | 16485.0 | 15212.1 | 13939.2 | 12692.5 | 11448.5 | 10201.8 | 8955.1 | 7275.4 | 5595.6 | 3913.3 | 2233.5 |
| 50° | 17277.7 | 16054.6 | 14831.5 | 13718.7 | 12608.5 | 11495.7 | 10382.9 | 8606.0 | 6831.8 | 5055.0 | 3278.1 |
| 52.5° | 17445.6 | 16230.5 | 15017.9 | 13902.4 | 12789.6 | 11674.2 | 10558.7 | 8789.7 | 7020.8 | 5249.2 | 3480.2 |
| 55° | 17747.5 | 16416.8 | 15086.1 | 13834.2 | 12582.3 | 11327.7 | 10075.8 | 8309.4 | 6543.1 | 4776.8 | 3010.4 |
| 57.5° | *18235.6* | *16844.6* | *15456.2* | *13965.4* | *12474.7* | *10983.9* | *9493.1* | *7711.0* | *5928.9* | *4146.8* | *2364.8* |
| 60° | 17786.8 | 16626.8 | 15469.3 | 13863.1 | 12254.2 | 10648.0 | 9039.1 | 7228.1 | 5414.5 | 3600.9 | 1790.0 |
| 62.5° | 15737.0 | 14897.2 | 14054.7 | 12629.5 | 11204.4 | 9779.2 | 8354.1 | 6590.3 | 4826.6 | 3062.9 | 1299.2 |
| 65° | 12734.5 | 12028.5 | 11319.9 | 10191.3 | 9062.7 | 7931.5 | 6802.9 | 5317.4 | 3834.5 | 2349.0 | 863.5 |
| 67.5° | 9821.2 | 9144.1 | 8466.9 | 7577.2 | 6687.5 | 5797.7 | 4908.0 | 3826.7 | 2745.3 | 1661.4 | 580.0 |
| 70° | 7577.2 | 6868.5 | 6159.9 | 5359.4 | 4558.9 | 3758.4 | 2957.9 | 2328.0 | 1700.7 | 1070.8 | 440.9 |
| 72.5° | 5068.1 | 4619.3 | 4170.5 | 3506.5 | 2842.4 | 2178.4 | 1514.4 | 1225.7 | 937.0 | 645.6 | 356.9 |
| 75° | 1648.2 | 1496.0 | 1341.2 | 1160.1 | 979.0 | 795.3 | 614.2 | 532.8 | 448.8 | 364.8 | 283.5 |
| 77.5° | 679.8 | 598.4 | 514.4 | 438.3 | 359.6 | 283.5 | 204.7 | 191.6 | 178.5 | 165.3 | 152.2 |
| 80° | 152.2 | 141.7 | 128.6 | 120.7 | 112.9 | 105.0 | 97.1 | 91.9 | 84.0 | 78.7 | 70.9 |
| 82.5° | 21.0 | 21.0 | 18.4 | 21.0 | 23.6 | 26.2 | 28.9 | 26.2 | 26.2 | 23.6 | 21.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 0° | 31.5 | 31.5 |
| 2.5° | 28.9 | 28.9 |
| 5° | 34.1 | 31.5 |
| 7.5° | 39.4 | 36.7 |
| 10° | 44.6 | 42.0 |
| 12.5° | 49.9 | 47.2 |
| 15° | 57.7 | 52.5 |
| 17.5° | 63.0 | 57.7 |
| 20° | 70.9 | 63.0 |
| 22.5° | 84.0 | 70.9 |
| 25° | 110.2 | 81.4 |
| 27.5° | 162.7 | 99.7 |
| 30° | 228.3 | 133.9 |
| 32.5° | 270.3 | 165.3 |
| 35° | 294.0 | 165.3 |
| 37.5° | 333.3 | 162.7 |
| 40° | 393.7 | 170.6 |
| 42.5° | 493.4 | 186.3 |
| 45° | 732.3 | 233.6 |
| 47.5° | 1328.0 | 422.6 |
| 50° | 1968.4 | 661.4 |
| 52.5° | 2099.7 | 719.1 |
| 55° | 1829.3 | 648.3 |
| 57.5° | *1456.6* | *548.5* |
| 60° | 1099.7 | 412.1 |
| 62.5° | 816.2 | 335.9 |
| 65° | 580.0 | 296.6 |
| 67.5° | 427.8 | 275.6 |
| 70° | 351.7 | 265.1 |
| 72.5° | 301.8 | 246.7 |
| 75° | 252.0 | 220.5 |
| 77.5° | 157.5 | 160.1 |
| 80° | 68.2 | 63.0 |
| 82.5° | 21.0 | 18.4 |
| 85° | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389927
CATALOG NUMBER: GSS-SA3A-730-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 112.5° | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-4

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-730-U-5WQ

Data in this report applies to families of products including GSS-SB1A-730-U-5WQ


Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04

## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-184-4 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 10/15/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | McGraw-Edison |
| Catalog Number: | **GSS-SB1A-730-U-5WQ** |
| Description: | GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI 3000K CCT 26 LEDS |

## Spectral Parameters

| | | | | | |
|---|---|---|---|---|---|
| CCT (K): | 2985 | CRI (Ra): | 70.8 | | |
| CIE u': | 0.2504 | R1: | 66.3 | R9: | -43.2 |
| CIE v': | 0.5243 | R2: | 80.6 | R10: | 57.6 |
| Duv: | 0.0019 | R3: | 94.5 | R11: | 64.8 |
| CIE x: | 0.4408 | R4: | 68.2 | R12: | 53.5 |
| CIE y: | 0.4101 | R5: | 66.5 | R13: | 68.7 |
| CIE z: | 0.1491 | R6: | 74.7 | R14: | 97.0 |
| Peak Wavelength (nm): | 595 | R7: | 76.2 | R15: | 56.4 |
| Dominant Wavelength (nm): | 582 | R8: | 39.6 | | |
| Purity: | 55.41818 | | | | |
| Rf: | 73.8 | | | | |
| Rg: | 94.4 | | | | |

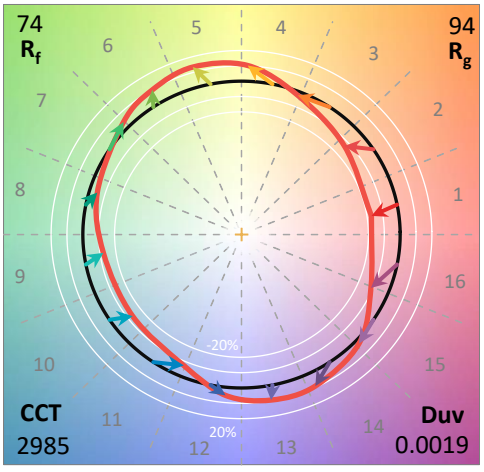


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 36M |
| Operation Time: | 1H 36M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-184-4


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-184-4

## CIE 1931 Chromaticity Diagram

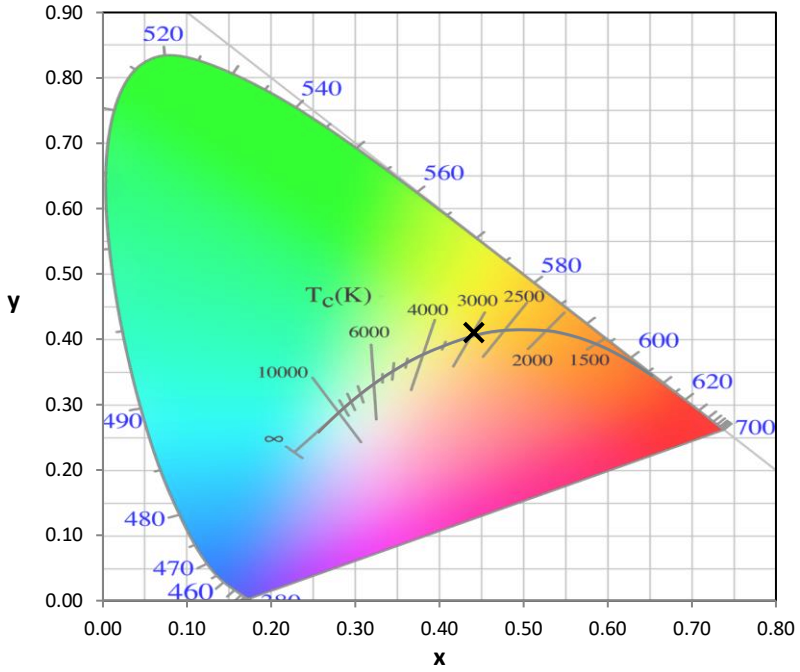


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

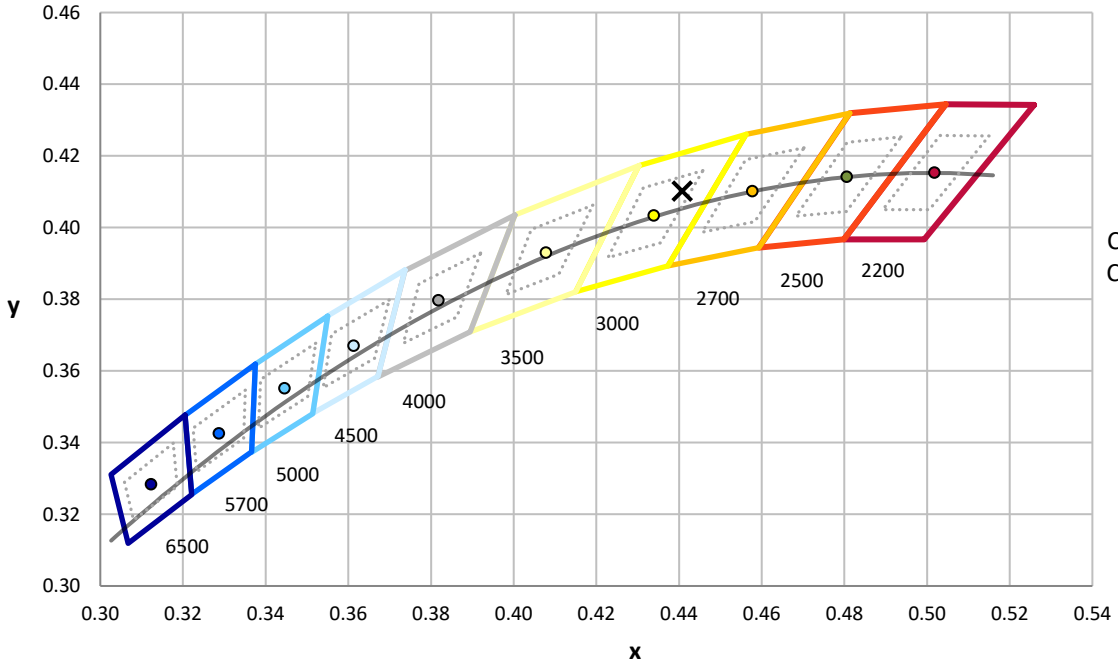



CCT = 2985K
CIE x = 0.4408
CIE y = 0.4101
Duv = 0.0019

Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-4

## Photopic Flux vs. Wavelength

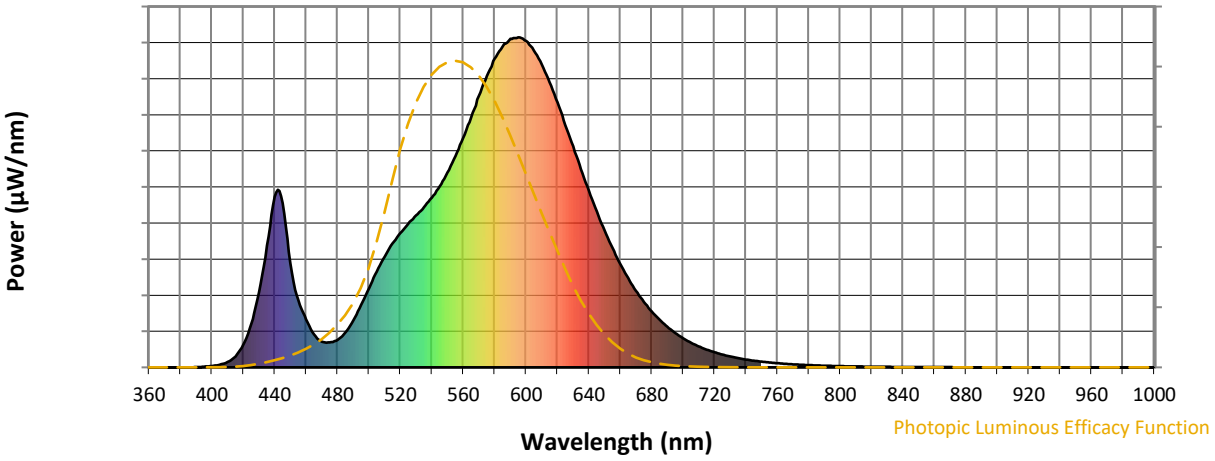



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 142 | NR | 620 | 803 | NR | 750 | 17 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 189 | NR | 625 | 734 | NR | 755 | 15 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 240 | NR | 630 | 670 | NR | 760 | 13 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 290 | NR | 635 | 600 | NR | 765 | 11 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 335 | NR | 640 | 535 | NR | 770 | 9 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 375 | NR | 645 | 473 | NR | 775 | 8 | NR | 905 | 0 | NR |
| 390 | 1 | NR | 520 | 408 | NR | 650 | 415 | NR | 780 | 7 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 434 | NR | 655 | 362 | NR | 785 | 6 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 461 | NR | 660 | 313 | NR | 790 | 5 | NR | 920 | 0 | NR |
| 405 | 8 | NR | 535 | 486 | NR | 665 | 271 | NR | 795 | 4 | NR | 925 | 0 | NR |
| 410 | 16 | NR | 540 | 514 | NR | 670 | 231 | NR | 800 | 4 | NR | 930 | 0 | NR |
| 415 | 33 | NR | 545 | 549 | NR | 675 | 198 | NR | 805 | 3 | NR | 935 | 0 | NR |
| 420 | 69 | NR | 550 | 591 | NR | 680 | 169 | NR | 810 | 3 | NR | 940 | 0 | NR |
| 425 | 131 | NR | 555 | 640 | NR | 685 | 144 | NR | 815 | 2 | NR | 945 | 0 | NR |
| 430 | 227 | NR | 560 | 695 | NR | 690 | 123 | NR | 820 | 2 | NR | 950 | 0 | NR |
| 435 | 369 | NR | 565 | 757 | NR | 695 | 104 | NR | 825 | 2 | NR | 955 | 0 | NR |
| 440 | 517 | NR | 570 | 822 | NR | 700 | 88 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 498 | NR | 575 | 882 | NR | 705 | 75 | NR | 835 | 1 | NR | 965 | 0 | NR |
| 450 | 315 | NR | 580 | 935 | NR | 710 | 63 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 204 | NR | 585 | 972 | NR | 715 | 54 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 145 | NR | 590 | 996 | NR | 720 | 46 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 100 | NR | 595 | 1000 | NR | 725 | 39 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 78 | NR | 600 | 989 | NR | 730 | 33 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 76 | NR | 605 | 960 | NR | 735 | 28 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 83 | NR | 610 | 918 | NR | 740 | 24 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 105 | NR | 615 | 864 | NR | 745 | 20 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-4

## Scotopic Flux vs. Wavelength

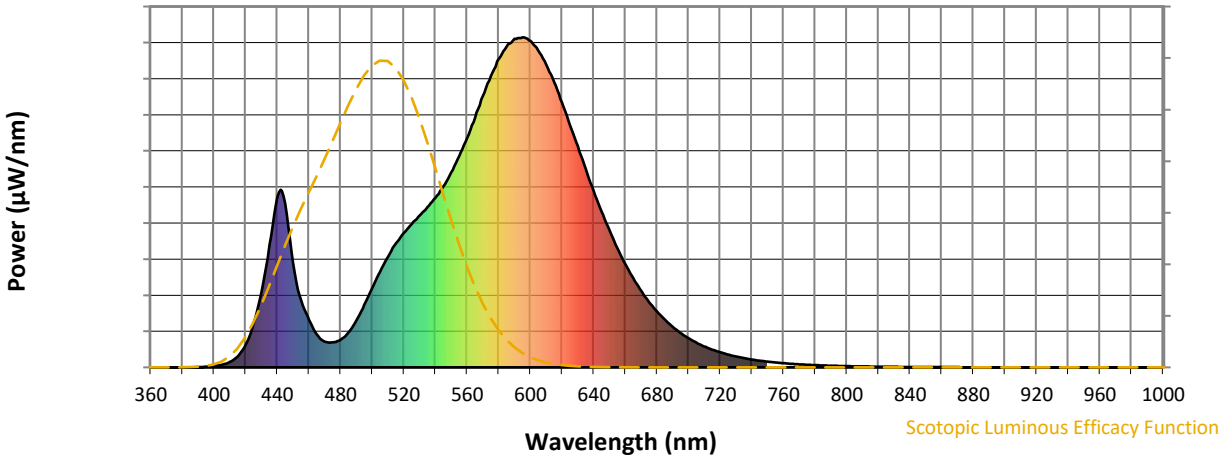



**Scotopic Lumens: NR** **S/P: 1.19**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 142 | NR | 620 | 803 | NR | 750 | 17 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 189 | NR | 625 | 734 | NR | 755 | 15 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 240 | NR | 630 | 670 | NR | 760 | 13 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 290 | NR | 635 | 600 | NR | 765 | 11 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 335 | NR | 640 | 535 | NR | 770 | 9 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 375 | NR | 645 | 473 | NR | 775 | 8 | NR | 905 | 0 | NR |
| 390 | 1 | NR | 520 | 408 | NR | 650 | 415 | NR | 780 | 7 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 434 | NR | 655 | 362 | NR | 785 | 6 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 461 | NR | 660 | 313 | NR | 790 | 5 | NR | 920 | 0 | NR |
| 405 | 8 | NR | 535 | 486 | NR | 665 | 271 | NR | 795 | 4 | NR | 925 | 0 | NR |
| 410 | 16 | NR | 540 | 514 | NR | 670 | 231 | NR | 800 | 4 | NR | 930 | 0 | NR |
| 415 | 33 | NR | 545 | 549 | NR | 675 | 198 | NR | 805 | 3 | NR | 935 | 0 | NR |
| 420 | 69 | NR | 550 | 591 | NR | 680 | 169 | NR | 810 | 3 | NR | 940 | 0 | NR |
| 425 | 131 | NR | 555 | 640 | NR | 685 | 144 | NR | 815 | 2 | NR | 945 | 0 | NR |
| 430 | 227 | NR | 560 | 695 | NR | 690 | 123 | NR | 820 | 2 | NR | 950 | 0 | NR |
| 435 | 369 | NR | 565 | 757 | NR | 695 | 104 | NR | 825 | 2 | NR | 955 | 0 | NR |
| 440 | 517 | NR | 570 | 822 | NR | 700 | 88 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 498 | NR | 575 | 882 | NR | 705 | 75 | NR | 835 | 1 | NR | 965 | 0 | NR |
| 450 | 315 | NR | 580 | 935 | NR | 710 | 63 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 204 | NR | 585 | 972 | NR | 715 | 54 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 145 | NR | 590 | 996 | NR | 720 | 46 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 100 | NR | 595 | 1000 | NR | 725 | 39 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 78 | NR | 600 | 989 | NR | 730 | 33 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 76 | NR | 605 | 960 | NR | 735 | 28 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 83 | NR | 610 | 918 | NR | 740 | 24 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 105 | NR | 615 | 864 | NR | 745 | 20 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-4

## Melanopic Flux vs. Wavelength

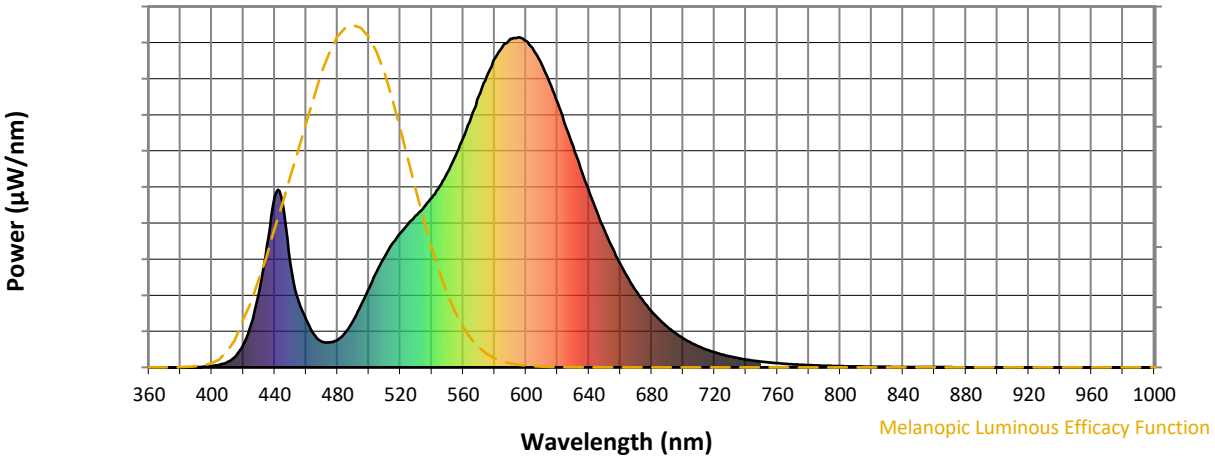


**Melanopic Lumens: NR** **M/P: 2.13**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 142 | NR | 620 | 803 | NR | 750 | 17 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 189 | NR | 625 | 734 | NR | 755 | 15 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 240 | NR | 630 | 670 | NR | 760 | 13 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 290 | NR | 635 | 600 | NR | 765 | 11 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 335 | NR | 640 | 535 | NR | 770 | 9 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 375 | NR | 645 | 473 | NR | 775 | 8 | NR | 905 | 0 | NR |
| 390 | 1 | NR | 520 | 408 | NR | 650 | 415 | NR | 780 | 7 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 434 | NR | 655 | 362 | NR | 785 | 6 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 461 | NR | 660 | 313 | NR | 790 | 5 | NR | 920 | 0 | NR |
| 405 | 8 | NR | 535 | 486 | NR | 665 | 271 | NR | 795 | 4 | NR | 925 | 0 | NR |
| 410 | 16 | NR | 540 | 514 | NR | 670 | 231 | NR | 800 | 4 | NR | 930 | 0 | NR |
| 415 | 33 | NR | 545 | 549 | NR | 675 | 198 | NR | 805 | 3 | NR | 935 | 0 | NR |
| 420 | 69 | NR | 550 | 591 | NR | 680 | 169 | NR | 810 | 3 | NR | 940 | 0 | NR |
| 425 | 131 | NR | 555 | 640 | NR | 685 | 144 | NR | 815 | 2 | NR | 945 | 0 | NR |
| 430 | 227 | NR | 560 | 695 | NR | 690 | 123 | NR | 820 | 2 | NR | 950 | 0 | NR |
| 435 | 369 | NR | 565 | 757 | NR | 695 | 104 | NR | 825 | 2 | NR | 955 | 0 | NR |
| 440 | 517 | NR | 570 | 822 | NR | 700 | 88 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 498 | NR | 575 | 882 | NR | 705 | 75 | NR | 835 | 1 | NR | 965 | 0 | NR |
| 450 | 315 | NR | 580 | 935 | NR | 710 | 63 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 204 | NR | 585 | 972 | NR | 715 | 54 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 145 | NR | 590 | 996 | NR | 720 | 46 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 100 | NR | 595 | 1000 | NR | 725 | 39 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 78 | NR | 600 | 989 | NR | 730 | 33 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 76 | NR | 605 | 960 | NR | 735 | 28 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 83 | NR | 610 | 918 | NR | 740 | 24 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 105 | NR | 615 | 864 | NR | 745 | 20 | NR | 875 | 1 | NR | | | |


REPORT NUMBER: SP1-2407-184-4

# TM-30-18


## Summary


$R_f$ = 73.8
$R_g$ = 94.4
CIE $R_a$ = 70.8
$R_9$ = -43.2


## Spectral Power Distribution Comparison

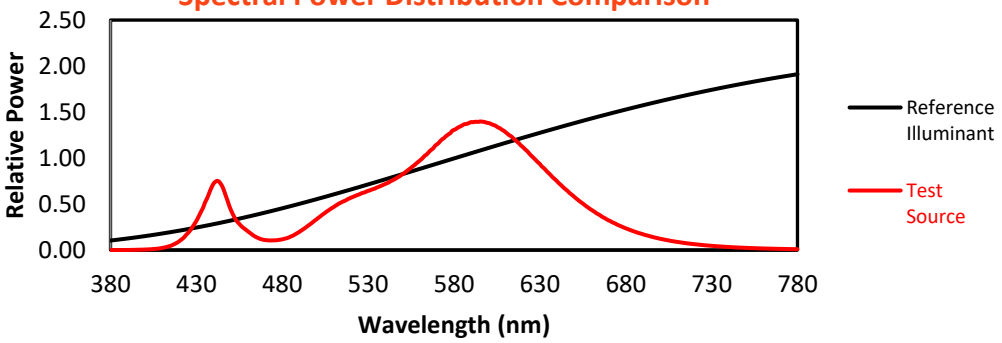



## Color Vector Graphics

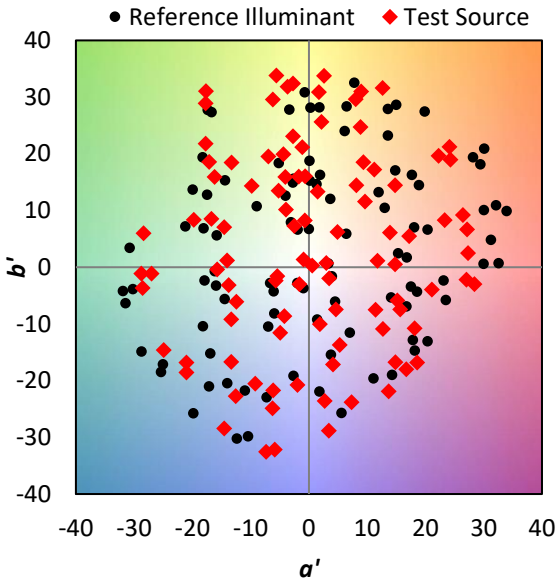

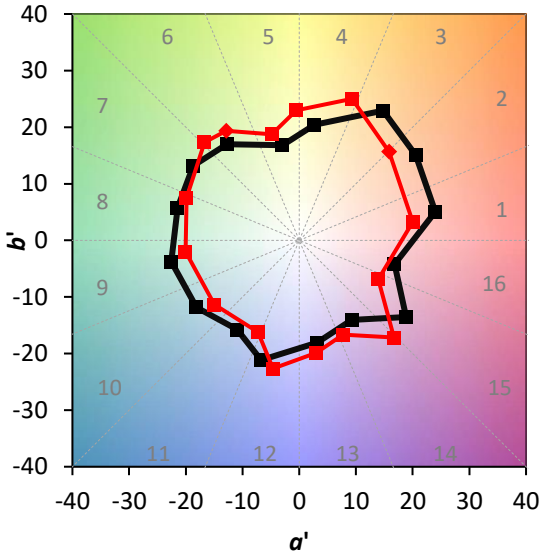


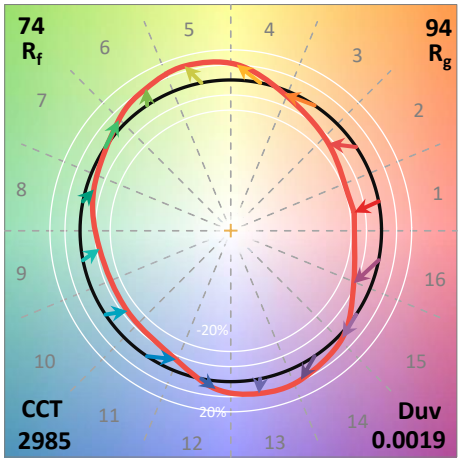
REPORT NUMBER: SP1-2407-184-4
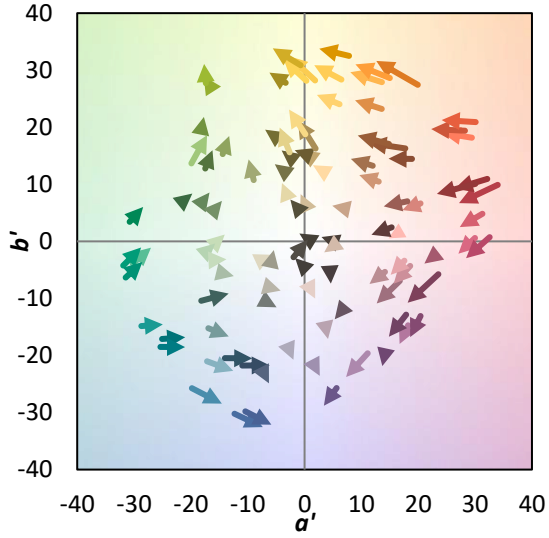
# TM-30-18

**Individual Sample Fidelity Index ($R_{f,i}$)**


| | | | |
|---|---|---|---|
| CES01 = 86 | CES26 = 63 | CES51 = 86 | CES76 = 61 |
| CES02 = 62 | CES27 = 83 | CES52 = 86 | CES77 = 81 |
| CES03 = 31 | CES28 = 86 | CES53 = 75 | CES78 = 64 |
| CES04 = 71 | CES29 = 58 | CES54 = 81 | CES79 = 86 |
| CES05 = 49 | CES30 = 61 | CES55 = 80 | CES80 = 86 |
| CES06 = 51 | CES31 = 63 | CES56 = 71 | CES81 = 70 |
| CES07 = 41 | CES32 = 61 | CES57 = 69 | CES82 = 94 |
| CES08 = 40 | CES33 = 65 | CES58 = 72 | CES83 = 88 |
| CES09 = 29 | CES34 = 77 | CES59 = 85 | CES84 = 90 |
| CES10 = 76 | CES35 = 88 | CES60 = 93 | CES85 = 80 |
| CES11 = 59 | CES36 = 89 | CES61 = 86 | CES86 = 60 |
| CES12 = 65 | CES37 = 85 | CES62 = 81 | CES87 = 78 |
| CES13 = 43 | CES38 = 69 | CES63 = 73 | CES88 = 75 |
| CES14 = 74 | CES39 = 93 | CES64 = 72 | CES89 = 66 |
| CES15 = 71 | CES40 = 89 | CES65 = 67 | CES90 = 72 |
| CES16 = 47 | CES41 = 83 | CES66 = 70 | CES91 = 95 |
| CES17 = 50 | CES42 = 87 | CES67 = 68 | CES92 = 59 |
| CES18 = 56 | CES43 = 77 | CES68 = 73 | CES93 = 76 |
| CES19 = 73 | CES44 = 99 | CES69 = 83 | CES94 = 48 |
| CES20 = 66 | CES45 = 83 | CES70 = 66 | CES95 = 70 |
| CES21 = 87 | CES46 = 77 | CES71 = 66 | CES96 = 76 |
| CES22 = 79 | CES47 = 74 | CES72 = 88 | CES97 = 82 |
| CES23 = 92 | CES48 = 62 | CES73 = 59 | CES98 = 73 |
| CES24 = 91 | CES49 = 77 | CES74 = 93 | CES99 = 60 |
| CES25 = 73 | CES50 = 85 | CES75 = 67 | |

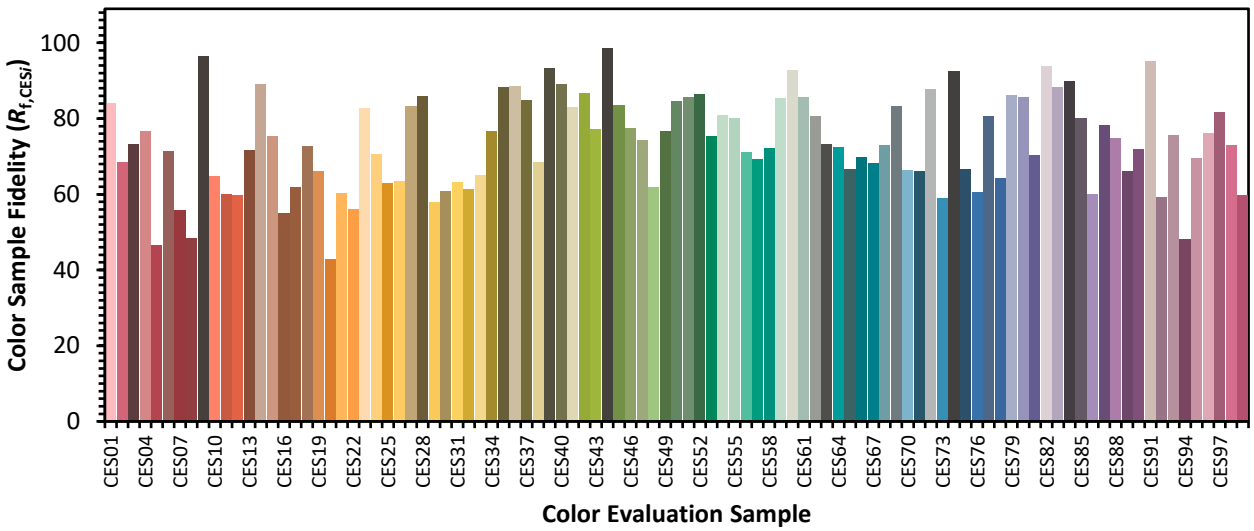



REPORT NUMBER: SP1-2407-184-4

**TM-30-18**

## Color Rendition by Hue-Angle Bin

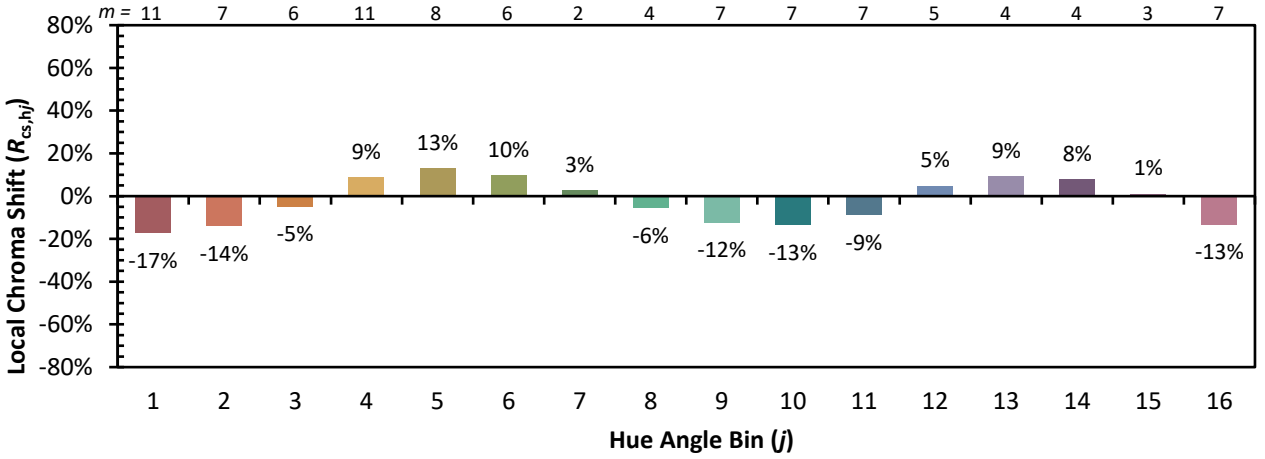

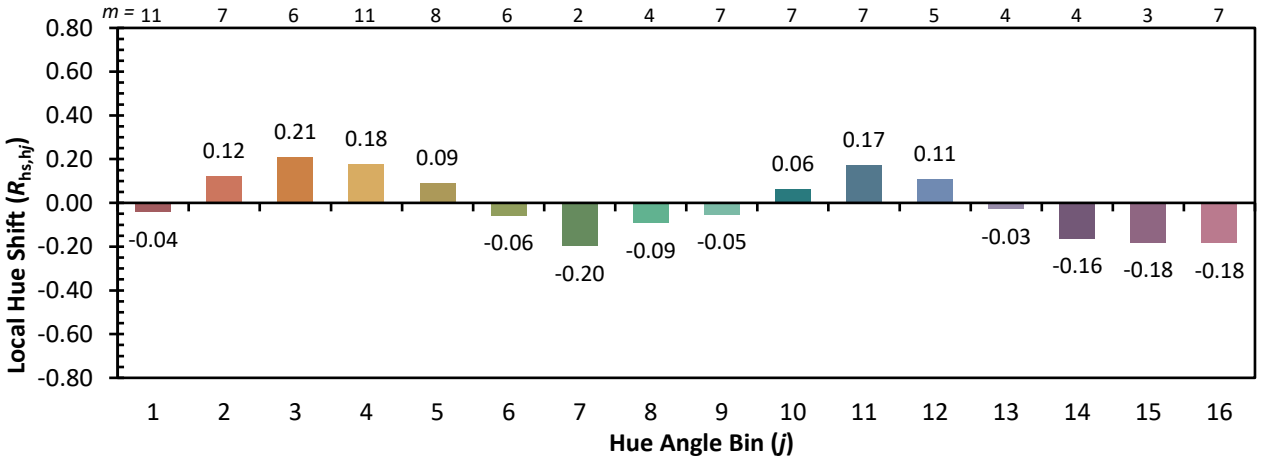


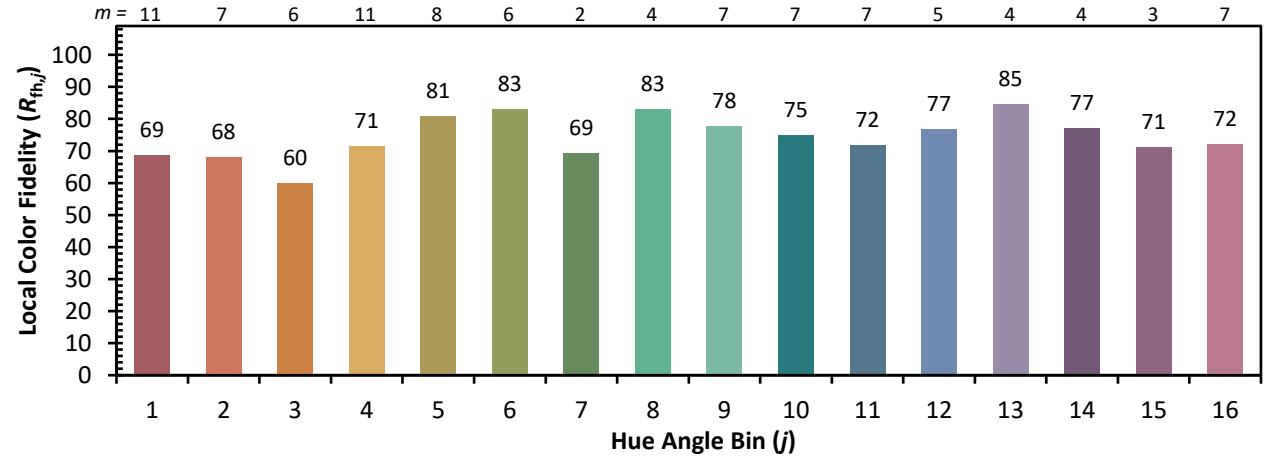
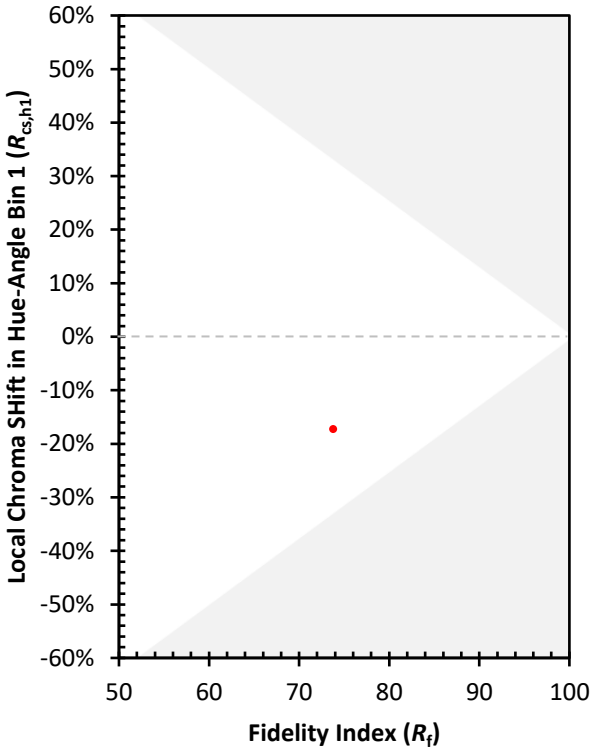



REPORT NUMBER: SP1-2407-184-4

## TM-30-18

### Measure Comparisons

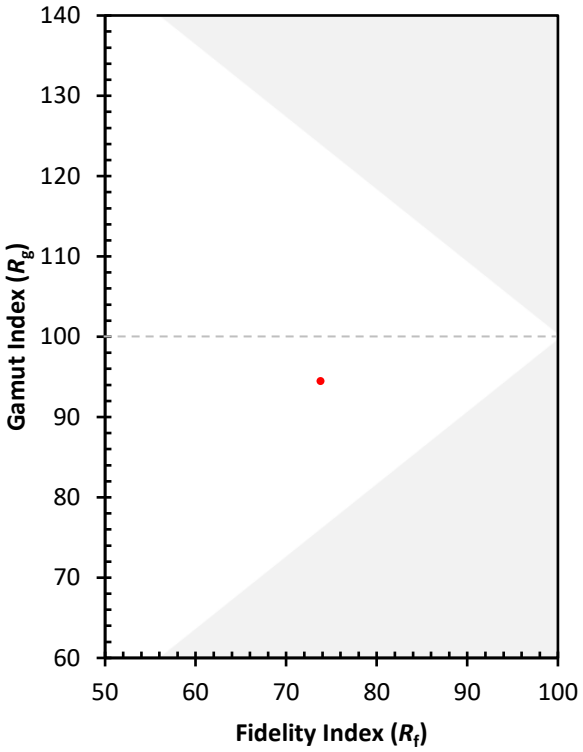


(END OF REPORT)