Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1389858

Luminaire Tested: **GSS-SA3D-740-U-RBC**

Issue Date: 02/18/2026

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P1389858 |
| Test Lab: | INNOVATION CENTER(G3) |
| Issue Date: | 02/18/2026 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | GSS-SA3D-740-U-RBC |
| Description: | GALLEON SLIM SITE LUMINAIRE 1200mA 3xLight Square PACKAGE 70CRI 4000K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL |
| Light Source: | (42) 4000K CCT, 70 CRI LEDS |
| Ballast/Driver: | ELECTRONIC DRIVER |

Luminaire Equipment:

| Sample No. | Condition | Description |
|---|---|---|
| a | good | reflector |
| b | good | lens |
| c | good | housing |
| d | good | cord |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 15376.7 lumens |
| Efficiency: | N/A |
| Efficacy: | 95.6 lumens/watt |
| Luminous Opening: | Rectangular (W 1.5' x L: 0.5' x H: 0') |
| IES Classification: | Type III - Short |
| BUG Rating: | B0 - U0 - G3 |


| | |
|---|---|
| Input Watts (W): | 160.9 |
| Input Voltage (V): | 120 |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | 0.97 |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 28.75 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

## Iso-Footcandle Lines of Horizontal Illumination

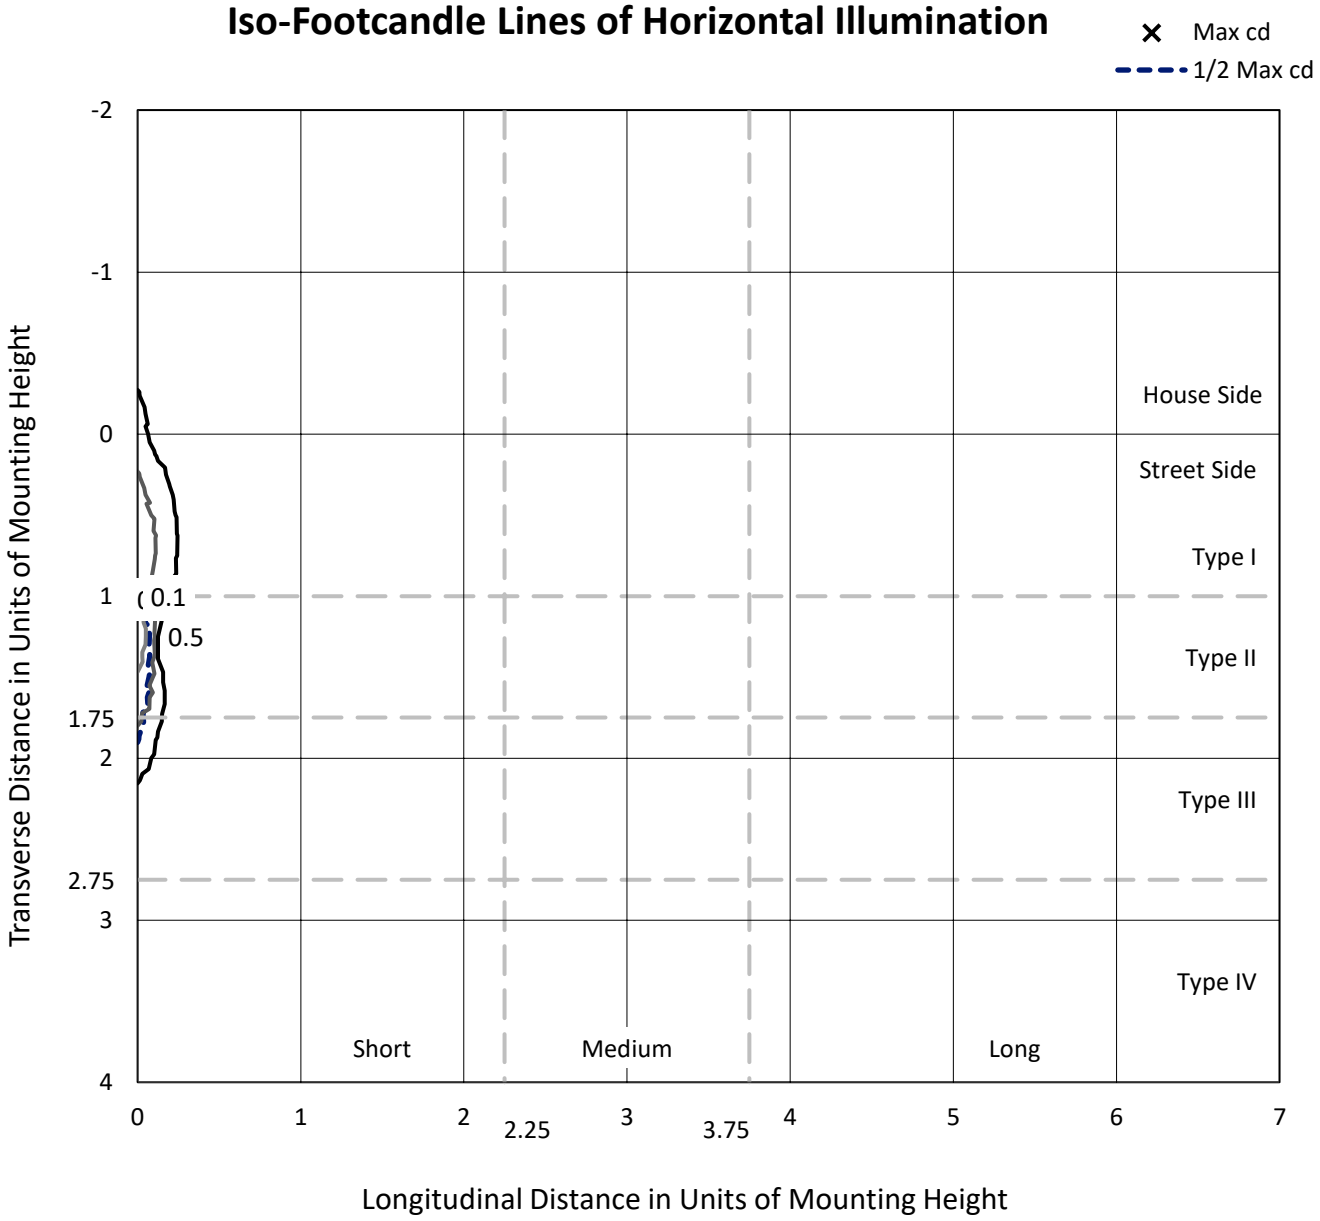



Based on 20 foot mounting height. Maximum calculated value = 0.8 fc
Type III - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

## Luminous Intensity Polar Plot

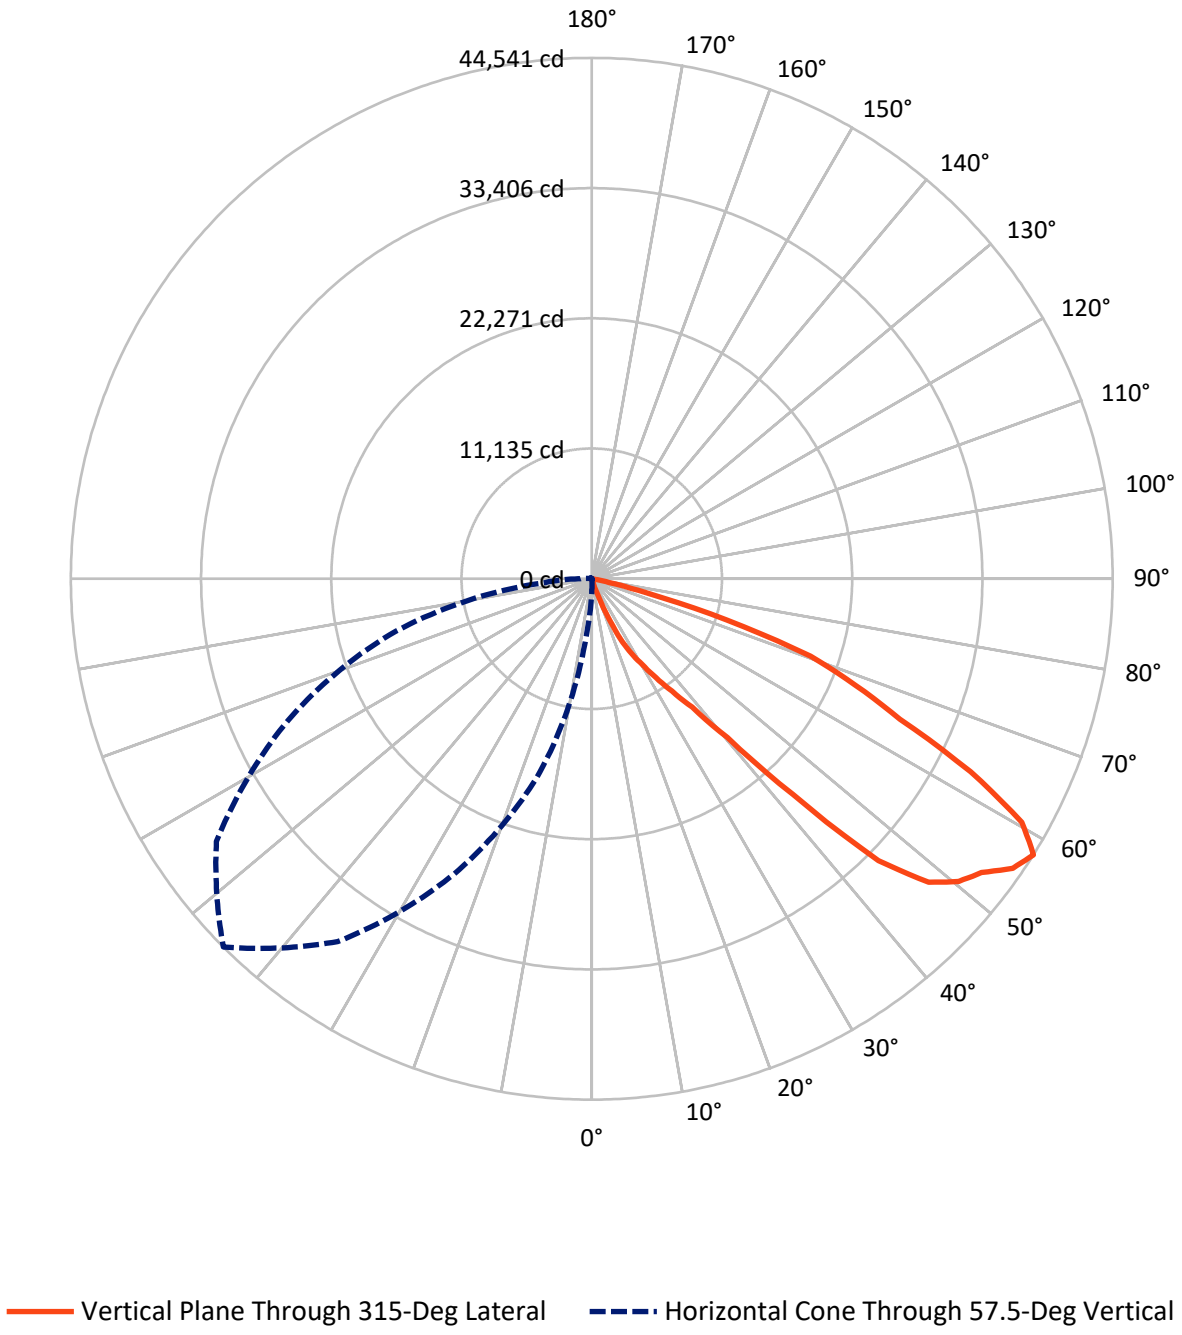

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 109.8 | 0.0 | 109.8 |
| | % Fixture | 0.7 | 0.0 | 0.7 |
| **Street Side** | Lumens | 15266.9 | 0.0 | 15266.9 |
| | % Fixture | 99.3 | 0.0 | 99.3 |
| **Total** | Lumens | 15376.7 | 0.0 | 15376.7 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 5.3 | 0.0 |
| 10°-20° | 25.9 | 0.2 |
| 20°-30° | 332.8 | 2.2 |
| 30°-40° | 1037.7 | 6.7 |
| 40°-50° | 3389.4 | 22.0 |
| 50°-60° | 5440.2 | 35.4 |
| 60°-70° | 4177.1 | 27.2 |
| 70°-80° | 951.2 | 6.2 |
| 80°-90° | 16.9 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 15376.7 | 100.0 |
| 0°-180° | 15376.7 | 100.0 |

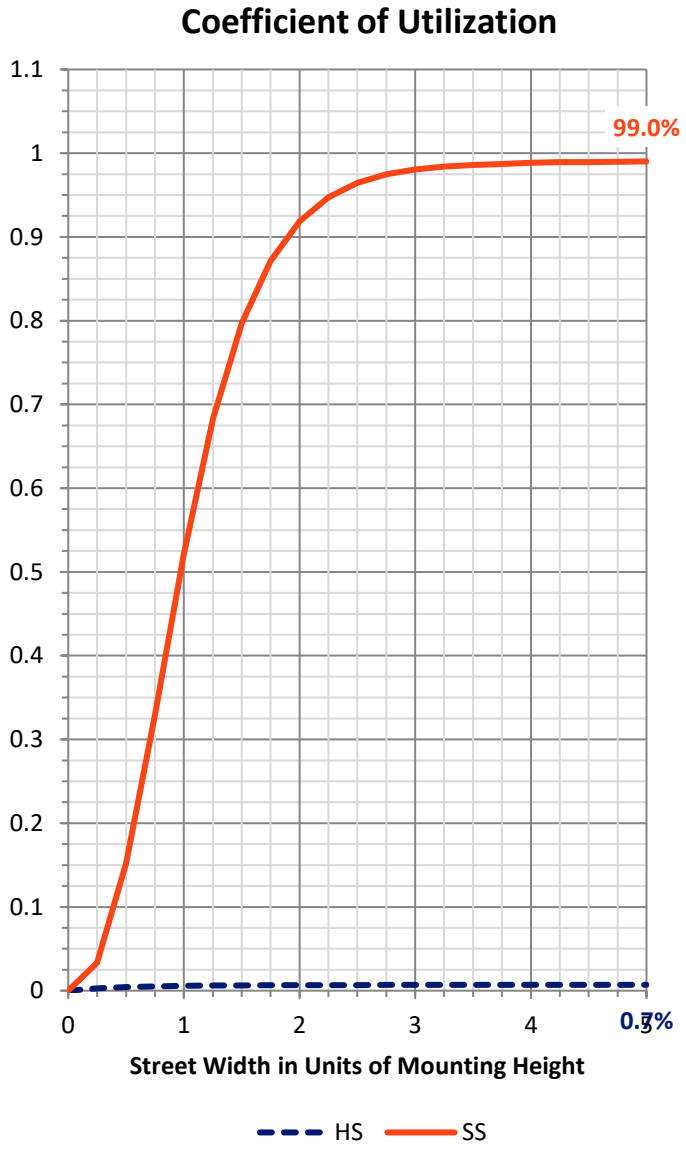

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 348.3 | 2.3 | | | |
| FM | (30°-60°) | 9821.1 | 63.9 | | | |
| FH | (60°-80°) | 5085.5 | 33.1 | | | G3/7500 |
| FVH | (80°-90°) | 12.0 | 0.1 | | | G1/100 |
| BL | (0°-30°) | 15.8 | 0.1 | B0/110 | | |
| BM | (30°-60°) | 46.3 | 0.3 | B0/220 | | |
| BH | (60°-80°) | 42.8 | 0.3 | B0/110 | | G0/110 |
| BVH | (80°-90°) | 4.9 | 0.0 | | | G0/10 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B0-U0-G3**
Type III Short

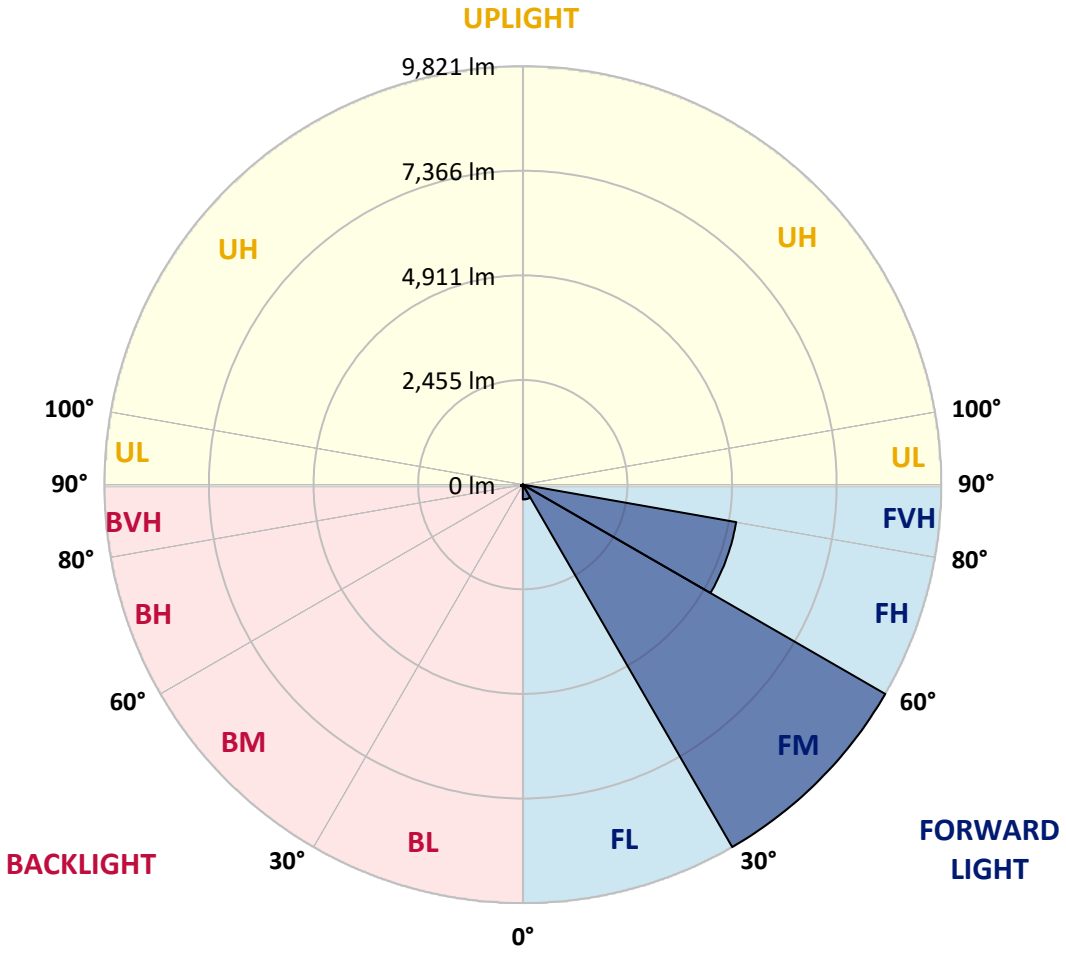

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 52.0 | 52.0 | 52.0 | 52.0 | 52.0 | 47.3 | 47.3 | 47.3 | 47.3 | 47.3 | 47.3 |
| 5° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 52.0 | 52.0 | 52.0 | 52.0 | 47.3 | 47.3 |
| 7.5° | 66.2 | 66.2 | 61.5 | 61.5 | 61.5 | 56.8 | 56.8 | 56.8 | 56.8 | 52.0 | 52.0 |
| 10° | 75.7 | 75.7 | 70.9 | 70.9 | 66.2 | 66.2 | 61.5 | 61.5 | 56.8 | 56.8 | 52.0 |
| 12.5° | 85.1 | 85.1 | 80.4 | 75.7 | 75.7 | 70.9 | 66.2 | 61.5 | 61.5 | 56.8 | 52.0 |
| 15° | 94.6 | 89.9 | 85.1 | 80.4 | 80.4 | 75.7 | 70.9 | 66.2 | 66.2 | 61.5 | 56.8 |
| 17.5° | 104.1 | 99.3 | 94.6 | 89.9 | 85.1 | 75.7 | 70.9 | 66.2 | 66.2 | 61.5 | 56.8 |
| 20° | 113.5 | 104.1 | 94.6 | 89.9 | 85.1 | 75.7 | 70.9 | 66.2 | 66.2 | 61.5 | 56.8 |
| 22.5° | 127.7 | 118.2 | 104.1 | 99.3 | 89.9 | 85.1 | 75.7 | 70.9 | 66.2 | 61.5 | 56.8 |
| 25° | 146.6 | 127.7 | 113.5 | 104.1 | 94.6 | 85.1 | 75.7 | 70.9 | 66.2 | 61.5 | 56.8 |
| 27.5° | 179.7 | 151.4 | 127.7 | 118.2 | 104.1 | 94.6 | 80.4 | 75.7 | 70.9 | 66.2 | 61.5 |
| 30° | 241.2 | 189.2 | 137.2 | 123.0 | 113.5 | 99.3 | 85.1 | 80.4 | 70.9 | 66.2 | 56.8 |
| 32.5° | 298.0 | 231.8 | 165.5 | 146.6 | 127.7 | 104.1 | 85.1 | 80.4 | 70.9 | 66.2 | 56.8 |
| 35° | 298.0 | 236.5 | 175.0 | 151.4 | 132.4 | 108.8 | 85.1 | 80.4 | 70.9 | 66.2 | 56.8 |
| 37.5° | 293.3 | 231.8 | 170.3 | 151.4 | 132.4 | 108.8 | 89.9 | 80.4 | 75.7 | 66.2 | 56.8 |
| 40° | 307.4 | 227.0 | 151.4 | 137.2 | 123.0 | 104.1 | 89.9 | 80.4 | 75.7 | 66.2 | 56.8 |
| 42.5° | 335.8 | 241.2 | 146.6 | 132.4 | 123.0 | 108.8 | 94.6 | 85.1 | 75.7 | 66.2 | 56.8 |
| 45° | 421.0 | 283.8 | 151.4 | 137.2 | 123.0 | 104.1 | 89.9 | 85.1 | 75.7 | 70.9 | 61.5 |
| 47.5° | 761.5 | 458.8 | 156.1 | 137.2 | 123.0 | 104.1 | 85.1 | 80.4 | 75.7 | 66.2 | 61.5 |
| 50° | 1191.9 | 676.4 | 160.8 | 141.9 | 123.0 | 104.1 | 85.1 | 80.4 | 75.7 | 70.9 | 66.2 |
| 52.5° | 1296.0 | 737.9 | 179.7 | 156.1 | 132.4 | 108.8 | 85.1 | 80.4 | 75.7 | 70.9 | 66.2 |
| 55° | 1168.3 | 685.8 | 208.1 | 179.7 | 146.6 | 118.2 | 85.1 | 80.4 | 75.7 | 70.9 | 66.2 |
| 57.5° | *988.5* | *610.2* | *231.8* | *198.7* | *160.8* | *127.7* | *89.9* | *85.1* | *80.4* | *75.7* | *70.9* |
| 60° | 742.6 | 506.1 | 269.6 | 227.0 | 189.2 | 146.6 | 104.1 | 99.3 | 94.6 | 85.1 | 80.4 |
| 62.5° | 605.4 | 449.3 | 298.0 | 255.4 | 208.1 | 165.5 | 118.2 | 113.5 | 108.8 | 99.3 | 94.6 |
| 65° | 534.5 | 425.7 | 316.9 | 269.6 | 222.3 | 170.3 | 123.0 | 118.2 | 113.5 | 108.8 | 104.1 |
| 67.5° | 496.6 | 411.5 | 331.1 | 279.1 | 231.8 | 179.7 | 127.7 | 123.0 | 118.2 | 113.5 | 108.8 |
| 70° | 477.7 | 402.0 | 326.4 | 279.1 | 231.8 | 184.5 | 137.2 | 132.4 | 123.0 | 118.2 | 108.8 |
| 72.5° | 444.6 | 383.1 | 321.6 | 283.8 | 241.2 | 203.4 | 160.8 | 146.6 | 132.4 | 113.5 | 99.3 |
| 75° | 397.3 | 340.6 | 283.8 | 260.1 | 236.5 | 208.1 | 184.5 | 160.8 | 137.2 | 108.8 | 85.1 |
| 77.5° | 288.5 | 264.9 | 241.2 | 227.0 | 212.8 | 193.9 | 179.7 | 156.1 | 132.4 | 104.1 | 80.4 |
| 80° | 113.5 | 127.7 | 137.2 | 137.2 | 141.9 | 141.9 | 141.9 | 123.0 | 104.1 | 85.1 | 66.2 |
| 82.5° | 33.1 | 33.1 | 33.1 | 37.8 | 42.6 | 47.3 | 52.0 | 47.3 | 47.3 | 42.6 | 37.8 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 47.3 | 47.3 | 42.6 | 42.6 | 42.6 | 42.6 | 42.6 | 42.6 | 42.6 | 42.6 | 42.6 |
| 5° | 47.3 | 47.3 | 42.6 | 42.6 | 42.6 | 42.6 | 37.8 | 37.8 | 37.8 | 37.8 | 37.8 |
| 7.5° | 52.0 | 47.3 | 47.3 | 42.6 | 42.6 | 42.6 | 37.8 | 37.8 | 37.8 | 37.8 | 37.8 |
| 10° | 52.0 | 47.3 | 47.3 | 42.6 | 42.6 | 42.6 | 37.8 | 37.8 | 37.8 | 37.8 | 33.1 |
| 12.5° | 52.0 | 52.0 | 47.3 | 47.3 | 47.3 | 42.6 | 42.6 | 37.8 | 37.8 | 37.8 | 33.1 |
| 15° | 52.0 | 52.0 | 47.3 | 42.6 | 42.6 | 42.6 | 37.8 | 37.8 | 37.8 | 37.8 | 33.1 |
| 17.5° | 52.0 | 52.0 | 47.3 | 42.6 | 42.6 | 37.8 | 37.8 | 33.1 | 33.1 | 33.1 | 28.4 |
| 20° | 52.0 | 52.0 | 47.3 | 42.6 | 42.6 | 37.8 | 37.8 | 33.1 | 33.1 | 33.1 | 28.4 |
| 22.5° | 52.0 | 52.0 | 47.3 | 42.6 | 42.6 | 37.8 | 37.8 | 33.1 | 33.1 | 28.4 | 28.4 |
| 25° | 52.0 | 52.0 | 47.3 | 42.6 | 37.8 | 37.8 | 33.1 | 28.4 | 28.4 | 23.6 | 23.6 |
| 27.5° | 56.8 | 52.0 | 47.3 | 42.6 | 37.8 | 37.8 | 33.1 | 28.4 | 23.6 | 23.6 | 18.9 |
| 30° | 52.0 | 52.0 | 47.3 | 42.6 | 37.8 | 33.1 | 28.4 | 23.6 | 18.9 | 18.9 | 14.2 |
| 32.5° | 52.0 | 52.0 | 47.3 | 42.6 | 37.8 | 33.1 | 28.4 | 23.6 | 18.9 | 18.9 | 14.2 |
| 35° | 52.0 | 47.3 | 42.6 | 37.8 | 33.1 | 28.4 | 23.6 | 18.9 | 14.2 | 14.2 | 9.5 |
| 37.5° | 52.0 | 47.3 | 42.6 | 37.8 | 33.1 | 28.4 | 23.6 | 18.9 | 14.2 | 9.5 | 4.7 |
| 40° | 52.0 | 47.3 | 42.6 | 37.8 | 33.1 | 28.4 | 18.9 | 14.2 | 9.5 | 9.5 | 4.7 |
| 42.5° | 52.0 | 47.3 | 42.6 | 37.8 | 33.1 | 28.4 | 23.6 | 18.9 | 14.2 | 9.5 | 4.7 |
| 45° | 56.8 | 52.0 | 42.6 | 37.8 | 33.1 | 33.1 | 28.4 | 23.6 | 18.9 | 14.2 | 4.7 |
| 47.5° | 56.8 | 47.3 | 42.6 | 33.1 | 33.1 | 33.1 | 28.4 | 28.4 | 23.6 | 14.2 | 9.5 |
| 50° | 61.5 | 52.0 | 47.3 | 37.8 | 33.1 | 33.1 | 28.4 | 23.6 | 18.9 | 14.2 | 4.7 |
| 52.5° | 61.5 | 56.8 | 47.3 | 42.6 | 37.8 | 28.4 | 23.6 | 14.2 | 9.5 | 9.5 | 4.7 |
| 55° | 61.5 | 61.5 | 56.8 | 52.0 | 42.6 | 33.1 | 18.9 | 9.5 | 9.5 | 4.7 | 4.7 |
| 57.5° | *66.2* | *66.2* | *61.5* | *56.8* | *42.6* | *28.4* | *14.2* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 75.7 | 70.9 | 66.2 | 61.5 | 47.3 | 33.1 | 14.2 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 85.1 | 75.7 | 66.2 | 56.8 | 42.6 | 28.4 | 14.2 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 89.9 | 75.7 | 61.5 | 47.3 | 37.8 | 23.6 | 14.2 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 94.6 | 75.7 | 61.5 | 42.6 | 33.1 | 23.6 | 9.5 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 89.9 | 70.9 | 52.0 | 33.1 | 23.6 | 18.9 | 9.5 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 80.4 | 66.2 | 47.3 | 28.4 | 23.6 | 14.2 | 9.5 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 70.9 | 56.8 | 37.8 | 23.6 | 18.9 | 14.2 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 66.2 | 47.3 | 33.1 | 14.2 | 9.5 | 9.5 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 52.0 | 37.8 | 18.9 | 4.7 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 28.4 | 18.9 | 9.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 42.6 | 42.6 | 42.6 | 37.8 | 37.8 | 37.8 | 37.8 | 37.8 | 37.8 | 37.8 | 37.8 |
| 5° | 37.8 | 37.8 | 37.8 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 |
| 7.5° | 37.8 | 37.8 | 37.8 | 33.1 | 33.1 | 33.1 | 33.1 | 28.4 | 28.4 | 28.4 | 28.4 |
| 10° | 33.1 | 33.1 | 33.1 | 28.4 | 28.4 | 28.4 | 28.4 | 23.6 | 23.6 | 23.6 | 23.6 |
| 12.5° | 33.1 | 33.1 | 33.1 | 28.4 | 28.4 | 28.4 | 28.4 | 23.6 | 23.6 | 23.6 | 23.6 |
| 15° | 33.1 | 33.1 | 33.1 | 28.4 | 28.4 | 28.4 | 23.6 | 23.6 | 18.9 | 18.9 | 18.9 |
| 17.5° | 28.4 | 28.4 | 28.4 | 23.6 | 23.6 | 23.6 | 23.6 | 18.9 | 18.9 | 18.9 | 14.2 |
| 20° | 28.4 | 28.4 | 28.4 | 23.6 | 23.6 | 18.9 | 18.9 | 14.2 | 9.5 | 9.5 | 9.5 |
| 22.5° | 23.6 | 23.6 | 18.9 | 18.9 | 14.2 | 14.2 | 9.5 | 9.5 | 4.7 | 4.7 | 4.7 |
| 25° | 18.9 | 18.9 | 14.2 | 14.2 | 9.5 | 9.5 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 |
| 27.5° | 14.2 | 9.5 | 9.5 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 9.5 | 9.5 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 9.5 | 9.5 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 4.7 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 37.8 | 37.8 | 37.8 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 |
| 5° | 28.4 | 28.4 | 28.4 | 28.4 | 28.4 | 28.4 | 28.4 | 28.4 | 28.4 | 28.4 | 28.4 |
| 7.5° | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 18.9 | 18.9 | 18.9 |
| 10° | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 14.2 | 14.2 | 14.2 |
| 12.5° | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 14.2 | 14.2 | 14.2 | 9.5 | 9.5 | 9.5 |
| 15° | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 9.5 | 9.5 | 9.5 | 4.7 | 4.7 | 4.7 |
| 17.5° | 14.2 | 9.5 | 9.5 | 9.5 | 9.5 | 4.7 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 |
| 20° | 4.7 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 | 33.1 |
| 5° | 28.4 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 | 23.6 |
| 7.5° | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 | 18.9 |
| 10° | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 |
| 12.5° | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 4.7 | 4.7 |
| 15° | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 33.1 | 37.8 | 37.8 | 37.8 | 37.8 | 42.6 | 42.6 | 42.6 | 47.3 | 47.3 | 52.0 |
| 5° | 23.6 | 28.4 | 28.4 | 28.4 | 28.4 | 33.1 | 33.1 | 33.1 | 37.8 | 37.8 | 42.6 |
| 7.5° | 18.9 | 23.6 | 23.6 | 23.6 | 23.6 | 28.4 | 28.4 | 28.4 | 33.1 | 33.1 | 37.8 |
| 10° | 14.2 | 14.2 | 14.2 | 14.2 | 18.9 | 18.9 | 23.6 | 23.6 | 28.4 | 28.4 | 33.1 |
| 12.5° | 4.7 | 9.5 | 9.5 | 9.5 | 9.5 | 14.2 | 14.2 | 14.2 | 18.9 | 23.6 | 23.6 |
| 15° | 0.0 | 4.7 | 4.7 | 4.7 | 4.7 | 9.5 | 9.5 | 9.5 | 14.2 | 18.9 | 18.9 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.5 | 9.5 | 14.2 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 52.0 | 56.8 | 56.8 | 61.5 | 61.5 | 66.2 | 66.2 | 70.9 | 70.9 | 70.9 | 75.7 |
| 5° | 42.6 | 47.3 | 52.0 | 52.0 | 56.8 | 61.5 | 61.5 | 66.2 | 66.2 | 66.2 | 70.9 |
| 7.5° | 37.8 | 42.6 | 47.3 | 47.3 | 52.0 | 56.8 | 56.8 | 61.5 | 61.5 | 61.5 | 66.2 |
| 10° | 33.1 | 37.8 | 42.6 | 42.6 | 47.3 | 52.0 | 52.0 | 56.8 | 56.8 | 61.5 | 61.5 |
| 12.5° | 28.4 | 33.1 | 37.8 | 37.8 | 42.6 | 47.3 | 47.3 | 52.0 | 56.8 | 56.8 | 61.5 |
| 15° | 23.6 | 28.4 | 33.1 | 33.1 | 37.8 | 42.6 | 47.3 | 52.0 | 52.0 | 56.8 | 56.8 |
| 17.5° | 14.2 | 18.9 | 23.6 | 28.4 | 33.1 | 37.8 | 42.6 | 47.3 | 47.3 | 52.0 | 56.8 |
| 20° | 9.5 | 14.2 | 18.9 | 23.6 | 28.4 | 33.1 | 33.1 | 37.8 | 42.6 | 47.3 | 47.3 |
| 22.5° | 4.7 | 9.5 | 14.2 | 14.2 | 18.9 | 23.6 | 28.4 | 33.1 | 33.1 | 37.8 | 42.6 |
| 25° | 0.0 | 4.7 | 9.5 | 9.5 | 14.2 | 18.9 | 18.9 | 23.6 | 28.4 | 33.1 | 33.1 |
| 27.5° | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 | 14.2 | 18.9 | 23.6 | 23.6 | 28.4 | 28.4 |
| 30° | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 | 14.2 | 14.2 | 18.9 | 18.9 | 23.6 | 28.4 |
| 32.5° | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.5 | 14.2 | 18.9 | 18.9 | 23.6 | 23.6 |
| 35° | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.5 | 9.5 | 14.2 | 14.2 | 18.9 | 18.9 |
| 37.5° | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.5 | 9.5 | 14.2 | 14.2 | 18.9 | 18.9 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 9.5 | 14.2 | 14.2 | 14.2 | 18.9 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 | 14.2 | 14.2 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 | 14.2 | 14.2 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 | 14.2 | 14.2 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 | 14.2 | 14.2 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 | 9.5 | 14.2 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 | 9.5 | 14.2 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *4.7* | *4.7* | *4.7* | *9.5* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.5 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.5 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.5 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.5 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.5 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.5 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 4.7 | 9.5 | 9.5 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 | 9.5 | 14.2 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 | 9.5 | 14.2 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.5 | 9.5 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 70.9 | 70.9 | 70.9 |
| 5° | 70.9 | 70.9 | 70.9 | 70.9 | 70.9 | 70.9 | 70.9 | 70.9 | 66.2 | 66.2 | 66.2 |
| 7.5° | 66.2 | 66.2 | 66.2 | 70.9 | 70.9 | 70.9 | 70.9 | 70.9 | 66.2 | 66.2 | 66.2 |
| 10° | 66.2 | 66.2 | 66.2 | 70.9 | 70.9 | 70.9 | 70.9 | 70.9 | 66.2 | 66.2 | 66.2 |
| 12.5° | 61.5 | 61.5 | 61.5 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 |
| 15° | 61.5 | 61.5 | 61.5 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 |
| 17.5° | 56.8 | 61.5 | 61.5 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 |
| 20° | 52.0 | 52.0 | 56.8 | 56.8 | 61.5 | 61.5 | 61.5 | 66.2 | 66.2 | 66.2 | 66.2 |
| 22.5° | 42.6 | 47.3 | 52.0 | 52.0 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 25° | 37.8 | 37.8 | 42.6 | 47.3 | 47.3 | 52.0 | 52.0 | 52.0 | 52.0 | 52.0 | 52.0 |
| 27.5° | 33.1 | 33.1 | 37.8 | 37.8 | 42.6 | 42.6 | 42.6 | 47.3 | 47.3 | 47.3 | 47.3 |
| 30° | 28.4 | 33.1 | 33.1 | 37.8 | 37.8 | 37.8 | 42.6 | 42.6 | 47.3 | 47.3 | 47.3 |
| 32.5° | 28.4 | 28.4 | 33.1 | 33.1 | 37.8 | 37.8 | 37.8 | 42.6 | 42.6 | 42.6 | 42.6 |
| 35° | 23.6 | 23.6 | 28.4 | 28.4 | 33.1 | 33.1 | 37.8 | 37.8 | 42.6 | 42.6 | 42.6 |
| 37.5° | 23.6 | 23.6 | 28.4 | 28.4 | 33.1 | 33.1 | 33.1 | 37.8 | 37.8 | 37.8 | 42.6 |
| 40° | 18.9 | 18.9 | 23.6 | 23.6 | 28.4 | 28.4 | 33.1 | 33.1 | 37.8 | 37.8 | 42.6 |
| 42.5° | 18.9 | 18.9 | 23.6 | 23.6 | 28.4 | 28.4 | 33.1 | 33.1 | 37.8 | 37.8 | 42.6 |
| 45° | 18.9 | 18.9 | 23.6 | 23.6 | 28.4 | 28.4 | 33.1 | 33.1 | 37.8 | 37.8 | 42.6 |
| 47.5° | 18.9 | 18.9 | 23.6 | 23.6 | 28.4 | 28.4 | 28.4 | 33.1 | 33.1 | 33.1 | 37.8 |
| 50° | 18.9 | 18.9 | 18.9 | 23.6 | 23.6 | 23.6 | 28.4 | 28.4 | 33.1 | 33.1 | 37.8 |
| 52.5° | 14.2 | 14.2 | 14.2 | 18.9 | 18.9 | 18.9 | 23.6 | 23.6 | 28.4 | 28.4 | 33.1 |
| 55° | 14.2 | 14.2 | 14.2 | 18.9 | 18.9 | 18.9 | 18.9 | 23.6 | 23.6 | 23.6 | 28.4 |
| 57.5° | *9.5* | *9.5* | *9.5* | *14.2* | *14.2* | *14.2* | *14.2* | *18.9* | *18.9* | *18.9* | *23.6* |
| 60° | 9.5 | 9.5 | 9.5 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 18.9 |
| 62.5° | 9.5 | 9.5 | 9.5 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 18.9 |
| 65° | 9.5 | 9.5 | 9.5 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 18.9 |
| 67.5° | 9.5 | 9.5 | 9.5 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 18.9 |
| 70° | 9.5 | 9.5 | 9.5 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 18.9 |
| 72.5° | 9.5 | 9.5 | 9.5 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 18.9 |
| 75° | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 |
| 77.5° | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 |
| 80° | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 |
| 82.5° | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 |
| 85° | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 |
| 87.5° | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 70.9 | 70.9 | 70.9 | 70.9 | 70.9 | 66.2 | 66.2 | 66.2 | 70.9 | 70.9 | 70.9 |
| 5° | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 |
| 7.5° | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 61.5 | 61.5 | 61.5 | 66.2 | 66.2 | 66.2 |
| 10° | 66.2 | 61.5 | 61.5 | 61.5 | 61.5 | 61.5 | 61.5 | 61.5 | 66.2 | 66.2 | 66.2 |
| 12.5° | 66.2 | 61.5 | 61.5 | 61.5 | 61.5 | 61.5 | 61.5 | 61.5 | 66.2 | 66.2 | 66.2 |
| 15° | 66.2 | 61.5 | 61.5 | 61.5 | 61.5 | 61.5 | 61.5 | 66.2 | 66.2 | 70.9 | 70.9 |
| 17.5° | 61.5 | 61.5 | 56.8 | 56.8 | 61.5 | 61.5 | 61.5 | 61.5 | 66.2 | 66.2 | 66.2 |
| 20° | 61.5 | 61.5 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 61.5 | 61.5 | 66.2 | 66.2 |
| 22.5° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 61.5 | 61.5 | 66.2 | 66.2 |
| 25° | 52.0 | 52.0 | 52.0 | 52.0 | 56.8 | 56.8 | 56.8 | 61.5 | 66.2 | 66.2 | 70.9 |
| 27.5° | 52.0 | 52.0 | 52.0 | 52.0 | 56.8 | 56.8 | 56.8 | 61.5 | 66.2 | 66.2 | 70.9 |
| 30° | 52.0 | 52.0 | 52.0 | 52.0 | 56.8 | 56.8 | 56.8 | 61.5 | 66.2 | 66.2 | 70.9 |
| 32.5° | 47.3 | 47.3 | 47.3 | 52.0 | 52.0 | 56.8 | 56.8 | 61.5 | 66.2 | 66.2 | 70.9 |
| 35° | 47.3 | 47.3 | 47.3 | 52.0 | 52.0 | 56.8 | 56.8 | 61.5 | 66.2 | 66.2 | 70.9 |
| 37.5° | 42.6 | 47.3 | 47.3 | 52.0 | 56.8 | 56.8 | 61.5 | 66.2 | 70.9 | 70.9 | 75.7 |
| 40° | 42.6 | 47.3 | 47.3 | 52.0 | 56.8 | 56.8 | 61.5 | 66.2 | 70.9 | 70.9 | 75.7 |
| 42.5° | 42.6 | 47.3 | 47.3 | 52.0 | 56.8 | 56.8 | 61.5 | 66.2 | 70.9 | 75.7 | 80.4 |
| 45° | 47.3 | 47.3 | 52.0 | 56.8 | 56.8 | 61.5 | 61.5 | 66.2 | 70.9 | 75.7 | 80.4 |
| 47.5° | 47.3 | 52.0 | 56.8 | 56.8 | 61.5 | 61.5 | 61.5 | 66.2 | 75.7 | 80.4 | 85.1 |
| 50° | 42.6 | 47.3 | 52.0 | 56.8 | 56.8 | 61.5 | 61.5 | 66.2 | 75.7 | 80.4 | 85.1 |
| 52.5° | 37.8 | 37.8 | 42.6 | 47.3 | 56.8 | 61.5 | 66.2 | 70.9 | 80.4 | 85.1 | 89.9 |
| 55° | 33.1 | 33.1 | 37.8 | 47.3 | 56.8 | 66.2 | 75.7 | 80.4 | 85.1 | 85.1 | 89.9 |
| 57.5° | *28.4* | *28.4* | *33.1* | *47.3* | *61.5* | *75.7* | *89.9* | *89.9* | *94.6* | *94.6* | *94.6* |
| 60° | 23.6 | 23.6 | 28.4 | 42.6 | 61.5 | 75.7 | 89.9 | 94.6 | 99.3 | 99.3 | 104.1 |
| 62.5° | 23.6 | 23.6 | 28.4 | 42.6 | 56.8 | 66.2 | 80.4 | 89.9 | 99.3 | 108.8 | 118.2 |
| 65° | 18.9 | 23.6 | 23.6 | 37.8 | 47.3 | 61.5 | 70.9 | 85.1 | 99.3 | 113.5 | 127.7 |
| 67.5° | 18.9 | 23.6 | 23.6 | 33.1 | 47.3 | 56.8 | 66.2 | 80.4 | 99.3 | 113.5 | 127.7 |
| 70° | 23.6 | 23.6 | 28.4 | 37.8 | 42.6 | 52.0 | 56.8 | 75.7 | 89.9 | 108.8 | 123.0 |
| 72.5° | 18.9 | 23.6 | 23.6 | 33.1 | 37.8 | 47.3 | 52.0 | 70.9 | 85.1 | 104.1 | 118.2 |
| 75° | 18.9 | 18.9 | 18.9 | 28.4 | 33.1 | 42.6 | 47.3 | 61.5 | 80.4 | 94.6 | 108.8 |
| 77.5° | 14.2 | 14.2 | 14.2 | 23.6 | 28.4 | 37.8 | 42.6 | 56.8 | 75.7 | 89.9 | 104.1 |
| 80° | 14.2 | 14.2 | 14.2 | 18.9 | 23.6 | 23.6 | 28.4 | 42.6 | 61.5 | 75.7 | 89.9 |
| 82.5° | 14.2 | 9.5 | 9.5 | 14.2 | 14.2 | 18.9 | 18.9 | 28.4 | 37.8 | 47.3 | 56.8 |
| 85° | 14.2 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 |
| 87.5° | 14.2 | 9.5 | 9.5 | 9.5 | 9.5 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 70.9 | 70.9 | 70.9 | 70.9 | 70.9 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 |
| 5° | 70.9 | 70.9 | 75.7 | 75.7 | 75.7 | 80.4 | 80.4 | 80.4 | 80.4 | 80.4 | 80.4 |
| 7.5° | 70.9 | 70.9 | 75.7 | 75.7 | 75.7 | 80.4 | 80.4 | 80.4 | 85.1 | 85.1 | 89.9 |
| 10° | 70.9 | 70.9 | 75.7 | 75.7 | 80.4 | 80.4 | 85.1 | 85.1 | 89.9 | 89.9 | 94.6 |
| 12.5° | 70.9 | 75.7 | 75.7 | 80.4 | 85.1 | 89.9 | 89.9 | 94.6 | 99.3 | 99.3 | 104.1 |
| 15° | 75.7 | 75.7 | 80.4 | 80.4 | 85.1 | 89.9 | 94.6 | 99.3 | 104.1 | 108.8 | 113.5 |
| 17.5° | 70.9 | 75.7 | 80.4 | 85.1 | 89.9 | 94.6 | 99.3 | 104.1 | 113.5 | 118.2 | 127.7 |
| 20° | 70.9 | 75.7 | 80.4 | 85.1 | 89.9 | 99.3 | 104.1 | 108.8 | 118.2 | 127.7 | 141.9 |
| 22.5° | 70.9 | 75.7 | 80.4 | 85.1 | 94.6 | 104.1 | 108.8 | 118.2 | 132.4 | 141.9 | 160.8 |
| 25° | 75.7 | 80.4 | 85.1 | 89.9 | 99.3 | 108.8 | 118.2 | 127.7 | 146.6 | 160.8 | 203.4 |
| 27.5° | 75.7 | 85.1 | 89.9 | 94.6 | 104.1 | 118.2 | 127.7 | 137.2 | 165.5 | 189.2 | 283.8 |
| 30° | 75.7 | 85.1 | 89.9 | 94.6 | 108.8 | 123.0 | 137.2 | 151.4 | 198.7 | 241.2 | 402.0 |
| 32.5° | 75.7 | 85.1 | 89.9 | 94.6 | 113.5 | 137.2 | 156.1 | 175.0 | 236.5 | 298.0 | 487.2 |
| 35° | 80.4 | 85.1 | 94.6 | 99.3 | 123.0 | 146.6 | 165.5 | 189.2 | 246.0 | 302.7 | 529.7 |
| 37.5° | 85.1 | 89.9 | 99.3 | 104.1 | 123.0 | 141.9 | 160.8 | 179.7 | 241.2 | 298.0 | 581.8 |
| 40° | 85.1 | 94.6 | 99.3 | 108.8 | 123.0 | 141.9 | 156.1 | 170.3 | 236.5 | 302.7 | 671.6 |
| 42.5° | 89.9 | 99.3 | 104.1 | 113.5 | 127.7 | 141.9 | 151.4 | 165.5 | 250.7 | 335.8 | 875.0 |
| 45° | 89.9 | 94.6 | 104.1 | 108.8 | 123.0 | 137.2 | 151.4 | 165.5 | 316.9 | 463.5 | 1390.6 |
| 47.5° | 89.9 | 94.6 | 99.3 | 104.1 | 123.0 | 141.9 | 156.1 | 175.0 | 468.3 | 761.5 | 2298.7 |
| 50° | 89.9 | 94.6 | 94.6 | 99.3 | 118.2 | 141.9 | 160.8 | 179.7 | 610.2 | 1035.8 | 3315.6 |
| 52.5° | 94.6 | 99.3 | 99.3 | 104.1 | 127.7 | 151.4 | 175.0 | 198.7 | 700.0 | 1201.4 | 3599.4 |
| 55° | 94.6 | 99.3 | 99.3 | 104.1 | 141.9 | 179.7 | 212.8 | 250.7 | 737.9 | 1220.3 | 3306.2 |
| 57.5° | *99.3* | *104.1* | *108.8* | *113.5* | *151.4* | *193.9* | *231.8* | *269.6* | *704.8* | *1139.9* | *2710.2* |
| 60° | 113.5 | 118.2 | 127.7 | 132.4 | 175.0 | 217.6 | 255.4 | 298.0 | 562.9 | 827.7 | 2133.2 |
| 62.5° | 127.7 | 132.4 | 141.9 | 146.6 | 189.2 | 231.8 | 274.3 | 316.9 | 496.6 | 671.6 | 1589.2 |
| 65° | 132.4 | 141.9 | 146.6 | 151.4 | 193.9 | 241.2 | 283.8 | 326.4 | 454.1 | 577.0 | 1177.7 |
| 67.5° | 137.2 | 146.6 | 151.4 | 160.8 | 203.4 | 246.0 | 288.5 | 331.1 | 430.4 | 525.0 | 875.0 |
| 70° | 137.2 | 146.6 | 160.8 | 170.3 | 208.1 | 246.0 | 279.1 | 316.9 | 397.3 | 473.0 | 671.6 |
| 72.5° | 137.2 | 156.1 | 175.0 | 193.9 | 222.3 | 250.7 | 274.3 | 302.7 | 364.2 | 421.0 | 520.3 |
| 75° | 137.2 | 165.5 | 189.2 | 217.6 | 231.8 | 246.0 | 260.1 | 274.3 | 316.9 | 354.7 | 411.5 |
| 77.5° | 132.4 | 156.1 | 184.5 | 208.1 | 212.8 | 217.6 | 222.3 | 227.0 | 227.0 | 227.0 | 227.0 |
| 80° | 108.8 | 132.4 | 151.4 | 170.3 | 160.8 | 146.6 | 137.2 | 123.0 | 113.5 | 104.1 | 113.5 |
| 82.5° | 56.8 | 61.5 | 61.5 | 61.5 | 56.8 | 56.8 | 52.0 | 47.3 | 47.3 | 42.6 | 42.6 |
| 85° | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 |
| 87.5° | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 70.9 | 70.9 | 70.9 | 70.9 |
| 5° | 80.4 | 80.4 | 80.4 | 80.4 | 80.4 | 80.4 | 80.4 | 75.7 | 75.7 | 75.7 | 75.7 |
| 7.5° | 89.9 | 89.9 | 89.9 | 89.9 | 89.9 | 89.9 | 89.9 | 89.9 | 89.9 | 89.9 | 89.9 |
| 10° | 94.6 | 99.3 | 99.3 | 104.1 | 104.1 | 104.1 | 108.8 | 108.8 | 108.8 | 108.8 | 108.8 |
| 12.5° | 108.8 | 113.5 | 113.5 | 118.2 | 118.2 | 123.0 | 123.0 | 127.7 | 127.7 | 127.7 | 132.4 |
| 15° | 118.2 | 123.0 | 127.7 | 132.4 | 137.2 | 146.6 | 151.4 | 160.8 | 165.5 | 170.3 | 175.0 |
| 17.5° | 137.2 | 146.6 | 160.8 | 170.3 | 179.7 | 198.7 | 217.6 | 231.8 | 250.7 | 274.3 | 302.7 |
| 20° | 151.4 | 184.5 | 212.8 | 246.0 | 274.3 | 359.5 | 444.6 | 529.7 | 614.9 | 728.4 | 841.9 |
| 22.5° | 179.7 | 283.8 | 392.6 | 496.6 | 600.7 | 879.8 | 1154.1 | 1428.4 | 1707.5 | 1972.4 | 2237.2 |
| 25° | 246.0 | 468.3 | 695.3 | 917.6 | 1139.9 | 1608.2 | 2071.7 | 2535.2 | 3003.5 | 3452.8 | 3906.9 |
| 27.5° | 373.7 | 733.1 | 1092.6 | 1452.1 | 1811.5 | 2426.4 | 3036.6 | 3646.7 | 4261.6 | 4805.5 | 5344.8 |
| 30° | 562.9 | 1026.4 | 1489.9 | 1953.4 | 2417.0 | 3211.6 | 4006.2 | 4800.8 | 5595.4 | 6125.2 | 6654.9 |
| 32.5° | 671.6 | 1277.1 | 1882.5 | 2483.2 | 3088.6 | 3954.2 | 4819.7 | 5690.0 | 6555.6 | 7161.0 | 7766.4 |
| 35° | 752.0 | 1504.1 | 2251.4 | 3003.5 | 3750.8 | 4715.7 | 5680.6 | 6650.2 | 7615.1 | 8338.8 | 9062.4 |
| 37.5° | 860.8 | 1764.2 | 2662.9 | 3566.3 | 4465.0 | 5505.6 | 6546.1 | 7591.4 | 8632.0 | 9526.0 | 10424.6 |
| 40° | 1035.8 | 2109.5 | 3183.2 | 4252.2 | 5325.8 | 6631.3 | 7936.7 | 9242.2 | 10547.6 | 11734.8 | 12922.0 |
| 42.5° | 1414.2 | 2828.5 | 4247.4 | 5661.7 | 7075.9 | 9029.3 | 10978.0 | 12926.7 | 14880.2 | 16559.3 | 18238.4 |
| 45° | 2317.6 | 4517.0 | 6716.4 | 8915.8 | 11115.2 | 13451.7 | 15783.6 | 18120.1 | 20456.7 | 22939.9 | 25423.0 |
| 47.5° | 3835.9 | 6867.8 | 9899.6 | 12926.7 | 15958.6 | 18366.1 | 20768.8 | 23171.6 | 25579.1 | 27896.8 | 30214.4 |
| 50° | 5595.4 | 8859.0 | 12122.7 | 15386.3 | 18649.9 | 20802.0 | 22949.3 | 25096.7 | 27248.8 | 29523.8 | 31794.2 |
| 52.5° | 5997.5 | 9261.1 | 12524.7 | 15783.6 | 19047.2 | 21218.2 | 23389.2 | 25564.9 | 27735.9 | 29959.0 | 32186.7 |
| 55° | 5387.3 | 8622.5 | 11853.0 | 15088.3 | 18318.8 | 20702.6 | 23086.5 | 25470.3 | 27854.2 | 30346.8 | 32839.5 |
| 57.5° | *4280.5* | *7548.9* | *10812.5* | *14080.8* | *17344.4* | *20172.9* | *22996.6* | *25825.1* | *28653.5* | *31283.3* | *33913.2* |
| 60° | 3438.6 | 6773.2 | 10107.7 | 13442.3 | 16776.8 | 19794.5 | 22807.4 | 25820.3 | 28838.0 | 31075.2 | 33312.5 |
| 62.5° | 2506.8 | 5808.3 | 9109.7 | 12411.2 | 15712.6 | 18418.1 | 21123.6 | 23833.8 | 26539.3 | 28128.5 | 29717.8 |
| 65° | 1778.4 | 4696.8 | 7615.1 | 10528.7 | 13447.0 | 15324.8 | 17202.5 | 19080.3 | 20958.0 | 22334.4 | 23710.8 |
| 67.5° | 1225.0 | 3282.5 | 5335.3 | 7392.8 | 9445.5 | 11044.2 | 12638.2 | 14236.9 | 15835.6 | 16994.4 | 18158.0 |
| 70° | 870.3 | 1991.3 | 3112.3 | 4228.5 | 5349.5 | 6763.7 | 8177.9 | 9592.2 | 11006.4 | 12420.6 | 13839.6 |
| 72.5° | 619.6 | 1111.5 | 1598.7 | 2090.6 | 2577.8 | 3807.5 | 5037.3 | 6271.8 | 7501.6 | 8357.7 | 9218.5 |
| 75° | 468.3 | 600.7 | 728.4 | 860.8 | 988.5 | 1286.5 | 1584.5 | 1882.5 | 2180.5 | 2483.2 | 2785.9 |
| 77.5° | 222.3 | 246.0 | 264.9 | 288.5 | 307.4 | 383.1 | 458.8 | 534.5 | 610.2 | 737.9 | 865.6 |
| 80° | 118.2 | 127.7 | 137.2 | 146.6 | 156.1 | 160.8 | 165.5 | 170.3 | 175.0 | 189.2 | 208.1 |
| 82.5° | 42.6 | 47.3 | 47.3 | 52.0 | 52.0 | 47.3 | 47.3 | 42.6 | 37.8 | 42.6 | 42.6 |
| 85° | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 66.2 | 66.2 | 66.2 | 66.2 | 61.5 | 61.5 | 61.5 | 61.5 | 56.8 | 56.8 | 56.8 |
| 5° | 75.7 | 75.7 | 75.7 | 75.7 | 70.9 | 70.9 | 70.9 | 70.9 | 66.2 | 66.2 | 66.2 |
| 7.5° | 89.9 | 89.9 | 89.9 | 89.9 | 85.1 | 85.1 | 85.1 | 85.1 | 80.4 | 80.4 | 80.4 |
| 10° | 108.8 | 108.8 | 108.8 | 108.8 | 108.8 | 108.8 | 108.8 | 108.8 | 104.1 | 104.1 | 104.1 |
| 12.5° | 132.4 | 132.4 | 132.4 | 132.4 | 132.4 | 132.4 | 132.4 | 132.4 | 127.7 | 127.7 | 127.7 |
| 15° | 175.0 | 179.7 | 184.5 | 189.2 | 189.2 | 193.9 | 189.2 | 184.5 | 179.7 | 175.0 | 170.3 |
| 17.5° | 326.4 | 350.0 | 359.5 | 364.2 | 373.7 | 378.4 | 373.7 | 364.2 | 359.5 | 350.0 | 326.4 |
| 20° | 950.7 | 1064.2 | 1144.6 | 1225.0 | 1305.4 | 1385.9 | 1338.6 | 1291.3 | 1244.0 | 1196.7 | 1073.7 |
| 22.5° | 2502.1 | 2767.0 | 2951.4 | 3135.9 | 3320.4 | 3504.8 | 3377.1 | 3249.4 | 3117.0 | 2989.3 | 2677.1 |
| 25° | 4356.2 | 4805.5 | 5042.0 | 5283.3 | 5519.8 | 5756.2 | 5538.7 | 5321.1 | 5098.8 | 4881.2 | 4446.1 |
| 27.5° | 5888.7 | 6427.9 | 6631.3 | 6829.9 | 7033.3 | 7232.0 | 7038.0 | 6848.8 | 6654.9 | 6461.0 | 5954.9 |
| 30° | 7184.7 | 7714.4 | 7913.1 | 8111.7 | 8310.4 | 8509.0 | 8291.5 | 8069.2 | 7851.6 | 7629.3 | 7127.9 |
| 32.5° | 8367.1 | 8972.6 | 9246.9 | 9521.2 | 9795.6 | 10069.9 | 9743.5 | 9417.2 | 9090.8 | 8764.4 | 8192.1 |
| 35° | 9786.1 | 10509.8 | 10831.4 | 11157.8 | 11479.4 | 11801.0 | 11413.2 | 11020.6 | 10632.7 | 10240.2 | 9516.5 |
| 37.5° | 11318.6 | 12212.5 | 12642.9 | 13073.4 | 13503.8 | 13934.2 | 13451.7 | 12969.3 | 12486.9 | 12004.4 | 11082.1 |
| 40° | 14109.2 | 15296.4 | 15934.9 | 16568.7 | 17207.3 | 17841.1 | 17117.4 | 16389.0 | 15665.3 | 14936.9 | 13669.3 |
| 42.5° | 19912.7 | 21591.8 | 22500.0 | 23408.1 | 24316.3 | 25224.4 | 24169.6 | 23110.1 | 22055.4 | 20995.9 | 19245.8 |
| 45° | 27906.2 | 30389.4 | 31392.1 | 32390.1 | 33392.9 | 34390.9 | 33198.9 | 32007.0 | 30810.4 | 29618.4 | 27267.7 |
| 47.5° | 32532.0 | 34849.7 | 35833.5 | 36817.3 | 37796.4 | 38780.2 | 37659.2 | 36538.2 | 35417.2 | 34296.3 | 32002.3 |
| 50° | 34069.2 | 36339.6 | 37422.7 | 38510.6 | 39593.7 | 40676.9 | 39395.1 | 38108.5 | 36826.8 | 35540.2 | 33336.1 |
| 52.5° | 34409.8 | 36632.8 | 37909.9 | 39187.0 | 40459.3 | 41736.4 | 40255.9 | 38775.5 | 37290.3 | 35809.8 | 33624.6 |
| 55° | 35327.4 | 37820.0 | 39291.0 | 40757.3 | 42228.3 | 43694.5 | 41968.1 | 40237.0 | 38510.6 | 36779.5 | 34381.4 |
| 57.5° | 36543.0 | 39172.8 | 40516.0 | 41859.3 | 43197.9 | 44541.2 | 42871.5 | 41206.6 | 39537.0 | 37867.3 | 35365.2 |
| 60° | 35545.0 | 37782.2 | 38903.2 | 40019.4 | 41140.4 | 42256.6 | 40747.8 | 39243.7 | 37734.9 | 36226.1 | 34140.2 |
| 62.5° | 31302.3 | 32891.5 | 33757.1 | 34622.6 | 35483.5 | 36349.0 | 35109.8 | 33870.6 | 32631.4 | 31392.1 | 29878.6 |
| 65° | 25082.5 | 26458.9 | 27083.2 | 27702.8 | 28327.2 | 28946.8 | 28086.0 | 27225.1 | 26359.6 | 25498.7 | 24226.4 |
| 67.5° | 19316.8 | 20475.6 | 21440.5 | 22400.7 | 23365.5 | 24325.7 | 23280.4 | 22235.1 | 21185.1 | 20139.8 | 18919.5 |
| 70° | 15253.8 | 16668.1 | 17462.7 | 18257.3 | 19051.9 | 19846.5 | 18938.4 | 18030.3 | 17117.4 | 16209.3 | 14932.2 |
| 72.5° | 10074.6 | 10930.7 | 11214.5 | 11503.0 | 11786.8 | 12070.6 | 11739.5 | 11413.2 | 11082.1 | 10751.0 | 9942.2 |
| 75° | 3083.9 | 3386.6 | 3722.4 | 4063.0 | 4398.8 | 4734.6 | 4431.9 | 4129.2 | 3826.5 | 3523.8 | 3249.4 |
| 77.5° | 988.5 | 1116.2 | 1215.6 | 1314.9 | 1409.5 | 1508.8 | 1513.6 | 1518.3 | 1518.3 | 1523.0 | 1376.4 |
| 80° | 222.3 | 236.5 | 236.5 | 236.5 | 231.8 | 231.8 | 255.4 | 274.3 | 298.0 | 316.9 | 298.0 |
| 82.5° | 47.3 | 47.3 | 47.3 | 47.3 | 47.3 | 47.3 | 47.3 | 47.3 | 42.6 | 42.6 | 42.6 |
| 85° | 4.7 | 4.7 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 |
| 2.5° | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 56.8 | 52.0 | 52.0 |
| 5° | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 66.2 | 61.5 | 61.5 |
| 7.5° | 80.4 | 80.4 | 80.4 | 80.4 | 80.4 | 75.7 | 75.7 | 75.7 | 75.7 | 70.9 | 70.9 |
| 10° | 104.1 | 99.3 | 99.3 | 99.3 | 94.6 | 94.6 | 89.9 | 89.9 | 85.1 | 85.1 | 80.4 |
| 12.5° | 127.7 | 123.0 | 123.0 | 118.2 | 118.2 | 113.5 | 108.8 | 104.1 | 99.3 | 94.6 | 89.9 |
| 15° | 165.5 | 160.8 | 156.1 | 151.4 | 141.9 | 137.2 | 127.7 | 123.0 | 118.2 | 113.5 | 108.8 |
| 17.5° | 302.7 | 279.1 | 255.4 | 231.8 | 212.8 | 189.2 | 165.5 | 156.1 | 141.9 | 132.4 | 118.2 |
| 20° | 955.4 | 832.5 | 709.5 | 600.7 | 491.9 | 378.4 | 269.6 | 236.5 | 203.4 | 170.3 | 137.2 |
| 22.5° | 2369.7 | 2057.5 | 1745.3 | 1475.7 | 1206.1 | 936.5 | 666.9 | 543.9 | 421.0 | 298.0 | 175.0 |
| 25° | 4010.9 | 3571.1 | 3135.9 | 2662.9 | 2194.7 | 1721.7 | 1248.7 | 1002.7 | 752.0 | 501.4 | 255.4 |
| 27.5° | 5448.8 | 4942.7 | 4436.6 | 3812.3 | 3187.9 | 2558.9 | 1934.5 | 1556.1 | 1173.0 | 789.9 | 411.5 |
| 30° | 6631.3 | 6129.9 | 5628.5 | 4862.3 | 4091.3 | 3325.1 | 2554.1 | 2062.2 | 1570.3 | 1073.7 | 581.8 |
| 32.5° | 7619.8 | 7047.5 | 6475.2 | 5633.3 | 4796.1 | 3954.2 | 3112.3 | 2502.1 | 1896.7 | 1286.5 | 676.4 |
| 35° | 8788.1 | 8064.4 | 7336.0 | 6437.3 | 5543.4 | 4644.7 | 3746.1 | 3003.5 | 2256.1 | 1508.8 | 766.2 |
| 37.5° | 10159.8 | 9237.4 | 8315.1 | 7340.8 | 6371.1 | 5396.8 | 4422.4 | 3542.7 | 2667.6 | 1787.9 | 908.1 |
| 40° | 12406.4 | 11138.8 | 9871.2 | 8703.0 | 7529.9 | 6361.7 | 5188.7 | 4171.7 | 3154.8 | 2133.2 | 1116.2 |
| 42.5° | 17495.8 | 15745.7 | 13995.7 | 12245.6 | 10490.8 | 8740.8 | 6986.0 | 5600.2 | 4219.0 | 2833.2 | 1447.3 |
| 45° | 24916.9 | 22566.2 | 20215.5 | 17869.4 | 15523.4 | 13177.4 | 10831.4 | 8679.3 | 6527.2 | 4370.4 | 2218.3 |
| 47.5° | 29708.3 | 27414.3 | 25120.3 | 22873.6 | 20631.7 | 18385.0 | 16138.3 | 13111.2 | 10084.1 | 7052.2 | 4025.1 |
| 50° | 31136.7 | 28932.6 | 26728.5 | 24723.0 | 22722.3 | 20716.8 | 18711.4 | 15509.2 | 12311.8 | 9109.7 | 5907.6 |
| 52.5° | 31439.4 | 29249.5 | 27064.3 | 25054.1 | 23048.6 | 21038.5 | 19028.3 | 15840.3 | 12652.4 | 9459.7 | 6271.8 |
| 55° | 31983.4 | 29585.3 | 27187.3 | 24931.1 | 22675.0 | 20414.1 | 18158.0 | 14974.8 | 11791.6 | 8608.4 | 5425.2 |
| 57.5° | *32863.1* | *30356.3* | *27854.2* | *25167.6* | *22481.1* | *19794.5* | *17107.9* | *13896.4* | *10684.8* | *7473.2* | *4261.6* |
| 60° | 32054.3 | 29963.7 | 27877.8 | 24983.2 | 22083.8 | 19189.1 | 16289.7 | 13026.1 | 9757.7 | 6489.4 | 3225.8 |
| 62.5° | 28360.3 | 26846.7 | 25328.4 | 22760.1 | 20191.8 | 17623.5 | 15055.2 | 11876.7 | 8698.2 | 5519.8 | 2341.3 |
| 65° | 22949.3 | 21677.0 | 20399.9 | 18366.1 | 16332.2 | 14293.7 | 12259.8 | 9582.7 | 6910.3 | 4233.2 | 1556.1 |
| 67.5° | 17699.2 | 16478.9 | 15258.6 | 13655.1 | 12051.7 | 10448.3 | 8844.9 | 6896.1 | 4947.4 | 2994.0 | 1045.3 |
| 70° | 13655.1 | 12378.1 | 11101.0 | 9658.4 | 8215.8 | 6773.2 | 5330.6 | 4195.4 | 3065.0 | 1929.8 | 794.6 |
| 72.5° | 9133.4 | 8324.6 | 7515.8 | 6319.1 | 5122.4 | 3925.8 | 2729.1 | 2208.8 | 1688.6 | 1163.5 | 643.3 |
| 75° | 2970.4 | 2696.0 | 2417.0 | 2090.6 | 1764.2 | 1433.1 | 1106.8 | 960.2 | 808.8 | 657.5 | 510.8 |
| 77.5° | 1225.0 | 1078.4 | 927.1 | 789.9 | 648.0 | 510.8 | 368.9 | 345.3 | 321.6 | 298.0 | 274.3 |
| 80° | 274.3 | 255.4 | 231.8 | 217.6 | 203.4 | 189.2 | 175.0 | 165.5 | 151.4 | 141.9 | 127.7 |
| 82.5° | 37.8 | 37.8 | 33.1 | 37.8 | 42.6 | 47.3 | 52.0 | 47.3 | 47.3 | 42.6 | 37.8 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 0° | 56.8 | 56.8 |
| 2.5° | 52.0 | 52.0 |
| 5° | 61.5 | 56.8 |
| 7.5° | 70.9 | 66.2 |
| 10° | 80.4 | 75.7 |
| 12.5° | 89.9 | 85.1 |
| 15° | 104.1 | 94.6 |
| 17.5° | 113.5 | 104.1 |
| 20° | 127.7 | 113.5 |
| 22.5° | 151.4 | 127.7 |
| 25° | 198.7 | 146.6 |
| 27.5° | 293.3 | 179.7 |
| 30° | 411.5 | 241.2 |
| 32.5° | 487.2 | 298.0 |
| 35° | 529.7 | 298.0 |
| 37.5° | 600.7 | 293.3 |
| 40° | 709.5 | 307.4 |
| 42.5° | 889.2 | 335.8 |
| 45° | 1319.6 | 421.0 |
| 47.5° | 2393.3 | 761.5 |
| 50° | 3547.4 | 1191.9 |
| 52.5° | 3783.9 | 1296.0 |
| 55° | 3296.7 | 1168.3 |
| 57.5° | *2625.1* | *988.5* |
| 60° | 1981.8 | 742.6 |
| 62.5° | 1471.0 | 605.4 |
| 65° | 1045.3 | 534.5 |
| 67.5° | 771.0 | 496.6 |
| 70° | 633.8 | 477.7 |
| 72.5° | 543.9 | 444.6 |
| 75° | 454.1 | 397.3 |
| 77.5° | 283.8 | 288.5 |
| 80° | 123.0 | 113.5 |
| 82.5° | 37.8 | 33.1 |
| 85° | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1389858
CATALOG NUMBER: GSS-SA3D-740-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 112.5° | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-1

Test Date: 10/09/2024

Luminaire Tested: GSS-SB1A-740-U-5WQ

Data in this report applies to families of products including GSS-SB1A-740-U-5WQ

Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04


## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-184-1 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 10/15/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | McGraw-Edison |
| Catalog Number: | **GSS-SB1A-740-U-5WQ** |
| Description: | GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI 4000K CCT 26 LEDS |

## Spectral Parameters

| | |
|---|---|
| CCT (K): | 3949 |
| CIE u': | 0.2248 |
| CIE v': | 0.5053 |
| Duv: | 0.0022 |
| CIE x: | 0.3844 |
| CIE y: | 0.3840 |
| CIE z: | 0.2316 |
| Peak Wavelength (nm): | 440 |
| Dominant Wavelength (nm): | 578 |
| Purity: | 30.60026 |
| Rf: | 71.8 |
| Rg: | 96.5 |

| | |
|---|---|
| CRI (Ra): | 70.7 |
| R1: | 68.0 |
| R2: | 76.0 |
| R3: | 84.3 |
| R4: | 72.0 |
| R5: | 68.6 |
| R6: | 68.3 |
| R7: | 77.9 |
| R8: | 50.3 |
| R9: | -36.7 |
| R10: | 45.1 |
| R11: | 70.7 |
| R12: | 47.1 |
| R13: | 68.5 |
| R14: | 91.1 |
| R15: | 58.7 |

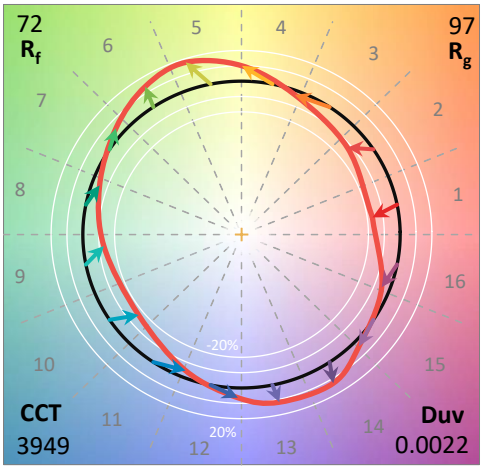


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 34M |
| Operation Time: | 1H 34M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-184-1


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-184-1

## CIE 1931 Chromaticity Diagram

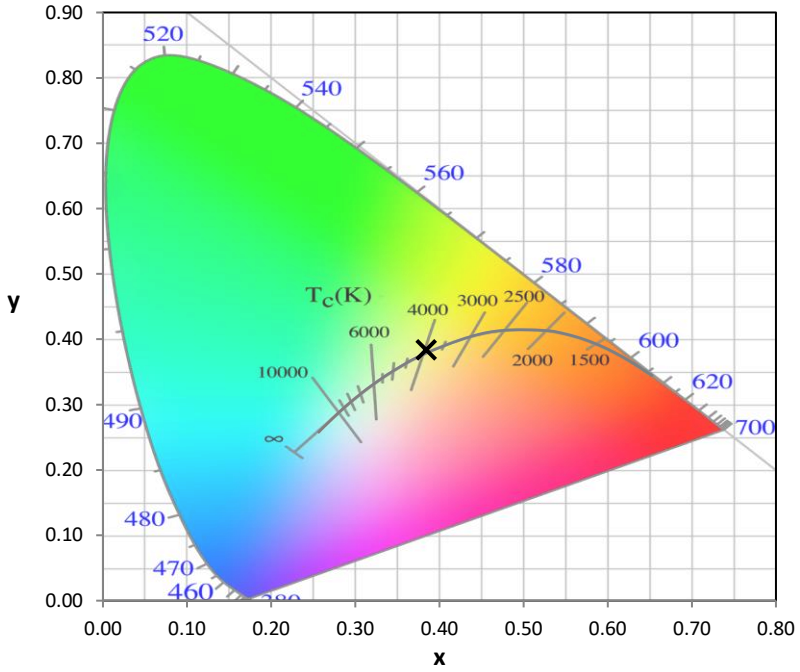


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

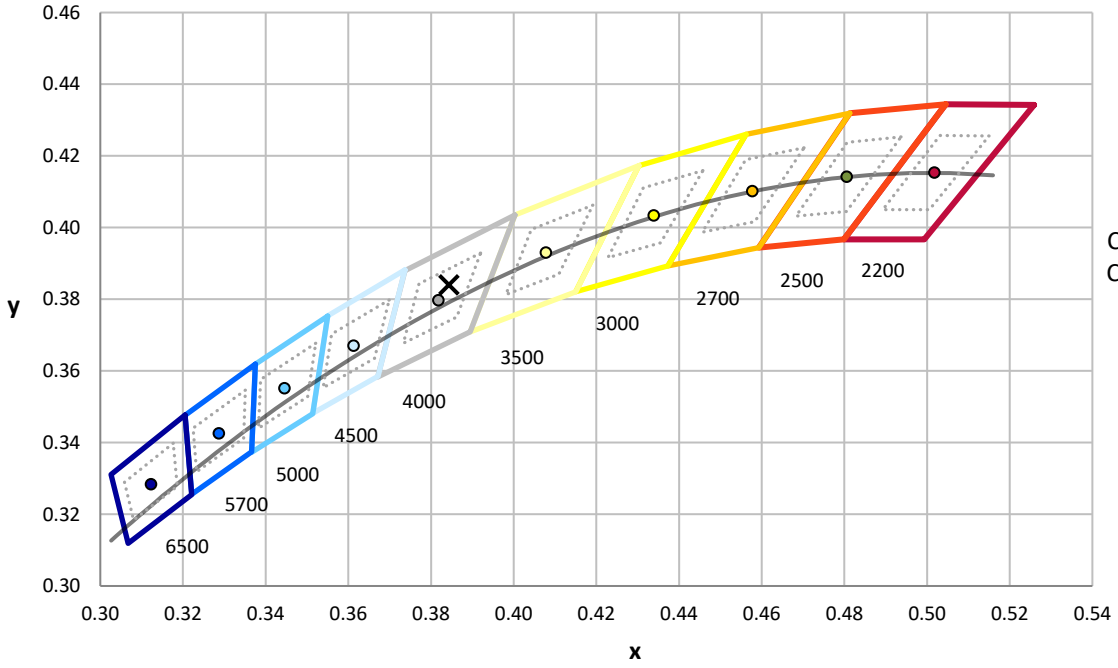



CCT = 3949K
CIE x = 0.3844
CIE y = 0.3840
Duv = 0.0022

Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-1

## Photopic Flux vs. Wavelength

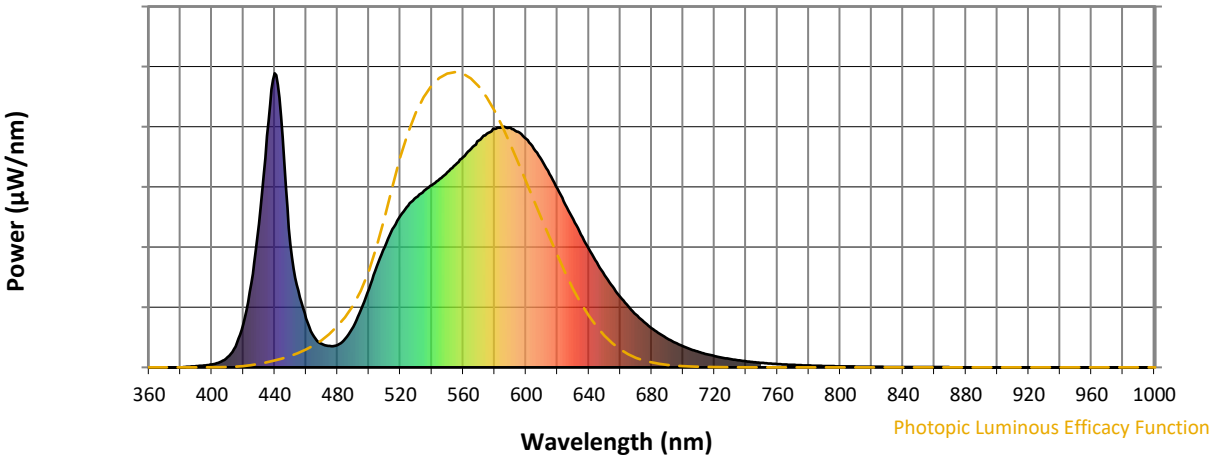



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 139 | NR | 620 | 607 | NR | 750 | 15 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 198 | NR | 625 | 554 | NR | 755 | 13 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 267 | NR | 630 | 504 | NR | 760 | 11 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 343 | NR | 635 | 452 | NR | 765 | 10 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 410 | NR | 640 | 403 | NR | 770 | 8 | NR | 900 | 0 | NR |
| 385 | 2 | NR | 515 | 470 | NR | 645 | 357 | NR | 775 | 7 | NR | 905 | 0 | NR |
| 390 | 4 | NR | 520 | 516 | NR | 650 | 314 | NR | 780 | 6 | NR | 910 | 0 | NR |
| 395 | 7 | NR | 525 | 550 | NR | 655 | 275 | NR | 785 | 5 | NR | 915 | 0 | NR |
| 400 | 10 | NR | 530 | 578 | NR | 660 | 240 | NR | 790 | 5 | NR | 920 | 0 | NR |
| 405 | 17 | NR | 535 | 601 | NR | 665 | 208 | NR | 795 | 4 | NR | 925 | 0 | NR |
| 410 | 35 | NR | 540 | 620 | NR | 670 | 179 | NR | 800 | 4 | NR | 930 | 0 | NR |
| 415 | 70 | NR | 545 | 641 | NR | 675 | 155 | NR | 805 | 3 | NR | 935 | 0 | NR |
| 420 | 147 | NR | 550 | 664 | NR | 680 | 133 | NR | 810 | 3 | NR | 940 | 0 | NR |
| 425 | 285 | NR | 555 | 689 | NR | 685 | 114 | NR | 815 | 2 | NR | 945 | 0 | NR |
| 430 | 487 | NR | 560 | 715 | NR | 690 | 98 | NR | 820 | 2 | NR | 950 | 0 | NR |
| 435 | 787 | NR | 565 | 743 | NR | 695 | 84 | NR | 825 | 2 | NR | 955 | 0 | NR |
| 440 | 1000 | NR | 570 | 771 | NR | 700 | 72 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 783 | NR | 575 | 794 | NR | 705 | 61 | NR | 835 | 1 | NR | 965 | 0 | NR |
| 450 | 417 | NR | 580 | 811 | NR | 710 | 52 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 261 | NR | 585 | 817 | NR | 715 | 45 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 167 | NR | 590 | 815 | NR | 720 | 39 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 104 | NR | 595 | 801 | NR | 725 | 33 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 79 | NR | 600 | 777 | NR | 730 | 28 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 73 | NR | 605 | 744 | NR | 735 | 24 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 76 | NR | 610 | 704 | NR | 740 | 21 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 98 | NR | 615 | 657 | NR | 745 | 18 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-1

## Scotopic Flux vs. Wavelength

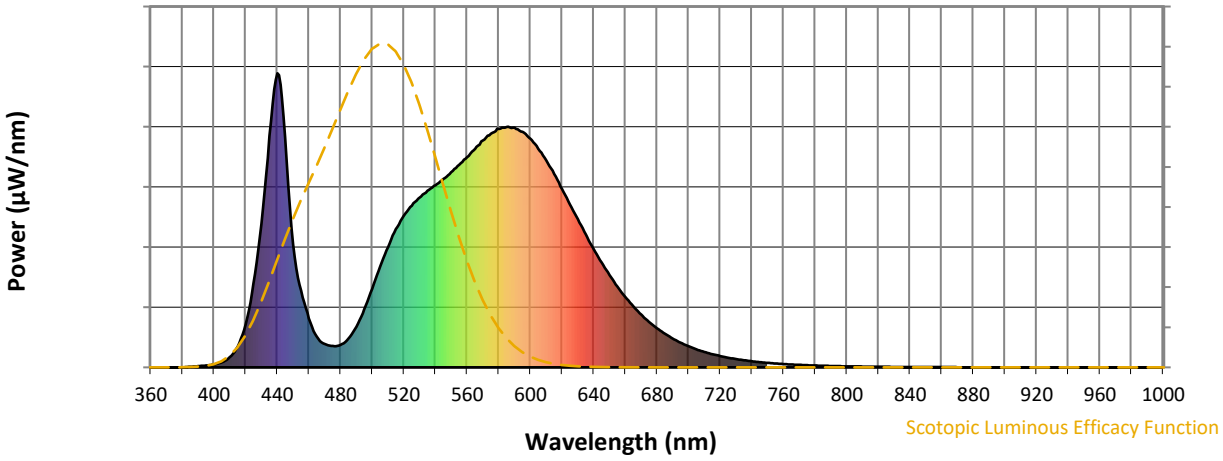



**Scotopic Lumens: NR** **S/P: 1.47**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 139 | NR | 620 | 607 | NR | 750 | 15 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 198 | NR | 625 | 554 | NR | 755 | 13 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 267 | NR | 630 | 504 | NR | 760 | 11 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 343 | NR | 635 | 452 | NR | 765 | 10 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 410 | NR | 640 | 403 | NR | 770 | 8 | NR | 900 | 0 | NR |
| 385 | 2 | NR | 515 | 470 | NR | 645 | 357 | NR | 775 | 7 | NR | 905 | 0 | NR |
| 390 | 4 | NR | 520 | 516 | NR | 650 | 314 | NR | 780 | 6 | NR | 910 | 0 | NR |
| 395 | 7 | NR | 525 | 550 | NR | 655 | 275 | NR | 785 | 5 | NR | 915 | 0 | NR |
| 400 | 10 | NR | 530 | 578 | NR | 660 | 240 | NR | 790 | 5 | NR | 920 | 0 | NR |
| 405 | 17 | NR | 535 | 601 | NR | 665 | 208 | NR | 795 | 4 | NR | 925 | 0 | NR |
| 410 | 35 | NR | 540 | 620 | NR | 670 | 179 | NR | 800 | 4 | NR | 930 | 0 | NR |
| 415 | 70 | NR | 545 | 641 | NR | 675 | 155 | NR | 805 | 3 | NR | 935 | 0 | NR |
| 420 | 147 | NR | 550 | 664 | NR | 680 | 133 | NR | 810 | 3 | NR | 940 | 0 | NR |
| 425 | 285 | NR | 555 | 689 | NR | 685 | 114 | NR | 815 | 2 | NR | 945 | 0 | NR |
| 430 | 487 | NR | 560 | 715 | NR | 690 | 98 | NR | 820 | 2 | NR | 950 | 0 | NR |
| 435 | 787 | NR | 565 | 743 | NR | 695 | 84 | NR | 825 | 2 | NR | 955 | 0 | NR |
| 440 | 1000 | NR | 570 | 771 | NR | 700 | 72 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 783 | NR | 575 | 794 | NR | 705 | 61 | NR | 835 | 1 | NR | 965 | 0 | NR |
| 450 | 417 | NR | 580 | 811 | NR | 710 | 52 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 261 | NR | 585 | 817 | NR | 715 | 45 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 167 | NR | 590 | 815 | NR | 720 | 39 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 104 | NR | 595 | 801 | NR | 725 | 33 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 79 | NR | 600 | 777 | NR | 730 | 28 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 73 | NR | 605 | 744 | NR | 735 | 24 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 76 | NR | 610 | 704 | NR | 740 | 21 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 98 | NR | 615 | 657 | NR | 745 | 18 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-1

## Melanopic Flux vs. Wavelength

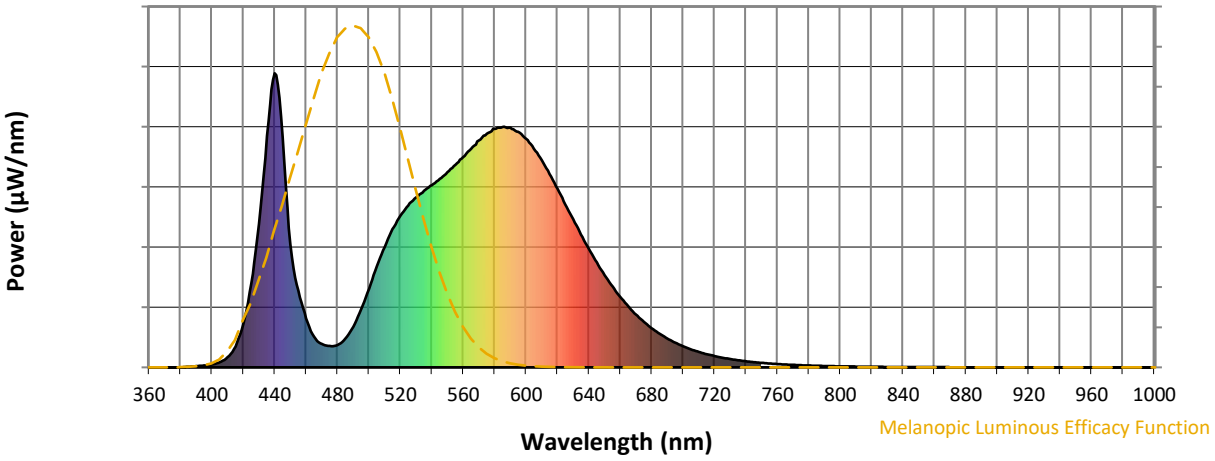


**Melanopic Lumens: NR** **M/P: 2.78**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 139 | NR | 620 | 607 | NR | 750 | 15 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 198 | NR | 625 | 554 | NR | 755 | 13 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 267 | NR | 630 | 504 | NR | 760 | 11 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 343 | NR | 635 | 452 | NR | 765 | 10 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 410 | NR | 640 | 403 | NR | 770 | 8 | NR | 900 | 0 | NR |
| 385 | 2 | NR | 515 | 470 | NR | 645 | 357 | NR | 775 | 7 | NR | 905 | 0 | NR |
| 390 | 4 | NR | 520 | 516 | NR | 650 | 314 | NR | 780 | 6 | NR | 910 | 0 | NR |
| 395 | 7 | NR | 525 | 550 | NR | 655 | 275 | NR | 785 | 5 | NR | 915 | 0 | NR |
| 400 | 10 | NR | 530 | 578 | NR | 660 | 240 | NR | 790 | 5 | NR | 920 | 0 | NR |
| 405 | 17 | NR | 535 | 601 | NR | 665 | 208 | NR | 795 | 4 | NR | 925 | 0 | NR |
| 410 | 35 | NR | 540 | 620 | NR | 670 | 179 | NR | 800 | 4 | NR | 930 | 0 | NR |
| 415 | 70 | NR | 545 | 641 | NR | 675 | 155 | NR | 805 | 3 | NR | 935 | 0 | NR |
| 420 | 147 | NR | 550 | 664 | NR | 680 | 133 | NR | 810 | 3 | NR | 940 | 0 | NR |
| 425 | 285 | NR | 555 | 689 | NR | 685 | 114 | NR | 815 | 2 | NR | 945 | 0 | NR |
| 430 | 487 | NR | 560 | 715 | NR | 690 | 98 | NR | 820 | 2 | NR | 950 | 0 | NR |
| 435 | 787 | NR | 565 | 743 | NR | 695 | 84 | NR | 825 | 2 | NR | 955 | 0 | NR |
| 440 | 1000 | NR | 570 | 771 | NR | 700 | 72 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 783 | NR | 575 | 794 | NR | 705 | 61 | NR | 835 | 1 | NR | 965 | 0 | NR |
| 450 | 417 | NR | 580 | 811 | NR | 710 | 52 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 261 | NR | 585 | 817 | NR | 715 | 45 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 167 | NR | 590 | 815 | NR | 720 | 39 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 104 | NR | 595 | 801 | NR | 725 | 33 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 79 | NR | 600 | 777 | NR | 730 | 28 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 73 | NR | 605 | 744 | NR | 735 | 24 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 76 | NR | 610 | 704 | NR | 740 | 21 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 98 | NR | 615 | 657 | NR | 745 | 18 | NR | 875 | 1 | NR | | | |


REPORT NUMBER: SP1-2407-184-1

# TM-30-18


## Summary


$R_f$ = 71.8
$R_g$ = 96.5
CIE $R_a$ = 70.7
$R_9$ = -36.7


## Spectral Power Distribution Comparison

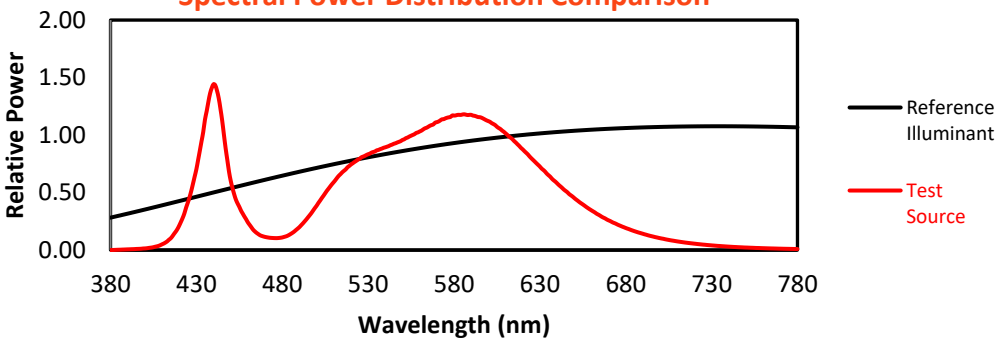



## Color Vector Graphics

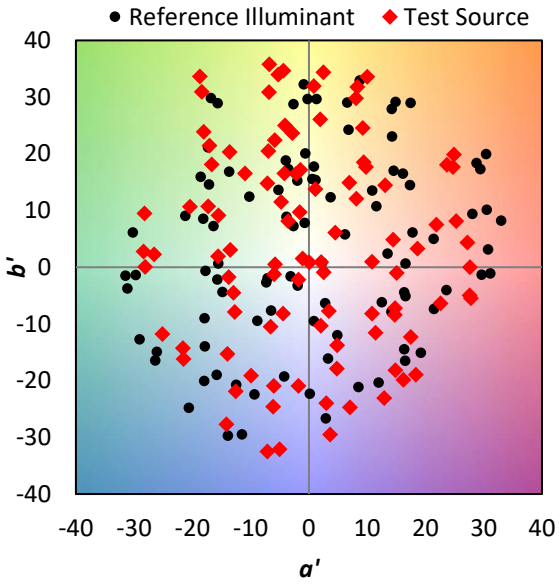

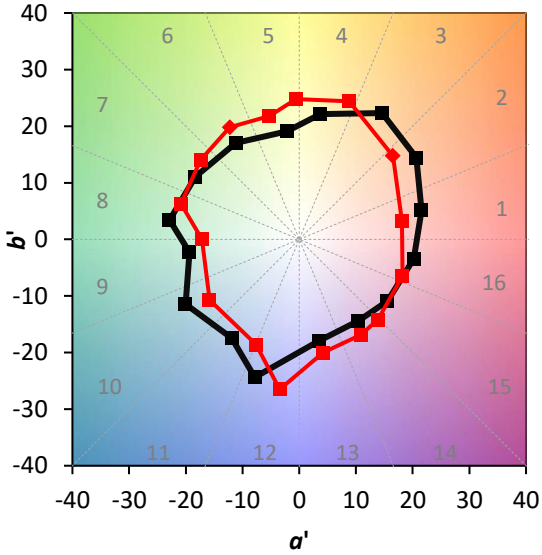


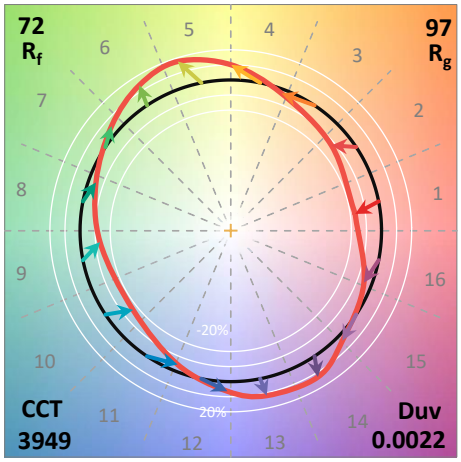
REPORT NUMBER: SP1-2407-184-1
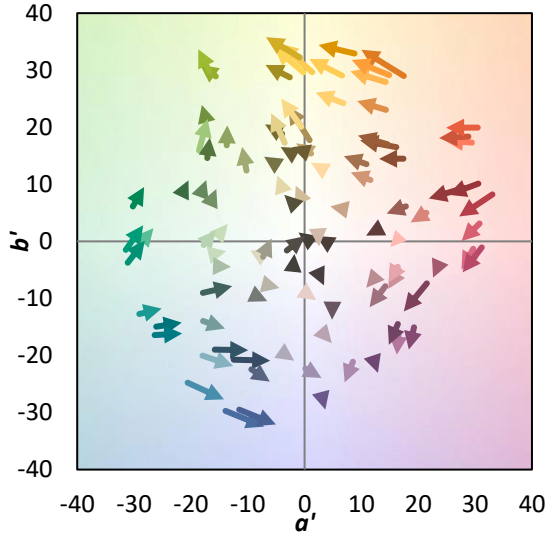
# TM-30-18

**Individual Sample Fidelity Index ($R_{f,i}$)**


| | | | |
|---|---|---|---|
| CES01 = 85 | CES26 = 56 | CES51 = 86 | CES76 = 48 |
| CES02 = 61 | CES27 = 79 | CES52 = 88 | CES77 = 71 |
| CES03 = 30 | CES28 = 80 | CES53 = 73 | CES78 = 52 |
| CES04 = 70 | CES29 = 49 | CES54 = 79 | CES79 = 79 |
| CES05 = 47 | CES30 = 53 | CES55 = 77 | CES80 = 77 |
| CES06 = 50 | CES31 = 55 | CES56 = 67 | CES81 = 75 |
| CES07 = 40 | CES32 = 53 | CES57 = 64 | CES82 = 90 |
| CES08 = 39 | CES33 = 59 | CES58 = 67 | CES83 = 84 |
| CES09 = 29 | CES34 = 67 | CES59 = 87 | CES84 = 89 |
| CES10 = 74 | CES35 = 82 | CES60 = 91 | CES85 = 86 |
| CES11 = 57 | CES36 = 86 | CES61 = 87 | CES86 = 71 |
| CES12 = 63 | CES37 = 76 | CES62 = 76 | CES87 = 78 |
| CES13 = 42 | CES38 = 62 | CES63 = 73 | CES88 = 76 |
| CES14 = 74 | CES39 = 91 | CES64 = 71 | CES89 = 72 |
| CES15 = 71 | CES40 = 84 | CES65 = 64 | CES90 = 72 |
| CES16 = 46 | CES41 = 81 | CES66 = 67 | CES91 = 97 |
| CES17 = 49 | CES42 = 76 | CES67 = 65 | CES92 = 66 |
| CES18 = 56 | CES43 = 71 | CES68 = 72 | CES93 = 81 |
| CES19 = 72 | CES44 = 98 | CES69 = 82 | CES94 = 55 |
| CES20 = 65 | CES45 = 80 | CES70 = 61 | CES95 = 73 |
| CES21 = 86 | CES46 = 76 | CES71 = 59 | CES96 = 78 |
| CES22 = 78 | CES47 = 71 | CES72 = 86 | CES97 = 83 |
| CES23 = 92 | CES48 = 61 | CES73 = 52 | CES98 = 72 |
| CES24 = 91 | CES49 = 76 | CES74 = 93 | CES99 = 60 |
| CES25 = 72 | CES50 = 84 | CES75 = 56 | |

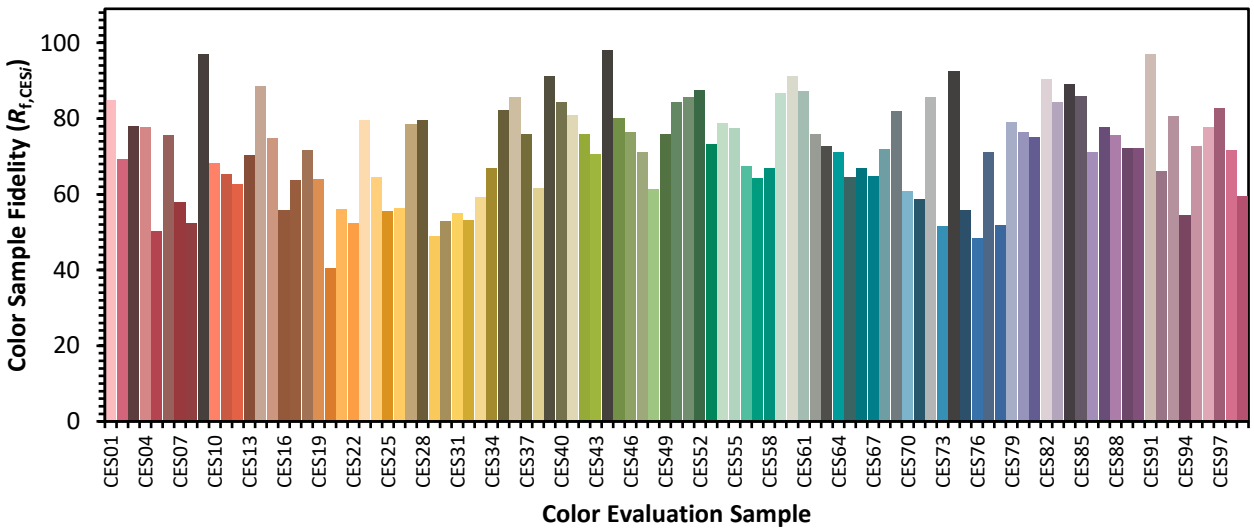



REPORT NUMBER: SP1-2407-184-1

**TM-30-18**

## Color Rendition by Hue-Angle Bin

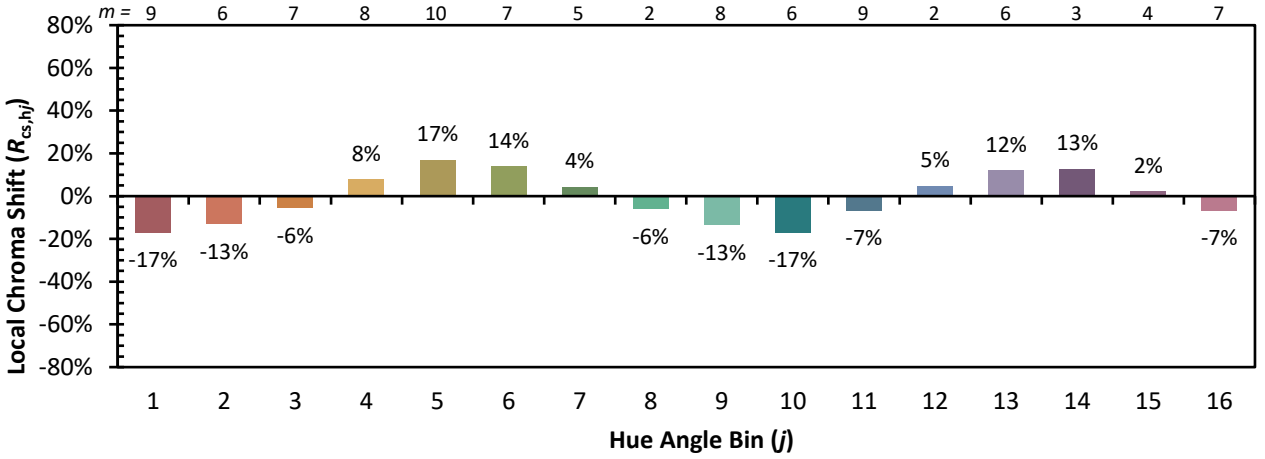

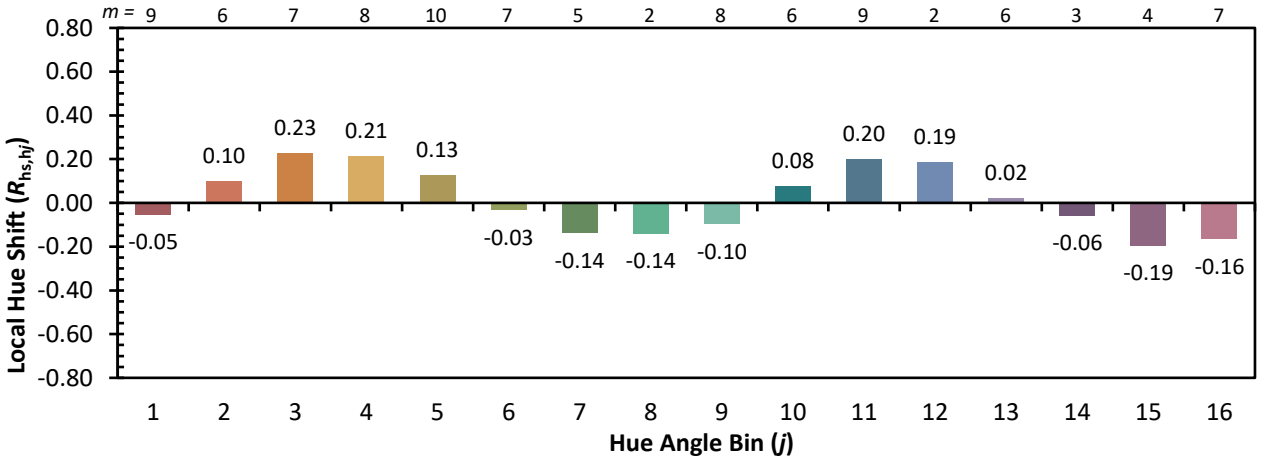


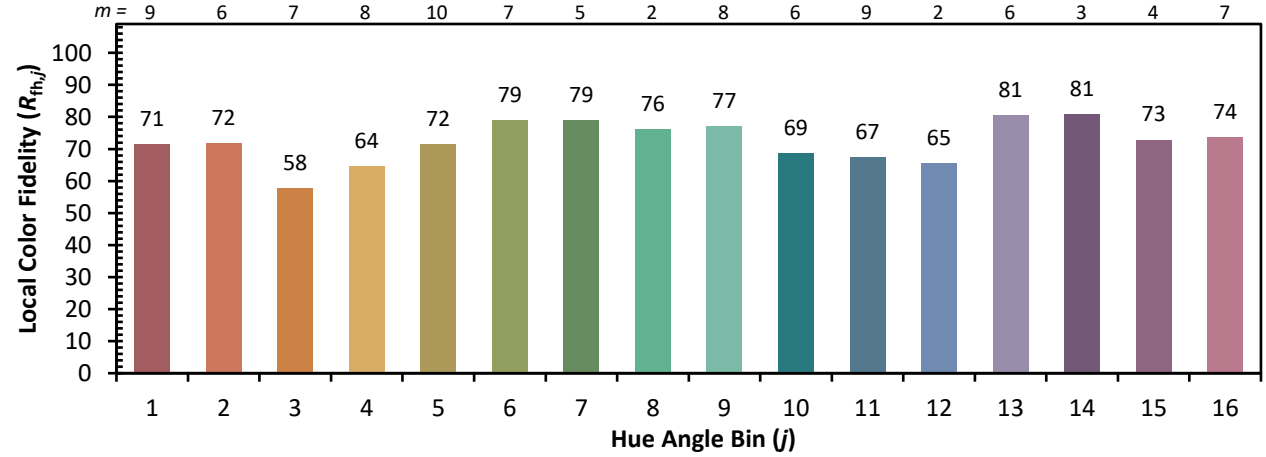
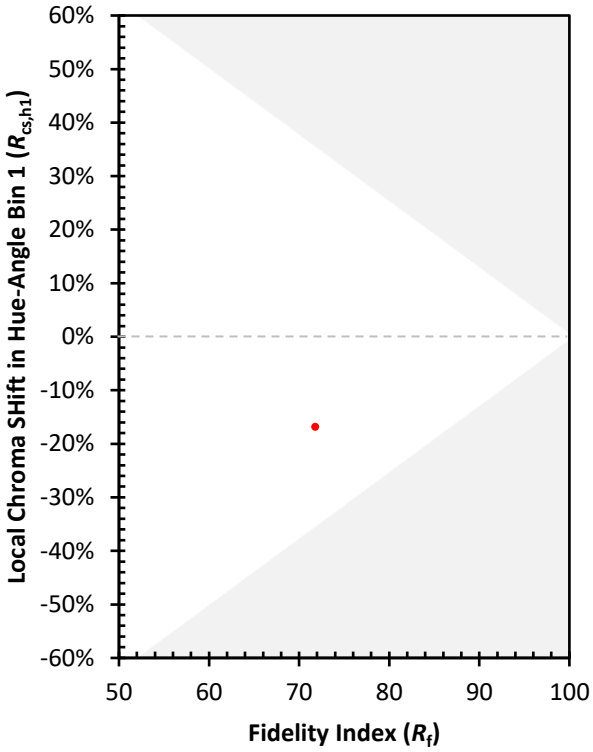



REPORT NUMBER: SP1-2407-184-1

# TM-30-18

## Measure Comparisons

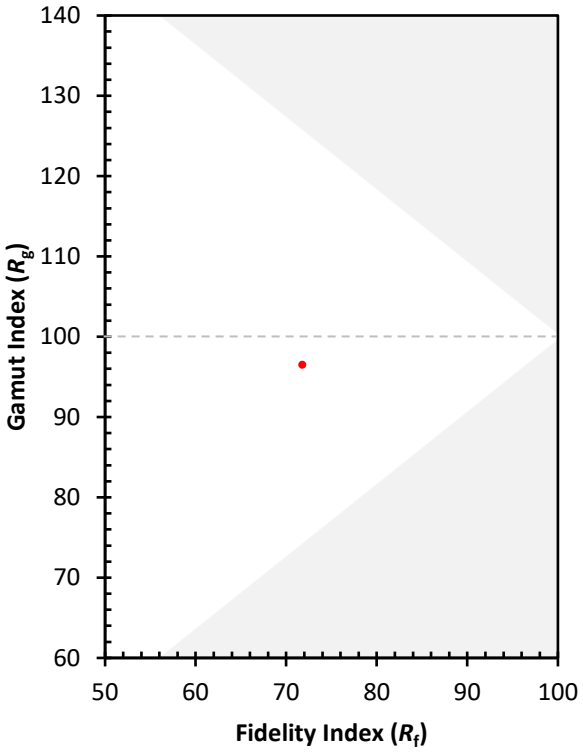


(END OF REPORT)