Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1390001

Luminaire Tested: **GSS-SA3C-760-U-RBC**

Issue Date: 02/18/2026

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P1390001 |
| Test Lab: | INNOVATION CENTER(G3) |
| Issue Date: | 02/18/2026 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | GSS-SA3C-760-U-RBC |
| Description: | GALLEON SLIM SITE LUMINAIRE 1050mA 3xLight Square PACKAGE 70CRI 5700K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL |
| Light Source: | (42) 5700K CCT, 70 CRI LEDS |
| Ballast/Driver: | ELECTRONIC DRIVER |

Luminaire Equipment:

| Sample No. | Condition | Description |
|---|---|---|
| a | good | reflector |
| b | good | lens |
| c | good | housing |
| d | good | cord |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 13955.1 lumens |
| Efficiency: | N/A |
| Efficacy: | 99.4 lumens/watt |
| Luminous Opening: | Rectangular (W 1.5' x L: 0.5' x H: 0') |
| IES Classification: | Type III - Short |
| BUG Rating: | B0 - U0 - G2 |


| | |
|---|---|
| Input Watts (W): | 140.4 |
| Input Voltage (V): | 120 |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | 0.97 |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 28.75 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

## Iso-Footcandle Lines of Horizontal Illumination

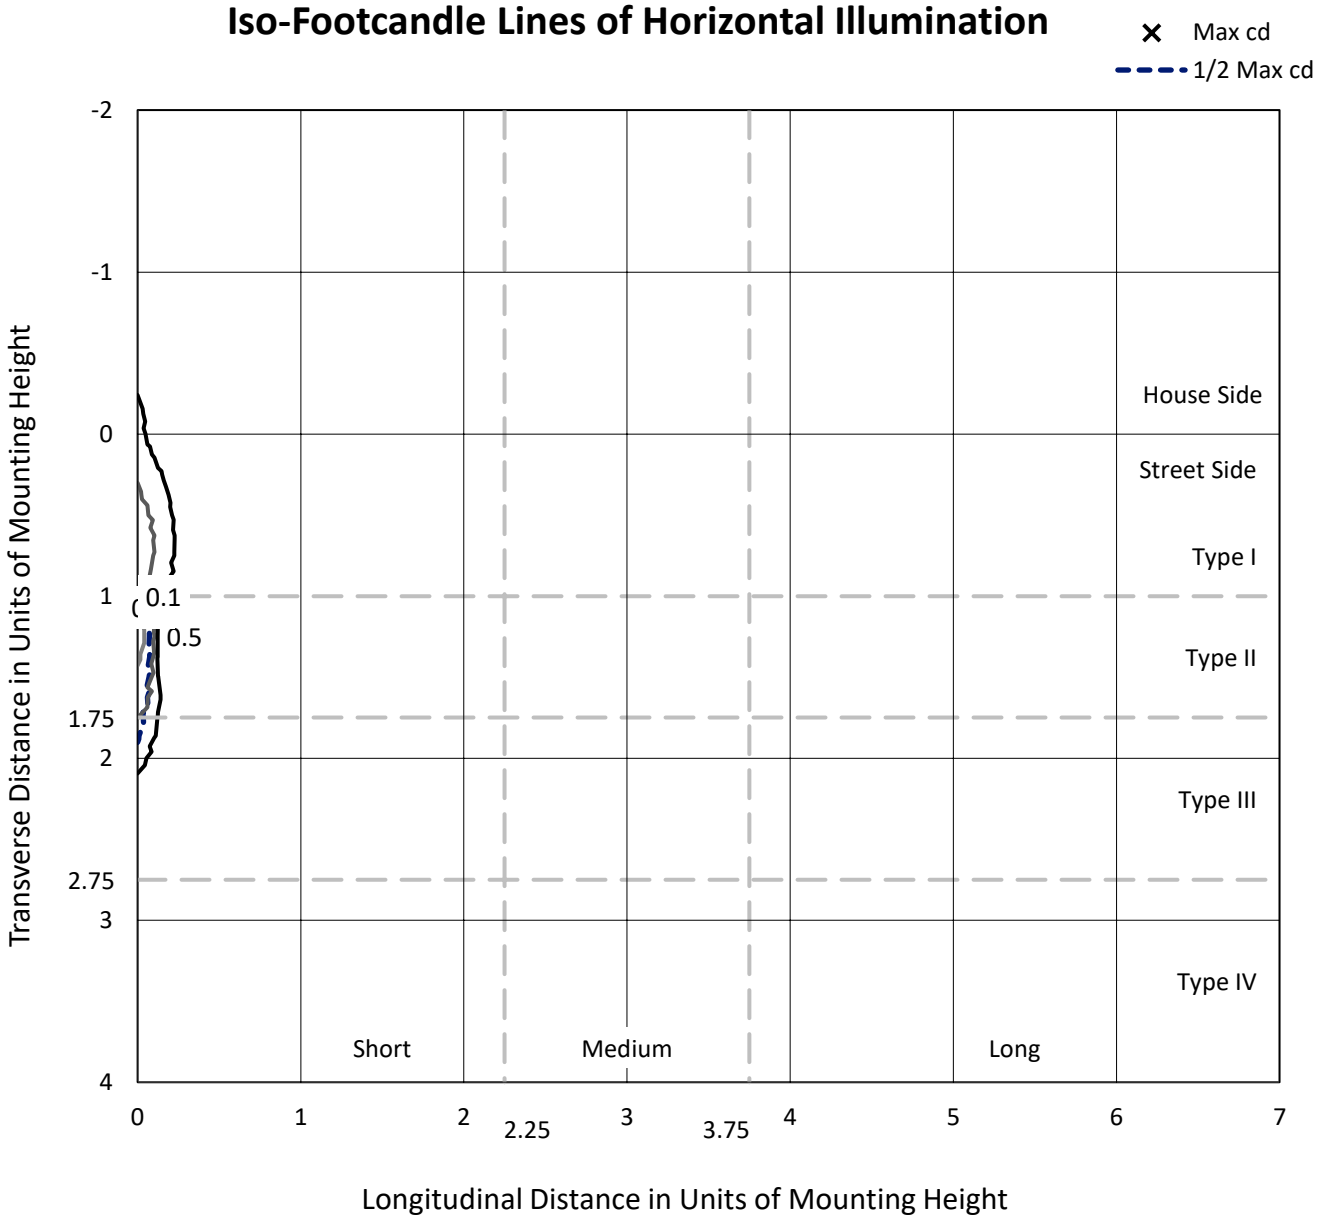



Based on 20 foot mounting height. Maximum calculated value = 0.7 fc
Type III - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

## Luminous Intensity Polar Plot

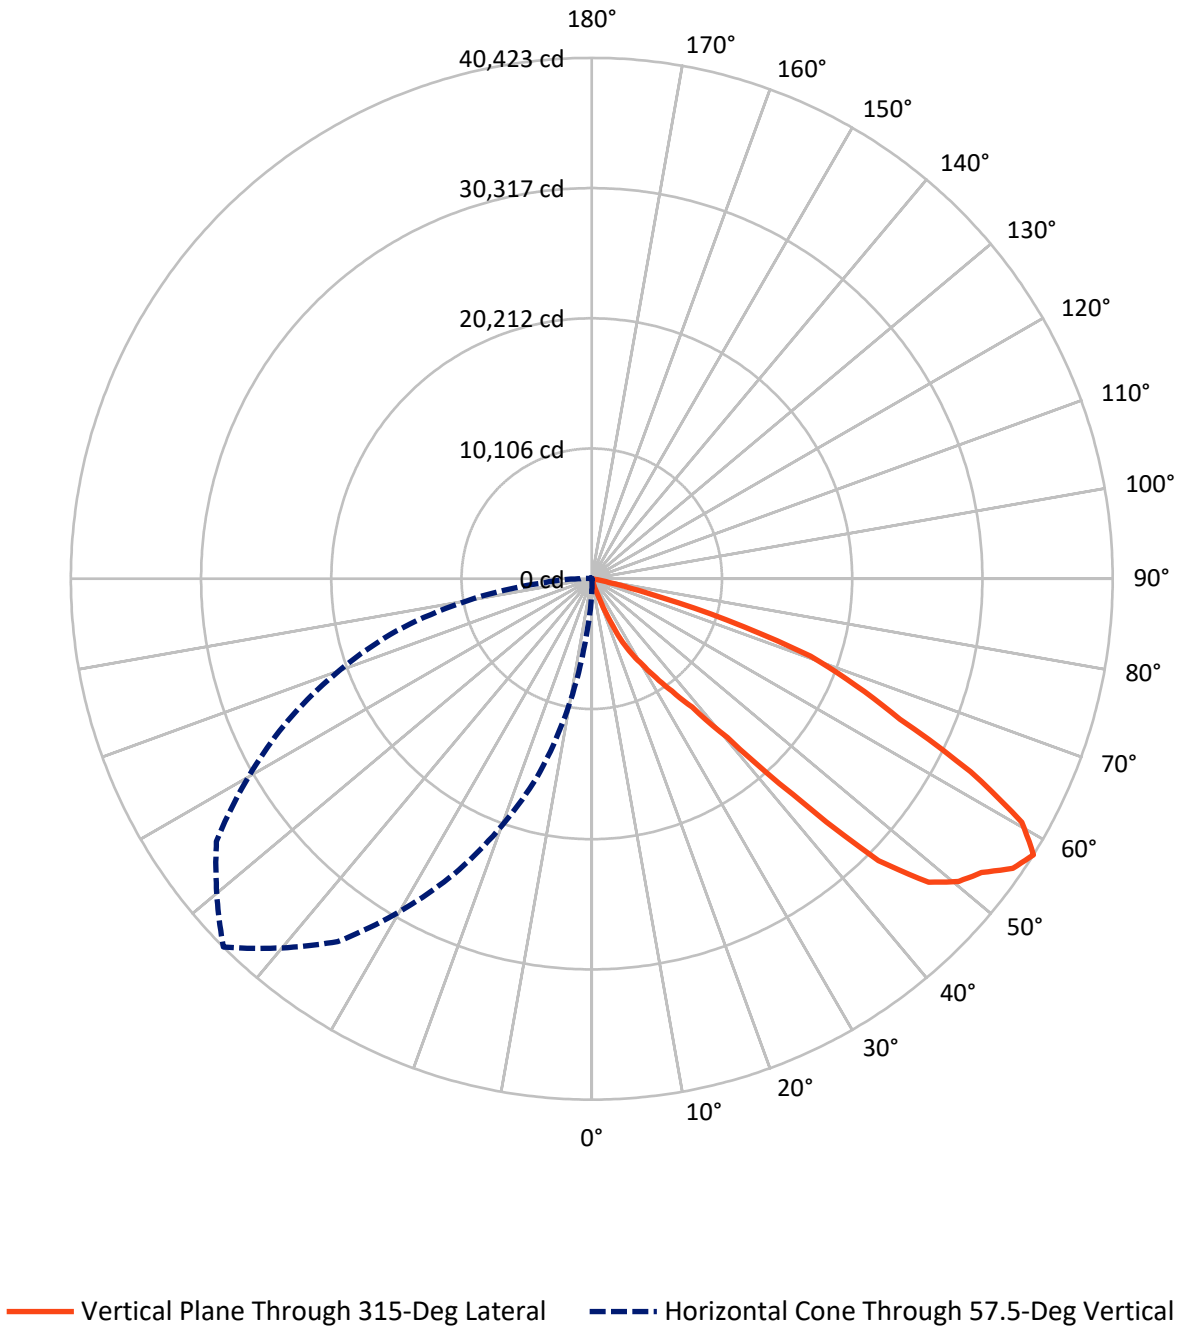

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 99.6 | 0.0 | 99.6 |
| | % Fixture | 0.7 | 0.0 | 0.7 |
| **Street Side** | Lumens | 13855.5 | 0.0 | 13855.5 |
| | % Fixture | 99.3 | 0.0 | 99.3 |
| **Total** | Lumens | 13955.1 | 0.0 | 13955.1 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 4.8 | 0.0 |
| 10°-20° | 23.5 | 0.2 |
| 20°-30° | 302.1 | 2.2 |
| 30°-40° | 941.8 | 6.7 |
| 40°-50° | 3076.1 | 22.0 |
| 50°-60° | 4937.3 | 35.4 |
| 60°-70° | 3790.9 | 27.2 |
| 70°-80° | 863.3 | 6.2 |
| 80°-90° | 15.4 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 13955.1 | 100.0 |
| 0°-180° | 13955.1 | 100.0 |

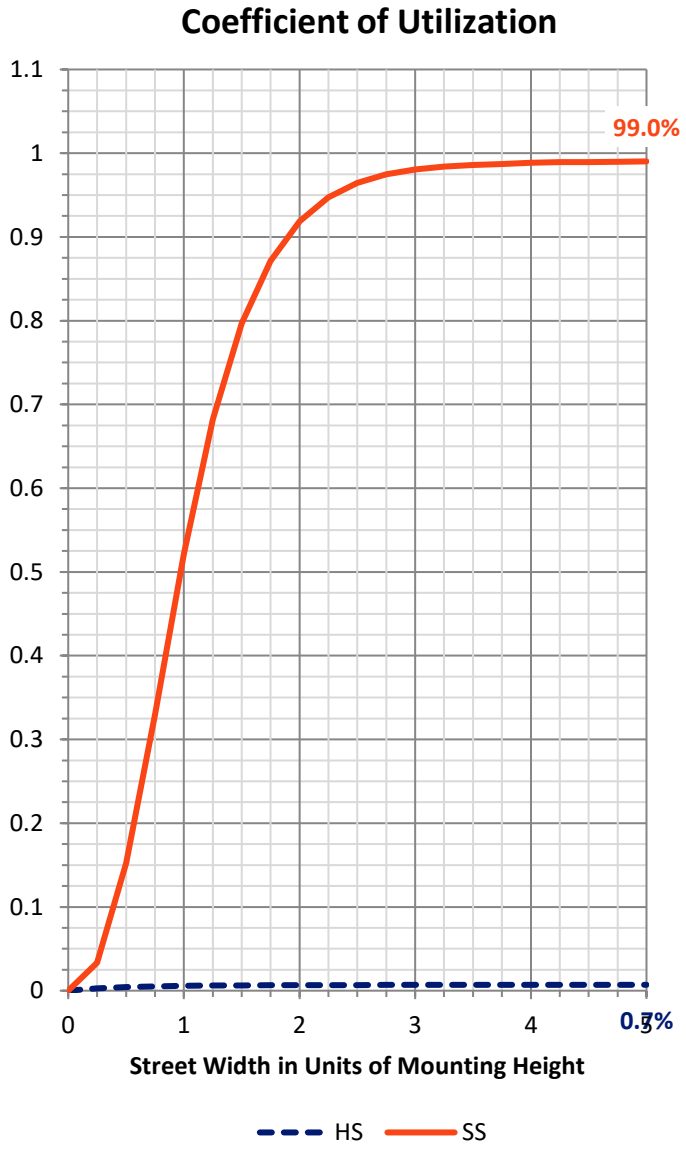

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 316.1 | 2.3 | | | |
| FM | (30°-60°) | 8913.1 | 63.9 | | | |
| FH | (60°-80°) | 4615.4 | 33.1 | | | G2/5000 |
| FVH | (80°-90°) | 10.9 | 0.1 | | | G1/100 |
| BL | (0°-30°) | 14.3 | 0.1 | B0/110 | | |
| BM | (30°-60°) | 42.0 | 0.3 | B0/220 | | |
| BH | (60°-80°) | 38.9 | 0.3 | B0/110 | | G0/110 |
| BVH | (80°-90°) | 4.5 | 0.0 | | | G0/10 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B0-U0-G2**
Type III Short

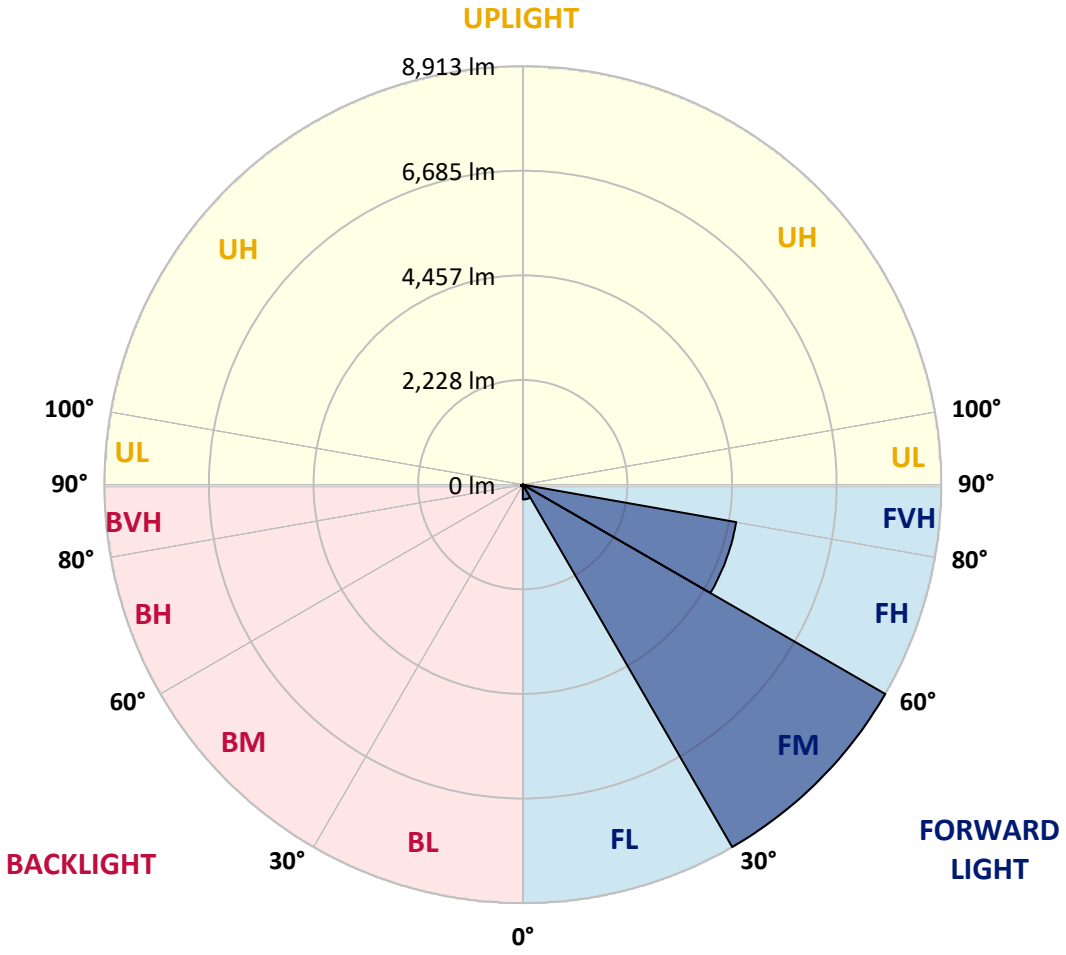

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 47.2 | 47.2 | 47.2 | 47.2 | 47.2 | 42.9 | 42.9 | 42.9 | 42.9 | 42.9 | 42.9 |
| 5° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 47.2 | 47.2 | 47.2 | 47.2 | 42.9 | 42.9 |
| 7.5° | 60.1 | 60.1 | 55.8 | 55.8 | 55.8 | 51.5 | 51.5 | 51.5 | 51.5 | 47.2 | 47.2 |
| 10° | 68.7 | 68.7 | 64.4 | 64.4 | 60.1 | 60.1 | 55.8 | 55.8 | 51.5 | 51.5 | 47.2 |
| 12.5° | 77.3 | 77.3 | 73.0 | 68.7 | 68.7 | 64.4 | 60.1 | 55.8 | 55.8 | 51.5 | 47.2 |
| 15° | 85.9 | 81.6 | 77.3 | 73.0 | 73.0 | 68.7 | 64.4 | 60.1 | 60.1 | 55.8 | 51.5 |
| 17.5° | 94.4 | 90.1 | 85.9 | 81.6 | 77.3 | 68.7 | 64.4 | 60.1 | 60.1 | 55.8 | 51.5 |
| 20° | 103.0 | 94.4 | 85.9 | 81.6 | 77.3 | 68.7 | 64.4 | 60.1 | 60.1 | 55.8 | 51.5 |
| 22.5° | 115.9 | 107.3 | 94.4 | 90.1 | 81.6 | 77.3 | 68.7 | 64.4 | 60.1 | 55.8 | 51.5 |
| 25° | 133.1 | 115.9 | 103.0 | 94.4 | 85.9 | 77.3 | 68.7 | 64.4 | 60.1 | 55.8 | 51.5 |
| 27.5° | 163.1 | 137.4 | 115.9 | 107.3 | 94.4 | 85.9 | 73.0 | 68.7 | 64.4 | 60.1 | 55.8 |
| 30° | 218.9 | 171.7 | 124.5 | 111.6 | 103.0 | 90.1 | 77.3 | 73.0 | 64.4 | 60.1 | 51.5 |
| 32.5° | 270.4 | 210.3 | 150.2 | 133.1 | 115.9 | 94.4 | 77.3 | 73.0 | 64.4 | 60.1 | 51.5 |
| 35° | 270.4 | 214.6 | 158.8 | 137.4 | 120.2 | 98.7 | 77.3 | 73.0 | 64.4 | 60.1 | 51.5 |
| 37.5° | 266.1 | 210.3 | 154.5 | 137.4 | 120.2 | 98.7 | 81.6 | 73.0 | 68.7 | 60.1 | 51.5 |
| 40° | 279.0 | 206.0 | 137.4 | 124.5 | 111.6 | 94.4 | 81.6 | 73.0 | 68.7 | 60.1 | 51.5 |
| 42.5° | 304.8 | 218.9 | 133.1 | 120.2 | 111.6 | 98.7 | 85.9 | 77.3 | 68.7 | 60.1 | 51.5 |
| 45° | 382.0 | 257.6 | 137.4 | 124.5 | 111.6 | 94.4 | 81.6 | 77.3 | 68.7 | 64.4 | 55.8 |
| 47.5° | 691.1 | 416.4 | 141.7 | 124.5 | 111.6 | 94.4 | 77.3 | 73.0 | 68.7 | 60.1 | 55.8 |
| 50° | 1081.7 | 613.8 | 145.9 | 128.8 | 111.6 | 94.4 | 77.3 | 73.0 | 68.7 | 64.4 | 60.1 |
| 52.5° | 1176.2 | 669.6 | 163.1 | 141.7 | 120.2 | 98.7 | 77.3 | 73.0 | 68.7 | 64.4 | 60.1 |
| 55° | 1060.3 | 622.4 | 188.9 | 163.1 | 133.1 | 107.3 | 77.3 | 73.0 | 68.7 | 64.4 | 60.1 |
| 57.5° | *897.2* | *553.7* | *210.3* | *180.3* | *145.9* | *115.9* | *81.6* | *77.3* | *73.0* | *68.7* | *64.4* |
| 60° | 673.9 | 459.3 | 244.7 | 206.0 | 171.7 | 133.1 | 94.4 | 90.1 | 85.9 | 77.3 | 73.0 |
| 62.5° | 549.5 | 407.8 | 270.4 | 231.8 | 188.9 | 150.2 | 107.3 | 103.0 | 98.7 | 90.1 | 85.9 |
| 65° | 485.1 | 386.3 | 287.6 | 244.7 | 201.8 | 154.5 | 111.6 | 107.3 | 103.0 | 98.7 | 94.4 |
| 67.5° | 450.7 | 373.5 | 300.5 | 253.3 | 210.3 | 163.1 | 115.9 | 111.6 | 107.3 | 103.0 | 98.7 |
| 70° | 433.6 | 364.9 | 296.2 | 253.3 | 210.3 | 167.4 | 124.5 | 120.2 | 111.6 | 107.3 | 98.7 |
| 72.5° | 403.5 | 347.7 | 291.9 | 257.6 | 218.9 | 184.6 | 145.9 | 133.1 | 120.2 | 103.0 | 90.1 |
| 75° | 360.6 | 309.1 | 257.6 | 236.1 | 214.6 | 188.9 | 167.4 | 145.9 | 124.5 | 98.7 | 77.3 |
| 77.5° | 261.8 | 240.4 | 218.9 | 206.0 | 193.2 | 176.0 | 163.1 | 141.7 | 120.2 | 94.4 | 73.0 |
| 80° | 103.0 | 115.9 | 124.5 | 124.5 | 128.8 | 128.8 | 128.8 | 111.6 | 94.4 | 77.3 | 60.1 |
| 82.5° | 30.0 | 30.0 | 30.0 | 34.3 | 38.6 | 42.9 | 47.2 | 42.9 | 42.9 | 38.6 | 34.3 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 42.9 | 42.9 | 38.6 | 38.6 | 38.6 | 38.6 | 38.6 | 38.6 | 38.6 | 38.6 | 38.6 |
| 5° | 42.9 | 42.9 | 38.6 | 38.6 | 38.6 | 38.6 | 34.3 | 34.3 | 34.3 | 34.3 | 34.3 |
| 7.5° | 47.2 | 42.9 | 42.9 | 38.6 | 38.6 | 38.6 | 34.3 | 34.3 | 34.3 | 34.3 | 34.3 |
| 10° | 47.2 | 42.9 | 42.9 | 38.6 | 38.6 | 38.6 | 34.3 | 34.3 | 34.3 | 34.3 | 30.0 |
| 12.5° | 47.2 | 47.2 | 42.9 | 42.9 | 42.9 | 38.6 | 38.6 | 34.3 | 34.3 | 34.3 | 30.0 |
| 15° | 47.2 | 47.2 | 42.9 | 38.6 | 38.6 | 38.6 | 34.3 | 34.3 | 34.3 | 34.3 | 30.0 |
| 17.5° | 47.2 | 47.2 | 42.9 | 38.6 | 38.6 | 34.3 | 34.3 | 30.0 | 30.0 | 30.0 | 25.8 |
| 20° | 47.2 | 47.2 | 42.9 | 38.6 | 38.6 | 34.3 | 34.3 | 30.0 | 30.0 | 30.0 | 25.8 |
| 22.5° | 47.2 | 47.2 | 42.9 | 38.6 | 38.6 | 34.3 | 34.3 | 30.0 | 30.0 | 25.8 | 25.8 |
| 25° | 47.2 | 47.2 | 42.9 | 38.6 | 34.3 | 34.3 | 30.0 | 25.8 | 25.8 | 21.5 | 21.5 |
| 27.5° | 51.5 | 47.2 | 42.9 | 38.6 | 34.3 | 34.3 | 30.0 | 25.8 | 21.5 | 21.5 | 17.2 |
| 30° | 47.2 | 47.2 | 42.9 | 38.6 | 34.3 | 30.0 | 25.8 | 21.5 | 17.2 | 17.2 | 12.9 |
| 32.5° | 47.2 | 47.2 | 42.9 | 38.6 | 34.3 | 30.0 | 25.8 | 21.5 | 17.2 | 17.2 | 12.9 |
| 35° | 47.2 | 42.9 | 38.6 | 34.3 | 30.0 | 25.8 | 21.5 | 17.2 | 12.9 | 12.9 | 8.6 |
| 37.5° | 47.2 | 42.9 | 38.6 | 34.3 | 30.0 | 25.8 | 21.5 | 17.2 | 12.9 | 8.6 | 4.3 |
| 40° | 47.2 | 42.9 | 38.6 | 34.3 | 30.0 | 25.8 | 17.2 | 12.9 | 8.6 | 8.6 | 4.3 |
| 42.5° | 47.2 | 42.9 | 38.6 | 34.3 | 30.0 | 25.8 | 21.5 | 17.2 | 12.9 | 8.6 | 4.3 |
| 45° | 51.5 | 47.2 | 38.6 | 34.3 | 30.0 | 30.0 | 25.8 | 21.5 | 17.2 | 12.9 | 4.3 |
| 47.5° | 51.5 | 42.9 | 38.6 | 30.0 | 30.0 | 30.0 | 25.8 | 25.8 | 21.5 | 12.9 | 8.6 |
| 50° | 55.8 | 47.2 | 42.9 | 34.3 | 30.0 | 30.0 | 25.8 | 21.5 | 17.2 | 12.9 | 4.3 |
| 52.5° | 55.8 | 51.5 | 42.9 | 38.6 | 34.3 | 25.8 | 21.5 | 12.9 | 8.6 | 8.6 | 4.3 |
| 55° | 55.8 | 55.8 | 51.5 | 47.2 | 38.6 | 30.0 | 17.2 | 8.6 | 8.6 | 4.3 | 4.3 |
| 57.5° | *60.1* | *60.1* | *55.8* | *51.5* | *38.6* | *25.8* | *12.9* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 68.7 | 64.4 | 60.1 | 55.8 | 42.9 | 30.0 | 12.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 77.3 | 68.7 | 60.1 | 51.5 | 38.6 | 25.8 | 12.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 81.6 | 68.7 | 55.8 | 42.9 | 34.3 | 21.5 | 12.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 85.9 | 68.7 | 55.8 | 38.6 | 30.0 | 21.5 | 8.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 81.6 | 64.4 | 47.2 | 30.0 | 21.5 | 17.2 | 8.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 73.0 | 60.1 | 42.9 | 25.8 | 21.5 | 12.9 | 8.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 64.4 | 51.5 | 34.3 | 21.5 | 17.2 | 12.9 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 60.1 | 42.9 | 30.0 | 12.9 | 8.6 | 8.6 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 47.2 | 34.3 | 17.2 | 4.3 | 4.3 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 25.8 | 17.2 | 8.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 38.6 | 38.6 | 38.6 | 34.3 | 34.3 | 34.3 | 34.3 | 34.3 | 34.3 | 34.3 | 34.3 |
| 5° | 34.3 | 34.3 | 34.3 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 |
| 7.5° | 34.3 | 34.3 | 34.3 | 30.0 | 30.0 | 30.0 | 30.0 | 25.8 | 25.8 | 25.8 | 25.8 |
| 10° | 30.0 | 30.0 | 30.0 | 25.8 | 25.8 | 25.8 | 25.8 | 21.5 | 21.5 | 21.5 | 21.5 |
| 12.5° | 30.0 | 30.0 | 30.0 | 25.8 | 25.8 | 25.8 | 25.8 | 21.5 | 21.5 | 21.5 | 21.5 |
| 15° | 30.0 | 30.0 | 30.0 | 25.8 | 25.8 | 25.8 | 21.5 | 21.5 | 17.2 | 17.2 | 17.2 |
| 17.5° | 25.8 | 25.8 | 25.8 | 21.5 | 21.5 | 21.5 | 21.5 | 17.2 | 17.2 | 17.2 | 12.9 |
| 20° | 25.8 | 25.8 | 25.8 | 21.5 | 21.5 | 17.2 | 17.2 | 12.9 | 8.6 | 8.6 | 8.6 |
| 22.5° | 21.5 | 21.5 | 17.2 | 17.2 | 12.9 | 12.9 | 8.6 | 8.6 | 4.3 | 4.3 | 4.3 |
| 25° | 17.2 | 17.2 | 12.9 | 12.9 | 8.6 | 8.6 | 4.3 | 4.3 | 0.0 | 0.0 | 0.0 |
| 27.5° | 12.9 | 8.6 | 8.6 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 8.6 | 8.6 | 4.3 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 8.6 | 8.6 | 4.3 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 4.3 | 4.3 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 34.3 | 34.3 | 34.3 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 |
| 5° | 25.8 | 25.8 | 25.8 | 25.8 | 25.8 | 25.8 | 25.8 | 25.8 | 25.8 | 25.8 | 25.8 |
| 7.5° | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 17.2 | 17.2 | 17.2 |
| 10° | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 12.9 | 12.9 | 12.9 |
| 12.5° | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 12.9 | 12.9 | 12.9 | 8.6 | 8.6 | 8.6 |
| 15° | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 8.6 | 8.6 | 8.6 | 4.3 | 4.3 | 4.3 |
| 17.5° | 12.9 | 8.6 | 8.6 | 8.6 | 8.6 | 4.3 | 4.3 | 4.3 | 0.0 | 0.0 | 0.0 |
| 20° | 4.3 | 4.3 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 | 30.0 |
| 5° | 25.8 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 |
| 7.5° | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 | 17.2 |
| 10° | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 |
| 12.5° | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 4.3 | 4.3 |
| 15° | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 30.0 | 34.3 | 34.3 | 34.3 | 34.3 | 38.6 | 38.6 | 38.6 | 42.9 | 42.9 | 47.2 |
| 5° | 21.5 | 25.8 | 25.8 | 25.8 | 25.8 | 30.0 | 30.0 | 30.0 | 34.3 | 34.3 | 38.6 |
| 7.5° | 17.2 | 21.5 | 21.5 | 21.5 | 21.5 | 25.8 | 25.8 | 25.8 | 30.0 | 30.0 | 34.3 |
| 10° | 12.9 | 12.9 | 12.9 | 12.9 | 17.2 | 17.2 | 21.5 | 21.5 | 25.8 | 25.8 | 30.0 |
| 12.5° | 4.3 | 8.6 | 8.6 | 8.6 | 8.6 | 12.9 | 12.9 | 12.9 | 17.2 | 21.5 | 21.5 |
| 15° | 0.0 | 4.3 | 4.3 | 4.3 | 4.3 | 8.6 | 8.6 | 8.6 | 12.9 | 17.2 | 17.2 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 8.6 | 8.6 | 12.9 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 47.2 | 51.5 | 51.5 | 55.8 | 55.8 | 60.1 | 60.1 | 64.4 | 64.4 | 64.4 | 68.7 |
| 5° | 38.6 | 42.9 | 47.2 | 47.2 | 51.5 | 55.8 | 55.8 | 60.1 | 60.1 | 60.1 | 64.4 |
| 7.5° | 34.3 | 38.6 | 42.9 | 42.9 | 47.2 | 51.5 | 51.5 | 55.8 | 55.8 | 55.8 | 60.1 |
| 10° | 30.0 | 34.3 | 38.6 | 38.6 | 42.9 | 47.2 | 47.2 | 51.5 | 51.5 | 55.8 | 55.8 |
| 12.5° | 25.8 | 30.0 | 34.3 | 34.3 | 38.6 | 42.9 | 42.9 | 47.2 | 51.5 | 51.5 | 55.8 |
| 15° | 21.5 | 25.8 | 30.0 | 30.0 | 34.3 | 38.6 | 42.9 | 47.2 | 47.2 | 51.5 | 51.5 |
| 17.5° | 12.9 | 17.2 | 21.5 | 25.8 | 30.0 | 34.3 | 38.6 | 42.9 | 42.9 | 47.2 | 51.5 |
| 20° | 8.6 | 12.9 | 17.2 | 21.5 | 25.8 | 30.0 | 30.0 | 34.3 | 38.6 | 42.9 | 42.9 |
| 22.5° | 4.3 | 8.6 | 12.9 | 12.9 | 17.2 | 21.5 | 25.8 | 30.0 | 30.0 | 34.3 | 38.6 |
| 25° | 0.0 | 4.3 | 8.6 | 8.6 | 12.9 | 17.2 | 17.2 | 21.5 | 25.8 | 30.0 | 30.0 |
| 27.5° | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 | 12.9 | 17.2 | 21.5 | 21.5 | 25.8 | 25.8 |
| 30° | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 | 12.9 | 12.9 | 17.2 | 17.2 | 21.5 | 25.8 |
| 32.5° | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 8.6 | 12.9 | 17.2 | 17.2 | 21.5 | 21.5 |
| 35° | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 8.6 | 8.6 | 12.9 | 12.9 | 17.2 | 17.2 |
| 37.5° | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 8.6 | 8.6 | 12.9 | 12.9 | 17.2 | 17.2 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 8.6 | 12.9 | 12.9 | 12.9 | 17.2 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 | 12.9 | 12.9 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 | 12.9 | 12.9 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 | 12.9 | 12.9 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 | 12.9 | 12.9 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 | 8.6 | 12.9 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 | 8.6 | 12.9 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *4.3* | *4.3* | *4.3* | *8.6* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 8.6 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 8.6 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 8.6 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 8.6 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 8.6 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 8.6 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 4.3 | 4.3 | 8.6 | 8.6 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 | 8.6 | 12.9 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 | 8.6 | 12.9 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 4.3 | 8.6 | 8.6 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 68.7 | 68.7 | 68.7 | 68.7 | 68.7 | 68.7 | 68.7 | 68.7 | 64.4 | 64.4 | 64.4 |
| 5° | 64.4 | 64.4 | 64.4 | 64.4 | 64.4 | 64.4 | 64.4 | 64.4 | 60.1 | 60.1 | 60.1 |
| 7.5° | 60.1 | 60.1 | 60.1 | 64.4 | 64.4 | 64.4 | 64.4 | 64.4 | 60.1 | 60.1 | 60.1 |
| 10° | 60.1 | 60.1 | 60.1 | 64.4 | 64.4 | 64.4 | 64.4 | 64.4 | 60.1 | 60.1 | 60.1 |
| 12.5° | 55.8 | 55.8 | 55.8 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 |
| 15° | 55.8 | 55.8 | 55.8 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 |
| 17.5° | 51.5 | 55.8 | 55.8 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 |
| 20° | 47.2 | 47.2 | 51.5 | 51.5 | 55.8 | 55.8 | 55.8 | 60.1 | 60.1 | 60.1 | 60.1 |
| 22.5° | 38.6 | 42.9 | 47.2 | 47.2 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 25° | 34.3 | 34.3 | 38.6 | 42.9 | 42.9 | 47.2 | 47.2 | 47.2 | 47.2 | 47.2 | 47.2 |
| 27.5° | 30.0 | 30.0 | 34.3 | 34.3 | 38.6 | 38.6 | 38.6 | 42.9 | 42.9 | 42.9 | 42.9 |
| 30° | 25.8 | 30.0 | 30.0 | 34.3 | 34.3 | 34.3 | 38.6 | 38.6 | 42.9 | 42.9 | 42.9 |
| 32.5° | 25.8 | 25.8 | 30.0 | 30.0 | 34.3 | 34.3 | 34.3 | 38.6 | 38.6 | 38.6 | 38.6 |
| 35° | 21.5 | 21.5 | 25.8 | 25.8 | 30.0 | 30.0 | 34.3 | 34.3 | 38.6 | 38.6 | 38.6 |
| 37.5° | 21.5 | 21.5 | 25.8 | 25.8 | 30.0 | 30.0 | 30.0 | 34.3 | 34.3 | 34.3 | 38.6 |
| 40° | 17.2 | 17.2 | 21.5 | 21.5 | 25.8 | 25.8 | 30.0 | 30.0 | 34.3 | 34.3 | 38.6 |
| 42.5° | 17.2 | 17.2 | 21.5 | 21.5 | 25.8 | 25.8 | 30.0 | 30.0 | 34.3 | 34.3 | 38.6 |
| 45° | 17.2 | 17.2 | 21.5 | 21.5 | 25.8 | 25.8 | 30.0 | 30.0 | 34.3 | 34.3 | 38.6 |
| 47.5° | 17.2 | 17.2 | 21.5 | 21.5 | 25.8 | 25.8 | 25.8 | 30.0 | 30.0 | 30.0 | 34.3 |
| 50° | 17.2 | 17.2 | 17.2 | 21.5 | 21.5 | 21.5 | 25.8 | 25.8 | 30.0 | 30.0 | 34.3 |
| 52.5° | 12.9 | 12.9 | 12.9 | 17.2 | 17.2 | 17.2 | 21.5 | 21.5 | 25.8 | 25.8 | 30.0 |
| 55° | 12.9 | 12.9 | 12.9 | 17.2 | 17.2 | 17.2 | 17.2 | 21.5 | 21.5 | 21.5 | 25.8 |
| 57.5° | *8.6* | *8.6* | *8.6* | *12.9* | *12.9* | *12.9* | *12.9* | *17.2* | *17.2* | *17.2* | *21.5* |
| 60° | 8.6 | 8.6 | 8.6 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 17.2 |
| 62.5° | 8.6 | 8.6 | 8.6 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 17.2 |
| 65° | 8.6 | 8.6 | 8.6 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 17.2 |
| 67.5° | 8.6 | 8.6 | 8.6 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 17.2 |
| 70° | 8.6 | 8.6 | 8.6 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 17.2 |
| 72.5° | 8.6 | 8.6 | 8.6 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 17.2 |
| 75° | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 |
| 77.5° | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 |
| 80° | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 |
| 82.5° | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 |
| 85° | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 |
| 87.5° | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 | 12.9 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 64.4 | 64.4 | 64.4 | 64.4 | 64.4 | 60.1 | 60.1 | 60.1 | 64.4 | 64.4 | 64.4 |
| 5° | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 |
| 7.5° | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 55.8 | 55.8 | 55.8 | 60.1 | 60.1 | 60.1 |
| 10° | 60.1 | 55.8 | 55.8 | 55.8 | 55.8 | 55.8 | 55.8 | 55.8 | 60.1 | 60.1 | 60.1 |
| 12.5° | 60.1 | 55.8 | 55.8 | 55.8 | 55.8 | 55.8 | 55.8 | 55.8 | 60.1 | 60.1 | 60.1 |
| 15° | 60.1 | 55.8 | 55.8 | 55.8 | 55.8 | 55.8 | 55.8 | 60.1 | 60.1 | 64.4 | 64.4 |
| 17.5° | 55.8 | 55.8 | 51.5 | 51.5 | 55.8 | 55.8 | 55.8 | 55.8 | 60.1 | 60.1 | 60.1 |
| 20° | 55.8 | 55.8 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 55.8 | 55.8 | 60.1 | 60.1 |
| 22.5° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 55.8 | 55.8 | 60.1 | 60.1 |
| 25° | 47.2 | 47.2 | 47.2 | 47.2 | 51.5 | 51.5 | 51.5 | 55.8 | 60.1 | 60.1 | 64.4 |
| 27.5° | 47.2 | 47.2 | 47.2 | 47.2 | 51.5 | 51.5 | 51.5 | 55.8 | 60.1 | 60.1 | 64.4 |
| 30° | 47.2 | 47.2 | 47.2 | 47.2 | 51.5 | 51.5 | 51.5 | 55.8 | 60.1 | 60.1 | 64.4 |
| 32.5° | 42.9 | 42.9 | 42.9 | 47.2 | 47.2 | 51.5 | 51.5 | 55.8 | 60.1 | 60.1 | 64.4 |
| 35° | 42.9 | 42.9 | 42.9 | 47.2 | 47.2 | 51.5 | 51.5 | 55.8 | 60.1 | 60.1 | 64.4 |
| 37.5° | 38.6 | 42.9 | 42.9 | 47.2 | 51.5 | 51.5 | 55.8 | 60.1 | 64.4 | 64.4 | 68.7 |
| 40° | 38.6 | 42.9 | 42.9 | 47.2 | 51.5 | 51.5 | 55.8 | 60.1 | 64.4 | 64.4 | 68.7 |
| 42.5° | 38.6 | 42.9 | 42.9 | 47.2 | 51.5 | 51.5 | 55.8 | 60.1 | 64.4 | 68.7 | 73.0 |
| 45° | 42.9 | 42.9 | 47.2 | 51.5 | 51.5 | 55.8 | 55.8 | 60.1 | 64.4 | 68.7 | 73.0 |
| 47.5° | 42.9 | 47.2 | 51.5 | 51.5 | 55.8 | 55.8 | 55.8 | 60.1 | 68.7 | 73.0 | 77.3 |
| 50° | 38.6 | 42.9 | 47.2 | 51.5 | 51.5 | 55.8 | 55.8 | 60.1 | 68.7 | 73.0 | 77.3 |
| 52.5° | 34.3 | 34.3 | 38.6 | 42.9 | 51.5 | 55.8 | 60.1 | 64.4 | 73.0 | 77.3 | 81.6 |
| 55° | 30.0 | 30.0 | 34.3 | 42.9 | 51.5 | 60.1 | 68.7 | 73.0 | 77.3 | 77.3 | 81.6 |
| 57.5° | *25.8* | *25.8* | *30.0* | *42.9* | *55.8* | *68.7* | *81.6* | *81.6* | *85.9* | *85.9* | *85.9* |
| 60° | 21.5 | 21.5 | 25.8 | 38.6 | 55.8 | 68.7 | 81.6 | 85.9 | 90.1 | 90.1 | 94.4 |
| 62.5° | 21.5 | 21.5 | 25.8 | 38.6 | 51.5 | 60.1 | 73.0 | 81.6 | 90.1 | 98.7 | 107.3 |
| 65° | 17.2 | 21.5 | 21.5 | 34.3 | 42.9 | 55.8 | 64.4 | 77.3 | 90.1 | 103.0 | 115.9 |
| 67.5° | 17.2 | 21.5 | 21.5 | 30.0 | 42.9 | 51.5 | 60.1 | 73.0 | 90.1 | 103.0 | 115.9 |
| 70° | 21.5 | 21.5 | 25.8 | 34.3 | 38.6 | 47.2 | 51.5 | 68.7 | 81.6 | 98.7 | 111.6 |
| 72.5° | 17.2 | 21.5 | 21.5 | 30.0 | 34.3 | 42.9 | 47.2 | 64.4 | 77.3 | 94.4 | 107.3 |
| 75° | 17.2 | 17.2 | 17.2 | 25.8 | 30.0 | 38.6 | 42.9 | 55.8 | 73.0 | 85.9 | 98.7 |
| 77.5° | 12.9 | 12.9 | 12.9 | 21.5 | 25.8 | 34.3 | 38.6 | 51.5 | 68.7 | 81.6 | 94.4 |
| 80° | 12.9 | 12.9 | 12.9 | 17.2 | 21.5 | 21.5 | 25.8 | 38.6 | 55.8 | 68.7 | 81.6 |
| 82.5° | 12.9 | 8.6 | 8.6 | 12.9 | 12.9 | 17.2 | 17.2 | 25.8 | 34.3 | 42.9 | 51.5 |
| 85° | 12.9 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 |
| 87.5° | 12.9 | 8.6 | 8.6 | 8.6 | 8.6 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 64.4 | 64.4 | 64.4 | 64.4 | 64.4 | 68.7 | 68.7 | 68.7 | 68.7 | 68.7 | 68.7 |
| 5° | 64.4 | 64.4 | 68.7 | 68.7 | 68.7 | 73.0 | 73.0 | 73.0 | 73.0 | 73.0 | 73.0 |
| 7.5° | 64.4 | 64.4 | 68.7 | 68.7 | 68.7 | 73.0 | 73.0 | 73.0 | 77.3 | 77.3 | 81.6 |
| 10° | 64.4 | 64.4 | 68.7 | 68.7 | 73.0 | 73.0 | 77.3 | 77.3 | 81.6 | 81.6 | 85.9 |
| 12.5° | 64.4 | 68.7 | 68.7 | 73.0 | 77.3 | 81.6 | 81.6 | 85.9 | 90.1 | 90.1 | 94.4 |
| 15° | 68.7 | 68.7 | 73.0 | 73.0 | 77.3 | 81.6 | 85.9 | 90.1 | 94.4 | 98.7 | 103.0 |
| 17.5° | 64.4 | 68.7 | 73.0 | 77.3 | 81.6 | 85.9 | 90.1 | 94.4 | 103.0 | 107.3 | 115.9 |
| 20° | 64.4 | 68.7 | 73.0 | 77.3 | 81.6 | 90.1 | 94.4 | 98.7 | 107.3 | 115.9 | 128.8 |
| 22.5° | 64.4 | 68.7 | 73.0 | 77.3 | 85.9 | 94.4 | 98.7 | 107.3 | 120.2 | 128.8 | 145.9 |
| 25° | 68.7 | 73.0 | 77.3 | 81.6 | 90.1 | 98.7 | 107.3 | 115.9 | 133.1 | 145.9 | 184.6 |
| 27.5° | 68.7 | 77.3 | 81.6 | 85.9 | 94.4 | 107.3 | 115.9 | 124.5 | 150.2 | 171.7 | 257.6 |
| 30° | 68.7 | 77.3 | 81.6 | 85.9 | 98.7 | 111.6 | 124.5 | 137.4 | 180.3 | 218.9 | 364.9 |
| 32.5° | 68.7 | 77.3 | 81.6 | 85.9 | 103.0 | 124.5 | 141.7 | 158.8 | 214.6 | 270.4 | 442.1 |
| 35° | 73.0 | 77.3 | 85.9 | 90.1 | 111.6 | 133.1 | 150.2 | 171.7 | 223.2 | 274.7 | 480.8 |
| 37.5° | 77.3 | 81.6 | 90.1 | 94.4 | 111.6 | 128.8 | 145.9 | 163.1 | 218.9 | 270.4 | 528.0 |
| 40° | 77.3 | 85.9 | 90.1 | 98.7 | 111.6 | 128.8 | 141.7 | 154.5 | 214.6 | 274.7 | 609.5 |
| 42.5° | 81.6 | 90.1 | 94.4 | 103.0 | 115.9 | 128.8 | 137.4 | 150.2 | 227.5 | 304.8 | 794.1 |
| 45° | 81.6 | 85.9 | 94.4 | 98.7 | 111.6 | 124.5 | 137.4 | 150.2 | 287.6 | 420.7 | 1262.0 |
| 47.5° | 81.6 | 85.9 | 90.1 | 94.4 | 111.6 | 128.8 | 141.7 | 158.8 | 425.0 | 691.1 | 2086.2 |
| 50° | 81.6 | 85.9 | 85.9 | 90.1 | 107.3 | 128.8 | 145.9 | 163.1 | 553.7 | 940.1 | 3009.1 |
| 52.5° | 85.9 | 90.1 | 90.1 | 94.4 | 115.9 | 137.4 | 158.8 | 180.3 | 635.3 | 1090.3 | 3266.7 |
| 55° | 85.9 | 90.1 | 90.1 | 94.4 | 128.8 | 163.1 | 193.2 | 227.5 | 669.6 | 1107.5 | 3000.5 |
| 57.5° | *90.1* | *94.4* | *98.7* | *103.0* | *137.4* | *176.0* | *210.3* | *244.7* | *639.6* | *1034.5* | *2459.7* |
| 60° | 103.0 | 107.3 | 115.9 | 120.2 | 158.8 | 197.5 | 231.8 | 270.4 | 510.8 | 751.2 | 1936.0 |
| 62.5° | 115.9 | 120.2 | 128.8 | 133.1 | 171.7 | 210.3 | 249.0 | 287.6 | 450.7 | 609.5 | 1442.3 |
| 65° | 120.2 | 128.8 | 133.1 | 137.4 | 176.0 | 218.9 | 257.6 | 296.2 | 412.1 | 523.7 | 1068.9 |
| 67.5° | 124.5 | 133.1 | 137.4 | 145.9 | 184.6 | 223.2 | 261.8 | 300.5 | 390.6 | 476.5 | 794.1 |
| 70° | 124.5 | 133.1 | 145.9 | 154.5 | 188.9 | 223.2 | 253.3 | 287.6 | 360.6 | 429.3 | 609.5 |
| 72.5° | 124.5 | 141.7 | 158.8 | 176.0 | 201.8 | 227.5 | 249.0 | 274.7 | 330.5 | 382.0 | 472.2 |
| 75° | 124.5 | 150.2 | 171.7 | 197.5 | 210.3 | 223.2 | 236.1 | 249.0 | 287.6 | 321.9 | 373.5 |
| 77.5° | 120.2 | 141.7 | 167.4 | 188.9 | 193.2 | 197.5 | 201.8 | 206.0 | 206.0 | 206.0 | 206.0 |
| 80° | 98.7 | 120.2 | 137.4 | 154.5 | 145.9 | 133.1 | 124.5 | 111.6 | 103.0 | 94.4 | 103.0 |
| 82.5° | 51.5 | 55.8 | 55.8 | 55.8 | 51.5 | 51.5 | 47.2 | 42.9 | 42.9 | 38.6 | 38.6 |
| 85° | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 8.6 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 |
| 87.5° | 4.3 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 68.7 | 68.7 | 68.7 | 68.7 | 68.7 | 68.7 | 68.7 | 64.4 | 64.4 | 64.4 | 64.4 |
| 5° | 73.0 | 73.0 | 73.0 | 73.0 | 73.0 | 73.0 | 73.0 | 68.7 | 68.7 | 68.7 | 68.7 |
| 7.5° | 81.6 | 81.6 | 81.6 | 81.6 | 81.6 | 81.6 | 81.6 | 81.6 | 81.6 | 81.6 | 81.6 |
| 10° | 85.9 | 90.1 | 90.1 | 94.4 | 94.4 | 94.4 | 98.7 | 98.7 | 98.7 | 98.7 | 98.7 |
| 12.5° | 98.7 | 103.0 | 103.0 | 107.3 | 107.3 | 111.6 | 111.6 | 115.9 | 115.9 | 115.9 | 120.2 |
| 15° | 107.3 | 111.6 | 115.9 | 120.2 | 124.5 | 133.1 | 137.4 | 145.9 | 150.2 | 154.5 | 158.8 |
| 17.5° | 124.5 | 133.1 | 145.9 | 154.5 | 163.1 | 180.3 | 197.5 | 210.3 | 227.5 | 249.0 | 274.7 |
| 20° | 137.4 | 167.4 | 193.2 | 223.2 | 249.0 | 326.2 | 403.5 | 480.8 | 558.0 | 661.1 | 764.1 |
| 22.5° | 163.1 | 257.6 | 356.3 | 450.7 | 545.2 | 798.4 | 1047.4 | 1296.4 | 1549.6 | 1790.0 | 2030.4 |
| 25° | 223.2 | 425.0 | 631.0 | 832.8 | 1034.5 | 1459.5 | 1880.2 | 2300.8 | 2725.8 | 3133.6 | 3545.7 |
| 27.5° | 339.1 | 665.4 | 991.6 | 1317.8 | 1644.1 | 2202.1 | 2755.8 | 3309.6 | 3867.6 | 4361.3 | 4850.6 |
| 30° | 510.8 | 931.5 | 1352.2 | 1772.8 | 2193.5 | 2914.7 | 3635.8 | 4357.0 | 5078.1 | 5558.9 | 6039.7 |
| 32.5° | 609.5 | 1159.0 | 1708.5 | 2253.6 | 2803.1 | 3588.6 | 4374.2 | 5164.0 | 5949.5 | 6499.0 | 7048.4 |
| 35° | 682.5 | 1365.0 | 2043.3 | 2725.8 | 3404.0 | 4279.7 | 5155.4 | 6035.4 | 6911.1 | 7567.8 | 8224.6 |
| 37.5° | 781.3 | 1601.1 | 2416.7 | 3236.6 | 4052.2 | 4996.6 | 5940.9 | 6889.6 | 7834.0 | 8645.3 | 9460.9 |
| 40° | 940.1 | 1914.5 | 2888.9 | 3859.0 | 4833.5 | 6018.2 | 7203.0 | 8387.7 | 9572.5 | 10649.9 | 11727.4 |
| 42.5° | 1283.5 | 2567.0 | 3854.7 | 5138.2 | 6421.7 | 8194.6 | 9963.1 | 11731.7 | 13504.5 | 15028.4 | 16552.2 |
| 45° | 2103.4 | 4099.4 | 6095.5 | 8091.5 | 10087.6 | 12208.1 | 14324.4 | 16444.9 | 18565.5 | 20819.1 | 23072.7 |
| 47.5° | 3481.3 | 6232.8 | 8984.4 | 11731.7 | 14483.2 | 16668.1 | 18848.8 | 21029.4 | 23214.3 | 25317.7 | 27421.1 |
| 50° | 5078.1 | 8040.0 | 11001.9 | 13963.8 | 16925.7 | 18878.8 | 20827.7 | 22776.5 | 24729.6 | 26794.4 | 28854.8 |
| 52.5° | 5443.0 | 8404.9 | 11366.8 | 14324.4 | 17286.3 | 19256.6 | 21226.9 | 23201.5 | 25171.8 | 27189.3 | 29211.1 |
| 55° | 4889.3 | 7825.4 | 10757.2 | 13693.4 | 16625.2 | 18788.7 | 20952.1 | 23115.6 | 25279.1 | 27541.3 | 29803.5 |
| 57.5° | *3884.8* | *6851.0* | *9812.9* | *12779.0* | *15740.9* | *18307.9* | *20870.6* | *23437.6* | *26004.5* | *28391.2* | *30777.9* |
| 60° | 3120.7 | 6147.0 | 9173.3 | 12199.5 | 15225.8 | 17964.5 | 20698.9 | 23433.3 | 26171.9 | 28202.3 | 30232.7 |
| 62.5° | 2275.1 | 5271.3 | 8267.5 | 11263.8 | 14260.0 | 16715.4 | 19170.7 | 21630.4 | 24085.7 | 25528.1 | 26970.4 |
| 65° | 1614.0 | 4262.5 | 6911.1 | 9555.3 | 12203.8 | 13908.0 | 15612.2 | 17316.3 | 19020.5 | 20269.6 | 21518.8 |
| 67.5° | 1111.8 | 2979.1 | 4842.0 | 6709.3 | 8572.3 | 10023.2 | 11469.8 | 12920.7 | 14371.6 | 15423.3 | 16479.3 |
| 70° | 789.8 | 1807.2 | 2824.5 | 3837.6 | 4854.9 | 6138.4 | 7421.9 | 8705.4 | 9988.9 | 11272.3 | 12560.1 |
| 72.5° | 562.3 | 1008.8 | 1450.9 | 1897.3 | 2339.5 | 3455.5 | 4571.6 | 5692.0 | 6808.1 | 7585.0 | 8366.3 |
| 75° | 425.0 | 545.2 | 661.1 | 781.3 | 897.2 | 1167.6 | 1438.0 | 1708.5 | 1978.9 | 2253.6 | 2528.3 |
| 77.5° | 201.8 | 223.2 | 240.4 | 261.8 | 279.0 | 347.7 | 416.4 | 485.1 | 553.7 | 669.6 | 785.5 |
| 80° | 107.3 | 115.9 | 124.5 | 133.1 | 141.7 | 145.9 | 150.2 | 154.5 | 158.8 | 171.7 | 188.9 |
| 82.5° | 38.6 | 42.9 | 42.9 | 47.2 | 47.2 | 42.9 | 42.9 | 38.6 | 34.3 | 38.6 | 38.6 |
| 85° | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 60.1 | 60.1 | 60.1 | 60.1 | 55.8 | 55.8 | 55.8 | 55.8 | 51.5 | 51.5 | 51.5 |
| 5° | 68.7 | 68.7 | 68.7 | 68.7 | 64.4 | 64.4 | 64.4 | 64.4 | 60.1 | 60.1 | 60.1 |
| 7.5° | 81.6 | 81.6 | 81.6 | 81.6 | 77.3 | 77.3 | 77.3 | 77.3 | 73.0 | 73.0 | 73.0 |
| 10° | 98.7 | 98.7 | 98.7 | 98.7 | 98.7 | 98.7 | 98.7 | 98.7 | 94.4 | 94.4 | 94.4 |
| 12.5° | 120.2 | 120.2 | 120.2 | 120.2 | 120.2 | 120.2 | 120.2 | 120.2 | 115.9 | 115.9 | 115.9 |
| 15° | 158.8 | 163.1 | 167.4 | 171.7 | 171.7 | 176.0 | 171.7 | 167.4 | 163.1 | 158.8 | 154.5 |
| 17.5° | 296.2 | 317.7 | 326.2 | 330.5 | 339.1 | 343.4 | 339.1 | 330.5 | 326.2 | 317.7 | 296.2 |
| 20° | 862.8 | 965.8 | 1038.8 | 1111.8 | 1184.8 | 1257.7 | 1214.8 | 1171.9 | 1129.0 | 1086.0 | 974.4 |
| 22.5° | 2270.8 | 2511.2 | 2678.6 | 2846.0 | 3013.4 | 3180.8 | 3064.9 | 2949.0 | 2828.8 | 2712.9 | 2429.6 |
| 25° | 3953.5 | 4361.3 | 4575.9 | 4794.8 | 5009.5 | 5224.1 | 5026.6 | 4829.2 | 4627.4 | 4430.0 | 4035.0 |
| 27.5° | 5344.3 | 5833.6 | 6018.2 | 6198.5 | 6383.1 | 6563.4 | 6387.4 | 6215.7 | 6039.7 | 5863.7 | 5404.4 |
| 30° | 6520.4 | 7001.2 | 7181.5 | 7361.8 | 7542.1 | 7722.4 | 7524.9 | 7323.2 | 7125.7 | 6924.0 | 6468.9 |
| 32.5° | 7593.6 | 8143.0 | 8392.0 | 8641.0 | 8890.0 | 9138.9 | 8842.7 | 8546.6 | 8250.4 | 7954.2 | 7434.8 |
| 35° | 8881.4 | 9538.1 | 9830.0 | 10126.2 | 10418.1 | 10710.0 | 10358.0 | 10001.7 | 9649.7 | 9293.5 | 8636.7 |
| 37.5° | 10272.2 | 11083.5 | 11474.1 | 11864.7 | 12255.4 | 12646.0 | 12208.1 | 11770.3 | 11332.4 | 10894.6 | 10057.5 |
| 40° | 12804.8 | 13882.2 | 14461.7 | 15037.0 | 15616.5 | 16191.7 | 15534.9 | 14873.8 | 14217.1 | 13556.0 | 12405.6 |
| 42.5° | 18071.8 | 19595.7 | 20419.9 | 21244.0 | 22068.2 | 22892.4 | 21935.2 | 20973.6 | 20016.4 | 19054.8 | 17466.6 |
| 45° | 25326.3 | 27579.9 | 28489.9 | 29395.7 | 30305.7 | 31211.4 | 30129.7 | 29048.0 | 27962.0 | 26880.2 | 24746.8 |
| 47.5° | 29524.5 | 31627.8 | 32520.7 | 33413.5 | 34302.1 | 35195.0 | 34177.6 | 33160.3 | 32142.9 | 31125.6 | 29043.7 |
| 50° | 30919.5 | 32980.0 | 33963.0 | 34950.3 | 35933.3 | 36916.3 | 35753.0 | 34585.4 | 33422.1 | 32254.5 | 30254.2 |
| 52.5° | 31228.6 | 33246.1 | 34405.1 | 35564.1 | 36718.8 | 37877.8 | 36534.3 | 35190.7 | 33842.8 | 32499.2 | 30516.0 |
| 55° | 32061.4 | 34323.6 | 35658.6 | 36989.3 | 38324.3 | 39655.0 | 38088.2 | 36517.1 | 34950.3 | 33379.2 | 31202.9 |
| 57.5° | 33164.6 | 35551.3 | 36770.4 | 37989.4 | 39204.3 | 40423.3 | 38908.1 | 37397.1 | 35881.8 | 34366.5 | 32095.7 |
| 60° | 32258.8 | 34289.2 | 35306.6 | 36319.6 | 37337.0 | 38350.0 | 36980.7 | 35615.6 | 34246.3 | 32877.0 | 30983.9 |
| 62.5° | 28408.4 | 29850.7 | 30636.2 | 31421.8 | 32203.0 | 32988.6 | 31863.9 | 30739.3 | 29614.6 | 28489.9 | 27116.3 |
| 65° | 22763.6 | 24012.8 | 24579.4 | 25141.7 | 25708.3 | 26270.7 | 25489.4 | 24708.2 | 23922.6 | 23141.4 | 21986.7 |
| 67.5° | 17531.0 | 18582.6 | 19458.3 | 20329.7 | 21205.4 | 22076.8 | 21128.1 | 20179.5 | 19226.5 | 18277.9 | 17170.4 |
| 70° | 13843.6 | 15127.1 | 15848.3 | 16569.4 | 17290.6 | 18011.7 | 17187.5 | 16363.4 | 15534.9 | 14710.7 | 13551.7 |
| 72.5° | 9143.2 | 9920.2 | 10177.7 | 10439.6 | 10697.1 | 10954.7 | 10654.2 | 10358.0 | 10057.5 | 9757.1 | 9023.0 |
| 75° | 2798.8 | 3073.5 | 3378.3 | 3687.3 | 3992.1 | 4296.9 | 4022.2 | 3747.4 | 3472.7 | 3198.0 | 2949.0 |
| 77.5° | 897.2 | 1013.1 | 1103.2 | 1193.3 | 1279.2 | 1369.3 | 1373.6 | 1377.9 | 1377.9 | 1382.2 | 1249.1 |
| 80° | 201.8 | 214.6 | 214.6 | 214.6 | 210.3 | 210.3 | 231.8 | 249.0 | 270.4 | 287.6 | 270.4 |
| 82.5° | 42.9 | 42.9 | 42.9 | 42.9 | 42.9 | 42.9 | 42.9 | 42.9 | 38.6 | 38.6 | 38.6 |
| 85° | 4.3 | 4.3 | 4.3 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 |
| 2.5° | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 51.5 | 47.2 | 47.2 |
| 5° | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 60.1 | 55.8 | 55.8 |
| 7.5° | 73.0 | 73.0 | 73.0 | 73.0 | 73.0 | 68.7 | 68.7 | 68.7 | 68.7 | 64.4 | 64.4 |
| 10° | 94.4 | 90.1 | 90.1 | 90.1 | 85.9 | 85.9 | 81.6 | 81.6 | 77.3 | 77.3 | 73.0 |
| 12.5° | 115.9 | 111.6 | 111.6 | 107.3 | 107.3 | 103.0 | 98.7 | 94.4 | 90.1 | 85.9 | 81.6 |
| 15° | 150.2 | 145.9 | 141.7 | 137.4 | 128.8 | 124.5 | 115.9 | 111.6 | 107.3 | 103.0 | 98.7 |
| 17.5° | 274.7 | 253.3 | 231.8 | 210.3 | 193.2 | 171.7 | 150.2 | 141.7 | 128.8 | 120.2 | 107.3 |
| 20° | 867.1 | 755.5 | 643.9 | 545.2 | 446.4 | 343.4 | 244.7 | 214.6 | 184.6 | 154.5 | 124.5 |
| 22.5° | 2150.6 | 1867.3 | 1584.0 | 1339.3 | 1094.6 | 849.9 | 605.3 | 493.6 | 382.0 | 270.4 | 158.8 |
| 25° | 3640.1 | 3240.9 | 2846.0 | 2416.7 | 1991.8 | 1562.5 | 1133.2 | 910.0 | 682.5 | 455.0 | 231.8 |
| 27.5° | 4945.1 | 4485.8 | 4026.5 | 3459.8 | 2893.2 | 2322.3 | 1755.7 | 1412.3 | 1064.6 | 716.9 | 373.5 |
| 30° | 6018.2 | 5563.2 | 5108.2 | 4412.8 | 3713.1 | 3017.7 | 2318.0 | 1871.6 | 1425.1 | 974.4 | 528.0 |
| 32.5° | 6915.4 | 6396.0 | 5876.6 | 5112.5 | 4352.7 | 3588.6 | 2824.5 | 2270.8 | 1721.3 | 1167.6 | 613.8 |
| 35° | 7975.6 | 7318.9 | 6657.8 | 5842.2 | 5030.9 | 4215.3 | 3399.7 | 2725.8 | 2047.6 | 1369.3 | 695.4 |
| 37.5° | 9220.5 | 8383.4 | 7546.4 | 6662.1 | 5782.1 | 4897.8 | 4013.6 | 3215.2 | 2421.0 | 1622.6 | 824.2 |
| 40° | 11259.5 | 10109.1 | 8958.6 | 7898.4 | 6833.8 | 5773.5 | 4709.0 | 3786.1 | 2863.2 | 1936.0 | 1013.1 |
| 42.5° | 15878.3 | 14290.0 | 12701.8 | 11113.5 | 9521.0 | 7932.7 | 6340.2 | 5082.4 | 3829.0 | 2571.3 | 1313.5 |
| 45° | 22613.4 | 20480.0 | 18346.5 | 16217.4 | 14088.3 | 11959.2 | 9830.0 | 7876.9 | 5923.8 | 3966.4 | 2013.2 |
| 47.5° | 26961.8 | 24879.9 | 22798.0 | 20759.0 | 18724.3 | 16685.3 | 14646.3 | 11899.1 | 9151.8 | 6400.3 | 3653.0 |
| 50° | 28258.1 | 26257.8 | 24257.4 | 22437.4 | 20621.6 | 18801.6 | 16981.5 | 14075.4 | 11173.6 | 8267.5 | 5361.4 |
| 52.5° | 28532.9 | 26545.4 | 24562.2 | 22737.9 | 20917.8 | 19093.5 | 17269.1 | 14375.9 | 11482.7 | 8585.2 | 5692.0 |
| 55° | 29026.5 | 26850.2 | 24673.8 | 22626.3 | 20578.7 | 18526.8 | 16479.3 | 13590.3 | 10701.4 | 7812.5 | 4923.6 |
| 57.5° | *29824.9* | *27549.9* | *25279.1* | *22840.9* | *20402.7* | *17964.5* | *15526.3* | *12611.6* | *9697.0* | *6782.3* | *3867.6* |
| 60° | 29090.9 | 27193.6 | 25300.5 | 22673.5 | 20042.1 | 17415.0 | 14783.7 | 11821.8 | 8855.6 | 5889.4 | 2927.5 |
| 62.5° | 25738.4 | 24364.8 | 22986.8 | 20656.0 | 18325.1 | 15994.2 | 13663.3 | 10778.7 | 7894.1 | 5009.5 | 2124.8 |
| 65° | 20827.7 | 19673.0 | 18514.0 | 16668.1 | 14822.3 | 12972.2 | 11126.4 | 8696.8 | 6271.5 | 3841.9 | 1412.3 |
| 67.5° | 16062.9 | 14955.4 | 13847.9 | 12392.7 | 10937.5 | 9482.3 | 8027.1 | 6258.6 | 4490.1 | 2717.2 | 948.7 |
| 70° | 12392.7 | 11233.7 | 10074.7 | 8765.5 | 7456.2 | 6147.0 | 4837.8 | 3807.5 | 2781.6 | 1751.4 | 721.2 |
| 72.5° | 8289.0 | 7555.0 | 6820.9 | 5734.9 | 4648.9 | 3562.9 | 2476.8 | 2004.6 | 1532.5 | 1056.0 | 583.8 |
| 75° | 2695.7 | 2446.8 | 2193.5 | 1897.3 | 1601.1 | 1300.7 | 1004.5 | 871.4 | 734.0 | 596.7 | 463.6 |
| 77.5° | 1111.8 | 978.7 | 841.3 | 716.9 | 588.1 | 463.6 | 334.8 | 313.4 | 291.9 | 270.4 | 249.0 |
| 80° | 249.0 | 231.8 | 210.3 | 197.5 | 184.6 | 171.7 | 158.8 | 150.2 | 137.4 | 128.8 | 115.9 |
| 82.5° | 34.3 | 34.3 | 30.0 | 34.3 | 38.6 | 42.9 | 47.2 | 42.9 | 42.9 | 38.6 | 34.3 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 0° | 51.5 | 51.5 |
| 2.5° | 47.2 | 47.2 |
| 5° | 55.8 | 51.5 |
| 7.5° | 64.4 | 60.1 |
| 10° | 73.0 | 68.7 |
| 12.5° | 81.6 | 77.3 |
| 15° | 94.4 | 85.9 |
| 17.5° | 103.0 | 94.4 |
| 20° | 115.9 | 103.0 |
| 22.5° | 137.4 | 115.9 |
| 25° | 180.3 | 133.1 |
| 27.5° | 266.1 | 163.1 |
| 30° | 373.5 | 218.9 |
| 32.5° | 442.1 | 270.4 |
| 35° | 480.8 | 270.4 |
| 37.5° | 545.2 | 266.1 |
| 40° | 643.9 | 279.0 |
| 42.5° | 807.0 | 304.8 |
| 45° | 1197.6 | 382.0 |
| 47.5° | 2172.1 | 691.1 |
| 50° | 3219.4 | 1081.7 |
| 52.5° | 3434.1 | 1176.2 |
| 55° | 2991.9 | 1060.3 |
| 57.5° | *2382.4* | *897.2* |
| 60° | 1798.6 | 673.9 |
| 62.5° | 1335.0 | 549.5 |
| 65° | 948.7 | 485.1 |
| 67.5° | 699.7 | 450.7 |
| 70° | 575.2 | 433.6 |
| 72.5° | 493.6 | 403.5 |
| 75° | 412.1 | 360.6 |
| 77.5° | 257.6 | 261.8 |
| 80° | 111.6 | 103.0 |
| 82.5° | 34.3 | 30.0 |
| 85° | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390001
CATALOG NUMBER: GSS-SA3C-760-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 112.5° | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-7

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-757-U-5WQ

Data in this report applies to families of products including GSS-SB1A-757-U-5WQ

Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04


## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-184-7 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 10/15/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | McGraw-Edison |
| Catalog Number: | **GSS-SB1A-757-U-5WQ** |
| Description: | GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI 5700K CCT 26 LEDS |

## Spectral Parameters

| | |
|---|---|
| CCT (K): | 5571 |
| CIE u': | 0.2033 |
| CIE v': | 0.4806 |
| Duv: | 0.0041 |
| CIE x: | 0.3308 |
| CIE y: | 0.3476 |
| CIE z: | 0.3216 |
| Peak Wavelength (nm): | 442 |
| Dominant Wavelength (nm): | 544 |
| Purity: | 3.635698 |
| Rf: | 70.4 |
| Rg: | 97.1 |

| | |
|---|---|
| CRI (Ra): | 69.9 |
| R1: | 68.8 |
| R2: | 72.5 |
| R3: | 76.8 |
| R4: | 72.0 |
| R5: | 70.9 |
| R6: | 65.6 |
| R7: | 75.5 |
| R8: | 56.8 |
| R9: | -35.4 |
| R10: | 36.7 |
| R11: | 73.9 |
| R12: | 47.8 |
| R13: | 68.0 |
| R14: | 87.0 |
| R15: | 59.8 |

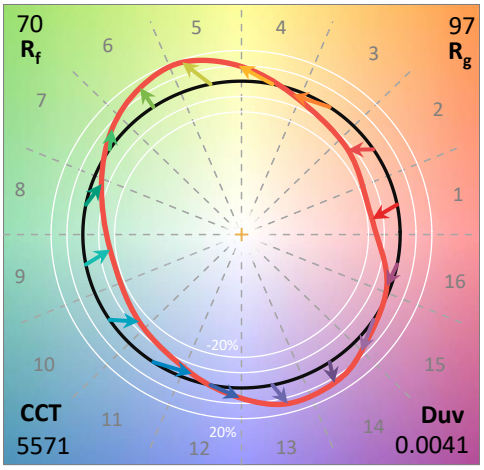


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 20M |
| Operation Time: | 1H 20M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-184-7


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-184-7

## CIE 1931 Chromaticity Diagram

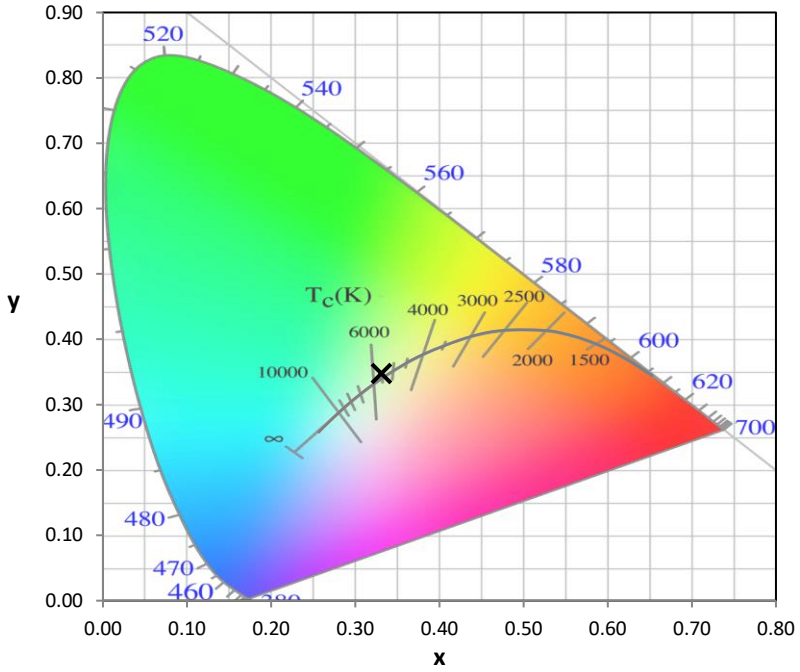


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

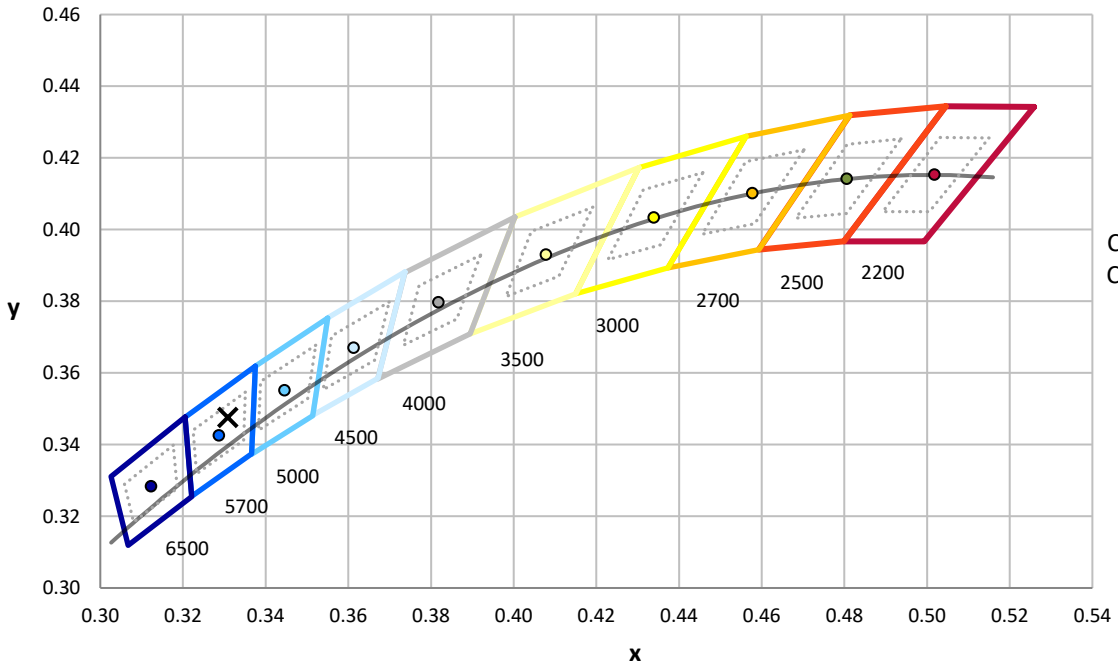



CCT = 5571K
CIE x = 0.3308
CIE y = 0.3476
Duv = 0.0041

Point lies inside the ANSI 5700K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-7

## Photopic Flux vs. Wavelength

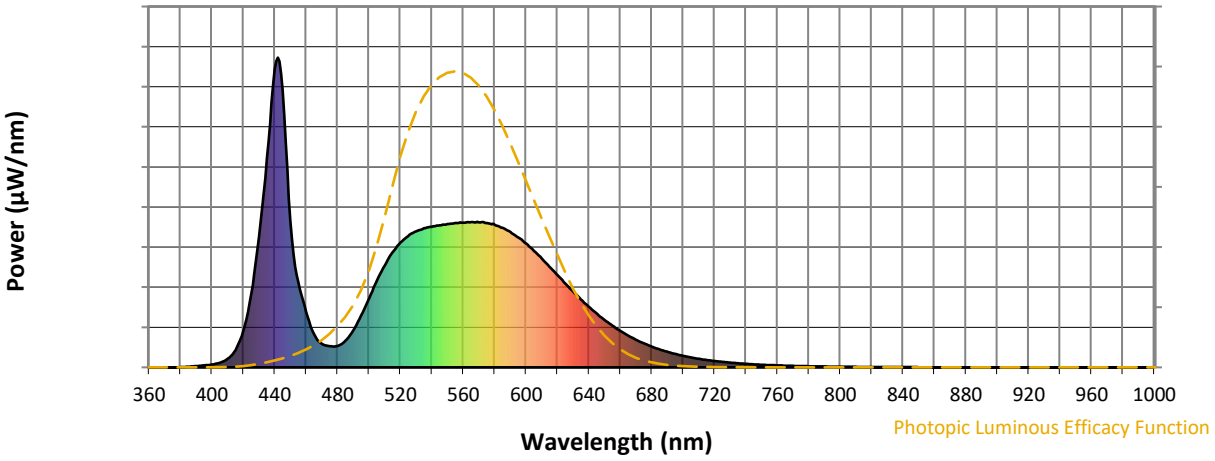



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 120 | NR | 620 | 298 | NR | 750 | 9 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 167 | NR | 625 | 270 | NR | 755 | 7 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 222 | NR | 630 | 245 | NR | 760 | 6 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 279 | NR | 635 | 219 | NR | 765 | 6 | NR | 895 | 0 | NR |
| 380 | 1 | NR | 510 | 329 | NR | 640 | 196 | NR | 770 | 5 | NR | 900 | 0 | NR |
| 385 | 2 | NR | 515 | 371 | NR | 645 | 173 | NR | 775 | 4 | NR | 905 | 0 | NR |
| 390 | 4 | NR | 520 | 403 | NR | 650 | 153 | NR | 780 | 4 | NR | 910 | 0 | NR |
| 395 | 6 | NR | 525 | 424 | NR | 655 | 135 | NR | 785 | 3 | NR | 915 | 0 | NR |
| 400 | 9 | NR | 530 | 439 | NR | 660 | 117 | NR | 790 | 3 | NR | 920 | 0 | NR |
| 405 | 14 | NR | 535 | 449 | NR | 665 | 103 | NR | 795 | 2 | NR | 925 | 0 | NR |
| 410 | 28 | NR | 540 | 454 | NR | 670 | 89 | NR | 800 | 2 | NR | 930 | 0 | NR |
| 415 | 55 | NR | 545 | 459 | NR | 675 | 77 | NR | 805 | 2 | NR | 935 | 0 | NR |
| 420 | 118 | NR | 550 | 463 | NR | 680 | 67 | NR | 810 | 2 | NR | 940 | 0 | NR |
| 425 | 237 | NR | 555 | 466 | NR | 685 | 58 | NR | 815 | 1 | NR | 945 | 0 | NR |
| 430 | 420 | NR | 560 | 467 | NR | 690 | 50 | NR | 820 | 1 | NR | 950 | 0 | NR |
| 435 | 677 | NR | 565 | 469 | NR | 695 | 43 | NR | 825 | 1 | NR | 955 | 0 | NR |
| 440 | 962 | NR | 570 | 469 | NR | 700 | 37 | NR | 830 | 1 | NR | 960 | 0 | NR |
| 445 | 894 | NR | 575 | 466 | NR | 705 | 32 | NR | 835 | 1 | NR | 965 | 0 | NR |
| 450 | 472 | NR | 580 | 461 | NR | 710 | 28 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 275 | NR | 585 | 450 | NR | 715 | 24 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 180 | NR | 590 | 437 | NR | 720 | 21 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 107 | NR | 595 | 420 | NR | 725 | 18 | NR | 855 | 0 | NR | 985 | 0 | NR |
| 470 | 76 | NR | 600 | 400 | NR | 730 | 15 | NR | 860 | 0 | NR | 990 | 0 | NR |
| 475 | 68 | NR | 605 | 376 | NR | 735 | 13 | NR | 865 | 0 | NR | 995 | 0 | NR |
| 480 | 69 | NR | 610 | 352 | NR | 740 | 11 | NR | 870 | 0 | NR | 1000 | 0 | NR |
| 485 | 86 | NR | 615 | 325 | NR | 745 | 10 | NR | 875 | 0 | NR | | | |

REPORT NUMBER: SP1-2407-184-7

## Scotopic Flux vs. Wavelength

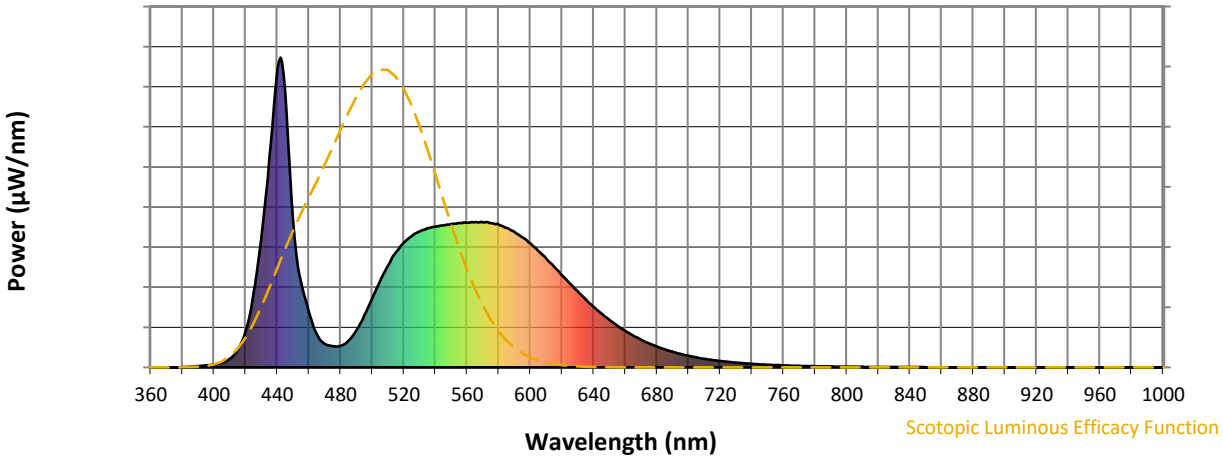



**Scotopic Lumens: NR** **S/P: 1.84**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 120 | NR | 620 | 298 | NR | 750 | 9 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 167 | NR | 625 | 270 | NR | 755 | 7 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 222 | NR | 630 | 245 | NR | 760 | 6 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 279 | NR | 635 | 219 | NR | 765 | 6 | NR | 895 | 0 | NR |
| 380 | 1 | NR | 510 | 329 | NR | 640 | 196 | NR | 770 | 5 | NR | 900 | 0 | NR |
| 385 | 2 | NR | 515 | 371 | NR | 645 | 173 | NR | 775 | 4 | NR | 905 | 0 | NR |
| 390 | 4 | NR | 520 | 403 | NR | 650 | 153 | NR | 780 | 4 | NR | 910 | 0 | NR |
| 395 | 6 | NR | 525 | 424 | NR | 655 | 135 | NR | 785 | 3 | NR | 915 | 0 | NR |
| 400 | 9 | NR | 530 | 439 | NR | 660 | 117 | NR | 790 | 3 | NR | 920 | 0 | NR |
| 405 | 14 | NR | 535 | 449 | NR | 665 | 103 | NR | 795 | 2 | NR | 925 | 0 | NR |
| 410 | 28 | NR | 540 | 454 | NR | 670 | 89 | NR | 800 | 2 | NR | 930 | 0 | NR |
| 415 | 55 | NR | 545 | 459 | NR | 675 | 77 | NR | 805 | 2 | NR | 935 | 0 | NR |
| 420 | 118 | NR | 550 | 463 | NR | 680 | 67 | NR | 810 | 2 | NR | 940 | 0 | NR |
| 425 | 237 | NR | 555 | 466 | NR | 685 | 58 | NR | 815 | 1 | NR | 945 | 0 | NR |
| 430 | 420 | NR | 560 | 467 | NR | 690 | 50 | NR | 820 | 1 | NR | 950 | 0 | NR |
| 435 | 677 | NR | 565 | 469 | NR | 695 | 43 | NR | 825 | 1 | NR | 955 | 0 | NR |
| 440 | 962 | NR | 570 | 469 | NR | 700 | 37 | NR | 830 | 1 | NR | 960 | 0 | NR |
| 445 | 894 | NR | 575 | 466 | NR | 705 | 32 | NR | 835 | 1 | NR | 965 | 0 | NR |
| 450 | 472 | NR | 580 | 461 | NR | 710 | 28 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 275 | NR | 585 | 450 | NR | 715 | 24 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 180 | NR | 590 | 437 | NR | 720 | 21 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 107 | NR | 595 | 420 | NR | 725 | 18 | NR | 855 | 0 | NR | 985 | 0 | NR |
| 470 | 76 | NR | 600 | 400 | NR | 730 | 15 | NR | 860 | 0 | NR | 990 | 0 | NR |
| 475 | 68 | NR | 605 | 376 | NR | 735 | 13 | NR | 865 | 0 | NR | 995 | 0 | NR |
| 480 | 69 | NR | 610 | 352 | NR | 740 | 11 | NR | 870 | 0 | NR | 1000 | 0 | NR |
| 485 | 86 | NR | 615 | 325 | NR | 745 | 10 | NR | 875 | 0 | NR | | | |

REPORT NUMBER: SP1-2407-184-7

## Melanopic Flux vs. Wavelength

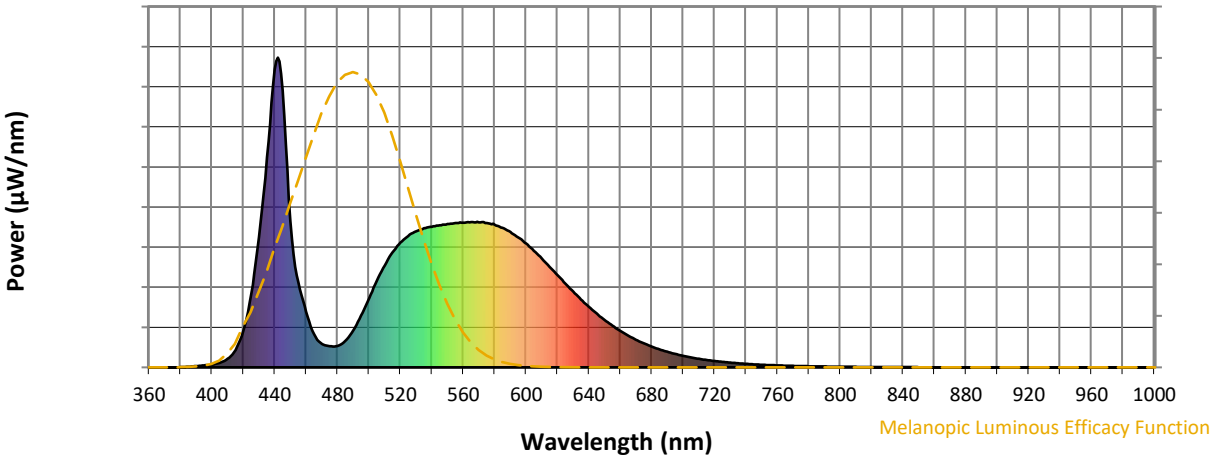


**Melanopic Lumens: NR** **M/P: 3.71**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 120 | NR | 620 | 298 | NR | 750 | 9 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 167 | NR | 625 | 270 | NR | 755 | 7 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 222 | NR | 630 | 245 | NR | 760 | 6 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 279 | NR | 635 | 219 | NR | 765 | 6 | NR | 895 | 0 | NR |
| 380 | 1 | NR | 510 | 329 | NR | 640 | 196 | NR | 770 | 5 | NR | 900 | 0 | NR |
| 385 | 2 | NR | 515 | 371 | NR | 645 | 173 | NR | 775 | 4 | NR | 905 | 0 | NR |
| 390 | 4 | NR | 520 | 403 | NR | 650 | 153 | NR | 780 | 4 | NR | 910 | 0 | NR |
| 395 | 6 | NR | 525 | 424 | NR | 655 | 135 | NR | 785 | 3 | NR | 915 | 0 | NR |
| 400 | 9 | NR | 530 | 439 | NR | 660 | 117 | NR | 790 | 3 | NR | 920 | 0 | NR |
| 405 | 14 | NR | 535 | 449 | NR | 665 | 103 | NR | 795 | 2 | NR | 925 | 0 | NR |
| 410 | 28 | NR | 540 | 454 | NR | 670 | 89 | NR | 800 | 2 | NR | 930 | 0 | NR |
| 415 | 55 | NR | 545 | 459 | NR | 675 | 77 | NR | 805 | 2 | NR | 935 | 0 | NR |
| 420 | 118 | NR | 550 | 463 | NR | 680 | 67 | NR | 810 | 2 | NR | 940 | 0 | NR |
| 425 | 237 | NR | 555 | 466 | NR | 685 | 58 | NR | 815 | 1 | NR | 945 | 0 | NR |
| 430 | 420 | NR | 560 | 467 | NR | 690 | 50 | NR | 820 | 1 | NR | 950 | 0 | NR |
| 435 | 677 | NR | 565 | 469 | NR | 695 | 43 | NR | 825 | 1 | NR | 955 | 0 | NR |
| 440 | 962 | NR | 570 | 469 | NR | 700 | 37 | NR | 830 | 1 | NR | 960 | 0 | NR |
| 445 | 894 | NR | 575 | 466 | NR | 705 | 32 | NR | 835 | 1 | NR | 965 | 0 | NR |
| 450 | 472 | NR | 580 | 461 | NR | 710 | 28 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 275 | NR | 585 | 450 | NR | 715 | 24 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 180 | NR | 590 | 437 | NR | 720 | 21 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 107 | NR | 595 | 420 | NR | 725 | 18 | NR | 855 | 0 | NR | 985 | 0 | NR |
| 470 | 76 | NR | 600 | 400 | NR | 730 | 15 | NR | 860 | 0 | NR | 990 | 0 | NR |
| 475 | 68 | NR | 605 | 376 | NR | 735 | 13 | NR | 865 | 0 | NR | 995 | 0 | NR |
| 480 | 69 | NR | 610 | 352 | NR | 740 | 11 | NR | 870 | 0 | NR | 1000 | 0 | NR |
| 485 | 86 | NR | 615 | 325 | NR | 745 | 10 | NR | 875 | 0 | NR | | | |


REPORT NUMBER: SP1-2407-184-7

# TM-30-18


## Summary


$R_f$ = 70.4
$R_g$ = 97.1
CIE $R_a$ = 69.9
$R_9$ = -35.4


## Spectral Power Distribution Comparison

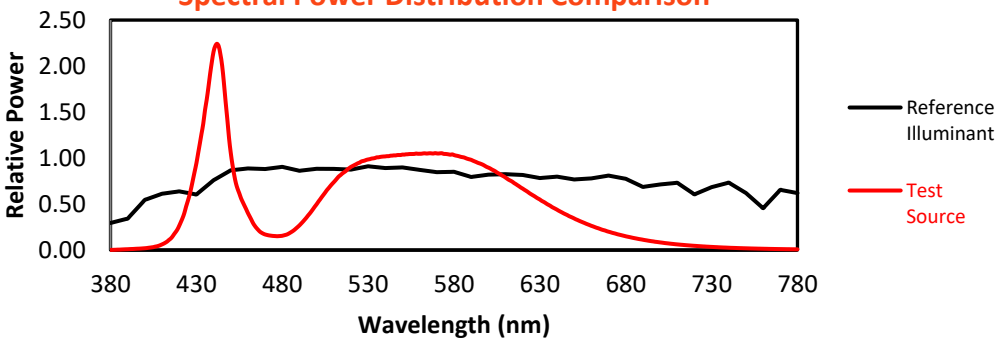



## Color Vector Graphics

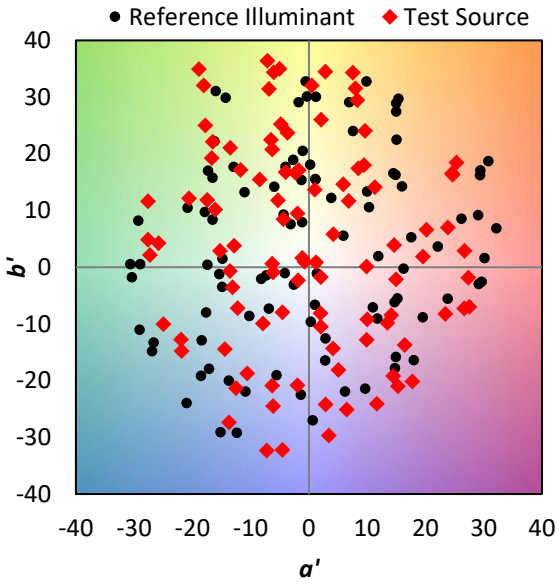

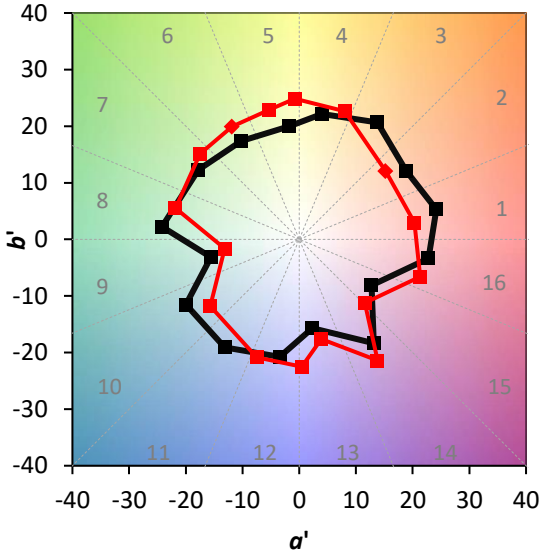


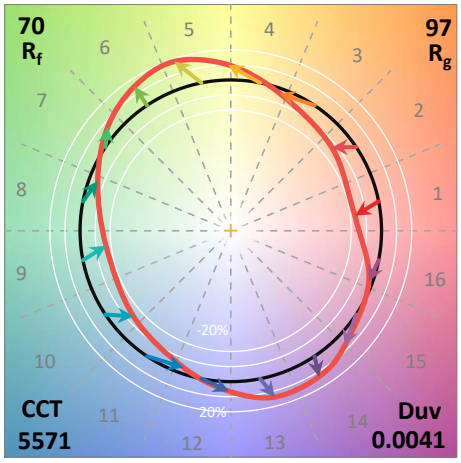
REPORT NUMBER: SP1-2407-184-7
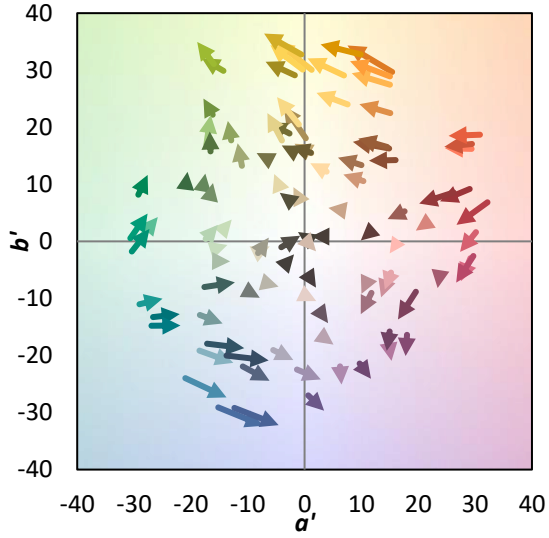
# TM-30-18

**Individual Sample Fidelity Index ($R_{f,i}$)**


| | | | |
|---|---|---|---|
| CES01 = 85 | CES26 = 52 | CES51 = 87 | CES76 = 40 |
| CES02 = 59 | CES27 = 77 | CES52 = 88 | CES77 = 62 |
| CES03 = 30 | CES28 = 76 | CES53 = 74 | CES78 = 43 |
| CES04 = 68 | CES29 = 46 | CES54 = 79 | CES79 = 72 |
| CES05 = 45 | CES30 = 54 | CES55 = 78 | CES80 = 68 |
| CES06 = 49 | CES31 = 52 | CES56 = 67 | CES81 = 70 |
| CES07 = 38 | CES32 = 49 | CES57 = 64 | CES82 = 87 |
| CES08 = 37 | CES33 = 59 | CES58 = 66 | CES83 = 81 |
| CES09 = 29 | CES34 = 61 | CES59 = 87 | CES84 = 87 |
| CES10 = 72 | CES35 = 78 | CES60 = 91 | CES85 = 83 |
| CES11 = 55 | CES36 = 88 | CES61 = 88 | CES86 = 75 |
| CES12 = 61 | CES37 = 71 | CES62 = 77 | CES87 = 74 |
| CES13 = 41 | CES38 = 64 | CES63 = 74 | CES88 = 76 |
| CES14 = 74 | CES39 = 90 | CES64 = 71 | CES89 = 75 |
| CES15 = 70 | CES40 = 81 | CES65 = 63 | CES90 = 73 |
| CES16 = 46 | CES41 = 82 | CES66 = 66 | CES91 = 93 |
| CES17 = 48 | CES42 = 69 | CES67 = 63 | CES92 = 69 |
| CES18 = 55 | CES43 = 67 | CES68 = 71 | CES93 = 82 |
| CES19 = 70 | CES44 = 98 | CES69 = 81 | CES94 = 58 |
| CES20 = 63 | CES45 = 77 | CES70 = 57 | CES95 = 72 |
| CES21 = 85 | CES46 = 76 | CES71 = 54 | CES96 = 78 |
| CES22 = 77 | CES47 = 73 | CES72 = 84 | CES97 = 82 |
| CES23 = 91 | CES48 = 65 | CES73 = 45 | CES98 = 70 |
| CES24 = 90 | CES49 = 77 | CES74 = 92 | CES99 = 59 |
| CES25 = 71 | CES50 = 85 | CES75 = 49 | |

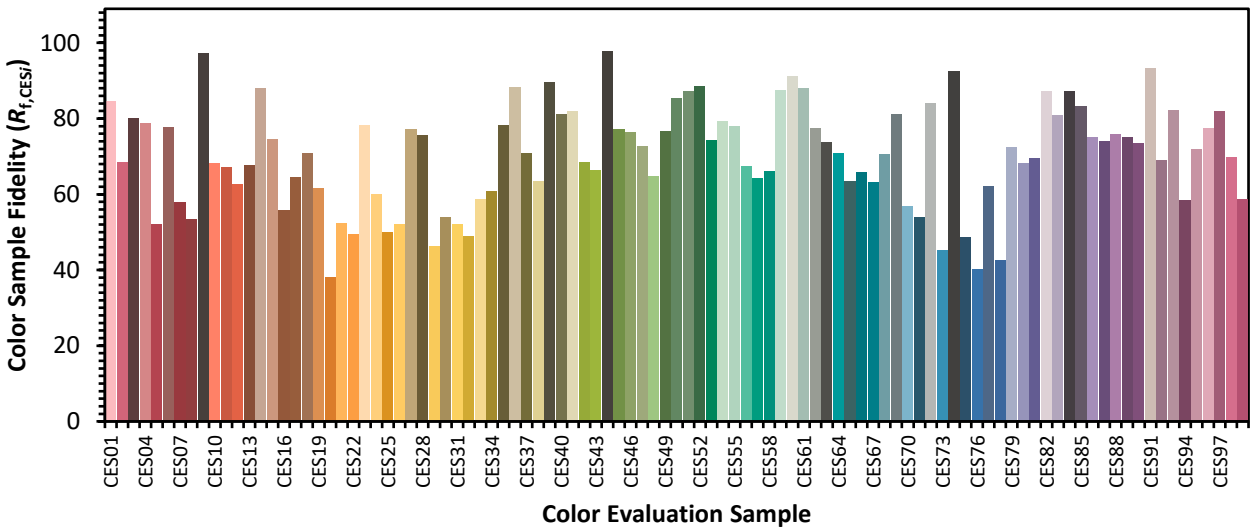



REPORT NUMBER: SP1-2407-184-7

**TM-30-18**

## Color Rendition by Hue-Angle Bin

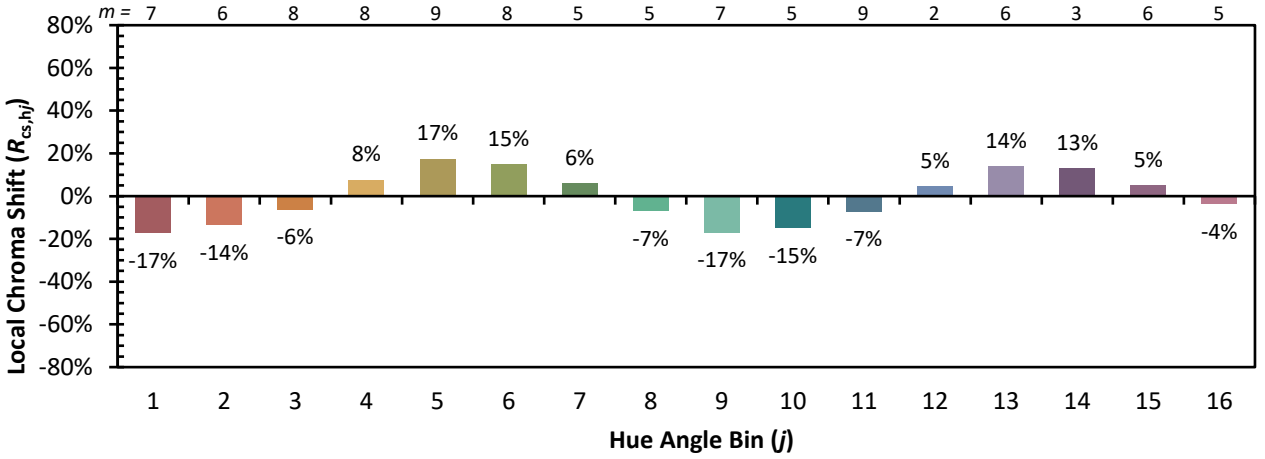

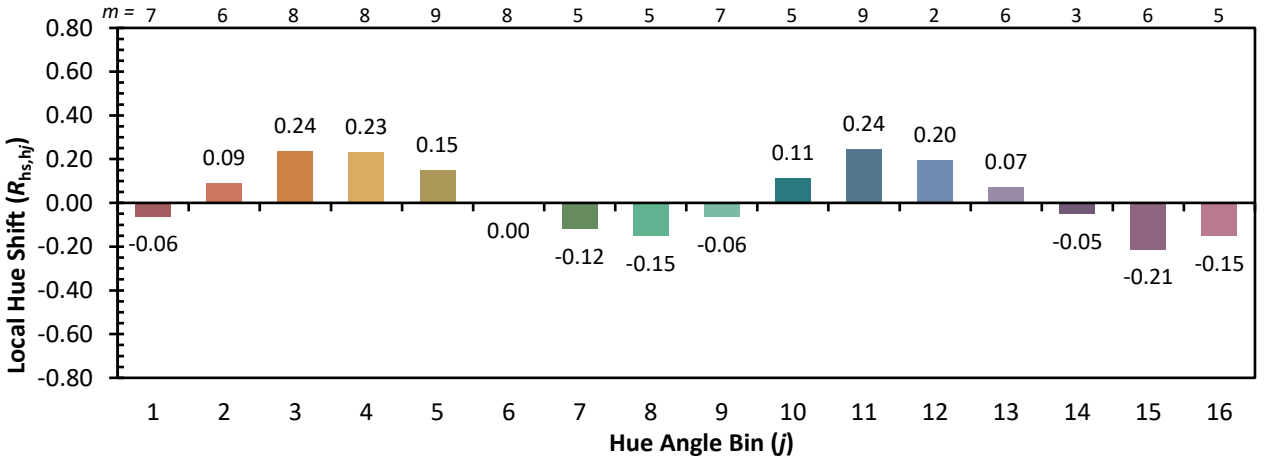


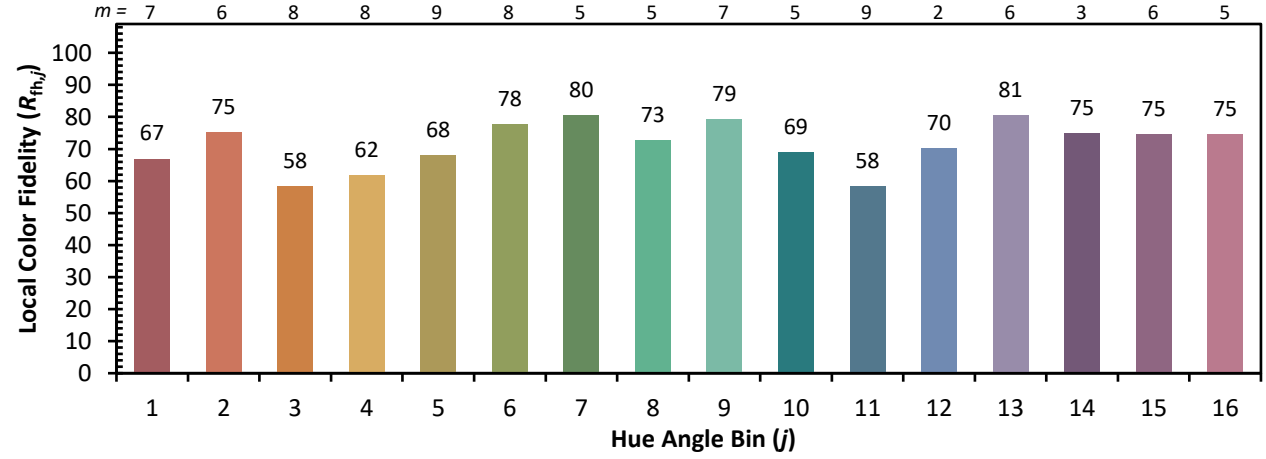
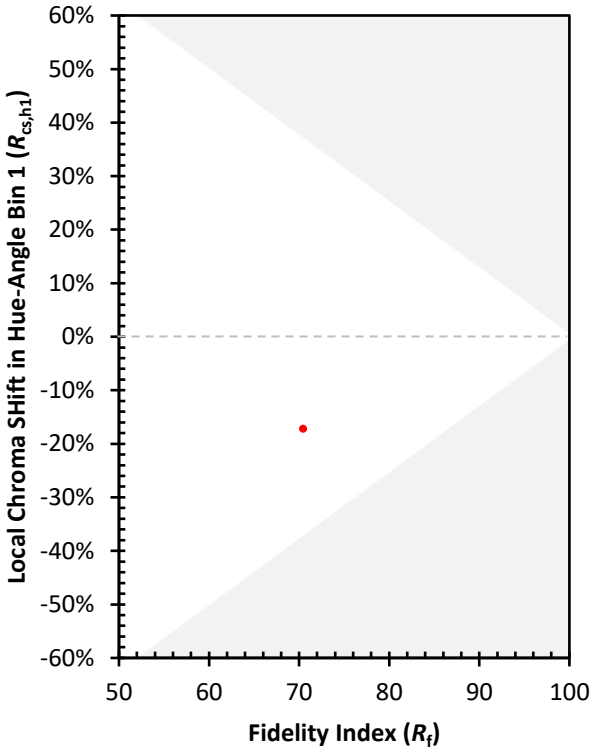



REPORT NUMBER: SP1-2407-184-7

# TM-30-18

## Measure Comparisons

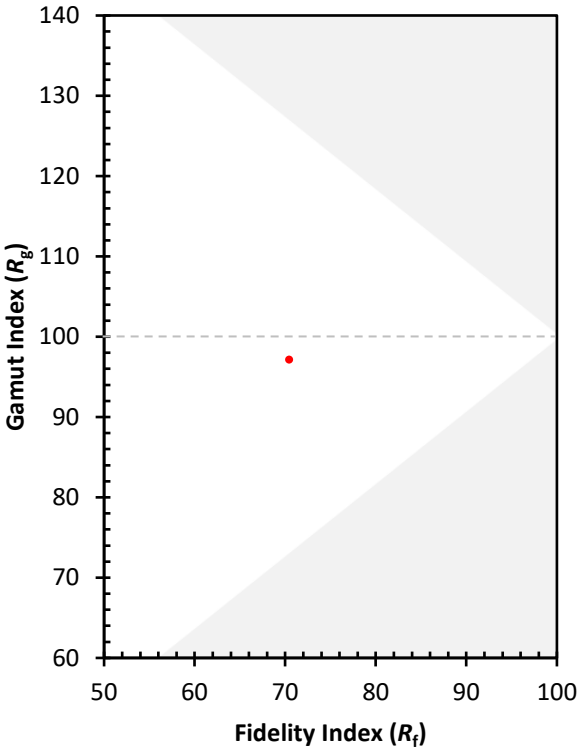


(END OF REPORT)