Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1390026

Luminaire Tested: **GSS-SA3D-827-U-RBC**

Issue Date: 02/18/2026

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P1390026 |
| Test Lab: | INNOVATION CENTER(G3) |
| Issue Date: | 02/18/2026 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | GSS-SA3D-827-U-RBC |
| Description: | GALLEON SLIM SITE LUMINAIRE 1200mA 3xLight Square PACKAGE 80CRI 2700K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL |
| Light Source: | (42) 2700K CCT, 80 CRI LEDS |
| Ballast/Driver: | ELECTRONIC DRIVER |

Luminaire Equipment:

| Sample No. | Condition | Description |
|---|---|---|
| a | good | reflector |
| b | good | lens |
| c | good | housing |
| d | good | cord |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 12639.7 lumens |
| Efficiency: | N/A |
| Efficacy: | 78.6 lumens/watt |
| Luminous Opening: | Rectangular (W 1.5' x L: 0.5' x H: 0') |
| IES Classification: | Type III - Short |
| BUG Rating: | B0 - U0 - G2 |


| | |
|---|---|
| Input Watts (W): | 160.9 |
| Input Voltage (V): | 120 |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | 0.97 |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 28.75 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

## Iso-Footcandle Lines of Horizontal Illumination

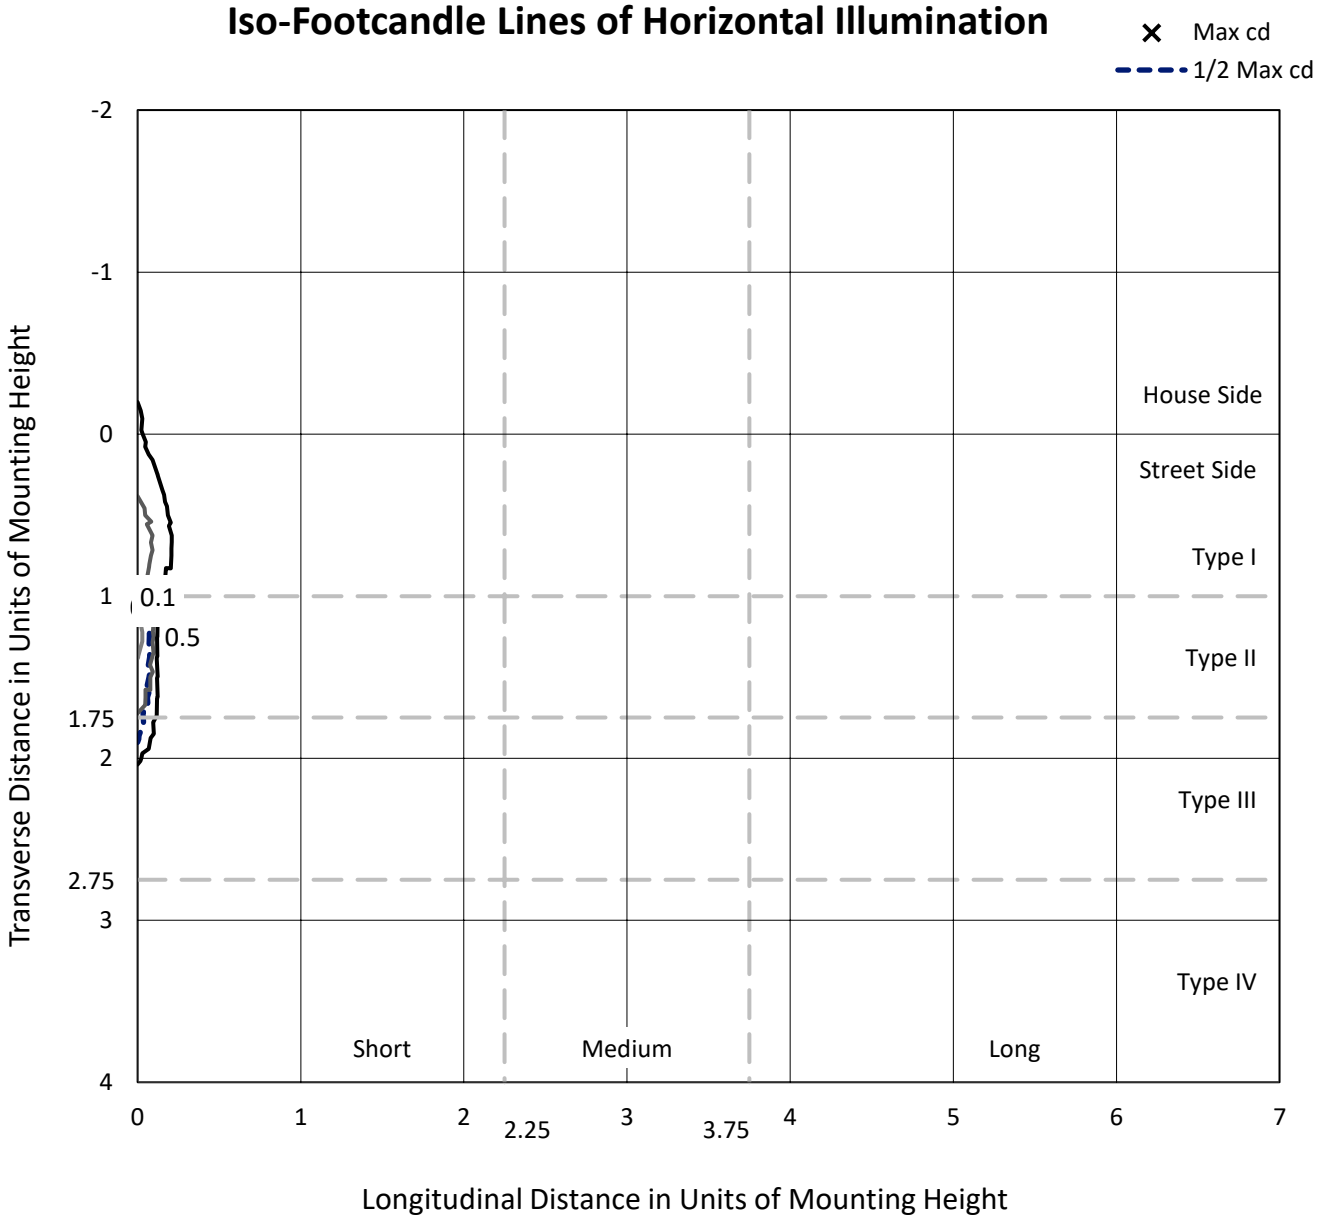



Based on 20 foot mounting height. Maximum calculated value = 0.6 fc
Type III - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

## Luminous Intensity Polar Plot

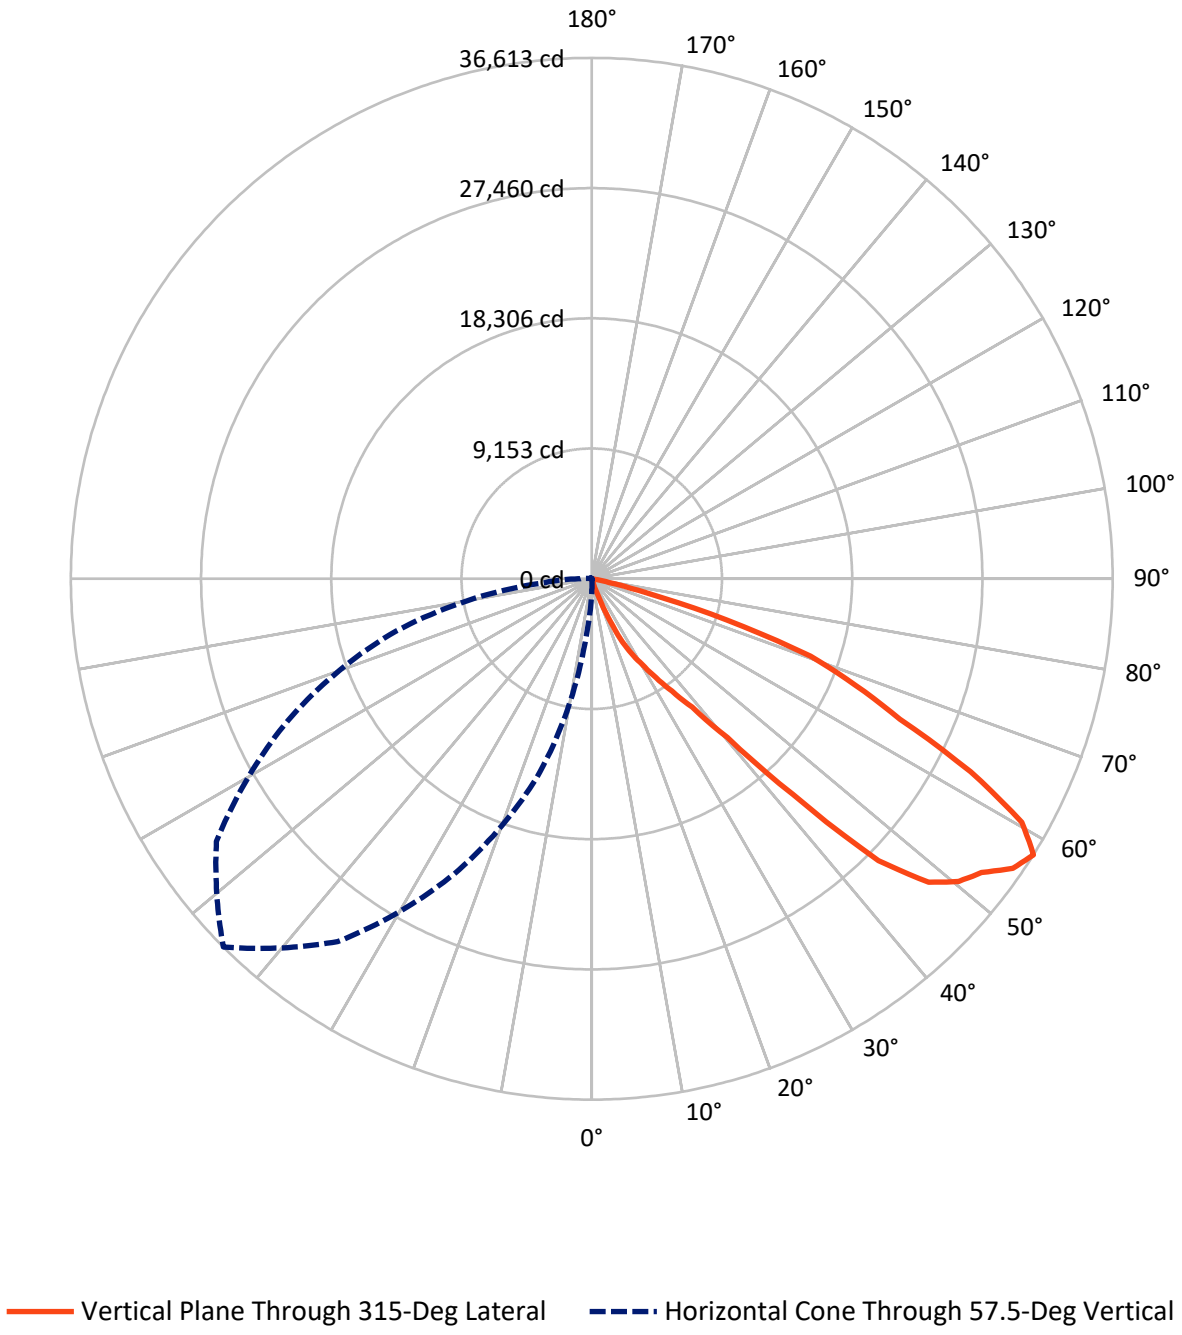

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 90.2 | 0.0 | 90.2 |
| | % Fixture | 0.7 | 0.0 | 0.7 |
| **Street Side** | Lumens | 12549.4 | 0.0 | 12549.4 |
| | % Fixture | 99.3 | 0.0 | 99.3 |
| **Total** | Lumens | 12639.7 | 0.0 | 12639.7 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 4.4 | 0.0 |
| 10°-20° | 21.3 | 0.2 |
| 20°-30° | 273.6 | 2.2 |
| 30°-40° | 853.0 | 6.7 |
| 40°-50° | 2786.1 | 22.0 |
| 50°-60° | 4471.9 | 35.4 |
| 60°-70° | 3433.6 | 27.2 |
| 70°-80° | 781.9 | 6.2 |
| 80°-90° | 13.9 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 12639.7 | 100.0 |
| 0°-180° | 12639.7 | 100.0 |

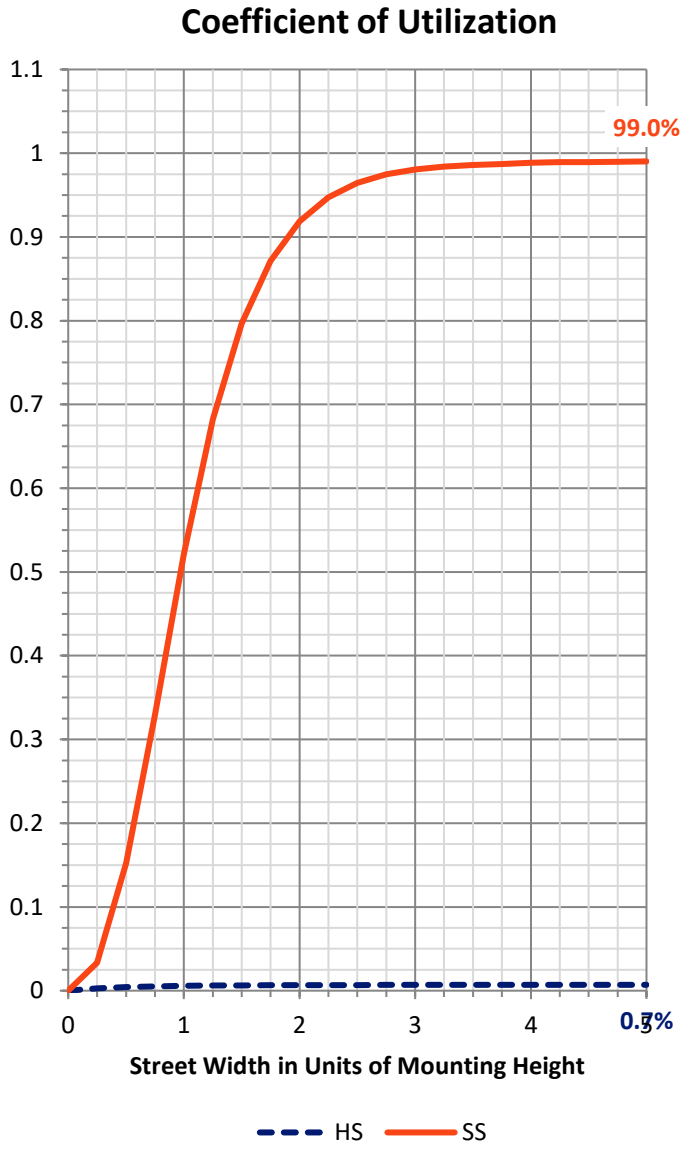

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 286.3 | 2.3 | | | |
| FM | (30°-60°) | 8072.9 | 63.9 | | | |
| FH | (60°-80°) | 4180.3 | 33.1 | | | G2/5000 |
| FVH | (80°-90°) | 9.9 | 0.1 | | | G0/10 |
| BL | (0°-30°) | 13.0 | 0.1 | B0/110 | | |
| BM | (30°-60°) | 38.0 | 0.3 | B0/220 | | |
| BH | (60°-80°) | 35.2 | 0.3 | B0/110 | | G0/110 |
| BVH | (80°-90°) | 4.0 | 0.0 | | | G0/10 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B0-U0-G2**
Type III Short

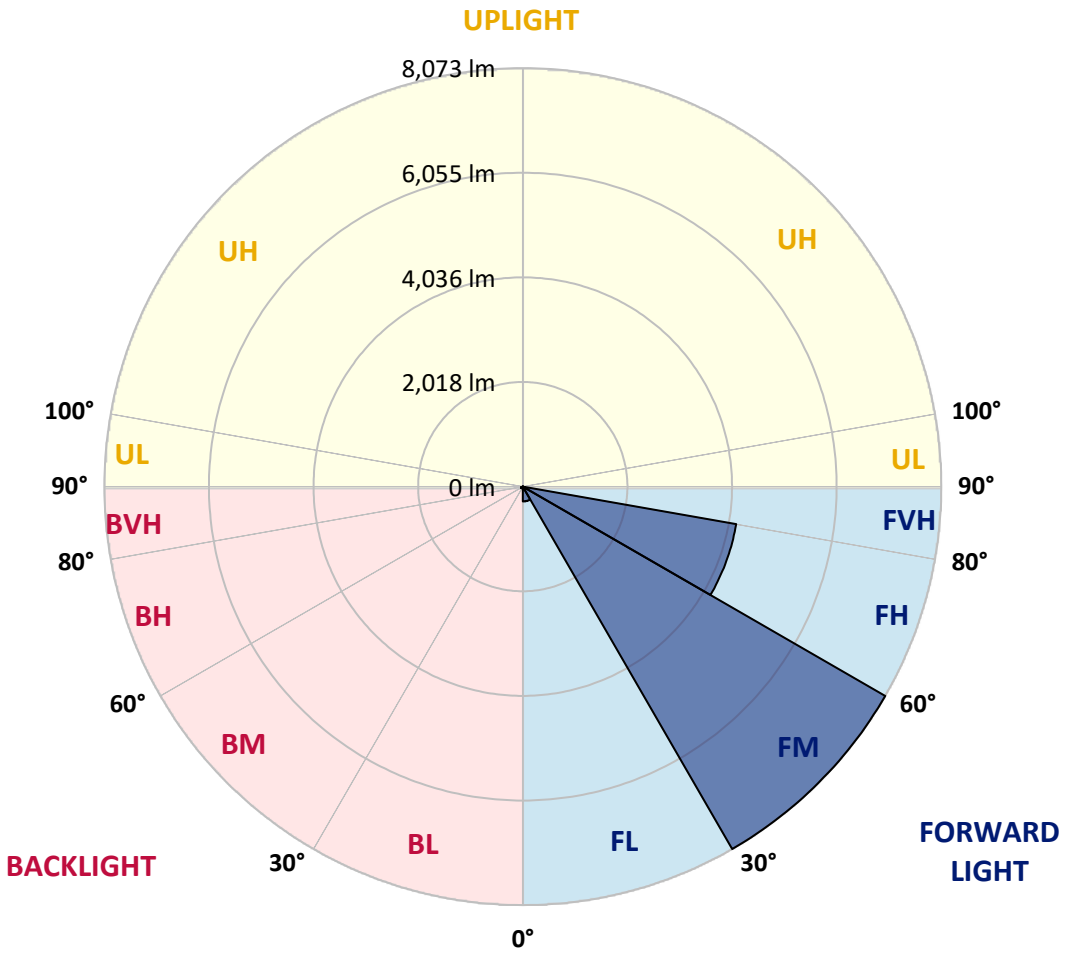

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 | 38.9 | 38.9 | 38.9 | 38.9 | 38.9 | 38.9 |
| 5° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 42.8 | 42.8 | 42.8 | 42.8 | 38.9 | 38.9 |
| 7.5° | 54.4 | 54.4 | 50.5 | 50.5 | 50.5 | 46.7 | 46.7 | 46.7 | 46.7 | 42.8 | 42.8 |
| 10° | 62.2 | 62.2 | 58.3 | 58.3 | 54.4 | 54.4 | 50.5 | 50.5 | 46.7 | 46.7 | 42.8 |
| 12.5° | 70.0 | 70.0 | 66.1 | 62.2 | 62.2 | 58.3 | 54.4 | 50.5 | 50.5 | 46.7 | 42.8 |
| 15° | 77.8 | 73.9 | 70.0 | 66.1 | 66.1 | 62.2 | 58.3 | 54.4 | 54.4 | 50.5 | 46.7 |
| 17.5° | 85.5 | 81.6 | 77.8 | 73.9 | 70.0 | 62.2 | 58.3 | 54.4 | 54.4 | 50.5 | 46.7 |
| 20° | 93.3 | 85.5 | 77.8 | 73.9 | 70.0 | 62.2 | 58.3 | 54.4 | 54.4 | 50.5 | 46.7 |
| 22.5° | 105.0 | 97.2 | 85.5 | 81.6 | 73.9 | 70.0 | 62.2 | 58.3 | 54.4 | 50.5 | 46.7 |
| 25° | 120.5 | 105.0 | 93.3 | 85.5 | 77.8 | 70.0 | 62.2 | 58.3 | 54.4 | 50.5 | 46.7 |
| 27.5° | 147.7 | 124.4 | 105.0 | 97.2 | 85.5 | 77.8 | 66.1 | 62.2 | 58.3 | 54.4 | 50.5 |
| 30° | 198.3 | 155.5 | 112.8 | 101.1 | 93.3 | 81.6 | 70.0 | 66.1 | 58.3 | 54.4 | 46.7 |
| 32.5° | 244.9 | 190.5 | 136.1 | 120.5 | 105.0 | 85.5 | 70.0 | 66.1 | 58.3 | 54.4 | 46.7 |
| 35° | 244.9 | 194.4 | 143.9 | 124.4 | 108.9 | 89.4 | 70.0 | 66.1 | 58.3 | 54.4 | 46.7 |
| 37.5° | 241.1 | 190.5 | 140.0 | 124.4 | 108.9 | 89.4 | 73.9 | 66.1 | 62.2 | 54.4 | 46.7 |
| 40° | 252.7 | 186.6 | 124.4 | 112.8 | 101.1 | 85.5 | 73.9 | 66.1 | 62.2 | 54.4 | 46.7 |
| 42.5° | 276.0 | 198.3 | 120.5 | 108.9 | 101.1 | 89.4 | 77.8 | 70.0 | 62.2 | 54.4 | 46.7 |
| 45° | 346.0 | 233.3 | 124.4 | 112.8 | 101.1 | 85.5 | 73.9 | 70.0 | 62.2 | 58.3 | 50.5 |
| 47.5° | 626.0 | 377.1 | 128.3 | 112.8 | 101.1 | 85.5 | 70.0 | 66.1 | 62.2 | 54.4 | 50.5 |
| 50° | 979.8 | 556.0 | 132.2 | 116.6 | 101.1 | 85.5 | 70.0 | 66.1 | 62.2 | 58.3 | 54.4 |
| 52.5° | 1065.3 | 606.5 | 147.7 | 128.3 | 108.9 | 89.4 | 70.0 | 66.1 | 62.2 | 58.3 | 54.4 |
| 55° | 960.3 | 563.8 | 171.1 | 147.7 | 120.5 | 97.2 | 70.0 | 66.1 | 62.2 | 58.3 | 54.4 |
| 57.5° | *812.6* | *501.5* | *190.5* | *163.3* | *132.2* | *105.0* | *73.9* | *70.0* | *66.1* | *62.2* | *58.3* |
| 60° | 610.4 | 416.0 | 221.6 | 186.6 | 155.5 | 120.5 | 85.5 | 81.6 | 77.8 | 70.0 | 66.1 |
| 62.5° | 497.7 | 369.4 | 244.9 | 209.9 | 171.1 | 136.1 | 97.2 | 93.3 | 89.4 | 81.6 | 77.8 |
| 65° | 439.3 | 349.9 | 260.5 | 221.6 | 182.7 | 140.0 | 101.1 | 97.2 | 93.3 | 89.4 | 85.5 |
| 67.5° | 408.2 | 338.3 | 272.2 | 229.4 | 190.5 | 147.7 | 105.0 | 101.1 | 97.2 | 93.3 | 89.4 |
| 70° | 392.7 | 330.5 | 268.3 | 229.4 | 190.5 | 151.6 | 112.8 | 108.9 | 101.1 | 97.2 | 89.4 |
| 72.5° | 365.5 | 314.9 | 264.4 | 233.3 | 198.3 | 167.2 | 132.2 | 120.5 | 108.9 | 93.3 | 81.6 |
| 75° | 326.6 | 279.9 | 233.3 | 213.8 | 194.4 | 171.1 | 151.6 | 132.2 | 112.8 | 89.4 | 70.0 |
| 77.5° | 237.2 | 217.7 | 198.3 | 186.6 | 175.0 | 159.4 | 147.7 | 128.3 | 108.9 | 85.5 | 66.1 |
| 80° | 93.3 | 105.0 | 112.8 | 112.8 | 116.6 | 116.6 | 116.6 | 101.1 | 85.5 | 70.0 | 54.4 |
| 82.5° | 27.2 | 27.2 | 27.2 | 31.1 | 35.0 | 38.9 | 42.8 | 38.9 | 38.9 | 35.0 | 31.1 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 38.9 | 38.9 | 35.0 | 35.0 | 35.0 | 35.0 | 35.0 | 35.0 | 35.0 | 35.0 | 35.0 |
| 5° | 38.9 | 38.9 | 35.0 | 35.0 | 35.0 | 35.0 | 31.1 | 31.1 | 31.1 | 31.1 | 31.1 |
| 7.5° | 42.8 | 38.9 | 38.9 | 35.0 | 35.0 | 35.0 | 31.1 | 31.1 | 31.1 | 31.1 | 31.1 |
| 10° | 42.8 | 38.9 | 38.9 | 35.0 | 35.0 | 35.0 | 31.1 | 31.1 | 31.1 | 31.1 | 27.2 |
| 12.5° | 42.8 | 42.8 | 38.9 | 38.9 | 38.9 | 35.0 | 35.0 | 31.1 | 31.1 | 31.1 | 27.2 |
| 15° | 42.8 | 42.8 | 38.9 | 35.0 | 35.0 | 35.0 | 31.1 | 31.1 | 31.1 | 31.1 | 27.2 |
| 17.5° | 42.8 | 42.8 | 38.9 | 35.0 | 35.0 | 31.1 | 31.1 | 27.2 | 27.2 | 27.2 | 23.3 |
| 20° | 42.8 | 42.8 | 38.9 | 35.0 | 35.0 | 31.1 | 31.1 | 27.2 | 27.2 | 27.2 | 23.3 |
| 22.5° | 42.8 | 42.8 | 38.9 | 35.0 | 35.0 | 31.1 | 31.1 | 27.2 | 27.2 | 23.3 | 23.3 |
| 25° | 42.8 | 42.8 | 38.9 | 35.0 | 31.1 | 31.1 | 27.2 | 23.3 | 23.3 | 19.4 | 19.4 |
| 27.5° | 46.7 | 42.8 | 38.9 | 35.0 | 31.1 | 31.1 | 27.2 | 23.3 | 19.4 | 19.4 | 15.6 |
| 30° | 42.8 | 42.8 | 38.9 | 35.0 | 31.1 | 27.2 | 23.3 | 19.4 | 15.6 | 15.6 | 11.7 |
| 32.5° | 42.8 | 42.8 | 38.9 | 35.0 | 31.1 | 27.2 | 23.3 | 19.4 | 15.6 | 15.6 | 11.7 |
| 35° | 42.8 | 38.9 | 35.0 | 31.1 | 27.2 | 23.3 | 19.4 | 15.6 | 11.7 | 11.7 | 7.8 |
| 37.5° | 42.8 | 38.9 | 35.0 | 31.1 | 27.2 | 23.3 | 19.4 | 15.6 | 11.7 | 7.8 | 3.9 |
| 40° | 42.8 | 38.9 | 35.0 | 31.1 | 27.2 | 23.3 | 15.6 | 11.7 | 7.8 | 7.8 | 3.9 |
| 42.5° | 42.8 | 38.9 | 35.0 | 31.1 | 27.2 | 23.3 | 19.4 | 15.6 | 11.7 | 7.8 | 3.9 |
| 45° | 46.7 | 42.8 | 35.0 | 31.1 | 27.2 | 27.2 | 23.3 | 19.4 | 15.6 | 11.7 | 3.9 |
| 47.5° | 46.7 | 38.9 | 35.0 | 27.2 | 27.2 | 27.2 | 23.3 | 23.3 | 19.4 | 11.7 | 7.8 |
| 50° | 50.5 | 42.8 | 38.9 | 31.1 | 27.2 | 27.2 | 23.3 | 19.4 | 15.6 | 11.7 | 3.9 |
| 52.5° | 50.5 | 46.7 | 38.9 | 35.0 | 31.1 | 23.3 | 19.4 | 11.7 | 7.8 | 7.8 | 3.9 |
| 55° | 50.5 | 50.5 | 46.7 | 42.8 | 35.0 | 27.2 | 15.6 | 7.8 | 7.8 | 3.9 | 3.9 |
| 57.5° | *54.4* | *54.4* | *50.5* | *46.7* | *35.0* | *23.3* | *11.7* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 62.2 | 58.3 | 54.4 | 50.5 | 38.9 | 27.2 | 11.7 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 70.0 | 62.2 | 54.4 | 46.7 | 35.0 | 23.3 | 11.7 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 73.9 | 62.2 | 50.5 | 38.9 | 31.1 | 19.4 | 11.7 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 77.8 | 62.2 | 50.5 | 35.0 | 27.2 | 19.4 | 7.8 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 73.9 | 58.3 | 42.8 | 27.2 | 19.4 | 15.6 | 7.8 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 66.1 | 54.4 | 38.9 | 23.3 | 19.4 | 11.7 | 7.8 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 58.3 | 46.7 | 31.1 | 19.4 | 15.6 | 11.7 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 54.4 | 38.9 | 27.2 | 11.7 | 7.8 | 7.8 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 42.8 | 31.1 | 15.6 | 3.9 | 3.9 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 23.3 | 15.6 | 7.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 35.0 | 35.0 | 35.0 | 31.1 | 31.1 | 31.1 | 31.1 | 31.1 | 31.1 | 31.1 | 31.1 |
| 5° | 31.1 | 31.1 | 31.1 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 |
| 7.5° | 31.1 | 31.1 | 31.1 | 27.2 | 27.2 | 27.2 | 27.2 | 23.3 | 23.3 | 23.3 | 23.3 |
| 10° | 27.2 | 27.2 | 27.2 | 23.3 | 23.3 | 23.3 | 23.3 | 19.4 | 19.4 | 19.4 | 19.4 |
| 12.5° | 27.2 | 27.2 | 27.2 | 23.3 | 23.3 | 23.3 | 23.3 | 19.4 | 19.4 | 19.4 | 19.4 |
| 15° | 27.2 | 27.2 | 27.2 | 23.3 | 23.3 | 23.3 | 19.4 | 19.4 | 15.6 | 15.6 | 15.6 |
| 17.5° | 23.3 | 23.3 | 23.3 | 19.4 | 19.4 | 19.4 | 19.4 | 15.6 | 15.6 | 15.6 | 11.7 |
| 20° | 23.3 | 23.3 | 23.3 | 19.4 | 19.4 | 15.6 | 15.6 | 11.7 | 7.8 | 7.8 | 7.8 |
| 22.5° | 19.4 | 19.4 | 15.6 | 15.6 | 11.7 | 11.7 | 7.8 | 7.8 | 3.9 | 3.9 | 3.9 |
| 25° | 15.6 | 15.6 | 11.7 | 11.7 | 7.8 | 7.8 | 3.9 | 3.9 | 0.0 | 0.0 | 0.0 |
| 27.5° | 11.7 | 7.8 | 7.8 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 7.8 | 7.8 | 3.9 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 7.8 | 7.8 | 3.9 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 3.9 | 3.9 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 31.1 | 31.1 | 31.1 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 |
| 5° | 23.3 | 23.3 | 23.3 | 23.3 | 23.3 | 23.3 | 23.3 | 23.3 | 23.3 | 23.3 | 23.3 |
| 7.5° | 19.4 | 19.4 | 19.4 | 19.4 | 19.4 | 19.4 | 19.4 | 19.4 | 15.6 | 15.6 | 15.6 |
| 10° | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 11.7 | 11.7 | 11.7 |
| 12.5° | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 11.7 | 11.7 | 11.7 | 7.8 | 7.8 | 7.8 |
| 15° | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 7.8 | 7.8 | 7.8 | 3.9 | 3.9 | 3.9 |
| 17.5° | 11.7 | 7.8 | 7.8 | 7.8 | 7.8 | 3.9 | 3.9 | 3.9 | 0.0 | 0.0 | 0.0 |
| 20° | 3.9 | 3.9 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 |
| 5° | 23.3 | 19.4 | 19.4 | 19.4 | 19.4 | 19.4 | 19.4 | 19.4 | 19.4 | 19.4 | 19.4 |
| 7.5° | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 | 15.6 |
| 10° | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 |
| 12.5° | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 3.9 | 3.9 |
| 15° | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 27.2 | 31.1 | 31.1 | 31.1 | 31.1 | 35.0 | 35.0 | 35.0 | 38.9 | 38.9 | 42.8 |
| 5° | 19.4 | 23.3 | 23.3 | 23.3 | 23.3 | 27.2 | 27.2 | 27.2 | 31.1 | 31.1 | 35.0 |
| 7.5° | 15.6 | 19.4 | 19.4 | 19.4 | 19.4 | 23.3 | 23.3 | 23.3 | 27.2 | 27.2 | 31.1 |
| 10° | 11.7 | 11.7 | 11.7 | 11.7 | 15.6 | 15.6 | 19.4 | 19.4 | 23.3 | 23.3 | 27.2 |
| 12.5° | 3.9 | 7.8 | 7.8 | 7.8 | 7.8 | 11.7 | 11.7 | 11.7 | 15.6 | 19.4 | 19.4 |
| 15° | 0.0 | 3.9 | 3.9 | 3.9 | 3.9 | 7.8 | 7.8 | 7.8 | 11.7 | 15.6 | 15.6 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 7.8 | 7.8 | 11.7 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 42.8 | 46.7 | 46.7 | 50.5 | 50.5 | 54.4 | 54.4 | 58.3 | 58.3 | 58.3 | 62.2 |
| 5° | 35.0 | 38.9 | 42.8 | 42.8 | 46.7 | 50.5 | 50.5 | 54.4 | 54.4 | 54.4 | 58.3 |
| 7.5° | 31.1 | 35.0 | 38.9 | 38.9 | 42.8 | 46.7 | 46.7 | 50.5 | 50.5 | 50.5 | 54.4 |
| 10° | 27.2 | 31.1 | 35.0 | 35.0 | 38.9 | 42.8 | 42.8 | 46.7 | 46.7 | 50.5 | 50.5 |
| 12.5° | 23.3 | 27.2 | 31.1 | 31.1 | 35.0 | 38.9 | 38.9 | 42.8 | 46.7 | 46.7 | 50.5 |
| 15° | 19.4 | 23.3 | 27.2 | 27.2 | 31.1 | 35.0 | 38.9 | 42.8 | 42.8 | 46.7 | 46.7 |
| 17.5° | 11.7 | 15.6 | 19.4 | 23.3 | 27.2 | 31.1 | 35.0 | 38.9 | 38.9 | 42.8 | 46.7 |
| 20° | 7.8 | 11.7 | 15.6 | 19.4 | 23.3 | 27.2 | 27.2 | 31.1 | 35.0 | 38.9 | 38.9 |
| 22.5° | 3.9 | 7.8 | 11.7 | 11.7 | 15.6 | 19.4 | 23.3 | 27.2 | 27.2 | 31.1 | 35.0 |
| 25° | 0.0 | 3.9 | 7.8 | 7.8 | 11.7 | 15.6 | 15.6 | 19.4 | 23.3 | 27.2 | 27.2 |
| 27.5° | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 | 11.7 | 15.6 | 19.4 | 19.4 | 23.3 | 23.3 |
| 30° | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 | 11.7 | 11.7 | 15.6 | 15.6 | 19.4 | 23.3 |
| 32.5° | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 7.8 | 11.7 | 15.6 | 15.6 | 19.4 | 19.4 |
| 35° | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 7.8 | 7.8 | 11.7 | 11.7 | 15.6 | 15.6 |
| 37.5° | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 7.8 | 7.8 | 11.7 | 11.7 | 15.6 | 15.6 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 7.8 | 11.7 | 11.7 | 11.7 | 15.6 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 | 11.7 | 11.7 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 | 11.7 | 11.7 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 | 11.7 | 11.7 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 | 11.7 | 11.7 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 | 7.8 | 11.7 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 | 7.8 | 11.7 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *3.9* | *3.9* | *3.9* | *7.8* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 7.8 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 7.8 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 7.8 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 7.8 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 7.8 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 7.8 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 3.9 | 3.9 | 7.8 | 7.8 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 | 7.8 | 11.7 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 | 7.8 | 11.7 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.9 | 3.9 | 7.8 | 7.8 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 62.2 | 62.2 | 62.2 | 62.2 | 62.2 | 62.2 | 62.2 | 62.2 | 58.3 | 58.3 | 58.3 |
| 5° | 58.3 | 58.3 | 58.3 | 58.3 | 58.3 | 58.3 | 58.3 | 58.3 | 54.4 | 54.4 | 54.4 |
| 7.5° | 54.4 | 54.4 | 54.4 | 58.3 | 58.3 | 58.3 | 58.3 | 58.3 | 54.4 | 54.4 | 54.4 |
| 10° | 54.4 | 54.4 | 54.4 | 58.3 | 58.3 | 58.3 | 58.3 | 58.3 | 54.4 | 54.4 | 54.4 |
| 12.5° | 50.5 | 50.5 | 50.5 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 |
| 15° | 50.5 | 50.5 | 50.5 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 |
| 17.5° | 46.7 | 50.5 | 50.5 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 |
| 20° | 42.8 | 42.8 | 46.7 | 46.7 | 50.5 | 50.5 | 50.5 | 54.4 | 54.4 | 54.4 | 54.4 |
| 22.5° | 35.0 | 38.9 | 42.8 | 42.8 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 25° | 31.1 | 31.1 | 35.0 | 38.9 | 38.9 | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 |
| 27.5° | 27.2 | 27.2 | 31.1 | 31.1 | 35.0 | 35.0 | 35.0 | 38.9 | 38.9 | 38.9 | 38.9 |
| 30° | 23.3 | 27.2 | 27.2 | 31.1 | 31.1 | 31.1 | 35.0 | 35.0 | 38.9 | 38.9 | 38.9 |
| 32.5° | 23.3 | 23.3 | 27.2 | 27.2 | 31.1 | 31.1 | 31.1 | 35.0 | 35.0 | 35.0 | 35.0 |
| 35° | 19.4 | 19.4 | 23.3 | 23.3 | 27.2 | 27.2 | 31.1 | 31.1 | 35.0 | 35.0 | 35.0 |
| 37.5° | 19.4 | 19.4 | 23.3 | 23.3 | 27.2 | 27.2 | 27.2 | 31.1 | 31.1 | 31.1 | 35.0 |
| 40° | 15.6 | 15.6 | 19.4 | 19.4 | 23.3 | 23.3 | 27.2 | 27.2 | 31.1 | 31.1 | 35.0 |
| 42.5° | 15.6 | 15.6 | 19.4 | 19.4 | 23.3 | 23.3 | 27.2 | 27.2 | 31.1 | 31.1 | 35.0 |
| 45° | 15.6 | 15.6 | 19.4 | 19.4 | 23.3 | 23.3 | 27.2 | 27.2 | 31.1 | 31.1 | 35.0 |
| 47.5° | 15.6 | 15.6 | 19.4 | 19.4 | 23.3 | 23.3 | 23.3 | 27.2 | 27.2 | 27.2 | 31.1 |
| 50° | 15.6 | 15.6 | 15.6 | 19.4 | 19.4 | 19.4 | 23.3 | 23.3 | 27.2 | 27.2 | 31.1 |
| 52.5° | 11.7 | 11.7 | 11.7 | 15.6 | 15.6 | 15.6 | 19.4 | 19.4 | 23.3 | 23.3 | 27.2 |
| 55° | 11.7 | 11.7 | 11.7 | 15.6 | 15.6 | 15.6 | 15.6 | 19.4 | 19.4 | 19.4 | 23.3 |
| 57.5° | *7.8* | *7.8* | *7.8* | *11.7* | *11.7* | *11.7* | *11.7* | *15.6* | *15.6* | *15.6* | *19.4* |
| 60° | 7.8 | 7.8 | 7.8 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 15.6 |
| 62.5° | 7.8 | 7.8 | 7.8 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 15.6 |
| 65° | 7.8 | 7.8 | 7.8 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 15.6 |
| 67.5° | 7.8 | 7.8 | 7.8 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 15.6 |
| 70° | 7.8 | 7.8 | 7.8 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 15.6 |
| 72.5° | 7.8 | 7.8 | 7.8 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 15.6 |
| 75° | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 |
| 77.5° | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 |
| 80° | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 |
| 82.5° | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 |
| 85° | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 |
| 87.5° | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 58.3 | 58.3 | 58.3 | 58.3 | 58.3 | 54.4 | 54.4 | 54.4 | 58.3 | 58.3 | 58.3 |
| 5° | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 |
| 7.5° | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 50.5 | 50.5 | 50.5 | 54.4 | 54.4 | 54.4 |
| 10° | 54.4 | 50.5 | 50.5 | 50.5 | 50.5 | 50.5 | 50.5 | 50.5 | 54.4 | 54.4 | 54.4 |
| 12.5° | 54.4 | 50.5 | 50.5 | 50.5 | 50.5 | 50.5 | 50.5 | 50.5 | 54.4 | 54.4 | 54.4 |
| 15° | 54.4 | 50.5 | 50.5 | 50.5 | 50.5 | 50.5 | 50.5 | 54.4 | 54.4 | 58.3 | 58.3 |
| 17.5° | 50.5 | 50.5 | 46.7 | 46.7 | 50.5 | 50.5 | 50.5 | 50.5 | 54.4 | 54.4 | 54.4 |
| 20° | 50.5 | 50.5 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 50.5 | 50.5 | 54.4 | 54.4 |
| 22.5° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 50.5 | 50.5 | 54.4 | 54.4 |
| 25° | 42.8 | 42.8 | 42.8 | 42.8 | 46.7 | 46.7 | 46.7 | 50.5 | 54.4 | 54.4 | 58.3 |
| 27.5° | 42.8 | 42.8 | 42.8 | 42.8 | 46.7 | 46.7 | 46.7 | 50.5 | 54.4 | 54.4 | 58.3 |
| 30° | 42.8 | 42.8 | 42.8 | 42.8 | 46.7 | 46.7 | 46.7 | 50.5 | 54.4 | 54.4 | 58.3 |
| 32.5° | 38.9 | 38.9 | 38.9 | 42.8 | 42.8 | 46.7 | 46.7 | 50.5 | 54.4 | 54.4 | 58.3 |
| 35° | 38.9 | 38.9 | 38.9 | 42.8 | 42.8 | 46.7 | 46.7 | 50.5 | 54.4 | 54.4 | 58.3 |
| 37.5° | 35.0 | 38.9 | 38.9 | 42.8 | 46.7 | 46.7 | 50.5 | 54.4 | 58.3 | 58.3 | 62.2 |
| 40° | 35.0 | 38.9 | 38.9 | 42.8 | 46.7 | 46.7 | 50.5 | 54.4 | 58.3 | 58.3 | 62.2 |
| 42.5° | 35.0 | 38.9 | 38.9 | 42.8 | 46.7 | 46.7 | 50.5 | 54.4 | 58.3 | 62.2 | 66.1 |
| 45° | 38.9 | 38.9 | 42.8 | 46.7 | 46.7 | 50.5 | 50.5 | 54.4 | 58.3 | 62.2 | 66.1 |
| 47.5° | 38.9 | 42.8 | 46.7 | 46.7 | 50.5 | 50.5 | 50.5 | 54.4 | 62.2 | 66.1 | 70.0 |
| 50° | 35.0 | 38.9 | 42.8 | 46.7 | 46.7 | 50.5 | 50.5 | 54.4 | 62.2 | 66.1 | 70.0 |
| 52.5° | 31.1 | 31.1 | 35.0 | 38.9 | 46.7 | 50.5 | 54.4 | 58.3 | 66.1 | 70.0 | 73.9 |
| 55° | 27.2 | 27.2 | 31.1 | 38.9 | 46.7 | 54.4 | 62.2 | 66.1 | 70.0 | 70.0 | 73.9 |
| 57.5° | *23.3* | *23.3* | *27.2* | *38.9* | *50.5* | *62.2* | *73.9* | *73.9* | *77.8* | *77.8* | *77.8* |
| 60° | 19.4 | 19.4 | 23.3 | 35.0 | 50.5 | 62.2 | 73.9 | 77.8 | 81.6 | 81.6 | 85.5 |
| 62.5° | 19.4 | 19.4 | 23.3 | 35.0 | 46.7 | 54.4 | 66.1 | 73.9 | 81.6 | 89.4 | 97.2 |
| 65° | 15.6 | 19.4 | 19.4 | 31.1 | 38.9 | 50.5 | 58.3 | 70.0 | 81.6 | 93.3 | 105.0 |
| 67.5° | 15.6 | 19.4 | 19.4 | 27.2 | 38.9 | 46.7 | 54.4 | 66.1 | 81.6 | 93.3 | 105.0 |
| 70° | 19.4 | 19.4 | 23.3 | 31.1 | 35.0 | 42.8 | 46.7 | 62.2 | 73.9 | 89.4 | 101.1 |
| 72.5° | 15.6 | 19.4 | 19.4 | 27.2 | 31.1 | 38.9 | 42.8 | 58.3 | 70.0 | 85.5 | 97.2 |
| 75° | 15.6 | 15.6 | 15.6 | 23.3 | 27.2 | 35.0 | 38.9 | 50.5 | 66.1 | 77.8 | 89.4 |
| 77.5° | 11.7 | 11.7 | 11.7 | 19.4 | 23.3 | 31.1 | 35.0 | 46.7 | 62.2 | 73.9 | 85.5 |
| 80° | 11.7 | 11.7 | 11.7 | 15.6 | 19.4 | 19.4 | 23.3 | 35.0 | 50.5 | 62.2 | 73.9 |
| 82.5° | 11.7 | 7.8 | 7.8 | 11.7 | 11.7 | 15.6 | 15.6 | 23.3 | 31.1 | 38.9 | 46.7 |
| 85° | 11.7 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 |
| 87.5° | 11.7 | 7.8 | 7.8 | 7.8 | 7.8 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 58.3 | 58.3 | 58.3 | 58.3 | 58.3 | 62.2 | 62.2 | 62.2 | 62.2 | 62.2 | 62.2 |
| 5° | 58.3 | 58.3 | 62.2 | 62.2 | 62.2 | 66.1 | 66.1 | 66.1 | 66.1 | 66.1 | 66.1 |
| 7.5° | 58.3 | 58.3 | 62.2 | 62.2 | 62.2 | 66.1 | 66.1 | 66.1 | 70.0 | 70.0 | 73.9 |
| 10° | 58.3 | 58.3 | 62.2 | 62.2 | 66.1 | 66.1 | 70.0 | 70.0 | 73.9 | 73.9 | 77.8 |
| 12.5° | 58.3 | 62.2 | 62.2 | 66.1 | 70.0 | 73.9 | 73.9 | 77.8 | 81.6 | 81.6 | 85.5 |
| 15° | 62.2 | 62.2 | 66.1 | 66.1 | 70.0 | 73.9 | 77.8 | 81.6 | 85.5 | 89.4 | 93.3 |
| 17.5° | 58.3 | 62.2 | 66.1 | 70.0 | 73.9 | 77.8 | 81.6 | 85.5 | 93.3 | 97.2 | 105.0 |
| 20° | 58.3 | 62.2 | 66.1 | 70.0 | 73.9 | 81.6 | 85.5 | 89.4 | 97.2 | 105.0 | 116.6 |
| 22.5° | 58.3 | 62.2 | 66.1 | 70.0 | 77.8 | 85.5 | 89.4 | 97.2 | 108.9 | 116.6 | 132.2 |
| 25° | 62.2 | 66.1 | 70.0 | 73.9 | 81.6 | 89.4 | 97.2 | 105.0 | 120.5 | 132.2 | 167.2 |
| 27.5° | 62.2 | 70.0 | 73.9 | 77.8 | 85.5 | 97.2 | 105.0 | 112.8 | 136.1 | 155.5 | 233.3 |
| 30° | 62.2 | 70.0 | 73.9 | 77.8 | 89.4 | 101.1 | 112.8 | 124.4 | 163.3 | 198.3 | 330.5 |
| 32.5° | 62.2 | 70.0 | 73.9 | 77.8 | 93.3 | 112.8 | 128.3 | 143.9 | 194.4 | 244.9 | 400.5 |
| 35° | 66.1 | 70.0 | 77.8 | 81.6 | 101.1 | 120.5 | 136.1 | 155.5 | 202.2 | 248.8 | 435.5 |
| 37.5° | 70.0 | 73.9 | 81.6 | 85.5 | 101.1 | 116.6 | 132.2 | 147.7 | 198.3 | 244.9 | 478.2 |
| 40° | 70.0 | 77.8 | 81.6 | 89.4 | 101.1 | 116.6 | 128.3 | 140.0 | 194.4 | 248.8 | 552.1 |
| 42.5° | 73.9 | 81.6 | 85.5 | 93.3 | 105.0 | 116.6 | 124.4 | 136.1 | 206.1 | 276.0 | 719.3 |
| 45° | 73.9 | 77.8 | 85.5 | 89.4 | 101.1 | 112.8 | 124.4 | 136.1 | 260.5 | 381.0 | 1143.1 |
| 47.5° | 73.9 | 77.8 | 81.6 | 85.5 | 101.1 | 116.6 | 128.3 | 143.9 | 384.9 | 626.0 | 1889.5 |
| 50° | 73.9 | 77.8 | 77.8 | 81.6 | 97.2 | 116.6 | 132.2 | 147.7 | 501.5 | 851.5 | 2725.5 |
| 52.5° | 77.8 | 81.6 | 81.6 | 85.5 | 105.0 | 124.4 | 143.9 | 163.3 | 575.4 | 987.5 | 2958.7 |
| 55° | 77.8 | 81.6 | 81.6 | 85.5 | 116.6 | 147.7 | 175.0 | 206.1 | 606.5 | 1003.1 | 2717.7 |
| 57.5° | *81.6* | *85.5* | *89.4* | *93.3* | *124.4* | *159.4* | *190.5* | *221.6* | *579.3* | *937.0* | *2227.8* |
| 60° | 93.3 | 97.2 | 105.0 | 108.9 | 143.9 | 178.8 | 209.9 | 244.9 | 462.7 | 680.4 | 1753.5 |
| 62.5° | 105.0 | 108.9 | 116.6 | 120.5 | 155.5 | 190.5 | 225.5 | 260.5 | 408.2 | 552.1 | 1306.4 |
| 65° | 108.9 | 116.6 | 120.5 | 124.4 | 159.4 | 198.3 | 233.3 | 268.3 | 373.2 | 474.3 | 968.1 |
| 67.5° | 112.8 | 120.5 | 124.4 | 132.2 | 167.2 | 202.2 | 237.2 | 272.2 | 353.8 | 431.6 | 719.3 |
| 70° | 112.8 | 120.5 | 132.2 | 140.0 | 171.1 | 202.2 | 229.4 | 260.5 | 326.6 | 388.8 | 552.1 |
| 72.5° | 112.8 | 128.3 | 143.9 | 159.4 | 182.7 | 206.1 | 225.5 | 248.8 | 299.4 | 346.0 | 427.7 |
| 75° | 112.8 | 136.1 | 155.5 | 178.8 | 190.5 | 202.2 | 213.8 | 225.5 | 260.5 | 291.6 | 338.3 |
| 77.5° | 108.9 | 128.3 | 151.6 | 171.1 | 175.0 | 178.8 | 182.7 | 186.6 | 186.6 | 186.6 | 186.6 |
| 80° | 89.4 | 108.9 | 124.4 | 140.0 | 132.2 | 120.5 | 112.8 | 101.1 | 93.3 | 85.5 | 93.3 |
| 82.5° | 46.7 | 50.5 | 50.5 | 50.5 | 46.7 | 46.7 | 42.8 | 38.9 | 38.9 | 35.0 | 35.0 |
| 85° | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 7.8 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 |
| 87.5° | 3.9 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 62.2 | 62.2 | 62.2 | 62.2 | 62.2 | 62.2 | 62.2 | 58.3 | 58.3 | 58.3 | 58.3 |
| 5° | 66.1 | 66.1 | 66.1 | 66.1 | 66.1 | 66.1 | 66.1 | 62.2 | 62.2 | 62.2 | 62.2 |
| 7.5° | 73.9 | 73.9 | 73.9 | 73.9 | 73.9 | 73.9 | 73.9 | 73.9 | 73.9 | 73.9 | 73.9 |
| 10° | 77.8 | 81.6 | 81.6 | 85.5 | 85.5 | 85.5 | 89.4 | 89.4 | 89.4 | 89.4 | 89.4 |
| 12.5° | 89.4 | 93.3 | 93.3 | 97.2 | 97.2 | 101.1 | 101.1 | 105.0 | 105.0 | 105.0 | 108.9 |
| 15° | 97.2 | 101.1 | 105.0 | 108.9 | 112.8 | 120.5 | 124.4 | 132.2 | 136.1 | 140.0 | 143.9 |
| 17.5° | 112.8 | 120.5 | 132.2 | 140.0 | 147.7 | 163.3 | 178.8 | 190.5 | 206.1 | 225.5 | 248.8 |
| 20° | 124.4 | 151.6 | 175.0 | 202.2 | 225.5 | 295.5 | 365.5 | 435.5 | 505.4 | 598.7 | 692.1 |
| 22.5° | 147.7 | 233.3 | 322.7 | 408.2 | 493.8 | 723.2 | 948.7 | 1174.2 | 1403.6 | 1621.3 | 1839.0 |
| 25° | 202.2 | 384.9 | 571.5 | 754.3 | 937.0 | 1321.9 | 1702.9 | 2083.9 | 2468.8 | 2838.2 | 3211.4 |
| 27.5° | 307.1 | 602.6 | 898.1 | 1193.6 | 1489.1 | 1994.5 | 2496.1 | 2997.6 | 3503.0 | 3950.2 | 4393.4 |
| 30° | 462.7 | 843.7 | 1224.7 | 1605.7 | 1986.7 | 2639.9 | 3293.1 | 3946.3 | 4599.4 | 5034.9 | 5470.3 |
| 32.5° | 552.1 | 1049.7 | 1547.4 | 2041.2 | 2538.8 | 3250.3 | 3961.8 | 4677.2 | 5388.7 | 5886.4 | 6384.0 |
| 35° | 618.2 | 1236.4 | 1850.7 | 2468.8 | 3083.1 | 3876.3 | 4669.4 | 5466.5 | 6259.6 | 6854.5 | 7449.3 |
| 37.5° | 707.6 | 1450.2 | 2188.9 | 2931.5 | 3670.2 | 4525.6 | 5380.9 | 6240.2 | 7095.5 | 7830.3 | 8569.0 |
| 40° | 851.5 | 1734.0 | 2616.6 | 3495.3 | 4377.8 | 5450.9 | 6524.0 | 7597.1 | 8670.1 | 9646.0 | 10621.9 |
| 42.5° | 1162.5 | 2325.0 | 3491.4 | 4653.9 | 5816.4 | 7422.1 | 9023.9 | 10625.8 | 12231.5 | 13611.7 | 14991.9 |
| 45° | 1905.1 | 3713.0 | 5520.9 | 7328.8 | 9136.7 | 11057.3 | 12974.1 | 14894.7 | 16815.4 | 18856.6 | 20897.7 |
| 47.5° | 3153.1 | 5645.3 | 8137.5 | 10625.8 | 13117.9 | 15096.9 | 17072.0 | 19047.1 | 21026.0 | 22931.1 | 24836.2 |
| 50° | 4599.4 | 7282.1 | 9964.8 | 12647.5 | 15330.2 | 17099.2 | 18864.3 | 20629.5 | 22398.5 | 24268.6 | 26134.8 |
| 52.5° | 4929.9 | 7612.6 | 10295.3 | 12974.1 | 15656.8 | 17441.3 | 19225.9 | 21014.4 | 22798.9 | 24626.3 | 26457.5 |
| 55° | 4428.4 | 7087.7 | 9743.2 | 12402.6 | 15058.0 | 17017.6 | 18977.1 | 20936.6 | 22896.1 | 24945.1 | 26994.0 |
| 57.5° | *3518.6* | *6205.2* | *8887.9* | *11574.4* | *14257.1* | *16582.1* | *18903.2* | *21228.2* | *23553.2* | *25714.9* | *27876.6* |
| 60° | 2826.5 | 5567.5 | 8308.6 | 11049.6 | 13790.6 | 16271.1 | 18747.7 | 21224.3 | 23704.8 | 25543.8 | 27382.8 |
| 62.5° | 2060.6 | 4774.4 | 7488.2 | 10202.0 | 12915.8 | 15139.7 | 17363.6 | 19591.4 | 21815.3 | 23121.6 | 24428.0 |
| 65° | 1461.9 | 3860.7 | 6259.6 | 8654.6 | 11053.4 | 12597.0 | 14140.5 | 15684.0 | 17227.5 | 18358.9 | 19490.3 |
| 67.5° | 1007.0 | 2698.2 | 4385.6 | 6076.9 | 7764.2 | 9078.4 | 10388.6 | 11702.7 | 13016.9 | 13969.4 | 14925.8 |
| 70° | 715.4 | 1636.8 | 2558.3 | 3475.8 | 4397.3 | 5559.8 | 6722.3 | 7884.8 | 9047.3 | 10209.8 | 11376.1 |
| 72.5° | 509.3 | 913.7 | 1314.1 | 1718.5 | 2118.9 | 3129.8 | 4140.7 | 5155.4 | 6166.3 | 6870.0 | 7577.6 |
| 75° | 384.9 | 493.8 | 598.7 | 707.6 | 812.6 | 1057.5 | 1302.5 | 1547.4 | 1792.3 | 2041.2 | 2290.0 |
| 77.5° | 182.7 | 202.2 | 217.7 | 237.2 | 252.7 | 314.9 | 377.1 | 439.3 | 501.5 | 606.5 | 711.5 |
| 80° | 97.2 | 105.0 | 112.8 | 120.5 | 128.3 | 132.2 | 136.1 | 140.0 | 143.9 | 155.5 | 171.1 |
| 82.5° | 35.0 | 38.9 | 38.9 | 42.8 | 42.8 | 38.9 | 38.9 | 35.0 | 31.1 | 35.0 | 35.0 |
| 85° | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | *46.7* | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 54.4 | 54.4 | 54.4 | 54.4 | 50.5 | *50.5* | 50.5 | 50.5 | 46.7 | 46.7 | 46.7 |
| 5° | 62.2 | 62.2 | 62.2 | 62.2 | 58.3 | *58.3* | 58.3 | 58.3 | 54.4 | 54.4 | 54.4 |
| 7.5° | 73.9 | 73.9 | 73.9 | 73.9 | 70.0 | *70.0* | 70.0 | 70.0 | 66.1 | 66.1 | 66.1 |
| 10° | 89.4 | 89.4 | 89.4 | 89.4 | 89.4 | *89.4* | 89.4 | 89.4 | 85.5 | 85.5 | 85.5 |
| 12.5° | 108.9 | 108.9 | 108.9 | 108.9 | 108.9 | *108.9* | 108.9 | 108.9 | 105.0 | 105.0 | 105.0 |
| 15° | 143.9 | 147.7 | 151.6 | 155.5 | 155.5 | *159.4* | 155.5 | 151.6 | 147.7 | 143.9 | 140.0 |
| 17.5° | 268.3 | 287.7 | 295.5 | 299.4 | 307.1 | *311.0* | 307.1 | 299.4 | 295.5 | 287.7 | 268.3 |
| 20° | 781.5 | 874.8 | 940.9 | 1007.0 | 1073.1 | *1139.2* | 1100.3 | 1061.4 | 1022.5 | 983.7 | 882.6 |
| 22.5° | 2056.7 | 2274.5 | 2426.1 | 2577.7 | 2729.3 | *2881.0* | 2776.0 | 2671.0 | 2562.2 | 2457.2 | 2200.6 |
| 25° | 3580.8 | 3950.2 | 4144.6 | 4342.8 | 4537.2 | *4731.6* | 4552.8 | 4373.9 | 4191.2 | 4012.4 | 3654.7 |
| 27.5° | 4840.5 | 5283.7 | 5450.9 | 5614.2 | 5781.4 | *5944.7* | 5785.3 | 5629.8 | 5470.3 | 5310.9 | 4894.9 |
| 30° | 5905.8 | 6341.2 | 6504.5 | 6667.8 | 6831.1 | *6994.4* | 6815.6 | 6632.8 | 6454.0 | 6271.3 | 5859.1 |
| 32.5° | 6877.8 | 7375.4 | 7600.9 | 7826.4 | 8051.9 | *8277.4* | 8009.2 | 7740.9 | 7472.6 | 7204.4 | 6733.9 |
| 35° | 8044.2 | 8639.0 | 8903.4 | 9171.7 | 9436.1 | *9700.4* | 9381.6 | 9058.9 | 8740.1 | 8417.4 | 7822.6 |
| 37.5° | 9303.9 | 10038.7 | 10392.5 | 10746.3 | 11100.1 | *11453.9* | 11057.3 | 10660.8 | 10264.2 | 9867.6 | 9109.5 |
| 40° | 11597.8 | 12573.6 | 13098.5 | 13619.5 | 14144.4 | *14665.4* | 14070.5 | 13471.8 | 12876.9 | 12278.2 | 11236.2 |
| 42.5° | 16368.3 | 17748.5 | 18495.0 | 19241.5 | 19988.0 | *20734.4* | 19867.4 | 18996.5 | 18129.5 | 17258.6 | 15820.1 |
| 45° | 22938.9 | 24980.1 | 25804.3 | 26624.7 | 27448.9 | *28269.3* | 27289.5 | 26309.8 | 25326.1 | 24346.4 | 22414.0 |
| 47.5° | 26741.3 | 28646.4 | 29455.1 | 30263.8 | 31068.6 | *31877.3* | 30955.9 | 30034.4 | 29113.0 | 28191.5 | 26305.9 |
| 50° | 28004.9 | 29871.1 | 30761.5 | 31655.7 | 32546.0 | *33436.4* | 32382.7 | 31325.2 | 30271.6 | 29214.1 | 27402.3 |
| 52.5° | 28284.8 | 30112.2 | 31161.9 | 32211.7 | 33257.5 | *34307.3* | 33090.4 | 31873.4 | 30652.6 | 29435.7 | 27639.4 |
| 55° | 29039.1 | 31088.1 | 32297.2 | 33502.5 | 34711.6 | *35916.9* | 34497.8 | 33074.8 | 31655.7 | 30232.7 | 28261.5 |
| 57.5° | *30038.3* | *32200.0* | *33304.2* | *34408.4* | *35508.7* | *36612.8* | *35240.4* | *33871.8* | *32499.4* | *31126.9* | *29070.2* |
| 60° | 29218.0 | 31057.0 | 31978.4 | 32896.0 | 33817.4 | *34735.0* | 33494.7 | 32258.3 | 31018.1 | 29777.8 | 28063.2 |
| 62.5° | 25730.5 | 27036.8 | 27748.3 | 28459.8 | 29167.4 | *29878.9* | 28860.3 | 27841.6 | 26823.0 | 25804.3 | 24560.2 |
| 65° | 20617.8 | 21749.2 | 22262.4 | 22771.7 | 23284.9 | *23794.3* | 23086.7 | 22379.0 | 21667.6 | 20959.9 | 19914.1 |
| 67.5° | 15878.4 | 16830.9 | 17624.1 | 18413.3 | 19206.5 | *19995.7* | 19136.5 | 18277.3 | 17414.1 | 16554.9 | 15551.8 |
| 70° | 12538.6 | 13701.1 | 14354.3 | 15007.5 | 15660.7 | *16313.8* | 15567.4 | 14820.9 | 14070.5 | 13324.0 | 12274.3 |
| 72.5° | 8281.3 | 8985.1 | 9218.3 | 9455.5 | 9688.8 | *9922.1* | 9649.9 | 9381.6 | 9109.5 | 8837.3 | 8172.5 |
| 75° | 2534.9 | 2783.8 | 3059.8 | 3339.8 | 3615.8 | *3891.8* | 3643.0 | 3394.2 | 3145.4 | 2896.5 | 2671.0 |
| 77.5° | 812.6 | 917.6 | 999.2 | 1080.9 | 1158.6 | *1240.3* | 1244.1 | 1248.0 | 1248.0 | 1251.9 | 1131.4 |
| 80° | 182.7 | 194.4 | 194.4 | 194.4 | 190.5 | *190.5* | 209.9 | 225.5 | 244.9 | 260.5 | 244.9 |
| 82.5° | 38.9 | 38.9 | 38.9 | 38.9 | 38.9 | *38.9* | 38.9 | 38.9 | 35.0 | 35.0 | 35.0 |
| 85° | 3.9 | 3.9 | 3.9 | 3.9 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 |
| 2.5° | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 46.7 | 42.8 | 42.8 |
| 5° | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 50.5 | 50.5 |
| 7.5° | 66.1 | 66.1 | 66.1 | 66.1 | 66.1 | 62.2 | 62.2 | 62.2 | 62.2 | 58.3 | 58.3 |
| 10° | 85.5 | 81.6 | 81.6 | 81.6 | 77.8 | 77.8 | 73.9 | 73.9 | 70.0 | 70.0 | 66.1 |
| 12.5° | 105.0 | 101.1 | 101.1 | 97.2 | 97.2 | 93.3 | 89.4 | 85.5 | 81.6 | 77.8 | 73.9 |
| 15° | 136.1 | 132.2 | 128.3 | 124.4 | 116.6 | 112.8 | 105.0 | 101.1 | 97.2 | 93.3 | 89.4 |
| 17.5° | 248.8 | 229.4 | 209.9 | 190.5 | 175.0 | 155.5 | 136.1 | 128.3 | 116.6 | 108.9 | 97.2 |
| 20° | 785.4 | 684.3 | 583.2 | 493.8 | 404.3 | 311.0 | 221.6 | 194.4 | 167.2 | 140.0 | 112.8 |
| 22.5° | 1947.9 | 1691.3 | 1434.7 | 1213.0 | 991.4 | 769.8 | 548.2 | 447.1 | 346.0 | 244.9 | 143.9 |
| 25° | 3297.0 | 2935.4 | 2577.7 | 2188.9 | 1804.0 | 1415.2 | 1026.4 | 824.2 | 618.2 | 412.1 | 209.9 |
| 27.5° | 4478.9 | 4062.9 | 3646.9 | 3133.7 | 2620.5 | 2103.4 | 1590.2 | 1279.1 | 964.2 | 649.3 | 338.3 |
| 30° | 5450.9 | 5038.8 | 4626.7 | 3996.8 | 3363.1 | 2733.2 | 2099.5 | 1695.1 | 1290.8 | 882.6 | 478.2 |
| 32.5° | 6263.5 | 5793.0 | 5322.6 | 4630.5 | 3942.4 | 3250.3 | 2558.3 | 2056.7 | 1559.1 | 1057.5 | 556.0 |
| 35° | 7223.8 | 6629.0 | 6030.2 | 5291.5 | 4556.7 | 3818.0 | 3079.3 | 2468.8 | 1854.6 | 1240.3 | 629.8 |
| 37.5° | 8351.3 | 7593.2 | 6835.0 | 6034.1 | 5237.1 | 4436.2 | 3635.2 | 2912.1 | 2192.8 | 1469.6 | 746.5 |
| 40° | 10198.1 | 9156.1 | 8114.2 | 7153.8 | 6189.6 | 5229.3 | 4265.1 | 3429.2 | 2593.3 | 1753.5 | 917.6 |
| 42.5° | 14381.5 | 12943.0 | 11504.4 | 10065.9 | 8623.5 | 7184.9 | 5742.5 | 4603.3 | 3468.1 | 2328.9 | 1189.7 |
| 45° | 20481.7 | 18549.4 | 16617.1 | 14688.7 | 12760.3 | 10831.8 | 8903.4 | 7134.4 | 5365.4 | 3592.5 | 1823.4 |
| 47.5° | 24420.2 | 22534.6 | 20648.9 | 18802.1 | 16959.2 | 15112.5 | 13265.7 | 10777.4 | 8289.1 | 5796.9 | 3308.6 |
| 50° | 25594.4 | 23782.6 | 21970.8 | 20322.3 | 18677.7 | 17029.2 | 15380.7 | 12748.6 | 10120.3 | 7488.2 | 4856.1 |
| 52.5° | 25843.2 | 24043.1 | 22246.9 | 20594.5 | 18946.0 | 17293.6 | 15641.2 | 13020.7 | 10400.3 | 7775.9 | 5155.4 |
| 55° | 26290.3 | 24319.1 | 22347.9 | 20493.4 | 18638.8 | 16780.4 | 14925.8 | 12309.3 | 9692.7 | 7076.1 | 4459.5 |
| 57.5° | *27013.5* | *24952.9* | *22896.1* | *20687.8* | *18479.4* | *16271.1* | *14062.7* | *11422.8* | *8782.9* | *6143.0* | *3503.0* |
| 60° | 26348.6 | 24630.2 | 22915.6 | 20536.2 | 18152.8 | 15773.4 | 13390.1 | 10707.4 | 8020.8 | 5334.3 | 2651.6 |
| 62.5° | 23312.2 | 22068.0 | 20820.0 | 18708.8 | 16597.7 | 14486.5 | 12375.3 | 9762.6 | 7149.9 | 4537.2 | 1924.5 |
| 65° | 18864.3 | 17818.5 | 16768.7 | 15096.9 | 13425.1 | 11749.4 | 10077.6 | 7877.0 | 5680.3 | 3479.7 | 1279.1 |
| 67.5° | 14548.7 | 13545.6 | 12542.5 | 11224.5 | 9906.5 | 8588.5 | 7270.5 | 5668.6 | 4066.8 | 2461.1 | 859.2 |
| 70° | 11224.5 | 10174.8 | 9125.0 | 7939.2 | 6753.4 | 5567.5 | 4381.7 | 3448.6 | 2519.4 | 1586.3 | 653.2 |
| 72.5° | 7507.6 | 6842.8 | 6178.0 | 5194.3 | 4210.7 | 3227.0 | 2243.3 | 1815.7 | 1388.0 | 956.4 | 528.8 |
| 75° | 2441.6 | 2216.1 | 1986.7 | 1718.5 | 1450.2 | 1178.0 | 909.8 | 789.3 | 664.8 | 540.4 | 419.9 |
| 77.5° | 1007.0 | 886.5 | 762.0 | 649.3 | 532.6 | 419.9 | 303.3 | 283.8 | 264.4 | 244.9 | 225.5 |
| 80° | 225.5 | 209.9 | 190.5 | 178.8 | 167.2 | 155.5 | 143.9 | 136.1 | 124.4 | 116.6 | 105.0 |
| 82.5° | 31.1 | 31.1 | 27.2 | 31.1 | 35.0 | 38.9 | 42.8 | 38.9 | 38.9 | 35.0 | 31.1 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 0° | 46.7 | 46.7 |
| 2.5° | 42.8 | 42.8 |
| 5° | 50.5 | 46.7 |
| 7.5° | 58.3 | 54.4 |
| 10° | 66.1 | 62.2 |
| 12.5° | 73.9 | 70.0 |
| 15° | 85.5 | 77.8 |
| 17.5° | 93.3 | 85.5 |
| 20° | 105.0 | 93.3 |
| 22.5° | 124.4 | 105.0 |
| 25° | 163.3 | 120.5 |
| 27.5° | 241.1 | 147.7 |
| 30° | 338.3 | 198.3 |
| 32.5° | 400.5 | 244.9 |
| 35° | 435.5 | 244.9 |
| 37.5° | 493.8 | 241.1 |
| 40° | 583.2 | 252.7 |
| 42.5° | 730.9 | 276.0 |
| 45° | 1084.7 | 346.0 |
| 47.5° | 1967.3 | 626.0 |
| 50° | 2916.0 | 979.8 |
| 52.5° | 3110.4 | 1065.3 |
| 55° | 2709.9 | 960.3 |
| 57.5° | *2157.8* | *812.6* |
| 60° | 1629.1 | 610.4 |
| 62.5° | 1209.2 | 497.7 |
| 65° | 859.2 | 439.3 |
| 67.5° | 633.7 | 408.2 |
| 70° | 521.0 | 392.7 |
| 72.5° | 447.1 | 365.5 |
| 75° | 373.2 | 326.6 |
| 77.5° | 233.3 | 237.2 |
| 80° | 101.1 | 93.3 |
| 82.5° | 31.1 | 27.2 |
| 85° | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390026
CATALOG NUMBER: GSS-SA3D-827-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 112.5° | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-8

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-827-U-5WQ

Data in this report applies to families of products including GSS-SB1A-827-U-5WQ

Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04


## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-184-8 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 10/15/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | McGraw-Edison |
| Catalog Number: | **GSS-SB1A-827-U-5WQ** |
| Description: | GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 80 CRI 2700K CCT 26 LEDS |

## Spectral Parameters

| | |
|---|---|
| CCT (K): | 2756 |
| CIE u': | 0.2599 |
| CIE v': | 0.5271 |
| Duv: | 0.0006 |
| CIE x: | 0.4563 |
| CIE y: | 0.4112 |
| CIE z: | 0.1325 |
| Peak Wavelength (nm): | 609 |
| Dominant Wavelength (nm): | 583 |
| Purity: | 60.41121 |
| Rf: | 82.2 |
| Rg: | 99.9 |

| | |
|---|---|
| CRI (Ra): | 82.9 |
| R1: | 81.6 |
| R2: | 88.8 |
| R3: | 96.0 |
| R4: | 83.4 |
| R5: | 81.4 |
| R6: | 87.0 |
| R7: | 84.0 |
| R8: | 60.8 |
| R9: | 10.8 |
| R10: | 74.8 |
| R11: | 84.3 |
| R12: | 72.1 |
| R13: | 82.9 |
| R14: | 97.3 |
| R15: | 73.7 |

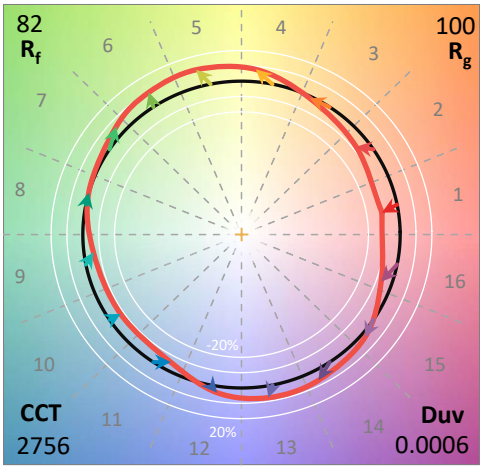


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 29M |
| Operation Time: | 1H 29M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-184-8


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-184-8

## CIE 1931 Chromaticity Diagram

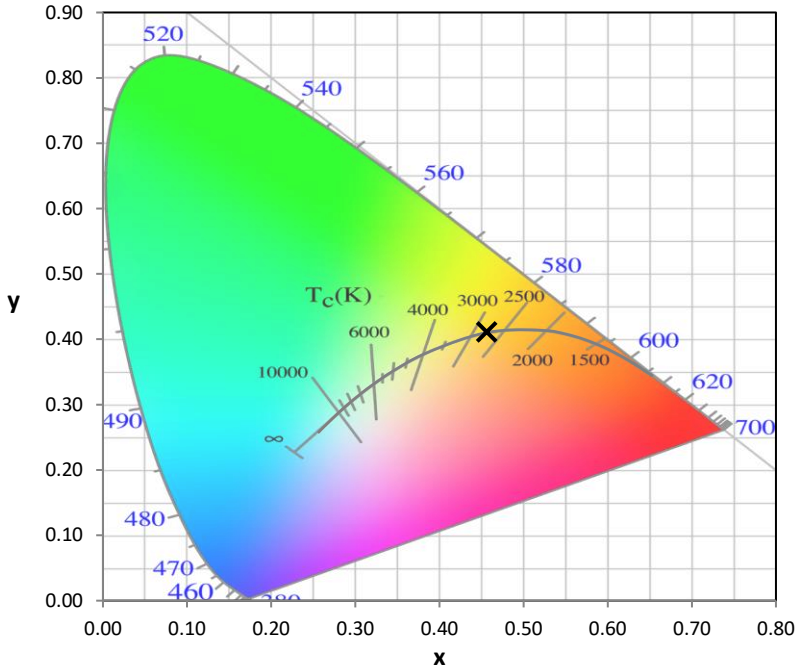


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

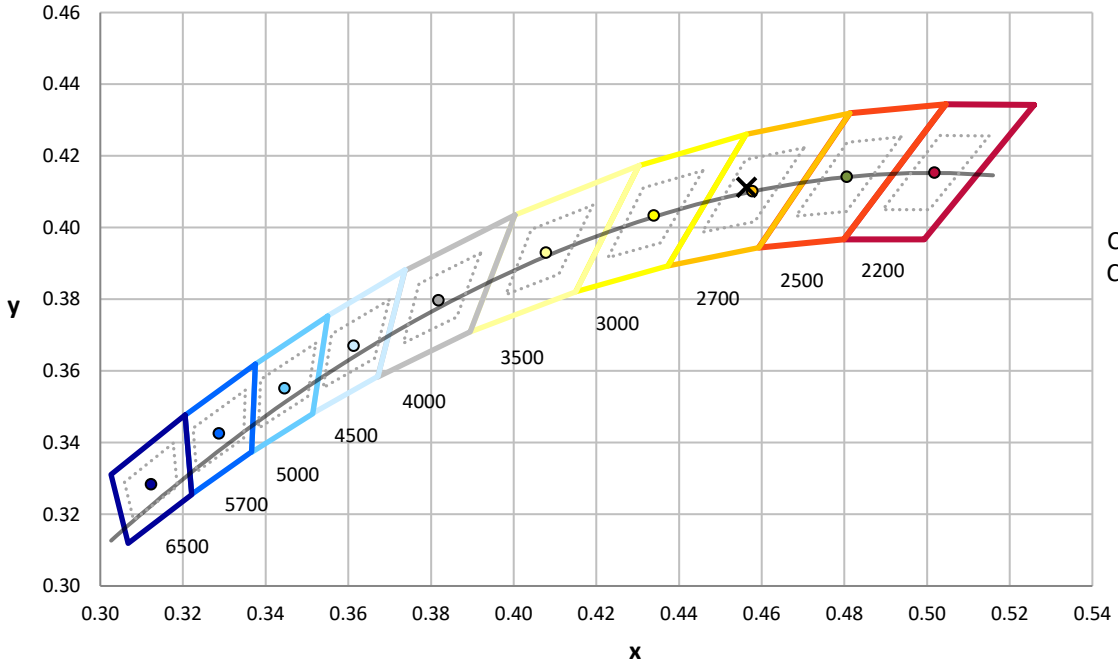



CCT = 2756K
CIE x = 0.4563
CIE y = 0.4112
Duv = 0.0006

Point lies inside the ANSI 2700K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-8

## Photopic Flux vs. Wavelength

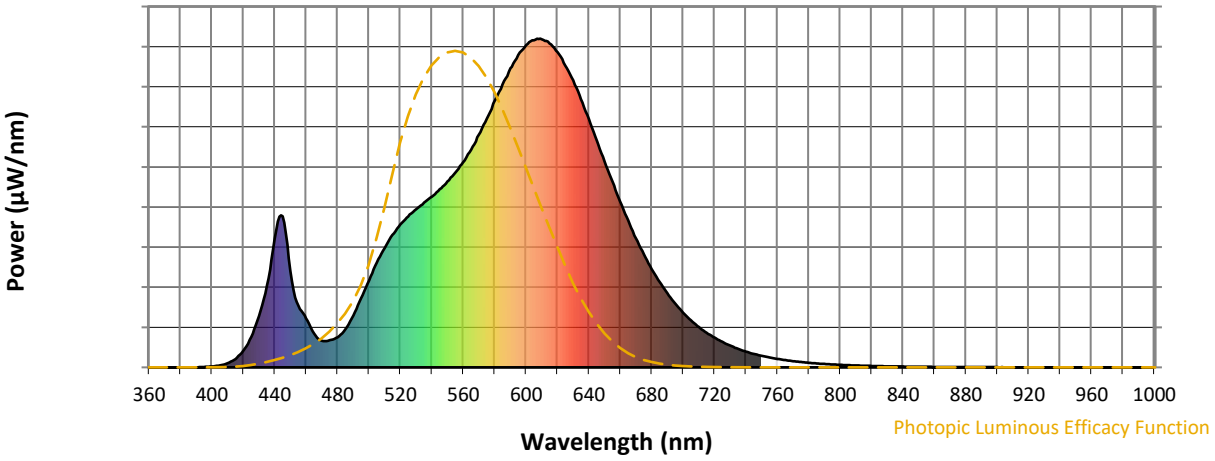



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 158 | NR | 620 | 959 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 211 | NR | 625 | 918 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 264 | NR | 630 | 873 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 318 | NR | 635 | 816 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 363 | NR | 640 | 755 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 403 | NR | 645 | 689 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 435 | NR | 650 | 626 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 459 | NR | 655 | 564 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 3 | NR | 530 | 481 | NR | 660 | 503 | NR | 790 | 10 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 501 | NR | 665 | 447 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 13 | NR | 540 | 519 | NR | 670 | 392 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 26 | NR | 545 | 542 | NR | 675 | 343 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 51 | NR | 550 | 565 | NR | 680 | 299 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 93 | NR | 555 | 593 | NR | 685 | 260 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 156 | NR | 560 | 624 | NR | 690 | 225 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 250 | NR | 565 | 662 | NR | 695 | 194 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 391 | NR | 570 | 707 | NR | 700 | 166 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 460 | NR | 575 | 756 | NR | 705 | 143 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 293 | NR | 580 | 810 | NR | 710 | 122 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 188 | NR | 585 | 860 | NR | 715 | 105 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 149 | NR | 590 | 910 | NR | 720 | 90 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 103 | NR | 595 | 950 | NR | 725 | 77 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 80 | NR | 600 | 980 | NR | 730 | 66 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 82 | NR | 605 | 995 | NR | 735 | 56 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 92 | NR | 610 | 998 | NR | 740 | 48 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 116 | NR | 615 | 985 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-8

## Scotopic Flux vs. Wavelength

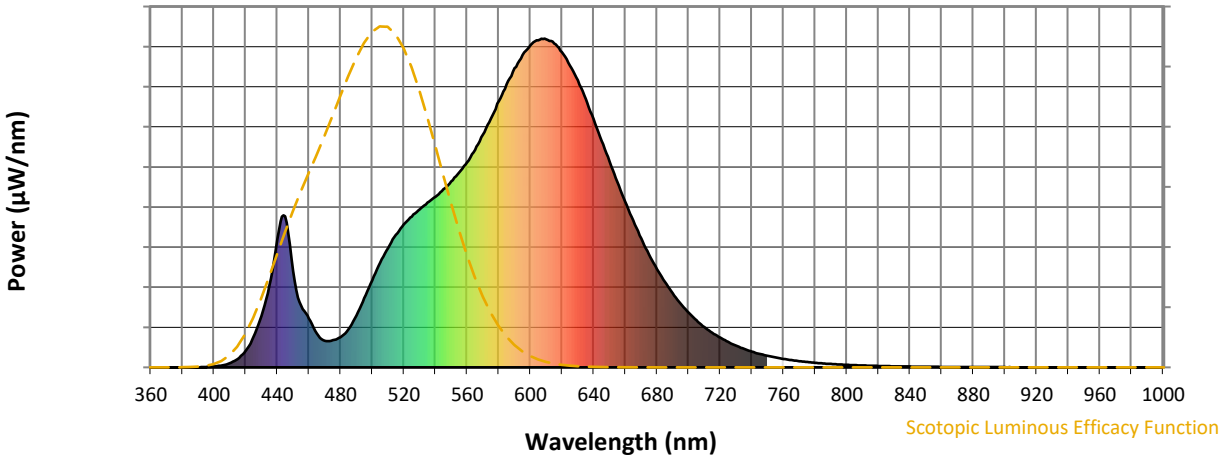



**Scotopic Lumens: NR** **S/P: 1.2**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 158 | NR | 620 | 959 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 211 | NR | 625 | 918 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 264 | NR | 630 | 873 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 318 | NR | 635 | 816 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 363 | NR | 640 | 755 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 403 | NR | 645 | 689 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 435 | NR | 650 | 626 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 459 | NR | 655 | 564 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 3 | NR | 530 | 481 | NR | 660 | 503 | NR | 790 | 10 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 501 | NR | 665 | 447 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 13 | NR | 540 | 519 | NR | 670 | 392 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 26 | NR | 545 | 542 | NR | 675 | 343 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 51 | NR | 550 | 565 | NR | 680 | 299 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 93 | NR | 555 | 593 | NR | 685 | 260 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 156 | NR | 560 | 624 | NR | 690 | 225 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 250 | NR | 565 | 662 | NR | 695 | 194 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 391 | NR | 570 | 707 | NR | 700 | 166 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 460 | NR | 575 | 756 | NR | 705 | 143 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 293 | NR | 580 | 810 | NR | 710 | 122 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 188 | NR | 585 | 860 | NR | 715 | 105 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 149 | NR | 590 | 910 | NR | 720 | 90 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 103 | NR | 595 | 950 | NR | 725 | 77 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 80 | NR | 600 | 980 | NR | 730 | 66 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 82 | NR | 605 | 995 | NR | 735 | 56 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 92 | NR | 610 | 998 | NR | 740 | 48 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 116 | NR | 615 | 985 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-8

## Melanopic Flux vs. Wavelength

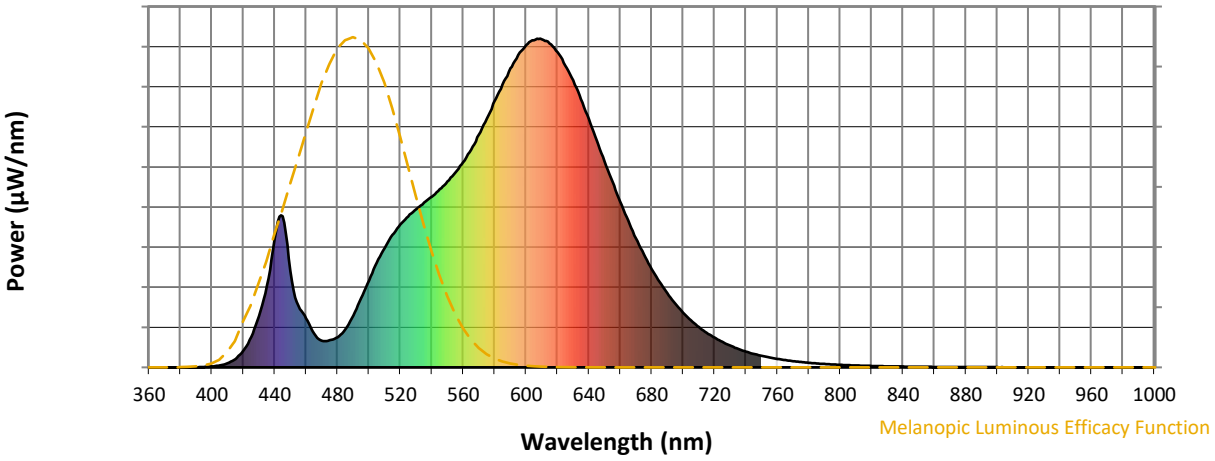


**Melanopic Lumens: NR** **M/P: 2.16**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 158 | NR | 620 | 959 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 211 | NR | 625 | 918 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 264 | NR | 630 | 873 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 318 | NR | 635 | 816 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 363 | NR | 640 | 755 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 403 | NR | 645 | 689 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 435 | NR | 650 | 626 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 459 | NR | 655 | 564 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 3 | NR | 530 | 481 | NR | 660 | 503 | NR | 790 | 10 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 501 | NR | 665 | 447 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 13 | NR | 540 | 519 | NR | 670 | 392 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 26 | NR | 545 | 542 | NR | 675 | 343 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 51 | NR | 550 | 565 | NR | 680 | 299 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 93 | NR | 555 | 593 | NR | 685 | 260 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 156 | NR | 560 | 624 | NR | 690 | 225 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 250 | NR | 565 | 662 | NR | 695 | 194 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 391 | NR | 570 | 707 | NR | 700 | 166 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 460 | NR | 575 | 756 | NR | 705 | 143 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 293 | NR | 580 | 810 | NR | 710 | 122 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 188 | NR | 585 | 860 | NR | 715 | 105 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 149 | NR | 590 | 910 | NR | 720 | 90 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 103 | NR | 595 | 950 | NR | 725 | 77 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 80 | NR | 600 | 980 | NR | 730 | 66 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 82 | NR | 605 | 995 | NR | 735 | 56 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 92 | NR | 610 | 998 | NR | 740 | 48 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 116 | NR | 615 | 985 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |


REPORT NUMBER: SP1-2407-184-8

# TM-30-18


## Summary


$R_f$ = 82.2
$R_g$ = 99.9
CIE $R_a$ = 82.9
$R_9$ = 10.8


## Spectral Power Distribution Comparison

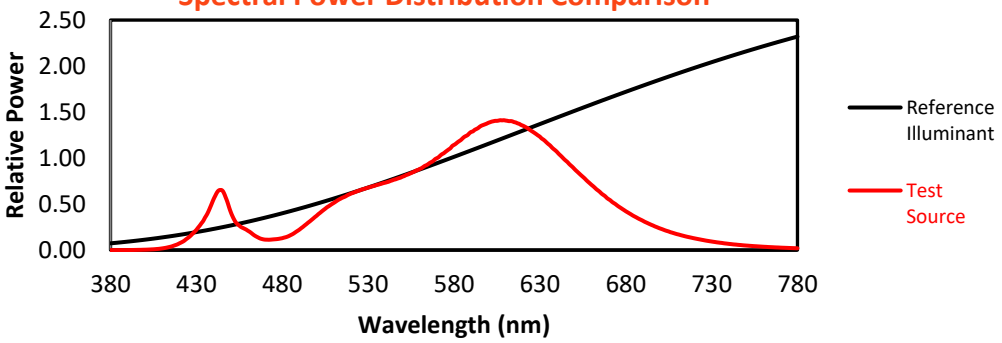



## Color Vector Graphics

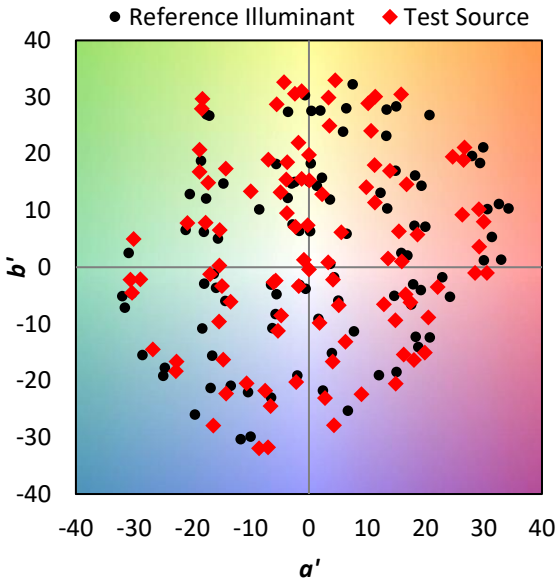

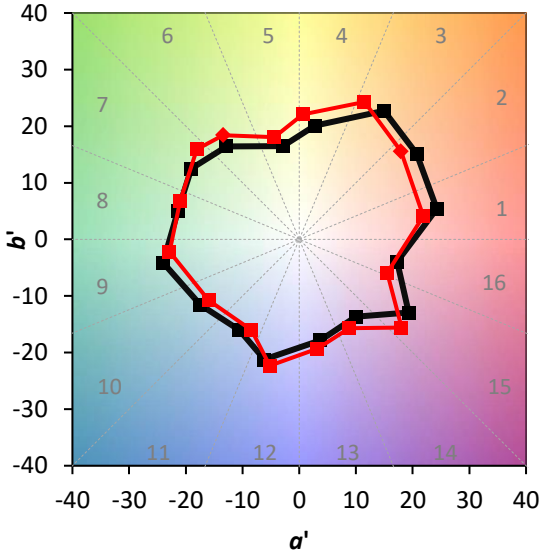


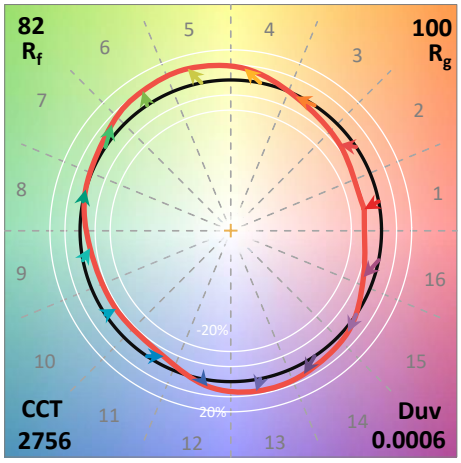
REPORT NUMBER: SP1-2407-184-8
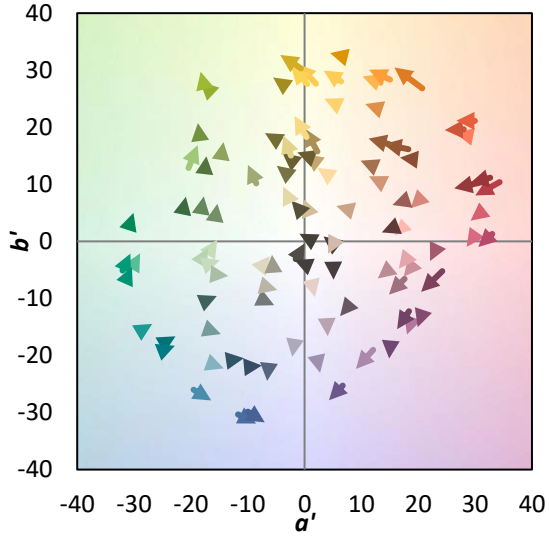
# TM-30-18

**Individual Sample Fidelity Index ($R_{f,i}$)**


| | | | |
|---|---|---|---|
| CES01 = 86 | CES26 = 76 | CES51 = 89 | CES76 = 75 |
| CES02 = 63 | CES27 = 89 | CES52 = 91 | CES77 = 87 |
| CES03 = 31 | CES28 = 90 | CES53 = 82 | CES78 = 76 |
| CES04 = 71 | CES29 = 68 | CES54 = 88 | CES79 = 91 |
| CES05 = 50 | CES30 = 69 | CES55 = 87 | CES80 = 90 |
| CES06 = 52 | CES31 = 72 | CES56 = 80 | CES81 = 74 |
| CES07 = 43 | CES32 = 71 | CES57 = 78 | CES82 = 95 |
| CES08 = 42 | CES33 = 71 | CES58 = 80 | CES83 = 90 |
| CES09 = 29 | CES34 = 84 | CES59 = 93 | CES84 = 94 |
| CES10 = 77 | CES35 = 92 | CES60 = 96 | CES85 = 83 |
| CES11 = 59 | CES36 = 92 | CES61 = 94 | CES86 = 69 |
| CES12 = 66 | CES37 = 89 | CES62 = 84 | CES87 = 85 |
| CES13 = 44 | CES38 = 75 | CES63 = 79 | CES88 = 84 |
| CES14 = 74 | CES39 = 93 | CES64 = 85 | CES89 = 74 |
| CES15 = 72 | CES40 = 89 | CES65 = 79 | CES90 = 81 |
| CES16 = 48 | CES41 = 85 | CES66 = 83 | CES91 = 96 |
| CES17 = 50 | CES42 = 88 | CES67 = 82 | CES92 = 72 |
| CES18 = 57 | CES43 = 81 | CES68 = 86 | CES93 = 84 |
| CES19 = 73 | CES44 = 98 | CES69 = 92 | CES94 = 63 |
| CES20 = 67 | CES45 = 87 | CES70 = 81 | CES95 = 80 |
| CES21 = 87 | CES46 = 82 | CES71 = 81 | CES96 = 85 |
| CES22 = 79 | CES47 = 76 | CES72 = 93 | CES97 = 87 |
| CES23 = 92 | CES48 = 71 | CES73 = 75 | CES98 = 82 |
| CES24 = 91 | CES49 = 81 | CES74 = 91 | CES99 = 76 |
| CES25 = 72 | CES50 = 88 | CES75 = 79 | |

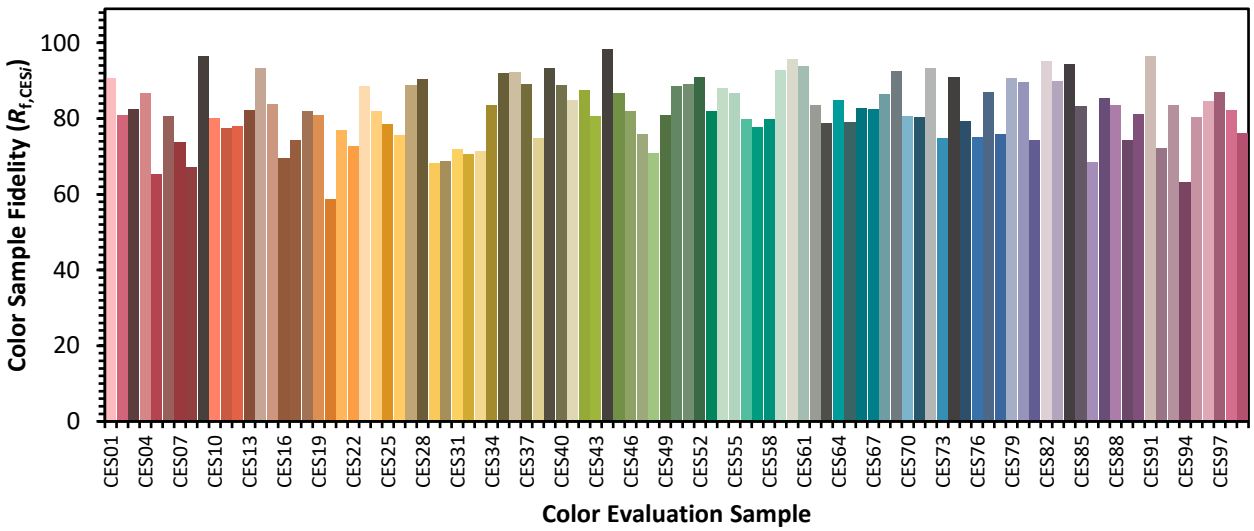



REPORT NUMBER: SP1-2407-184-8

# TM-30-18

## Color Rendition by Hue-Angle Bin

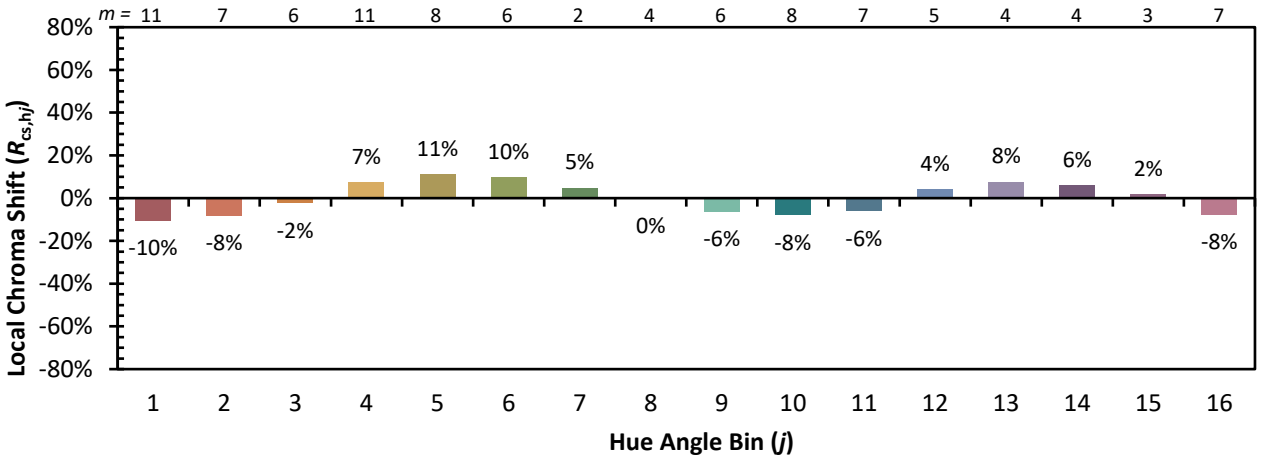

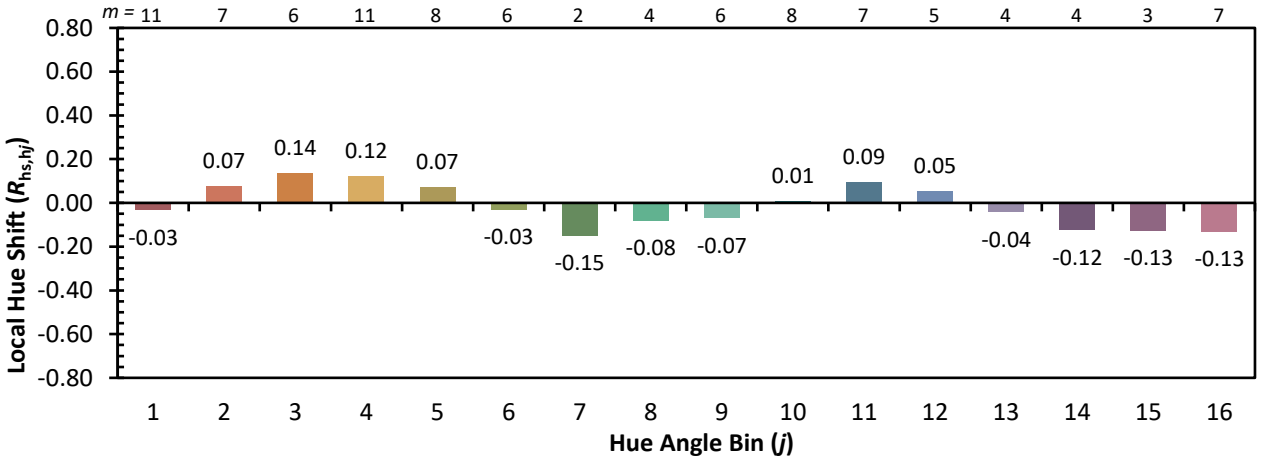


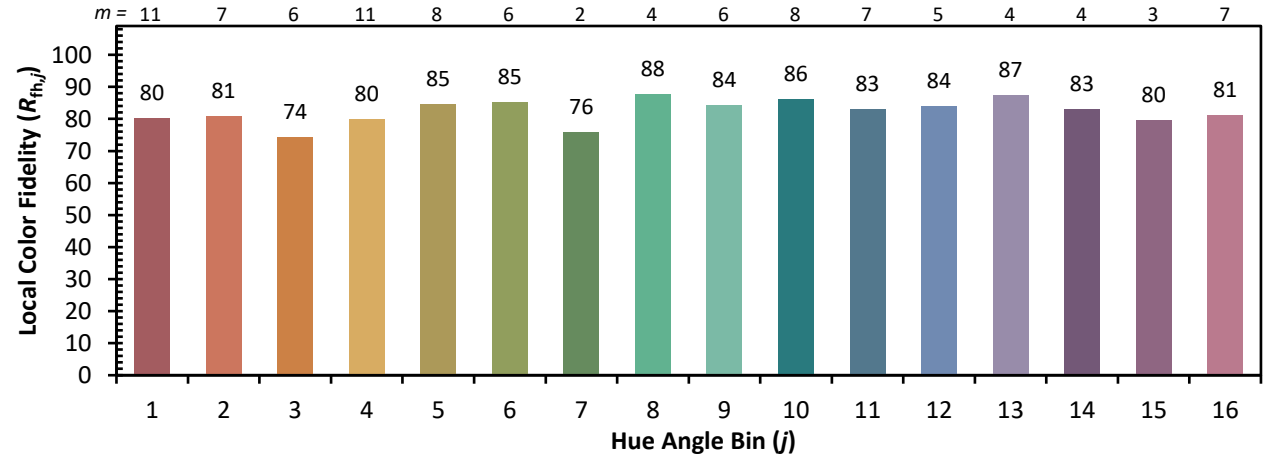
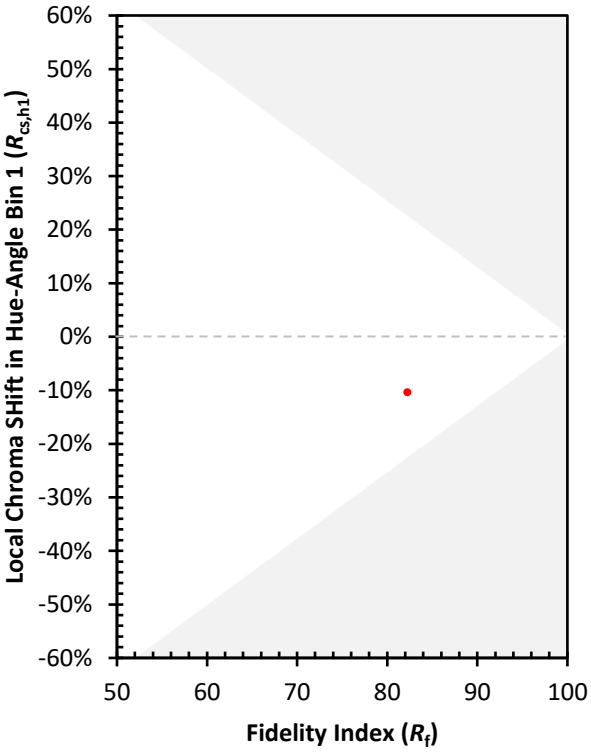



REPORT NUMBER: SP1-2407-184-8

# TM-30-18

## Measure Comparisons

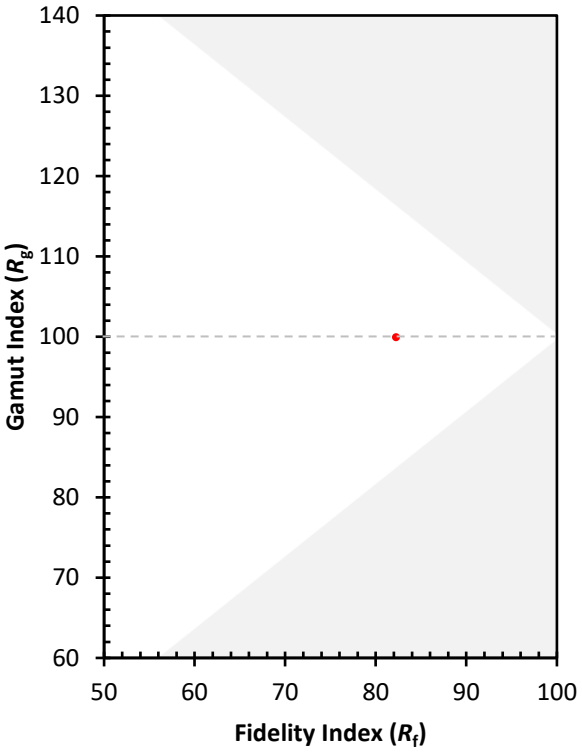


(END OF REPORT)