Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1390059

Luminaire Tested: **GSS-SA6A-830-U-RBC**

Issue Date: 02/18/2026

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P1390059 |
| Test Lab: | INNOVATION CENTER(G3) |
| Issue Date: | 02/18/2026 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | GSS-SA6A-830-U-RBC |
| Description: | GALLEON SLIM SITE LUMINAIRE 615mA 6xLight Square PACKAGE 80CRI 3000K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL |
| Light Source: | (84) 3000K CCT, 80 CRI LEDS |
| Ballast/Driver: | ELECTRONIC DRIVER |

Luminaire Equipment:

| Sample No. | Condition | Description |
|---|---|---|
| a | good | reflector |
| b | good | lens |
| c | good | housing |
| d | good | cord |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 15250.3 lumens |
| Efficiency: | N/A |
| Efficacy: | 93.8 lumens/watt |
| Luminous Opening: | Rectangular (W 1.5' x L: 1' x H: 0') |
| IES Classification: | Type III - Short |
| BUG Rating: | B0 - U0 - G3 |


| | |
|---|---|
| Input Watts (W): | 162.6 |
| Input Voltage (V): | 120 |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | 0.97 |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 28.75 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

## Iso-Footcandle Lines of Horizontal Illumination

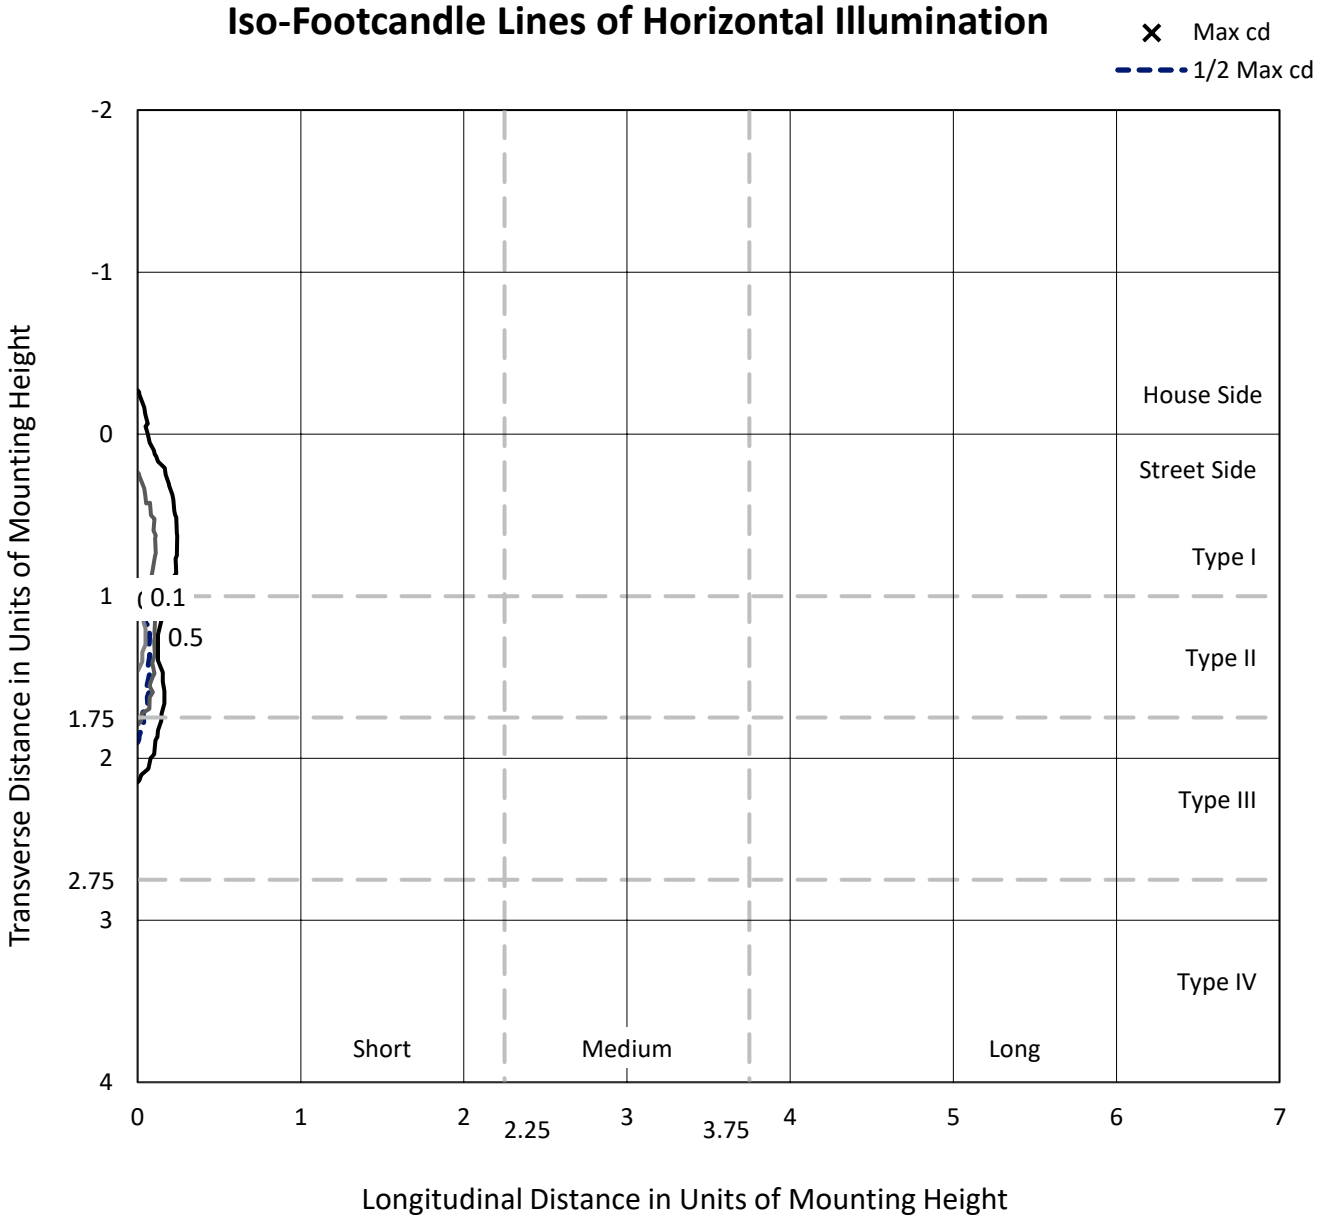



Based on 20 foot mounting height. Maximum calculated value = 0.8 fc
Type III - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

## Luminous Intensity Polar Plot

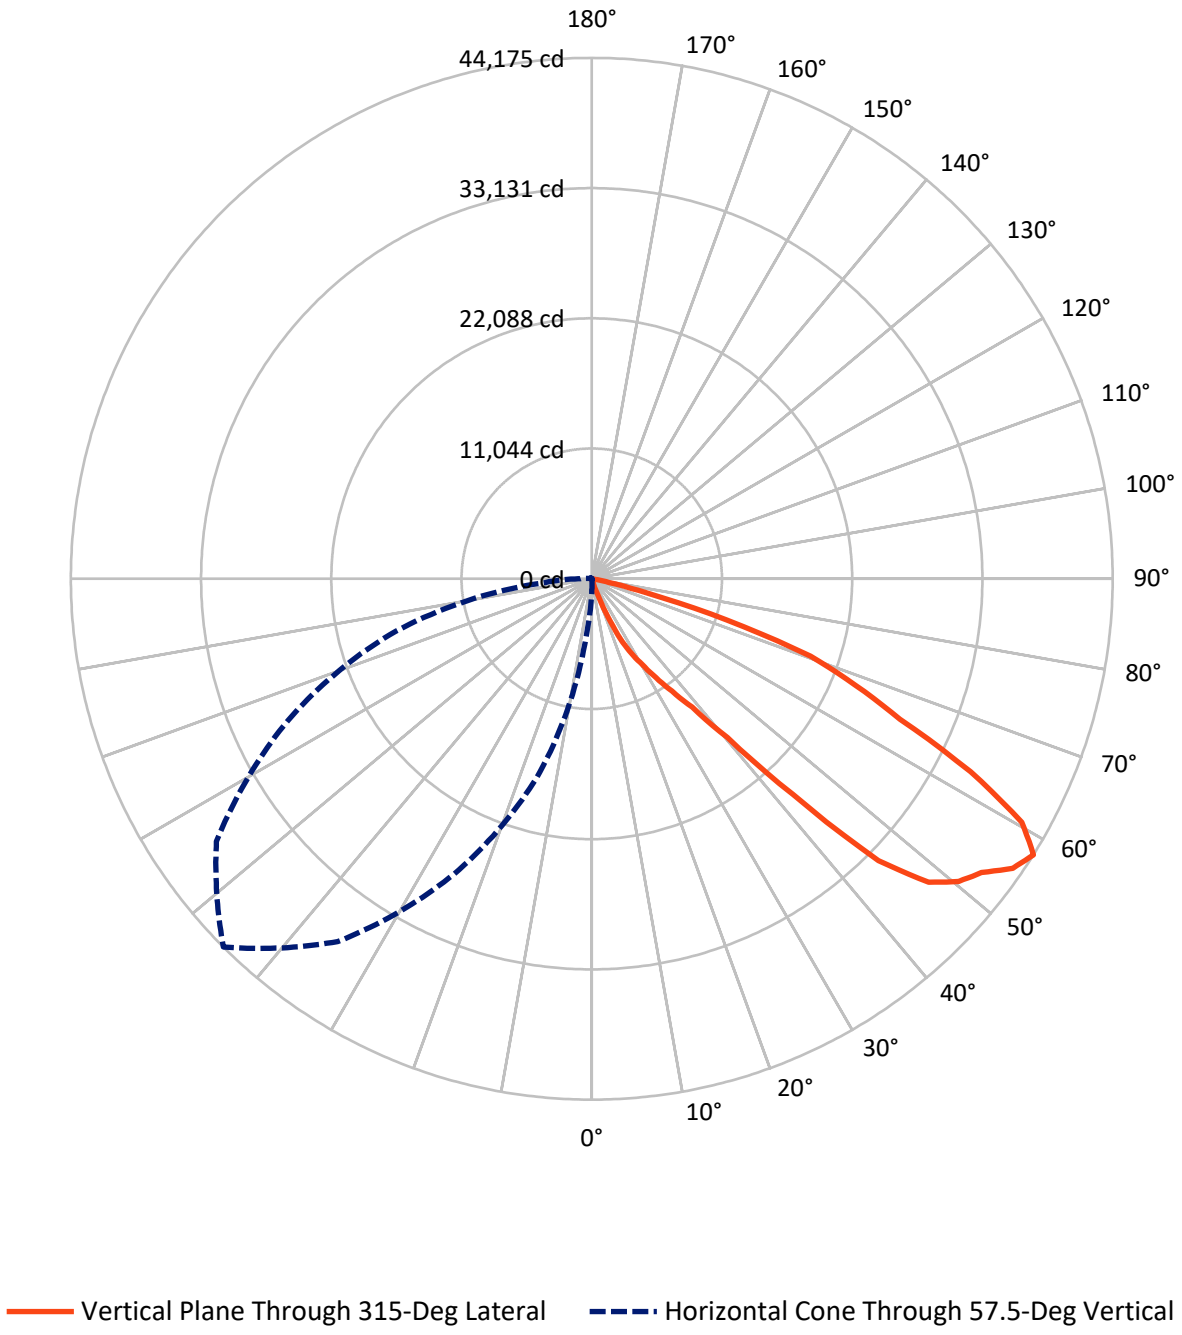

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 108.9 | 0.0 | 108.9 |
| | % Fixture | 0.7 | 0.0 | 0.7 |
| **Street Side** | Lumens | 15141.5 | 0.0 | 15141.5 |
| | % Fixture | 99.3 | 0.0 | 99.3 |
| **Total** | Lumens | 15250.3 | 0.0 | 15250.3 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 5.3 | 0.0 |
| 10°-20° | 25.7 | 0.2 |
| 20°-30° | 330.1 | 2.2 |
| 30°-40° | 1029.2 | 6.7 |
| 40°-50° | 3361.5 | 22.0 |
| 50°-60° | 5395.5 | 35.4 |
| 60°-70° | 4142.8 | 27.2 |
| 70°-80° | 943.4 | 6.2 |
| 80°-90° | 16.8 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 15250.3 | 100.0 |
| 0°-180° | 15250.3 | 100.0 |

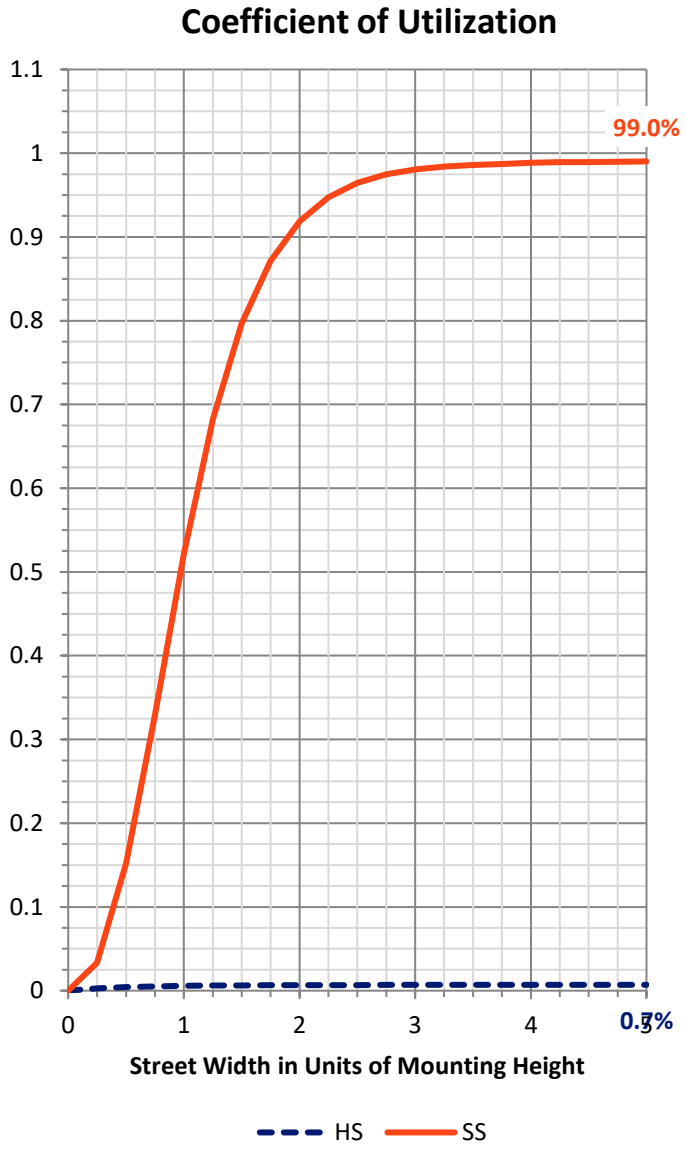

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 345.4 | 2.3 | | | |
| FM | (30°-60°) | 9740.4 | 63.9 | | | |
| FH | (60°-80°) | 5043.7 | 33.1 | | | G3/7500 |
| FVH | (80°-90°) | 11.9 | 0.1 | | | G1/100 |
| BL | (0°-30°) | 15.7 | 0.1 | B0/110 | | |
| BM | (30°-60°) | 45.9 | 0.3 | B0/220 | | |
| BH | (60°-80°) | 42.5 | 0.3 | B0/110 | | G0/110 |
| BVH | (80°-90°) | 4.9 | 0.0 | | | G0/10 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B0-U0-G3**
Type III Short

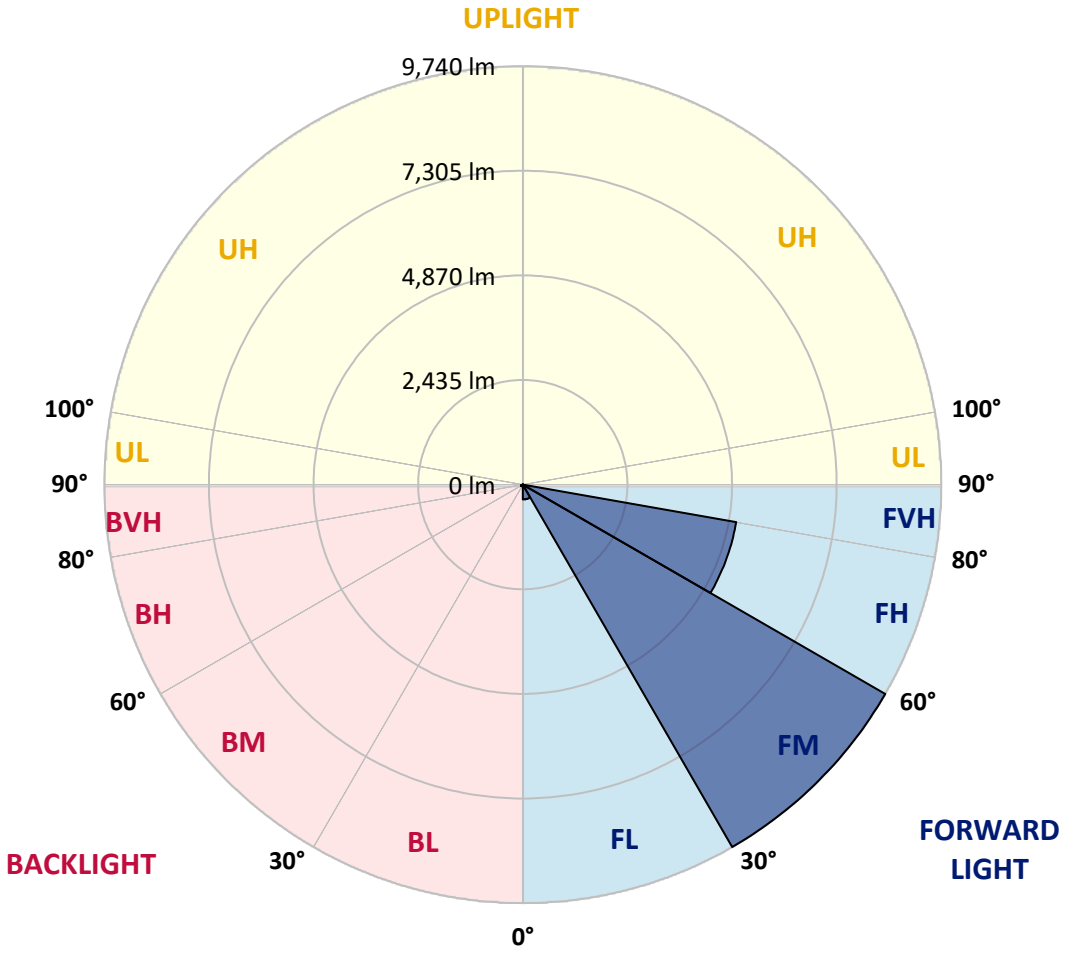

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 51.6 | 51.6 | 51.6 | 51.6 | 51.6 | 46.9 | 46.9 | 46.9 | 46.9 | 46.9 | 46.9 |
| 5° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 51.6 | 51.6 | 51.6 | 51.6 | 46.9 | 46.9 |
| 7.5° | 65.7 | 65.7 | 61.0 | 61.0 | 61.0 | 56.3 | 56.3 | 56.3 | 56.3 | 51.6 | 51.6 |
| 10° | 75.1 | 75.1 | 70.4 | 70.4 | 65.7 | 65.7 | 61.0 | 61.0 | 56.3 | 56.3 | 51.6 |
| 12.5° | 84.4 | 84.4 | 79.7 | 75.1 | 75.1 | 70.4 | 65.7 | 61.0 | 61.0 | 56.3 | 51.6 |
| 15° | 93.8 | 89.1 | 84.4 | 79.7 | 79.7 | 75.1 | 70.4 | 65.7 | 65.7 | 61.0 | 56.3 |
| 17.5° | 103.2 | 98.5 | 93.8 | 89.1 | 84.4 | 75.1 | 70.4 | 65.7 | 65.7 | 61.0 | 56.3 |
| 20° | 112.6 | 103.2 | 93.8 | 89.1 | 84.4 | 75.1 | 70.4 | 65.7 | 65.7 | 61.0 | 56.3 |
| 22.5° | 126.7 | 117.3 | 103.2 | 98.5 | 89.1 | 84.4 | 75.1 | 70.4 | 65.7 | 61.0 | 56.3 |
| 25° | 145.4 | 126.7 | 112.6 | 103.2 | 93.8 | 84.4 | 75.1 | 70.4 | 65.7 | 61.0 | 56.3 |
| 27.5° | 178.3 | 150.1 | 126.7 | 117.3 | 103.2 | 93.8 | 79.7 | 75.1 | 70.4 | 65.7 | 61.0 |
| 30° | 239.2 | 187.6 | 136.0 | 122.0 | 112.6 | 98.5 | 84.4 | 79.7 | 70.4 | 65.7 | 56.3 |
| 32.5° | 295.5 | 229.9 | 164.2 | 145.4 | 126.7 | 103.2 | 84.4 | 79.7 | 70.4 | 65.7 | 56.3 |
| 35° | 295.5 | 234.5 | 173.6 | 150.1 | 131.3 | 107.9 | 84.4 | 79.7 | 70.4 | 65.7 | 56.3 |
| 37.5° | 290.8 | 229.9 | 168.9 | 150.1 | 131.3 | 107.9 | 89.1 | 79.7 | 75.1 | 65.7 | 56.3 |
| 40° | 304.9 | 225.2 | 150.1 | 136.0 | 122.0 | 103.2 | 89.1 | 79.7 | 75.1 | 65.7 | 56.3 |
| 42.5° | 333.1 | 239.2 | 145.4 | 131.3 | 122.0 | 107.9 | 93.8 | 84.4 | 75.1 | 65.7 | 56.3 |
| 45° | 417.5 | 281.5 | 150.1 | 136.0 | 122.0 | 103.2 | 89.1 | 84.4 | 75.1 | 70.4 | 61.0 |
| 47.5° | 755.3 | 455.0 | 154.8 | 136.0 | 122.0 | 103.2 | 84.4 | 79.7 | 75.1 | 65.7 | 61.0 |
| 50° | 1182.1 | 670.8 | 159.5 | 140.7 | 122.0 | 103.2 | 84.4 | 79.7 | 75.1 | 70.4 | 65.7 |
| 52.5° | 1285.3 | 731.8 | 178.3 | 154.8 | 131.3 | 107.9 | 84.4 | 79.7 | 75.1 | 70.4 | 65.7 |
| 55° | 1158.7 | 680.2 | 206.4 | 178.3 | 145.4 | 117.3 | 84.4 | 79.7 | 75.1 | 70.4 | 65.7 |
| 57.5° | *980.4* | *605.1* | *229.9* | *197.0* | *159.5* | *126.7* | *89.1* | *84.4* | *79.7* | *75.1* | *70.4* |
| 60° | 736.5 | 501.9 | 267.4 | 225.2 | 187.6 | 145.4 | 103.2 | 98.5 | 93.8 | 84.4 | 79.7 |
| 62.5° | 600.4 | 445.6 | 295.5 | 253.3 | 206.4 | 164.2 | 117.3 | 112.6 | 107.9 | 98.5 | 93.8 |
| 65° | 530.1 | 422.2 | 314.3 | 267.4 | 220.5 | 168.9 | 122.0 | 117.3 | 112.6 | 107.9 | 103.2 |
| 67.5° | 492.6 | 408.1 | 328.4 | 276.8 | 229.9 | 178.3 | 126.7 | 122.0 | 117.3 | 112.6 | 107.9 |
| 70° | 473.8 | 398.7 | 323.7 | 276.8 | 229.9 | 182.9 | 136.0 | 131.3 | 122.0 | 117.3 | 107.9 |
| 72.5° | 441.0 | 380.0 | 319.0 | 281.5 | 239.2 | 201.7 | 159.5 | 145.4 | 131.3 | 112.6 | 98.5 |
| 75° | 394.0 | 337.8 | 281.5 | 258.0 | 234.5 | 206.4 | 182.9 | 159.5 | 136.0 | 107.9 | 84.4 |
| 77.5° | 286.2 | 262.7 | 239.2 | 225.2 | 211.1 | 192.3 | 178.3 | 154.8 | 131.3 | 103.2 | 79.7 |
| 80° | 112.6 | 126.7 | 136.0 | 136.0 | 140.7 | 140.7 | 140.7 | 122.0 | 103.2 | 84.4 | 65.7 |
| 82.5° | 32.8 | 32.8 | 32.8 | 37.5 | 42.2 | 46.9 | 51.6 | 46.9 | 46.9 | 42.2 | 37.5 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 46.9 | 46.9 | 42.2 | 42.2 | 42.2 | 42.2 | 42.2 | 42.2 | 42.2 | 42.2 | 42.2 |
| 5° | 46.9 | 46.9 | 42.2 | 42.2 | 42.2 | 42.2 | 37.5 | 37.5 | 37.5 | 37.5 | 37.5 |
| 7.5° | 51.6 | 46.9 | 46.9 | 42.2 | 42.2 | 42.2 | 37.5 | 37.5 | 37.5 | 37.5 | 37.5 |
| 10° | 51.6 | 46.9 | 46.9 | 42.2 | 42.2 | 42.2 | 37.5 | 37.5 | 37.5 | 37.5 | 32.8 |
| 12.5° | 51.6 | 51.6 | 46.9 | 46.9 | 46.9 | 42.2 | 42.2 | 37.5 | 37.5 | 37.5 | 32.8 |
| 15° | 51.6 | 51.6 | 46.9 | 42.2 | 42.2 | 42.2 | 37.5 | 37.5 | 37.5 | 37.5 | 32.8 |
| 17.5° | 51.6 | 51.6 | 46.9 | 42.2 | 42.2 | 37.5 | 37.5 | 32.8 | 32.8 | 32.8 | 28.1 |
| 20° | 51.6 | 51.6 | 46.9 | 42.2 | 42.2 | 37.5 | 37.5 | 32.8 | 32.8 | 32.8 | 28.1 |
| 22.5° | 51.6 | 51.6 | 46.9 | 42.2 | 42.2 | 37.5 | 37.5 | 32.8 | 32.8 | 28.1 | 28.1 |
| 25° | 51.6 | 51.6 | 46.9 | 42.2 | 37.5 | 37.5 | 32.8 | 28.1 | 28.1 | 23.5 | 23.5 |
| 27.5° | 56.3 | 51.6 | 46.9 | 42.2 | 37.5 | 37.5 | 32.8 | 28.1 | 23.5 | 23.5 | 18.8 |
| 30° | 51.6 | 51.6 | 46.9 | 42.2 | 37.5 | 32.8 | 28.1 | 23.5 | 18.8 | 18.8 | 14.1 |
| 32.5° | 51.6 | 51.6 | 46.9 | 42.2 | 37.5 | 32.8 | 28.1 | 23.5 | 18.8 | 18.8 | 14.1 |
| 35° | 51.6 | 46.9 | 42.2 | 37.5 | 32.8 | 28.1 | 23.5 | 18.8 | 14.1 | 14.1 | 9.4 |
| 37.5° | 51.6 | 46.9 | 42.2 | 37.5 | 32.8 | 28.1 | 23.5 | 18.8 | 14.1 | 9.4 | 4.7 |
| 40° | 51.6 | 46.9 | 42.2 | 37.5 | 32.8 | 28.1 | 18.8 | 14.1 | 9.4 | 9.4 | 4.7 |
| 42.5° | 51.6 | 46.9 | 42.2 | 37.5 | 32.8 | 28.1 | 23.5 | 18.8 | 14.1 | 9.4 | 4.7 |
| 45° | 56.3 | 51.6 | 42.2 | 37.5 | 32.8 | 32.8 | 28.1 | 23.5 | 18.8 | 14.1 | 4.7 |
| 47.5° | 56.3 | 46.9 | 42.2 | 32.8 | 32.8 | 32.8 | 28.1 | 28.1 | 23.5 | 14.1 | 9.4 |
| 50° | 61.0 | 51.6 | 46.9 | 37.5 | 32.8 | 32.8 | 28.1 | 23.5 | 18.8 | 14.1 | 4.7 |
| 52.5° | 61.0 | 56.3 | 46.9 | 42.2 | 37.5 | 28.1 | 23.5 | 14.1 | 9.4 | 9.4 | 4.7 |
| 55° | 61.0 | 61.0 | 56.3 | 51.6 | 42.2 | 32.8 | 18.8 | 9.4 | 9.4 | 4.7 | 4.7 |
| 57.5° | *65.7* | *65.7* | *61.0* | *56.3* | *42.2* | *28.1* | *14.1* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 75.1 | 70.4 | 65.7 | 61.0 | 46.9 | 32.8 | 14.1 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 84.4 | 75.1 | 65.7 | 56.3 | 42.2 | 28.1 | 14.1 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 89.1 | 75.1 | 61.0 | 46.9 | 37.5 | 23.5 | 14.1 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 93.8 | 75.1 | 61.0 | 42.2 | 32.8 | 23.5 | 9.4 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 89.1 | 70.4 | 51.6 | 32.8 | 23.5 | 18.8 | 9.4 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 79.7 | 65.7 | 46.9 | 28.1 | 23.5 | 14.1 | 9.4 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 70.4 | 56.3 | 37.5 | 23.5 | 18.8 | 14.1 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 65.7 | 46.9 | 32.8 | 14.1 | 9.4 | 9.4 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 51.6 | 37.5 | 18.8 | 4.7 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 28.1 | 18.8 | 9.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 42.2 | 42.2 | 42.2 | 37.5 | 37.5 | 37.5 | 37.5 | 37.5 | 37.5 | 37.5 | 37.5 |
| 5° | 37.5 | 37.5 | 37.5 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 |
| 7.5° | 37.5 | 37.5 | 37.5 | 32.8 | 32.8 | 32.8 | 32.8 | 28.1 | 28.1 | 28.1 | 28.1 |
| 10° | 32.8 | 32.8 | 32.8 | 28.1 | 28.1 | 28.1 | 28.1 | 23.5 | 23.5 | 23.5 | 23.5 |
| 12.5° | 32.8 | 32.8 | 32.8 | 28.1 | 28.1 | 28.1 | 28.1 | 23.5 | 23.5 | 23.5 | 23.5 |
| 15° | 32.8 | 32.8 | 32.8 | 28.1 | 28.1 | 28.1 | 23.5 | 23.5 | 18.8 | 18.8 | 18.8 |
| 17.5° | 28.1 | 28.1 | 28.1 | 23.5 | 23.5 | 23.5 | 23.5 | 18.8 | 18.8 | 18.8 | 14.1 |
| 20° | 28.1 | 28.1 | 28.1 | 23.5 | 23.5 | 18.8 | 18.8 | 14.1 | 9.4 | 9.4 | 9.4 |
| 22.5° | 23.5 | 23.5 | 18.8 | 18.8 | 14.1 | 14.1 | 9.4 | 9.4 | 4.7 | 4.7 | 4.7 |
| 25° | 18.8 | 18.8 | 14.1 | 14.1 | 9.4 | 9.4 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 |
| 27.5° | 14.1 | 9.4 | 9.4 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 9.4 | 9.4 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 9.4 | 9.4 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 4.7 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 37.5 | 37.5 | 37.5 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 |
| 5° | 28.1 | 28.1 | 28.1 | 28.1 | 28.1 | 28.1 | 28.1 | 28.1 | 28.1 | 28.1 | 28.1 |
| 7.5° | 23.5 | 23.5 | 23.5 | 23.5 | 23.5 | 23.5 | 23.5 | 23.5 | 18.8 | 18.8 | 18.8 |
| 10° | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 14.1 | 14.1 | 14.1 |
| 12.5° | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 14.1 | 14.1 | 14.1 | 9.4 | 9.4 | 9.4 |
| 15° | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 9.4 | 9.4 | 9.4 | 4.7 | 4.7 | 4.7 |
| 17.5° | 14.1 | 9.4 | 9.4 | 9.4 | 9.4 | 4.7 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 |
| 20° | 4.7 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 | 32.8 |
| 5° | 28.1 | 23.5 | 23.5 | 23.5 | 23.5 | 23.5 | 23.5 | 23.5 | 23.5 | 23.5 | 23.5 |
| 7.5° | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 |
| 10° | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 |
| 12.5° | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 4.7 | 4.7 |
| 15° | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 32.8 | 37.5 | 37.5 | 37.5 | 37.5 | 42.2 | 42.2 | 42.2 | 46.9 | 46.9 | 51.6 |
| 5° | 23.5 | 28.1 | 28.1 | 28.1 | 28.1 | 32.8 | 32.8 | 32.8 | 37.5 | 37.5 | 42.2 |
| 7.5° | 18.8 | 23.5 | 23.5 | 23.5 | 23.5 | 28.1 | 28.1 | 28.1 | 32.8 | 32.8 | 37.5 |
| 10° | 14.1 | 14.1 | 14.1 | 14.1 | 18.8 | 18.8 | 23.5 | 23.5 | 28.1 | 28.1 | 32.8 |
| 12.5° | 4.7 | 9.4 | 9.4 | 9.4 | 9.4 | 14.1 | 14.1 | 14.1 | 18.8 | 23.5 | 23.5 |
| 15° | 0.0 | 4.7 | 4.7 | 4.7 | 4.7 | 9.4 | 9.4 | 9.4 | 14.1 | 18.8 | 18.8 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.4 | 9.4 | 14.1 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 51.6 | 56.3 | 56.3 | 61.0 | 61.0 | 65.7 | 65.7 | 70.4 | 70.4 | 70.4 | 75.1 |
| 5° | 42.2 | 46.9 | 51.6 | 51.6 | 56.3 | 61.0 | 61.0 | 65.7 | 65.7 | 65.7 | 70.4 |
| 7.5° | 37.5 | 42.2 | 46.9 | 46.9 | 51.6 | 56.3 | 56.3 | 61.0 | 61.0 | 61.0 | 65.7 |
| 10° | 32.8 | 37.5 | 42.2 | 42.2 | 46.9 | 51.6 | 51.6 | 56.3 | 56.3 | 61.0 | 61.0 |
| 12.5° | 28.1 | 32.8 | 37.5 | 37.5 | 42.2 | 46.9 | 46.9 | 51.6 | 56.3 | 56.3 | 61.0 |
| 15° | 23.5 | 28.1 | 32.8 | 32.8 | 37.5 | 42.2 | 46.9 | 51.6 | 51.6 | 56.3 | 56.3 |
| 17.5° | 14.1 | 18.8 | 23.5 | 28.1 | 32.8 | 37.5 | 42.2 | 46.9 | 46.9 | 51.6 | 56.3 |
| 20° | 9.4 | 14.1 | 18.8 | 23.5 | 28.1 | 32.8 | 32.8 | 37.5 | 42.2 | 46.9 | 46.9 |
| 22.5° | 4.7 | 9.4 | 14.1 | 14.1 | 18.8 | 23.5 | 28.1 | 32.8 | 32.8 | 37.5 | 42.2 |
| 25° | 0.0 | 4.7 | 9.4 | 9.4 | 14.1 | 18.8 | 18.8 | 23.5 | 28.1 | 32.8 | 32.8 |
| 27.5° | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 | 14.1 | 18.8 | 23.5 | 23.5 | 28.1 | 28.1 |
| 30° | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 | 14.1 | 14.1 | 18.8 | 18.8 | 23.5 | 28.1 |
| 32.5° | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.4 | 14.1 | 18.8 | 18.8 | 23.5 | 23.5 |
| 35° | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.4 | 9.4 | 14.1 | 14.1 | 18.8 | 18.8 |
| 37.5° | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.4 | 9.4 | 14.1 | 14.1 | 18.8 | 18.8 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 9.4 | 14.1 | 14.1 | 14.1 | 18.8 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 | 14.1 | 14.1 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 | 14.1 | 14.1 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 | 14.1 | 14.1 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 | 14.1 | 14.1 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 | 9.4 | 14.1 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 | 9.4 | 14.1 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *4.7* | *4.7* | *4.7* | *9.4* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.4 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.4 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.4 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.4 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.4 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 9.4 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 4.7 | 4.7 | 9.4 | 9.4 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 | 9.4 | 14.1 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 | 9.4 | 14.1 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 4.7 | 9.4 | 9.4 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 75.1 | 75.1 | 75.1 | 75.1 | 75.1 | 75.1 | 75.1 | 75.1 | 70.4 | 70.4 | 70.4 |
| 5° | 70.4 | 70.4 | 70.4 | 70.4 | 70.4 | 70.4 | 70.4 | 70.4 | 65.7 | 65.7 | 65.7 |
| 7.5° | 65.7 | 65.7 | 65.7 | 70.4 | 70.4 | 70.4 | 70.4 | 70.4 | 65.7 | 65.7 | 65.7 |
| 10° | 65.7 | 65.7 | 65.7 | 70.4 | 70.4 | 70.4 | 70.4 | 70.4 | 65.7 | 65.7 | 65.7 |
| 12.5° | 61.0 | 61.0 | 61.0 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 |
| 15° | 61.0 | 61.0 | 61.0 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 |
| 17.5° | 56.3 | 61.0 | 61.0 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 |
| 20° | 51.6 | 51.6 | 56.3 | 56.3 | 61.0 | 61.0 | 61.0 | 65.7 | 65.7 | 65.7 | 65.7 |
| 22.5° | 42.2 | 46.9 | 51.6 | 51.6 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 25° | 37.5 | 37.5 | 42.2 | 46.9 | 46.9 | 51.6 | 51.6 | 51.6 | 51.6 | 51.6 | 51.6 |
| 27.5° | 32.8 | 32.8 | 37.5 | 37.5 | 42.2 | 42.2 | 42.2 | 46.9 | 46.9 | 46.9 | 46.9 |
| 30° | 28.1 | 32.8 | 32.8 | 37.5 | 37.5 | 37.5 | 42.2 | 42.2 | 46.9 | 46.9 | 46.9 |
| 32.5° | 28.1 | 28.1 | 32.8 | 32.8 | 37.5 | 37.5 | 37.5 | 42.2 | 42.2 | 42.2 | 42.2 |
| 35° | 23.5 | 23.5 | 28.1 | 28.1 | 32.8 | 32.8 | 37.5 | 37.5 | 42.2 | 42.2 | 42.2 |
| 37.5° | 23.5 | 23.5 | 28.1 | 28.1 | 32.8 | 32.8 | 32.8 | 37.5 | 37.5 | 37.5 | 42.2 |
| 40° | 18.8 | 18.8 | 23.5 | 23.5 | 28.1 | 28.1 | 32.8 | 32.8 | 37.5 | 37.5 | 42.2 |
| 42.5° | 18.8 | 18.8 | 23.5 | 23.5 | 28.1 | 28.1 | 32.8 | 32.8 | 37.5 | 37.5 | 42.2 |
| 45° | 18.8 | 18.8 | 23.5 | 23.5 | 28.1 | 28.1 | 32.8 | 32.8 | 37.5 | 37.5 | 42.2 |
| 47.5° | 18.8 | 18.8 | 23.5 | 23.5 | 28.1 | 28.1 | 28.1 | 32.8 | 32.8 | 32.8 | 37.5 |
| 50° | 18.8 | 18.8 | 18.8 | 23.5 | 23.5 | 23.5 | 28.1 | 28.1 | 32.8 | 32.8 | 37.5 |
| 52.5° | 14.1 | 14.1 | 14.1 | 18.8 | 18.8 | 18.8 | 23.5 | 23.5 | 28.1 | 28.1 | 32.8 |
| 55° | 14.1 | 14.1 | 14.1 | 18.8 | 18.8 | 18.8 | 18.8 | 23.5 | 23.5 | 23.5 | 28.1 |
| 57.5° | *9.4* | *9.4* | *9.4* | *14.1* | *14.1* | *14.1* | *14.1* | *18.8* | *18.8* | *18.8* | *23.5* |
| 60° | 9.4 | 9.4 | 9.4 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 18.8 |
| 62.5° | 9.4 | 9.4 | 9.4 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 18.8 |
| 65° | 9.4 | 9.4 | 9.4 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 18.8 |
| 67.5° | 9.4 | 9.4 | 9.4 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 18.8 |
| 70° | 9.4 | 9.4 | 9.4 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 18.8 |
| 72.5° | 9.4 | 9.4 | 9.4 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 18.8 |
| 75° | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 |
| 77.5° | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 |
| 80° | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 |
| 82.5° | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 |
| 85° | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 |
| 87.5° | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 70.4 | 70.4 | 70.4 | 70.4 | 70.4 | 65.7 | 65.7 | 65.7 | 70.4 | 70.4 | 70.4 |
| 5° | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 |
| 7.5° | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 61.0 | 61.0 | 61.0 | 65.7 | 65.7 | 65.7 |
| 10° | 65.7 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 65.7 | 65.7 | 65.7 |
| 12.5° | 65.7 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 65.7 | 65.7 | 65.7 |
| 15° | 65.7 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 65.7 | 65.7 | 70.4 | 70.4 |
| 17.5° | 61.0 | 61.0 | 56.3 | 56.3 | 61.0 | 61.0 | 61.0 | 61.0 | 65.7 | 65.7 | 65.7 |
| 20° | 61.0 | 61.0 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 61.0 | 61.0 | 65.7 | 65.7 |
| 22.5° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 61.0 | 61.0 | 65.7 | 65.7 |
| 25° | 51.6 | 51.6 | 51.6 | 51.6 | 56.3 | 56.3 | 56.3 | 61.0 | 65.7 | 65.7 | 70.4 |
| 27.5° | 51.6 | 51.6 | 51.6 | 51.6 | 56.3 | 56.3 | 56.3 | 61.0 | 65.7 | 65.7 | 70.4 |
| 30° | 51.6 | 51.6 | 51.6 | 51.6 | 56.3 | 56.3 | 56.3 | 61.0 | 65.7 | 65.7 | 70.4 |
| 32.5° | 46.9 | 46.9 | 46.9 | 51.6 | 51.6 | 56.3 | 56.3 | 61.0 | 65.7 | 65.7 | 70.4 |
| 35° | 46.9 | 46.9 | 46.9 | 51.6 | 51.6 | 56.3 | 56.3 | 61.0 | 65.7 | 65.7 | 70.4 |
| 37.5° | 42.2 | 46.9 | 46.9 | 51.6 | 56.3 | 56.3 | 61.0 | 65.7 | 70.4 | 70.4 | 75.1 |
| 40° | 42.2 | 46.9 | 46.9 | 51.6 | 56.3 | 56.3 | 61.0 | 65.7 | 70.4 | 70.4 | 75.1 |
| 42.5° | 42.2 | 46.9 | 46.9 | 51.6 | 56.3 | 56.3 | 61.0 | 65.7 | 70.4 | 75.1 | 79.7 |
| 45° | 46.9 | 46.9 | 51.6 | 56.3 | 56.3 | 61.0 | 61.0 | 65.7 | 70.4 | 75.1 | 79.7 |
| 47.5° | 46.9 | 51.6 | 56.3 | 56.3 | 61.0 | 61.0 | 61.0 | 65.7 | 75.1 | 79.7 | 84.4 |
| 50° | 42.2 | 46.9 | 51.6 | 56.3 | 56.3 | 61.0 | 61.0 | 65.7 | 75.1 | 79.7 | 84.4 |
| 52.5° | 37.5 | 37.5 | 42.2 | 46.9 | 56.3 | 61.0 | 65.7 | 70.4 | 79.7 | 84.4 | 89.1 |
| 55° | 32.8 | 32.8 | 37.5 | 46.9 | 56.3 | 65.7 | 75.1 | 79.7 | 84.4 | 84.4 | 89.1 |
| 57.5° | *28.1* | *28.1* | *32.8* | *46.9* | *61.0* | *75.1* | *89.1* | *89.1* | *93.8* | *93.8* | *93.8* |
| 60° | 23.5 | 23.5 | 28.1 | 42.2 | 61.0 | 75.1 | 89.1 | 93.8 | 98.5 | 98.5 | 103.2 |
| 62.5° | 23.5 | 23.5 | 28.1 | 42.2 | 56.3 | 65.7 | 79.7 | 89.1 | 98.5 | 107.9 | 117.3 |
| 65° | 18.8 | 23.5 | 23.5 | 37.5 | 46.9 | 61.0 | 70.4 | 84.4 | 98.5 | 112.6 | 126.7 |
| 67.5° | 18.8 | 23.5 | 23.5 | 32.8 | 46.9 | 56.3 | 65.7 | 79.7 | 98.5 | 112.6 | 126.7 |
| 70° | 23.5 | 23.5 | 28.1 | 37.5 | 42.2 | 51.6 | 56.3 | 75.1 | 89.1 | 107.9 | 122.0 |
| 72.5° | 18.8 | 23.5 | 23.5 | 32.8 | 37.5 | 46.9 | 51.6 | 70.4 | 84.4 | 103.2 | 117.3 |
| 75° | 18.8 | 18.8 | 18.8 | 28.1 | 32.8 | 42.2 | 46.9 | 61.0 | 79.7 | 93.8 | 107.9 |
| 77.5° | 14.1 | 14.1 | 14.1 | 23.5 | 28.1 | 37.5 | 42.2 | 56.3 | 75.1 | 89.1 | 103.2 |
| 80° | 14.1 | 14.1 | 14.1 | 18.8 | 23.5 | 23.5 | 28.1 | 42.2 | 61.0 | 75.1 | 89.1 |
| 82.5° | 14.1 | 9.4 | 9.4 | 14.1 | 14.1 | 18.8 | 18.8 | 28.1 | 37.5 | 46.9 | 56.3 |
| 85° | 14.1 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 |
| 87.5° | 14.1 | 9.4 | 9.4 | 9.4 | 9.4 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 70.4 | 70.4 | 70.4 | 70.4 | 70.4 | 75.1 | 75.1 | 75.1 | 75.1 | 75.1 | 75.1 |
| 5° | 70.4 | 70.4 | 75.1 | 75.1 | 75.1 | 79.7 | 79.7 | 79.7 | 79.7 | 79.7 | 79.7 |
| 7.5° | 70.4 | 70.4 | 75.1 | 75.1 | 75.1 | 79.7 | 79.7 | 79.7 | 84.4 | 84.4 | 89.1 |
| 10° | 70.4 | 70.4 | 75.1 | 75.1 | 79.7 | 79.7 | 84.4 | 84.4 | 89.1 | 89.1 | 93.8 |
| 12.5° | 70.4 | 75.1 | 75.1 | 79.7 | 84.4 | 89.1 | 89.1 | 93.8 | 98.5 | 98.5 | 103.2 |
| 15° | 75.1 | 75.1 | 79.7 | 79.7 | 84.4 | 89.1 | 93.8 | 98.5 | 103.2 | 107.9 | 112.6 |
| 17.5° | 70.4 | 75.1 | 79.7 | 84.4 | 89.1 | 93.8 | 98.5 | 103.2 | 112.6 | 117.3 | 126.7 |
| 20° | 70.4 | 75.1 | 79.7 | 84.4 | 89.1 | 98.5 | 103.2 | 107.9 | 117.3 | 126.7 | 140.7 |
| 22.5° | 70.4 | 75.1 | 79.7 | 84.4 | 93.8 | 103.2 | 107.9 | 117.3 | 131.3 | 140.7 | 159.5 |
| 25° | 75.1 | 79.7 | 84.4 | 89.1 | 98.5 | 107.9 | 117.3 | 126.7 | 145.4 | 159.5 | 201.7 |
| 27.5° | 75.1 | 84.4 | 89.1 | 93.8 | 103.2 | 117.3 | 126.7 | 136.0 | 164.2 | 187.6 | 281.5 |
| 30° | 75.1 | 84.4 | 89.1 | 93.8 | 107.9 | 122.0 | 136.0 | 150.1 | 197.0 | 239.2 | 398.7 |
| 32.5° | 75.1 | 84.4 | 89.1 | 93.8 | 112.6 | 136.0 | 154.8 | 173.6 | 234.5 | 295.5 | 483.2 |
| 35° | 79.7 | 84.4 | 93.8 | 98.5 | 122.0 | 145.4 | 164.2 | 187.6 | 243.9 | 300.2 | 525.4 |
| 37.5° | 84.4 | 89.1 | 98.5 | 103.2 | 122.0 | 140.7 | 159.5 | 178.3 | 239.2 | 295.5 | 577.0 |
| 40° | 84.4 | 93.8 | 98.5 | 107.9 | 122.0 | 140.7 | 154.8 | 168.9 | 234.5 | 300.2 | 666.1 |
| 42.5° | 89.1 | 98.5 | 103.2 | 112.6 | 126.7 | 140.7 | 150.1 | 164.2 | 248.6 | 333.1 | 867.8 |
| 45° | 89.1 | 93.8 | 103.2 | 107.9 | 122.0 | 136.0 | 150.1 | 164.2 | 314.3 | 459.7 | 1379.2 |
| 47.5° | 89.1 | 93.8 | 98.5 | 103.2 | 122.0 | 140.7 | 154.8 | 173.6 | 464.4 | 755.3 | 2279.8 |
| 50° | 89.1 | 93.8 | 93.8 | 98.5 | 117.3 | 140.7 | 159.5 | 178.3 | 605.1 | 1027.3 | 3288.4 |
| 52.5° | 93.8 | 98.5 | 98.5 | 103.2 | 126.7 | 150.1 | 173.6 | 197.0 | 694.3 | 1191.5 | 3569.8 |
| 55° | 93.8 | 98.5 | 98.5 | 103.2 | 140.7 | 178.3 | 211.1 | 248.6 | 731.8 | 1210.3 | 3279.0 |
| 57.5° | *98.5* | *103.2* | *107.9* | *112.6* | *150.1* | *192.3* | *229.9* | *267.4* | *699.0* | *1130.5* | *2687.9* |
| 60° | 112.6 | 117.3 | 126.7 | 131.3 | 173.6 | 215.8 | 253.3 | 295.5 | 558.2 | 820.9 | 2115.6 |
| 62.5° | 126.7 | 131.3 | 140.7 | 145.4 | 187.6 | 229.9 | 272.1 | 314.3 | 492.6 | 666.1 | 1576.2 |
| 65° | 131.3 | 140.7 | 145.4 | 150.1 | 192.3 | 239.2 | 281.5 | 323.7 | 450.3 | 572.3 | 1168.1 |
| 67.5° | 136.0 | 145.4 | 150.1 | 159.5 | 201.7 | 243.9 | 286.2 | 328.4 | 426.9 | 520.7 | 867.8 |
| 70° | 136.0 | 145.4 | 159.5 | 168.9 | 206.4 | 243.9 | 276.8 | 314.3 | 394.0 | 469.1 | 666.1 |
| 72.5° | 136.0 | 154.8 | 173.6 | 192.3 | 220.5 | 248.6 | 272.1 | 300.2 | 361.2 | 417.5 | 516.0 |
| 75° | 136.0 | 164.2 | 187.6 | 215.8 | 229.9 | 243.9 | 258.0 | 272.1 | 314.3 | 351.8 | 408.1 |
| 77.5° | 131.3 | 154.8 | 182.9 | 206.4 | 211.1 | 215.8 | 220.5 | 225.2 | 225.2 | 225.2 | 225.2 |
| 80° | 107.9 | 131.3 | 150.1 | 168.9 | 159.5 | 145.4 | 136.0 | 122.0 | 112.6 | 103.2 | 112.6 |
| 82.5° | 56.3 | 61.0 | 61.0 | 61.0 | 56.3 | 56.3 | 51.6 | 46.9 | 46.9 | 42.2 | 42.2 |
| 85° | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 9.4 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 |
| 87.5° | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 75.1 | 75.1 | 75.1 | 75.1 | 75.1 | 75.1 | 75.1 | 70.4 | 70.4 | 70.4 | 70.4 |
| 5° | 79.7 | 79.7 | 79.7 | 79.7 | 79.7 | 79.7 | 79.7 | 75.1 | 75.1 | 75.1 | 75.1 |
| 7.5° | 89.1 | 89.1 | 89.1 | 89.1 | 89.1 | 89.1 | 89.1 | 89.1 | 89.1 | 89.1 | 89.1 |
| 10° | 93.8 | 98.5 | 98.5 | 103.2 | 103.2 | 103.2 | 107.9 | 107.9 | 107.9 | 107.9 | 107.9 |
| 12.5° | 107.9 | 112.6 | 112.6 | 117.3 | 117.3 | 122.0 | 122.0 | 126.7 | 126.7 | 126.7 | 131.3 |
| 15° | 117.3 | 122.0 | 126.7 | 131.3 | 136.0 | 145.4 | 150.1 | 159.5 | 164.2 | 168.9 | 173.6 |
| 17.5° | 136.0 | 145.4 | 159.5 | 168.9 | 178.3 | 197.0 | 215.8 | 229.9 | 248.6 | 272.1 | 300.2 |
| 20° | 150.1 | 182.9 | 211.1 | 243.9 | 272.1 | 356.5 | 441.0 | 525.4 | 609.8 | 722.4 | 835.0 |
| 22.5° | 178.3 | 281.5 | 389.4 | 492.6 | 595.8 | 872.5 | 1144.6 | 1416.7 | 1693.5 | 1956.1 | 2218.8 |
| 25° | 243.9 | 464.4 | 689.6 | 910.1 | 1130.5 | 1594.9 | 2054.7 | 2514.4 | 2978.8 | 3424.4 | 3874.8 |
| 27.5° | 370.6 | 727.1 | 1083.6 | 1440.1 | 1796.7 | 2406.5 | 3011.6 | 3616.8 | 4226.6 | 4766.1 | 5300.8 |
| 30° | 558.2 | 1017.9 | 1477.7 | 1937.4 | 2397.1 | 3185.2 | 3973.3 | 4761.4 | 5549.5 | 6074.8 | 6600.2 |
| 32.5° | 666.1 | 1266.6 | 1867.0 | 2462.8 | 3063.2 | 3921.7 | 4780.1 | 5643.3 | 6501.7 | 7102.2 | 7702.6 |
| 35° | 745.9 | 1491.7 | 2232.9 | 2978.8 | 3720.0 | 4676.9 | 5633.9 | 6595.5 | 7552.5 | 8270.2 | 8988.0 |
| 37.5° | 853.8 | 1749.7 | 2641.0 | 3537.0 | 4428.3 | 5460.3 | 6492.3 | 7529.1 | 8561.1 | 9447.7 | 10339.0 |
| 40° | 1027.3 | 2092.2 | 3157.0 | 4217.2 | 5282.1 | 6576.8 | 7871.5 | 9166.2 | 10460.9 | 11638.4 | 12815.8 |
| 42.5° | 1402.6 | 2805.2 | 4212.5 | 5615.1 | 7017.7 | 8955.1 | 10887.8 | 12820.5 | 14757.9 | 16423.2 | 18088.5 |
| 45° | 2298.6 | 4479.9 | 6661.2 | 8842.5 | 11023.8 | 13341.2 | 15653.9 | 17971.2 | 20288.6 | 22751.3 | 25214.1 |
| 47.5° | 3804.4 | 6811.3 | 9818.3 | 12820.5 | 15827.4 | 18215.1 | 20598.2 | 22981.2 | 25368.9 | 27667.5 | 29966.1 |
| 50° | 5549.5 | 8786.2 | 12023.0 | 15259.8 | 18496.6 | 20631.0 | 22760.7 | 24890.4 | 27024.8 | 29281.2 | 31532.9 |
| 52.5° | 5948.2 | 9185.0 | 12421.8 | 15653.9 | 18890.6 | 21043.8 | 23197.0 | 25354.8 | 27508.0 | 29712.8 | 31922.2 |
| 55° | 5343.0 | 8551.7 | 11755.6 | 14964.3 | 18168.2 | 20532.5 | 22896.8 | 25261.0 | 27625.3 | 30097.4 | 32569.6 |
| 57.5° | *4245.4* | *7486.8* | *10723.6* | *13965.1* | *17201.9* | *20007.1* | *22807.6* | *25612.8* | *28418.1* | *31026.3* | *33634.5* |
| 60° | 3410.4 | 6717.5 | 10024.7 | 13331.8 | 16639.0 | 19631.8 | 22620.0 | 25608.2 | 28601.0 | 30819.9 | 33038.7 |
| 62.5° | 2486.2 | 5760.5 | 9034.9 | 12309.2 | 15583.5 | 18266.7 | 20950.0 | 23637.9 | 26321.2 | 27897.4 | 29473.5 |
| 65° | 1763.8 | 4658.2 | 7552.5 | 10442.2 | 13336.5 | 15198.8 | 17061.2 | 18923.5 | 20785.8 | 22150.9 | 23516.0 |
| 67.5° | 1215.0 | 3255.6 | 5291.4 | 7332.0 | 9367.9 | 10953.5 | 12534.3 | 14119.9 | 15705.5 | 16854.8 | 18008.7 |
| 70° | 863.1 | 1974.9 | 3086.7 | 4193.8 | 5305.5 | 6708.1 | 8110.7 | 9513.3 | 10916.0 | 12318.6 | 13725.9 |
| 72.5° | 614.5 | 1102.4 | 1585.6 | 2073.4 | 2556.6 | 3776.3 | 4995.9 | 6220.3 | 7439.9 | 8289.0 | 9142.8 |
| 75° | 464.4 | 595.8 | 722.4 | 853.8 | 980.4 | 1276.0 | 1571.5 | 1867.0 | 2162.6 | 2462.8 | 2763.0 |
| 77.5° | 220.5 | 243.9 | 262.7 | 286.2 | 304.9 | 380.0 | 455.0 | 530.1 | 605.1 | 731.8 | 858.5 |
| 80° | 117.3 | 126.7 | 136.0 | 145.4 | 154.8 | 159.5 | 164.2 | 168.9 | 173.6 | 187.6 | 206.4 |
| 82.5° | 42.2 | 46.9 | 46.9 | 51.6 | 51.6 | 46.9 | 46.9 | 42.2 | 37.5 | 42.2 | 42.2 |
| 85° | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 65.7 | 65.7 | 65.7 | 65.7 | 61.0 | 61.0 | 61.0 | 61.0 | 56.3 | 56.3 | 56.3 |
| 5° | 75.1 | 75.1 | 75.1 | 75.1 | 70.4 | 70.4 | 70.4 | 70.4 | 65.7 | 65.7 | 65.7 |
| 7.5° | 89.1 | 89.1 | 89.1 | 89.1 | 84.4 | 84.4 | 84.4 | 84.4 | 79.7 | 79.7 | 79.7 |
| 10° | 107.9 | 107.9 | 107.9 | 107.9 | 107.9 | 107.9 | 107.9 | 107.9 | 103.2 | 103.2 | 103.2 |
| 12.5° | 131.3 | 131.3 | 131.3 | 131.3 | 131.3 | 131.3 | 131.3 | 131.3 | 126.7 | 126.7 | 126.7 |
| 15° | 173.6 | 178.3 | 182.9 | 187.6 | 187.6 | 192.3 | 187.6 | 182.9 | 178.3 | 173.6 | 168.9 |
| 17.5° | 323.7 | 347.1 | 356.5 | 361.2 | 370.6 | 375.3 | 370.6 | 361.2 | 356.5 | 347.1 | 323.7 |
| 20° | 942.9 | 1055.5 | 1135.2 | 1215.0 | 1294.7 | 1374.5 | 1327.6 | 1280.6 | 1233.7 | 1186.8 | 1064.9 |
| 22.5° | 2481.5 | 2744.2 | 2927.2 | 3110.1 | 3293.1 | 3476.0 | 3349.4 | 3222.7 | 3091.4 | 2964.7 | 2655.1 |
| 25° | 4320.4 | 4766.1 | 5000.6 | 5239.8 | 5474.4 | 5708.9 | 5493.2 | 5277.4 | 5056.9 | 4841.1 | 4409.5 |
| 27.5° | 5840.3 | 6375.1 | 6576.8 | 6773.8 | 6975.5 | 7172.5 | 6980.2 | 6792.6 | 6600.2 | 6407.9 | 5906.0 |
| 30° | 7125.6 | 7651.0 | 7848.0 | 8045.1 | 8242.1 | 8439.1 | 8223.3 | 8002.8 | 7787.1 | 7566.6 | 7069.3 |
| 32.5° | 8298.4 | 8898.8 | 9170.9 | 9443.0 | 9715.1 | 9987.1 | 9663.5 | 9339.8 | 9016.1 | 8692.4 | 8124.8 |
| 35° | 9705.7 | 10423.4 | 10742.4 | 11066.1 | 11385.1 | 11704.0 | 11319.4 | 10930.0 | 10545.4 | 10156.0 | 9438.3 |
| 37.5° | 11225.6 | 12112.2 | 12539.0 | 12965.9 | 13392.8 | 13819.7 | 13341.2 | 12862.7 | 12384.2 | 11905.8 | 10991.0 |
| 40° | 13993.2 | 15170.7 | 15804.0 | 16432.6 | 17065.9 | 17694.4 | 16976.7 | 16254.3 | 15536.6 | 14814.2 | 13557.0 |
| 42.5° | 19749.1 | 21414.4 | 22315.1 | 23215.7 | 24116.4 | 25017.1 | 23971.0 | 22920.2 | 21874.1 | 20823.3 | 19087.7 |
| 45° | 27676.9 | 30139.7 | 31134.2 | 32124.0 | 33118.4 | 34108.2 | 32926.1 | 31744.0 | 30557.2 | 29375.0 | 27043.6 |
| 47.5° | 32264.7 | 34563.3 | 35539.0 | 36514.7 | 37485.8 | 38461.5 | 37349.7 | 36238.0 | 35126.2 | 34014.4 | 31739.3 |
| 50° | 33789.3 | 36040.9 | 37115.2 | 38194.1 | 39268.3 | 40342.6 | 39071.3 | 37795.4 | 36524.1 | 35248.2 | 33062.2 |
| 52.5° | 34127.0 | 36331.8 | 37598.3 | 38864.9 | 40126.8 | 41393.4 | 39925.1 | 38456.8 | 36983.8 | 35515.5 | 33348.3 |
| 55° | 35037.1 | 37509.2 | 38968.1 | 40422.3 | 41881.2 | 43335.4 | 41623.2 | 39906.3 | 38194.1 | 36477.2 | 34098.9 |
| 57.5° | 36242.6 | 38850.8 | 40183.1 | 41515.3 | 42842.9 | 44175.1 | 42519.2 | 40868.0 | 39212.1 | 37556.1 | 35074.6 |
| 60° | 35252.8 | 37471.7 | 38583.5 | 39690.5 | 40802.3 | 41909.4 | 40412.9 | 38921.2 | 37424.8 | 35928.4 | 33859.6 |
| 62.5° | 31045.0 | 32621.2 | 33479.7 | 34338.1 | 35191.9 | 36050.3 | 34821.3 | 33592.2 | 32363.2 | 31134.2 | 29633.0 |
| 65° | 24876.4 | 26241.4 | 26860.7 | 27475.2 | 28094.4 | 28708.9 | 27855.1 | 27001.4 | 26142.9 | 25289.2 | 24027.3 |
| 67.5° | 19158.0 | 20307.3 | 21264.3 | 22216.6 | 23173.5 | 24125.8 | 23089.1 | 22052.4 | 21011.0 | 19974.3 | 18764.0 |
| 70° | 15128.5 | 16531.1 | 17319.2 | 18107.3 | 18895.3 | 19683.4 | 18782.8 | 17882.1 | 16976.7 | 16076.0 | 14809.5 |
| 72.5° | 9991.8 | 10840.9 | 11122.4 | 11408.5 | 11690.0 | 11971.4 | 11643.1 | 11319.4 | 10991.0 | 10662.6 | 9860.5 |
| 75° | 3058.5 | 3358.8 | 3691.8 | 4029.6 | 4362.6 | 4695.7 | 4395.5 | 4095.2 | 3795.0 | 3494.8 | 3222.7 |
| 77.5° | 980.4 | 1107.1 | 1205.6 | 1304.1 | 1397.9 | 1496.4 | 1501.1 | 1505.8 | 1505.8 | 1510.5 | 1365.1 |
| 80° | 220.5 | 234.5 | 234.5 | 234.5 | 229.9 | 229.9 | 253.3 | 272.1 | 295.5 | 314.3 | 295.5 |
| 82.5° | 46.9 | 46.9 | 46.9 | 46.9 | 46.9 | 46.9 | 46.9 | 46.9 | 42.2 | 42.2 | 42.2 |
| 85° | 4.7 | 4.7 | 4.7 | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| 2.5° | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 | 51.6 | 51.6 |
| 5° | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 65.7 | 61.0 | 61.0 |
| 7.5° | 79.7 | 79.7 | 79.7 | 79.7 | 79.7 | 75.1 | 75.1 | 75.1 | 75.1 | 70.4 | 70.4 |
| 10° | 103.2 | 98.5 | 98.5 | 98.5 | 93.8 | 93.8 | 89.1 | 89.1 | 84.4 | 84.4 | 79.7 |
| 12.5° | 126.7 | 122.0 | 122.0 | 117.3 | 117.3 | 112.6 | 107.9 | 103.2 | 98.5 | 93.8 | 89.1 |
| 15° | 164.2 | 159.5 | 154.8 | 150.1 | 140.7 | 136.0 | 126.7 | 122.0 | 117.3 | 112.6 | 107.9 |
| 17.5° | 300.2 | 276.8 | 253.3 | 229.9 | 211.1 | 187.6 | 164.2 | 154.8 | 140.7 | 131.3 | 117.3 |
| 20° | 947.6 | 825.6 | 703.6 | 595.8 | 487.9 | 375.3 | 267.4 | 234.5 | 201.7 | 168.9 | 136.0 |
| 22.5° | 2350.2 | 2040.6 | 1731.0 | 1463.6 | 1196.2 | 928.8 | 661.4 | 539.5 | 417.5 | 295.5 | 173.6 |
| 25° | 3978.0 | 3541.7 | 3110.1 | 2641.0 | 2176.6 | 1707.5 | 1238.4 | 994.5 | 745.9 | 497.2 | 253.3 |
| 27.5° | 5404.0 | 4902.1 | 4400.2 | 3780.9 | 3161.7 | 2537.8 | 1918.6 | 1543.3 | 1163.4 | 783.4 | 408.1 |
| 30° | 6576.8 | 6079.5 | 5582.3 | 4822.3 | 4057.7 | 3297.8 | 2533.1 | 2045.3 | 1557.4 | 1064.9 | 577.0 |
| 32.5° | 7557.2 | 6989.6 | 6422.0 | 5587.0 | 4756.7 | 3921.7 | 3086.7 | 2481.5 | 1881.1 | 1276.0 | 670.8 |
| 35° | 8715.9 | 7998.2 | 7275.7 | 6384.4 | 5497.8 | 4606.6 | 3715.3 | 2978.8 | 2237.6 | 1496.4 | 759.9 |
| 37.5° | 10076.3 | 9161.5 | 8246.8 | 7280.4 | 6318.8 | 5352.4 | 4386.1 | 3513.6 | 2645.7 | 1773.2 | 900.7 |
| 40° | 12304.5 | 11047.3 | 9790.1 | 8631.4 | 7468.1 | 6309.4 | 5146.0 | 4137.5 | 3128.9 | 2115.6 | 1107.1 |
| 42.5° | 17352.0 | 15616.3 | 13880.7 | 12145.0 | 10404.6 | 8669.0 | 6928.6 | 5554.1 | 4184.4 | 2809.9 | 1435.4 |
| 45° | 24712.2 | 22380.8 | 20049.3 | 17722.6 | 15395.9 | 13069.1 | 10742.4 | 8608.0 | 6473.6 | 4334.5 | 2200.1 |
| 47.5° | 29464.2 | 27189.0 | 24913.9 | 22685.7 | 20462.1 | 18233.9 | 16005.7 | 13003.4 | 10001.2 | 6994.3 | 3992.0 |
| 50° | 30880.8 | 28694.8 | 26508.8 | 24519.8 | 22535.6 | 20546.6 | 18557.6 | 15381.8 | 12210.7 | 9034.9 | 5859.1 |
| 52.5° | 31181.1 | 29009.1 | 26841.9 | 24848.2 | 22859.2 | 20865.6 | 18871.9 | 15710.2 | 12548.4 | 9382.0 | 6220.3 |
| 55° | 31720.5 | 29342.2 | 26963.9 | 24726.2 | 22488.6 | 20246.3 | 18008.7 | 14851.7 | 11694.7 | 8537.6 | 5380.6 |
| 57.5° | *32593.1* | *30106.8* | *27625.3* | *24960.8* | *22296.3* | *19631.8* | *16967.3* | *13782.2* | *10597.0* | *7411.8* | *4226.6* |
| 60° | 31790.9 | 29717.5 | 27648.7 | 24777.9 | 21902.3 | 19031.4 | 16155.8 | 12919.0 | 9677.5 | 6436.0 | 3199.3 |
| 62.5° | 28127.2 | 26626.1 | 25120.3 | 22573.1 | 20025.9 | 17478.7 | 14931.4 | 11779.1 | 8626.7 | 5474.4 | 2322.0 |
| 65° | 22760.7 | 21498.8 | 20232.3 | 18215.1 | 16198.0 | 14176.2 | 12159.1 | 9504.0 | 6853.5 | 4198.4 | 1543.3 |
| 67.5° | 17553.7 | 16343.4 | 15133.2 | 13542.9 | 11952.7 | 10362.4 | 8772.2 | 6839.5 | 4906.8 | 2969.4 | 1036.7 |
| 70° | 13542.9 | 12276.3 | 11009.8 | 9579.0 | 8148.3 | 6717.5 | 5286.8 | 4160.9 | 3039.8 | 1913.9 | 788.1 |
| 72.5° | 9058.3 | 8256.2 | 7454.0 | 6267.2 | 5080.4 | 3893.5 | 2706.7 | 2190.7 | 1674.7 | 1154.0 | 638.0 |
| 75° | 2945.9 | 2673.9 | 2397.1 | 2073.4 | 1749.7 | 1421.4 | 1097.7 | 952.3 | 802.2 | 652.0 | 506.6 |
| 77.5° | 1215.0 | 1069.5 | 919.4 | 783.4 | 642.7 | 506.6 | 365.9 | 342.4 | 319.0 | 295.5 | 272.1 |
| 80° | 272.1 | 253.3 | 229.9 | 215.8 | 201.7 | 187.6 | 173.6 | 164.2 | 150.1 | 140.7 | 126.7 |
| 82.5° | 37.5 | 37.5 | 32.8 | 37.5 | 42.2 | 46.9 | 51.6 | 46.9 | 46.9 | 42.2 | 37.5 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 0° | 56.3 | 56.3 |
| 2.5° | 51.6 | 51.6 |
| 5° | 61.0 | 56.3 |
| 7.5° | 70.4 | 65.7 |
| 10° | 79.7 | 75.1 |
| 12.5° | 89.1 | 84.4 |
| 15° | 103.2 | 93.8 |
| 17.5° | 112.6 | 103.2 |
| 20° | 126.7 | 112.6 |
| 22.5° | 150.1 | 126.7 |
| 25° | 197.0 | 145.4 |
| 27.5° | 290.8 | 178.3 |
| 30° | 408.1 | 239.2 |
| 32.5° | 483.2 | 295.5 |
| 35° | 525.4 | 295.5 |
| 37.5° | 595.8 | 290.8 |
| 40° | 703.6 | 304.9 |
| 42.5° | 881.9 | 333.1 |
| 45° | 1308.8 | 417.5 |
| 47.5° | 2373.6 | 755.3 |
| 50° | 3518.2 | 1182.1 |
| 52.5° | 3752.8 | 1285.3 |
| 55° | 3269.6 | 1158.7 |
| 57.5° | *2603.5* | *980.4* |
| 60° | 1965.5 | 736.5 |
| 62.5° | 1458.9 | 600.4 |
| 65° | 1036.7 | 530.1 |
| 67.5° | 764.6 | 492.6 |
| 70° | 628.6 | 473.8 |
| 72.5° | 539.5 | 441.0 |
| 75° | 450.3 | 394.0 |
| 77.5° | 281.5 | 286.2 |
| 80° | 122.0 | 112.6 |
| 82.5° | 37.5 | 32.8 |
| 85° | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390059
CATALOG NUMBER: GSS-SA6A-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 112.5° | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-9

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-830-U-5WQ

Data in this report applies to families of products including GSS-SB1A-830-U-5WQ

Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04


## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-184-9 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 10/15/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | McGraw-Edison |
| Catalog Number: | **GSS-SB1A-830-U-5WQ** |
| Description: | GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 80 CRI 3000K CCT 26 LEDS |

## Spectral Parameters

| | |
|---|---|
| CCT (K): | 3055 |
| CIE u': | 0.2475 |
| CIE v': | 0.5247 |
| Duv: | 0.0032 |
| CIE x: | 0.4377 |
| CIE y: | 0.4124 |
| CIE z: | 0.1499 |
| Peak Wavelength (nm): | 604 |
| Dominant Wavelength (nm): | 581 |
| Purity: | 55.16339 |
| Rf: | 81.5 |
| Rg: | 99.2 |

| | |
|---|---|
| CRI (Ra): | 80.9 |
| R1: | 79.5 |
| R2: | 85.6 |
| R3: | 92.1 |
| R4: | 82.4 |
| R5: | 78.9 |
| R6: | 81.7 |
| R7: | 85.1 |
| R8: | 61.9 |
| R9: | 6.8 |
| R10: | 67.1 |
| R11: | 82.5 |
| R12: | 63.4 |
| R13: | 80.2 |
| R14: | 95.1 |
| R15: | 71.7 |

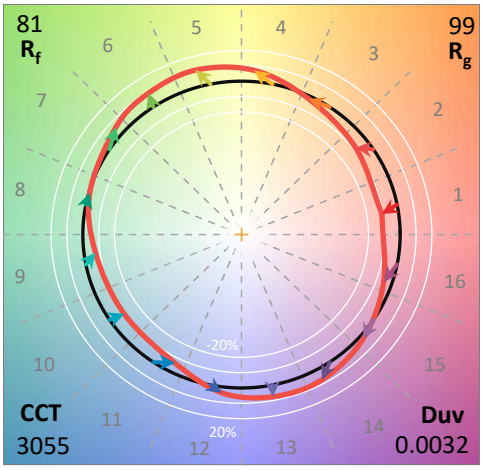


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 20M |
| Operation Time: | 1H 20M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-184-9


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-184-9

## CIE 1931 Chromaticity Diagram

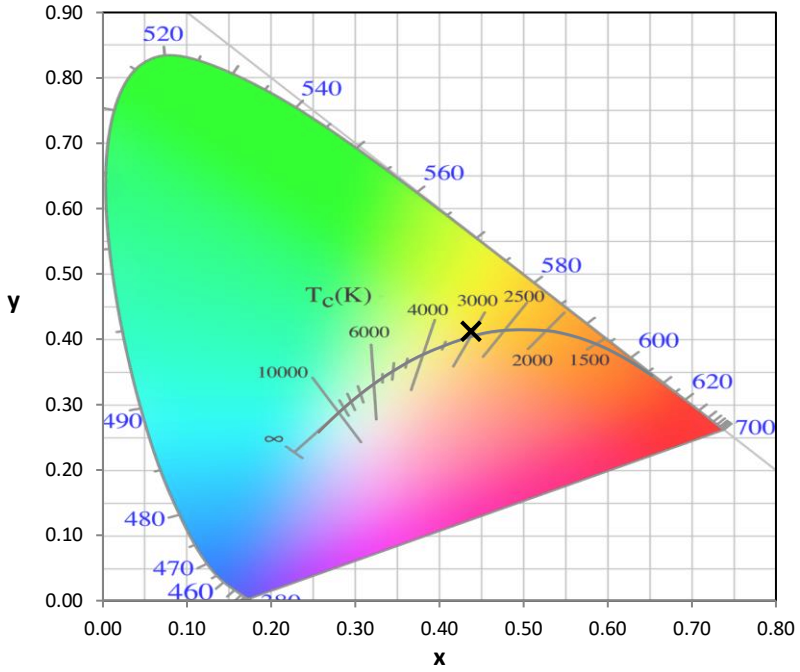


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

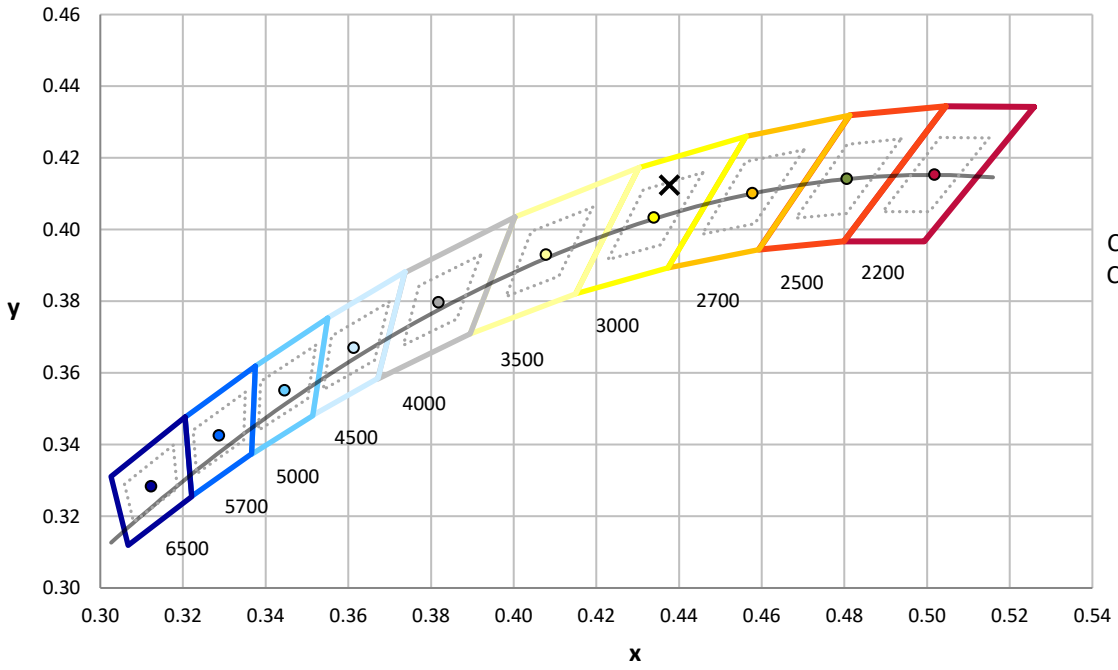



CCT = 3055K
CIE x = 0.4377
CIE y = 0.4124
Duv = 0.0032

Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-9

## Photopic Flux vs. Wavelength

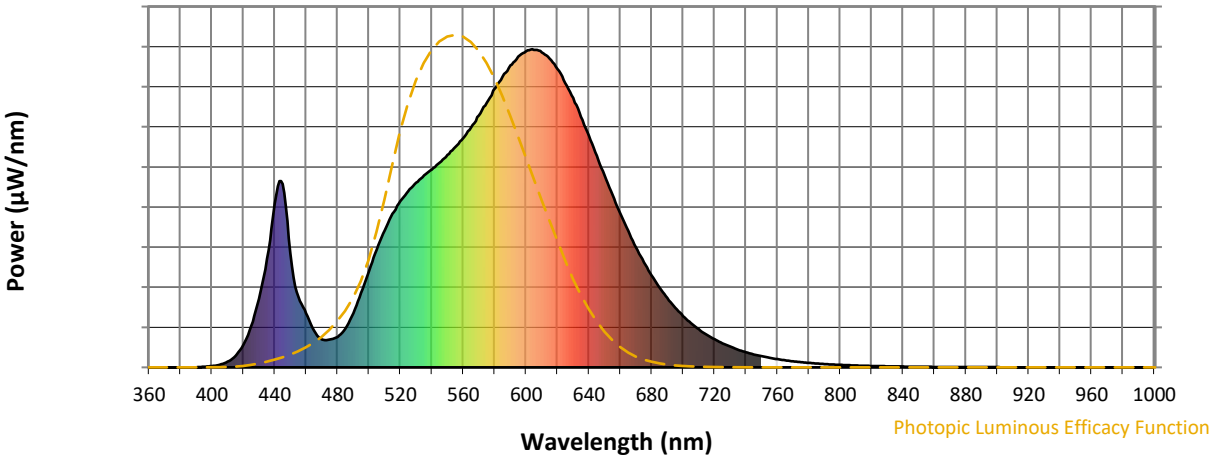



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 170 | NR | 620 | 938 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 234 | NR | 625 | 894 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 302 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 371 | NR | 635 | 788 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 431 | NR | 640 | 728 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 482 | NR | 645 | 665 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 523 | NR | 650 | 603 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 553 | NR | 655 | 542 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 580 | NR | 660 | 484 | NR | 790 | 11 | NR | 920 | 0 | NR |
| 405 | 8 | NR | 535 | 603 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 18 | NR | 540 | 622 | NR | 670 | 377 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 36 | NR | 545 | 644 | NR | 675 | 330 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 71 | NR | 550 | 668 | NR | 680 | 289 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 131 | NR | 555 | 693 | NR | 685 | 250 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 215 | NR | 560 | 720 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 341 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 514 | NR | 570 | 792 | NR | 700 | 161 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 576 | NR | 575 | 832 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 358 | NR | 580 | 875 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 222 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 170 | NR | 590 | 950 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 115 | NR | 595 | 977 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 88 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 87 | NR | 605 | 997 | NR | 735 | 56 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 96 | NR | 610 | 990 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 122 | NR | 615 | 971 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-9

## Scotopic Flux vs. Wavelength

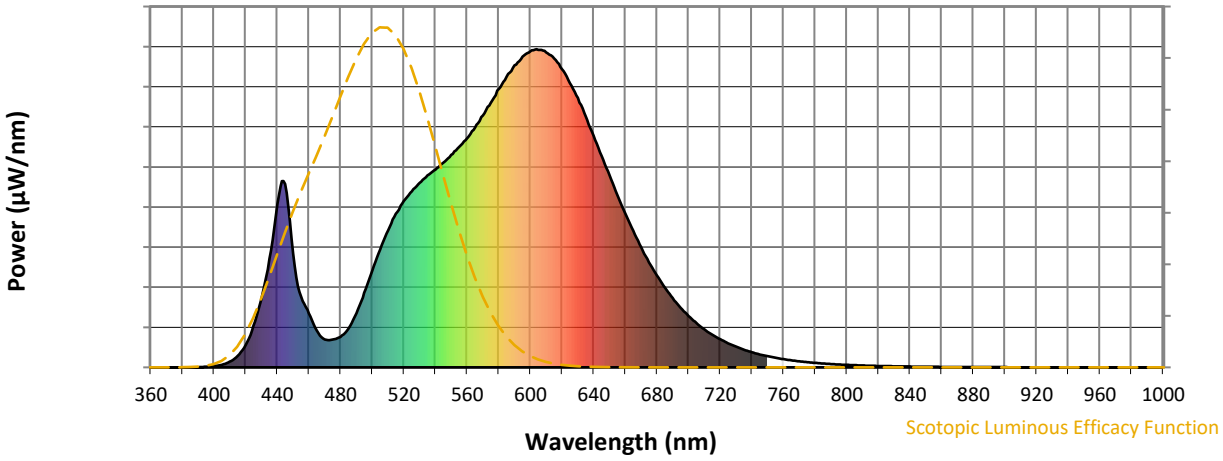



**Scotopic Lumens: NR** **S/P: 1.28**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 170 | NR | 620 | 938 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 234 | NR | 625 | 894 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 302 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 371 | NR | 635 | 788 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 431 | NR | 640 | 728 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 482 | NR | 645 | 665 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 523 | NR | 650 | 603 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 553 | NR | 655 | 542 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 580 | NR | 660 | 484 | NR | 790 | 11 | NR | 920 | 0 | NR |
| 405 | 8 | NR | 535 | 603 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 18 | NR | 540 | 622 | NR | 670 | 377 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 36 | NR | 545 | 644 | NR | 675 | 330 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 71 | NR | 550 | 668 | NR | 680 | 289 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 131 | NR | 555 | 693 | NR | 685 | 250 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 215 | NR | 560 | 720 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 341 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 514 | NR | 570 | 792 | NR | 700 | 161 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 576 | NR | 575 | 832 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 358 | NR | 580 | 875 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 222 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 170 | NR | 590 | 950 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 115 | NR | 595 | 977 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 88 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 87 | NR | 605 | 997 | NR | 735 | 56 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 96 | NR | 610 | 990 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 122 | NR | 615 | 971 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-9

## Melanopic Flux vs. Wavelength

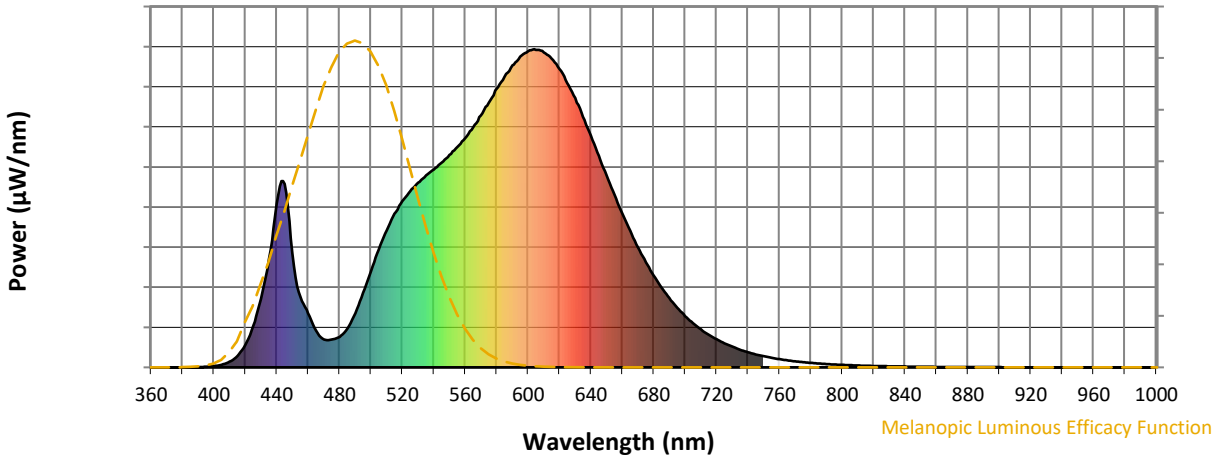


**Melanopic Lumens: NR** **M/P: 2.33**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 170 | NR | 620 | 938 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 234 | NR | 625 | 894 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 302 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 371 | NR | 635 | 788 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 431 | NR | 640 | 728 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 482 | NR | 645 | 665 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 523 | NR | 650 | 603 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 553 | NR | 655 | 542 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 580 | NR | 660 | 484 | NR | 790 | 11 | NR | 920 | 0 | NR |
| 405 | 8 | NR | 535 | 603 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 18 | NR | 540 | 622 | NR | 670 | 377 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 36 | NR | 545 | 644 | NR | 675 | 330 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 71 | NR | 550 | 668 | NR | 680 | 289 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 131 | NR | 555 | 693 | NR | 685 | 250 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 215 | NR | 560 | 720 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 341 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 514 | NR | 570 | 792 | NR | 700 | 161 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 576 | NR | 575 | 832 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 358 | NR | 580 | 875 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 222 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 170 | NR | 590 | 950 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 115 | NR | 595 | 977 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 88 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 87 | NR | 605 | 997 | NR | 735 | 56 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 96 | NR | 610 | 990 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 122 | NR | 615 | 971 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |


REPORT NUMBER: SP1-2407-184-9

# TM-30-18


## Summary


$R_f$ = 81.5
$R_g$ = 99.2
CIE $R_a$ = 80.9
$R_9$ = 6.8


## Spectral Power Distribution Comparison

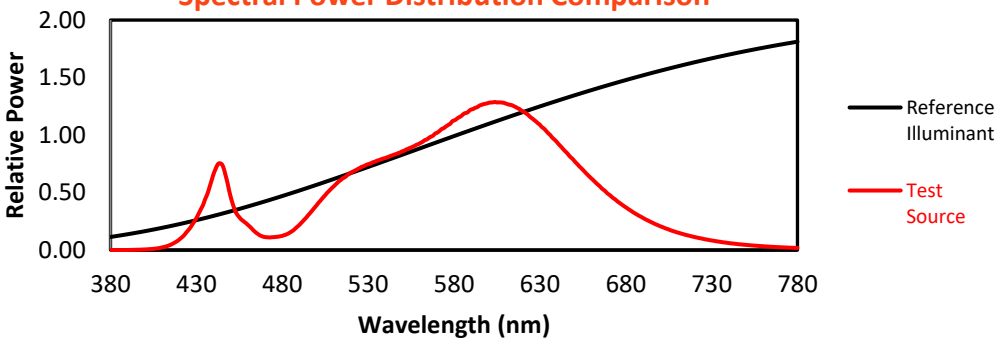



## Color Vector Graphics

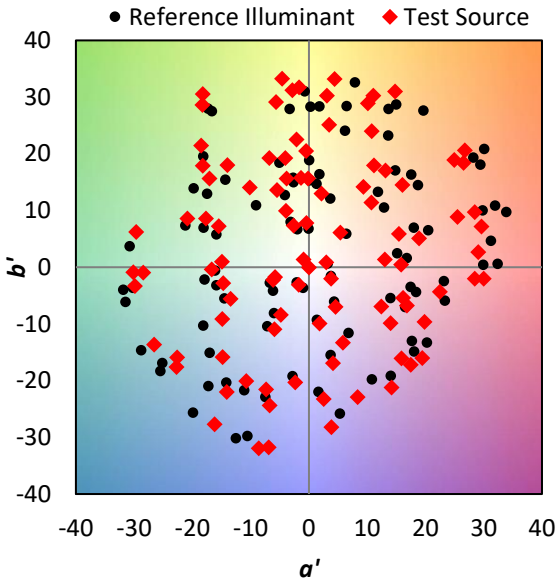

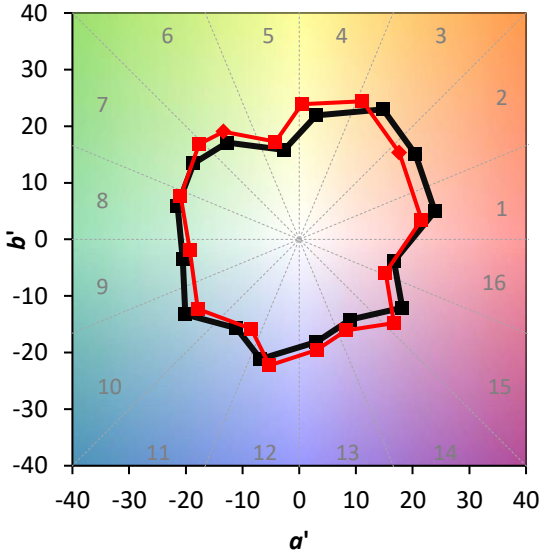


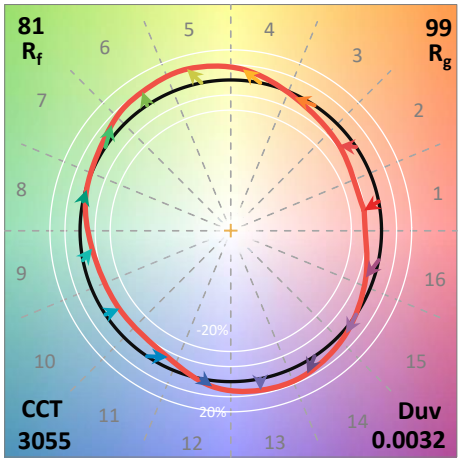
REPORT NUMBER: SP1-2407-184-9
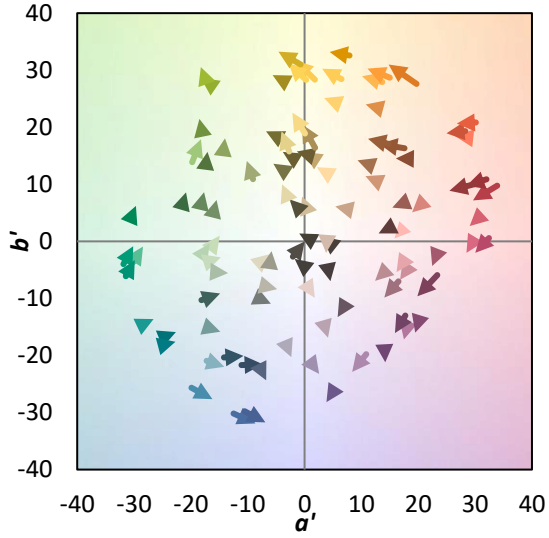
# TM-30-18

## Individual Sample Fidelity Index ($R_{f,i}$)


| | | | |
|---|---|---|---|
| CES01 = 86 | CES26 = 74 | CES51 = 89 | CES76 = 70 |
| CES02 = 63 | CES27 = 88 | CES52 = 91 | CES77 = 86 |
| CES03 = 31 | CES28 = 89 | CES53 = 81 | CES78 = 72 |
| CES04 = 70 | CES29 = 67 | CES54 = 87 | CES79 = 90 |
| CES05 = 50 | CES30 = 68 | CES55 = 85 | CES80 = 88 |
| CES06 = 51 | CES31 = 71 | CES56 = 78 | CES81 = 78 |
| CES07 = 42 | CES32 = 70 | CES57 = 76 | CES82 = 95 |
| CES08 = 41 | CES33 = 71 | CES58 = 78 | CES83 = 90 |
| CES09 = 29 | CES34 = 82 | CES59 = 92 | CES84 = 93 |
| CES10 = 76 | CES35 = 90 | CES60 = 95 | CES85 = 86 |
| CES11 = 59 | CES36 = 93 | CES61 = 93 | CES86 = 72 |
| CES12 = 65 | CES37 = 87 | CES62 = 83 | CES87 = 85 |
| CES13 = 43 | CES38 = 75 | CES63 = 77 | CES88 = 83 |
| CES14 = 74 | CES39 = 94 | CES64 = 83 | CES89 = 75 |
| CES15 = 71 | CES40 = 89 | CES65 = 77 | CES90 = 81 |
| CES16 = 47 | CES41 = 85 | CES66 = 80 | CES91 = 96 |
| CES17 = 50 | CES42 = 86 | CES67 = 79 | CES92 = 73 |
| CES18 = 56 | CES43 = 81 | CES68 = 84 | CES93 = 84 |
| CES19 = 72 | CES44 = 99 | CES69 = 90 | CES94 = 64 |
| CES20 = 66 | CES45 = 87 | CES70 = 77 | CES95 = 80 |
| CES21 = 87 | CES46 = 82 | CES71 = 76 | CES96 = 84 |
| CES22 = 79 | CES47 = 77 | CES72 = 92 | CES97 = 87 |
| CES23 = 92 | CES48 = 71 | CES73 = 71 | CES98 = 81 |
| CES24 = 91 | CES49 = 81 | CES74 = 93 | CES99 = 74 |
| CES25 = 72 | CES50 = 89 | CES75 = 74 | |

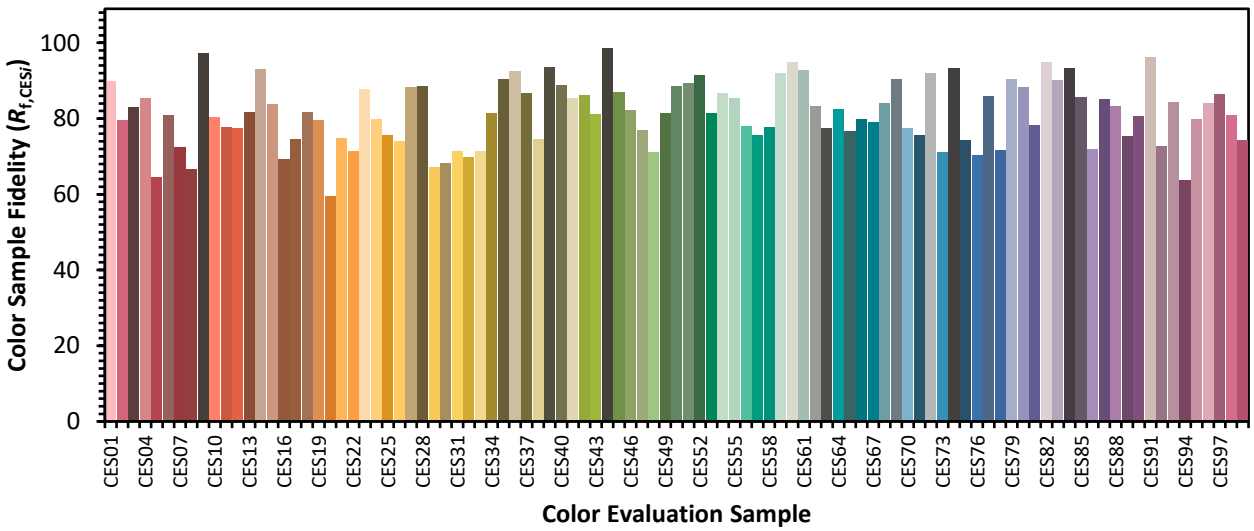



REPORT NUMBER: SP1-2407-184-9

**TM-30-18**

## Color Rendition by Hue-Angle Bin

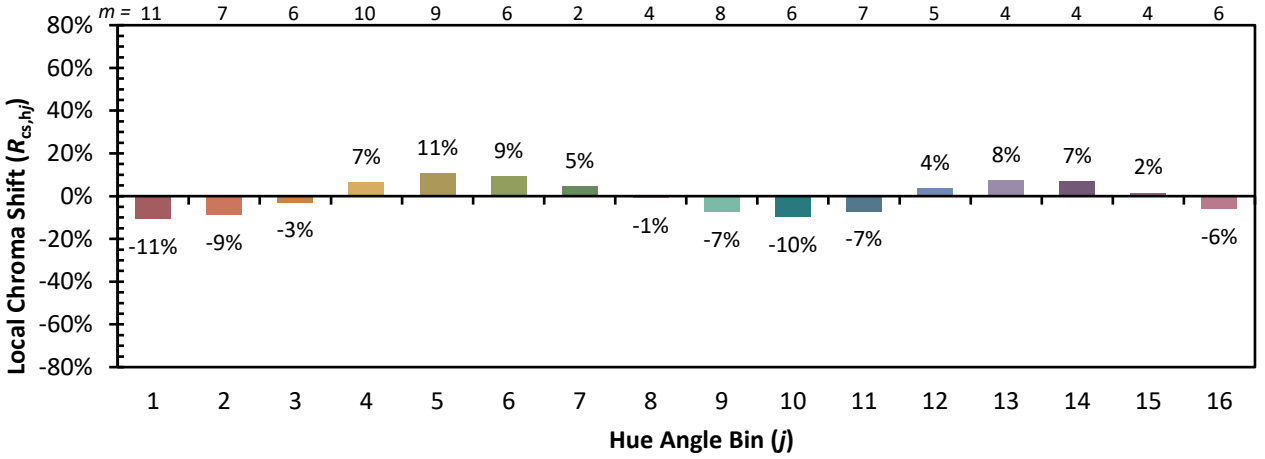

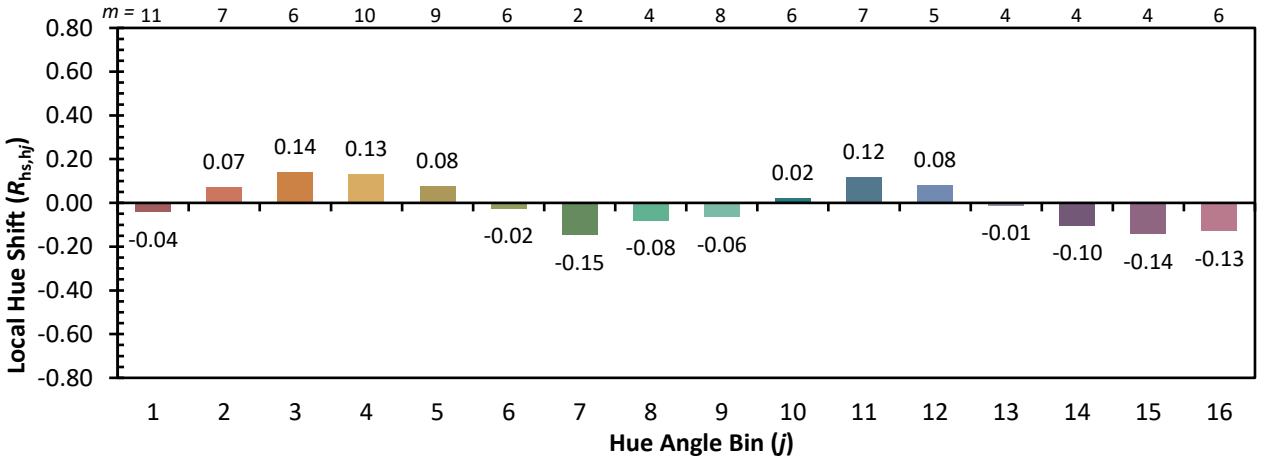


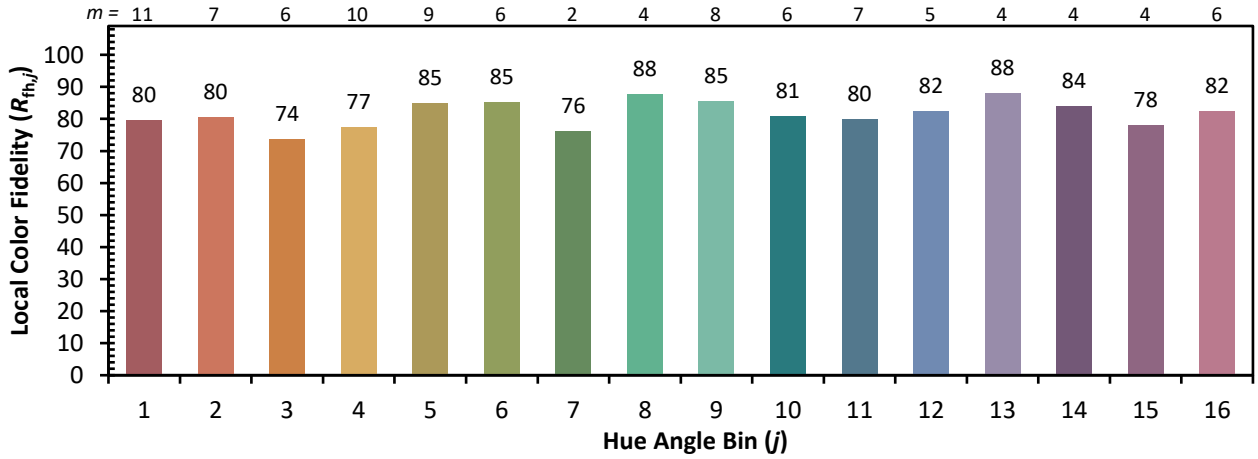
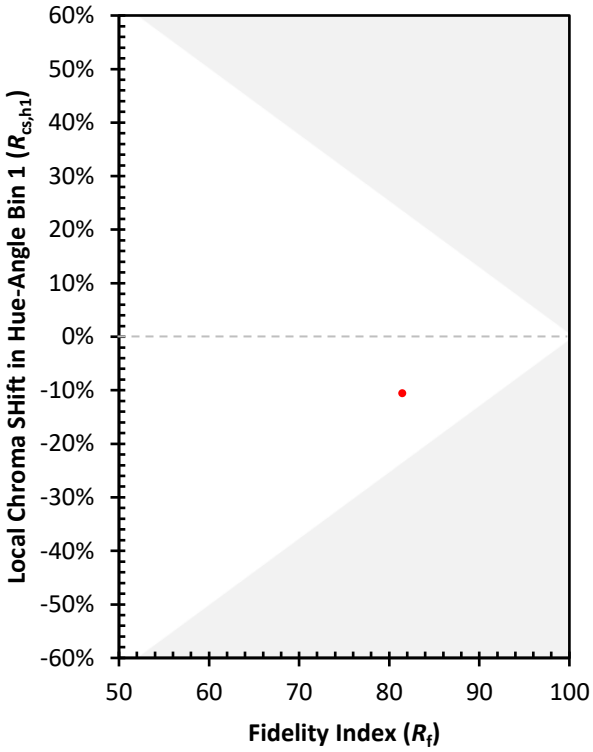



REPORT NUMBER: SP1-2407-184-9

# TM-30-18

## Measure Comparisons

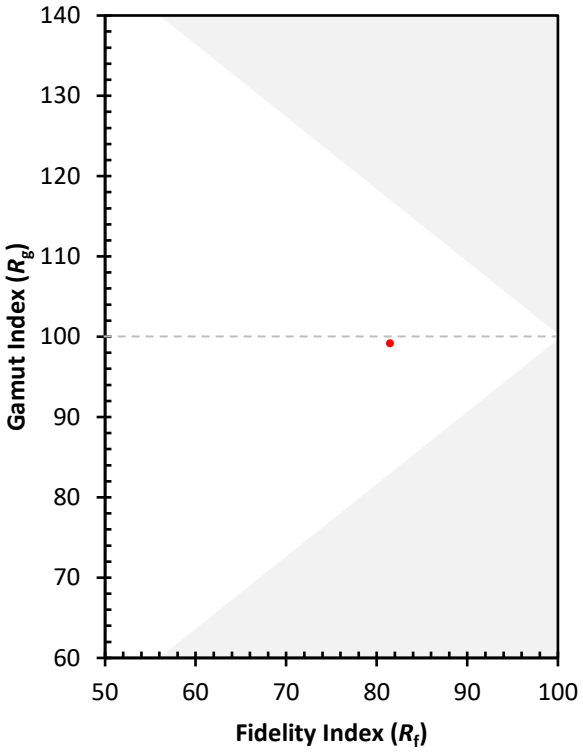


(END OF REPORT)