Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1390056

Luminaire Tested: **GSS-SA5B-830-U-RBC**

Issue Date: 02/18/2026

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P1390056 |
| Test Lab: | INNOVATION CENTER(G3) |
| Issue Date: | 02/18/2026 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | GSS-SA5B-830-U-RBC |
| Description: | GALLEON SLIM SITE LUMINAIRE 800mA 5xLight Square PACKAGE 80CRI 3000K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL |
| Light Source: | (70) 3000K CCT, 80 CRI LEDS |
| Ballast/Driver: | ELECTRONIC DRIVER |

Luminaire Equipment:

| Sample No. | Condition | Description |
|---|---|---|
| a | good | reflector |
| b | good | lens |
| c | good | housing |
| d | good | cord |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 16207.6 lumens |
| Efficiency: | N/A |
| Efficacy: | 90.6 lumens/watt |
| Luminous Opening: | Rectangular (W 1.5' x L: 1' x H: 0') |
| IES Classification: | Type III - Short |
| BUG Rating: | B0 - U0 - G3 |


| | |
|---|---|
| Input Watts (W): | 178.8 |
| Input Voltage (V): | 120 |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | 0.97 |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 28.75 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

## Iso-Footcandle Lines of Horizontal Illumination

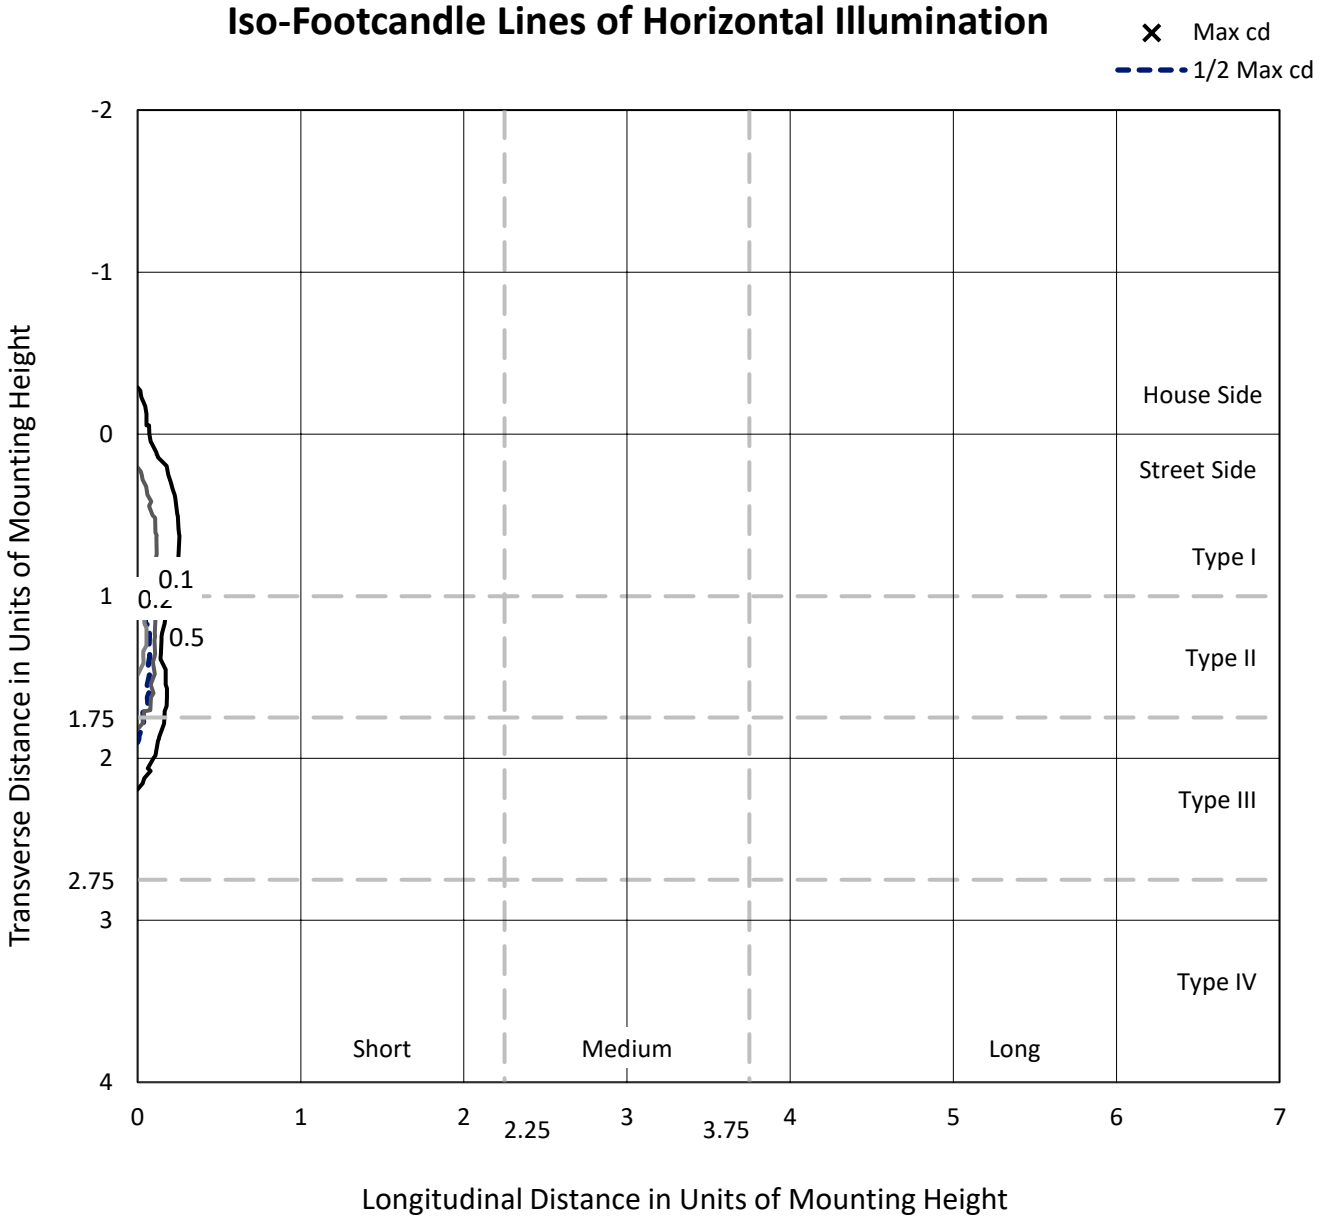



Based on 20 foot mounting height. Maximum calculated value = 0.8 fc
Type III - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

## Luminous Intensity Polar Plot

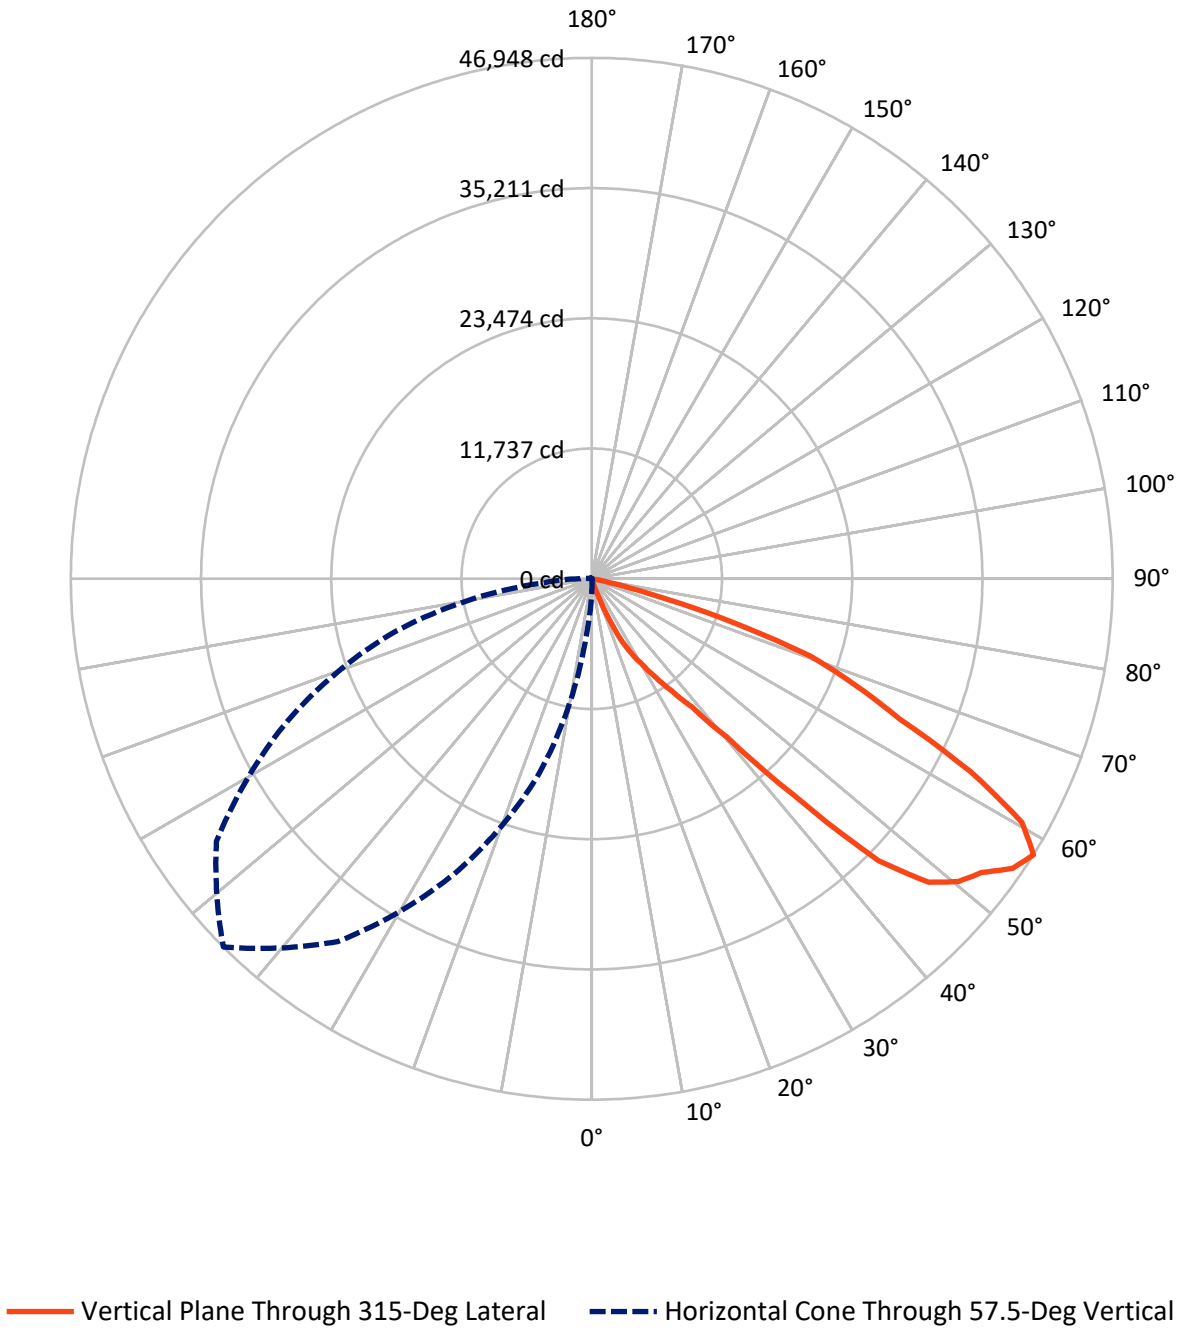

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 115.7 | 0.0 | 115.7 |
| | % Fixture | 0.7 | 0.0 | 0.7 |
| **Street Side** | Lumens | 16091.8 | 0.0 | 16091.8 |
| | % Fixture | 99.3 | 0.0 | 99.3 |
| **Total** | Lumens | 16207.6 | 0.0 | 16207.6 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 5.6 | 0.0 |
| 10°-20° | 27.3 | 0.2 |
| 20°-30° | 350.8 | 2.2 |
| 30°-40° | 1093.8 | 6.7 |
| 40°-50° | 3572.5 | 22.0 |
| 50°-60° | 5734.2 | 35.4 |
| 60°-70° | 4402.8 | 27.2 |
| 70°-80° | 1002.6 | 6.2 |
| 80°-90° | 17.9 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 16207.6 | 100.0 |
| 0°-180° | 16207.6 | 100.0 |

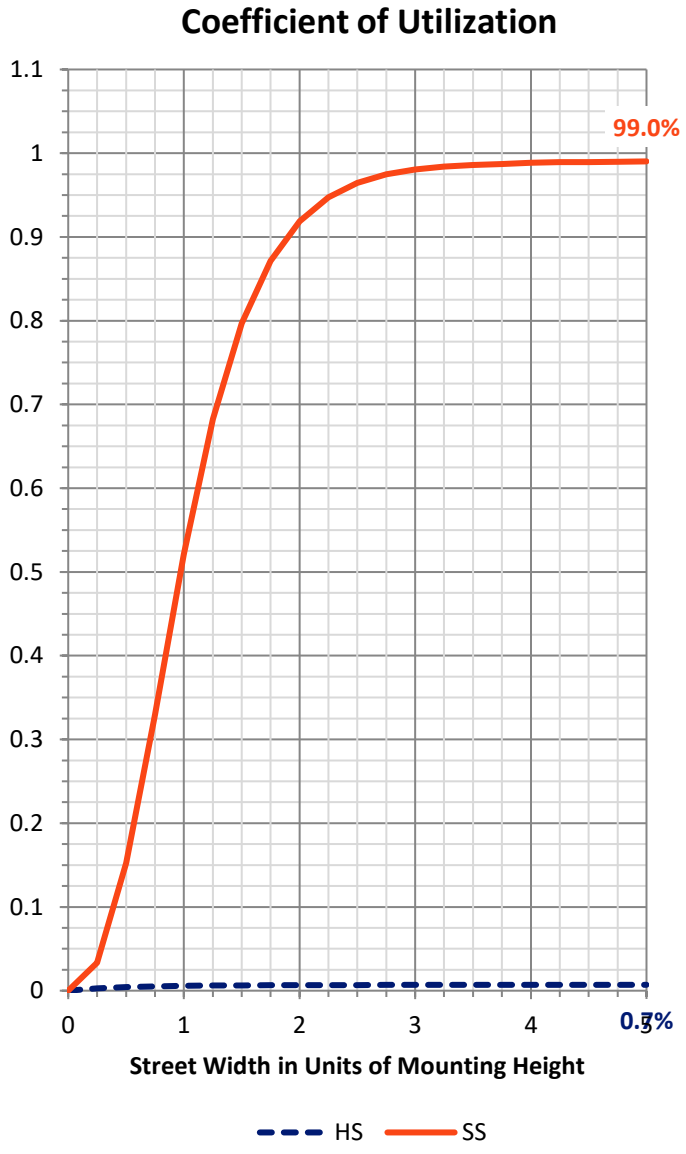

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 367.1 | 2.3 | | | |
| FM | (30°-60°) | 10351.8 | 63.9 | | | |
| FH | (60°-80°) | 5360.3 | 33.1 | | | G3/7500 |
| FVH | (80°-90°) | 12.7 | 0.1 | | | G1/100 |
| BL | (0°-30°) | 16.6 | 0.1 | B0/110 | | |
| BM | (30°-60°) | 48.8 | 0.3 | B0/220 | | |
| BH | (60°-80°) | 45.1 | 0.3 | B0/110 | | G0/110 |
| BVH | (80°-90°) | 5.2 | 0.0 | | | G0/10 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B0-U0-G3**
Type III Short

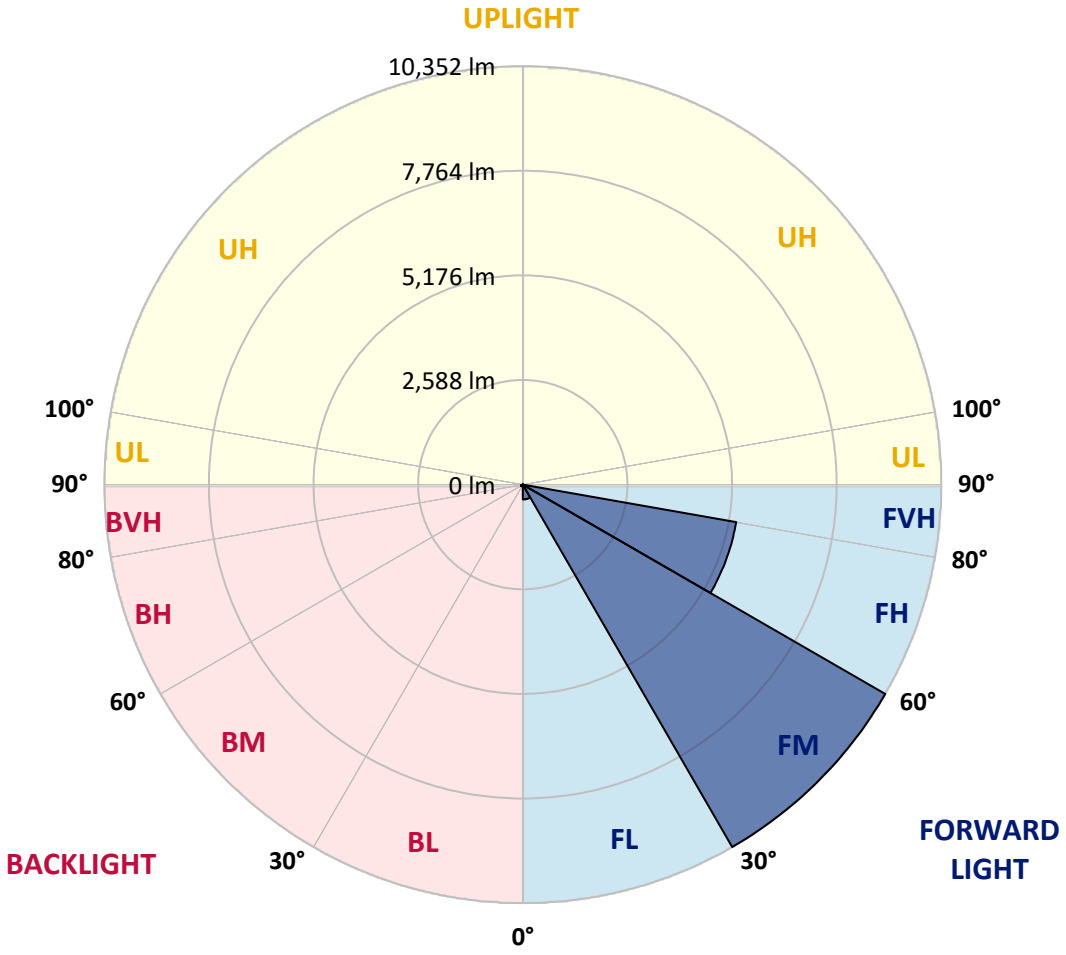

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 54.8 | 54.8 | 54.8 | 54.8 | 54.8 | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 |
| 5° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 54.8 | 54.8 | 54.8 | 54.8 | 49.9 | 49.9 |
| 7.5° | 69.8 | 69.8 | 64.8 | 64.8 | 64.8 | 59.8 | 59.8 | 59.8 | 59.8 | 54.8 | 54.8 |
| 10° | 79.8 | 79.8 | 74.8 | 74.8 | 69.8 | 69.8 | 64.8 | 64.8 | 59.8 | 59.8 | 54.8 |
| 12.5° | 89.7 | 89.7 | 84.8 | 79.8 | 79.8 | 74.8 | 69.8 | 64.8 | 64.8 | 59.8 | 54.8 |
| 15° | 99.7 | 94.7 | 89.7 | 84.8 | 84.8 | 79.8 | 74.8 | 69.8 | 69.8 | 64.8 | 59.8 |
| 17.5° | 109.7 | 104.7 | 99.7 | 94.7 | 89.7 | 79.8 | 74.8 | 69.8 | 69.8 | 64.8 | 59.8 |
| 20° | 119.7 | 109.7 | 99.7 | 94.7 | 89.7 | 79.8 | 74.8 | 69.8 | 69.8 | 64.8 | 59.8 |
| 22.5° | 134.6 | 124.6 | 109.7 | 104.7 | 94.7 | 89.7 | 79.8 | 74.8 | 69.8 | 64.8 | 59.8 |
| 25° | 154.5 | 134.6 | 119.7 | 109.7 | 99.7 | 89.7 | 79.8 | 74.8 | 69.8 | 64.8 | 59.8 |
| 27.5° | 189.4 | 159.5 | 134.6 | 124.6 | 109.7 | 99.7 | 84.8 | 79.8 | 74.8 | 69.8 | 64.8 |
| 30° | 254.3 | 199.4 | 144.6 | 129.6 | 119.7 | 104.7 | 89.7 | 84.8 | 74.8 | 69.8 | 59.8 |
| 32.5° | 314.1 | 244.3 | 174.5 | 154.5 | 134.6 | 109.7 | 89.7 | 84.8 | 74.8 | 69.8 | 59.8 |
| 35° | 314.1 | 249.3 | 184.5 | 159.5 | 139.6 | 114.7 | 89.7 | 84.8 | 74.8 | 69.8 | 59.8 |
| 37.5° | 309.1 | 244.3 | 179.5 | 159.5 | 139.6 | 114.7 | 94.7 | 84.8 | 79.8 | 69.8 | 59.8 |
| 40° | 324.1 | 239.3 | 159.5 | 144.6 | 129.6 | 109.7 | 94.7 | 84.8 | 79.8 | 69.8 | 59.8 |
| 42.5° | 354.0 | 254.3 | 154.5 | 139.6 | 129.6 | 114.7 | 99.7 | 89.7 | 79.8 | 69.8 | 59.8 |
| 45° | 443.7 | 299.1 | 159.5 | 144.6 | 129.6 | 109.7 | 94.7 | 89.7 | 79.8 | 74.8 | 64.8 |
| 47.5° | 802.7 | 483.6 | 164.5 | 144.6 | 129.6 | 109.7 | 89.7 | 84.8 | 79.8 | 69.8 | 64.8 |
| 50° | 1256.3 | 712.9 | 169.5 | 149.6 | 129.6 | 109.7 | 89.7 | 84.8 | 79.8 | 74.8 | 69.8 |
| 52.5° | 1366.0 | 777.7 | 189.4 | 164.5 | 139.6 | 114.7 | 89.7 | 84.8 | 79.8 | 74.8 | 69.8 |
| 55° | 1231.4 | 722.9 | 219.4 | 189.4 | 154.5 | 124.6 | 89.7 | 84.8 | 79.8 | 74.8 | 69.8 |
| 57.5° | *1042.0* | *643.1* | *244.3* | *209.4* | *169.5* | *134.6* | *94.7* | *89.7* | *84.8* | *79.8* | *74.8* |
| 60° | 782.7 | 533.4 | 284.2 | 239.3 | 199.4 | 154.5 | 109.7 | 104.7 | 99.7 | 89.7 | 84.8 |
| 62.5° | 638.1 | 473.6 | 314.1 | 269.2 | 219.4 | 174.5 | 124.6 | 119.7 | 114.7 | 104.7 | 99.7 |
| 65° | 563.4 | 448.7 | 334.0 | 284.2 | 234.3 | 179.5 | 129.6 | 124.6 | 119.7 | 114.7 | 109.7 |
| 67.5° | 523.5 | 433.7 | 349.0 | 294.1 | 244.3 | 189.4 | 134.6 | 129.6 | 124.6 | 119.7 | 114.7 |
| 70° | 503.5 | 423.8 | 344.0 | 294.1 | 244.3 | 194.4 | 144.6 | 139.6 | 129.6 | 124.6 | 114.7 |
| 72.5° | 468.6 | 403.8 | 339.0 | 299.1 | 254.3 | 214.4 | 169.5 | 154.5 | 139.6 | 119.7 | 104.7 |
| 75° | 418.8 | 359.0 | 299.1 | 274.2 | 249.3 | 219.4 | 194.4 | 169.5 | 144.6 | 114.7 | 89.7 |
| 77.5° | 304.1 | 279.2 | 254.3 | 239.3 | 224.3 | 204.4 | 189.4 | 164.5 | 139.6 | 109.7 | 84.8 |
| 80° | 119.7 | 134.6 | 144.6 | 144.6 | 149.6 | 149.6 | 149.6 | 129.6 | 109.7 | 89.7 | 69.8 |
| 82.5° | 34.9 | 34.9 | 34.9 | 39.9 | 44.9 | 49.9 | 54.8 | 49.9 | 49.9 | 44.9 | 39.9 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 49.9 | 49.9 | 44.9 | 44.9 | 44.9 | 44.9 | 44.9 | 44.9 | 44.9 | 44.9 | 44.9 |
| 5° | 49.9 | 49.9 | 44.9 | 44.9 | 44.9 | 44.9 | 39.9 | 39.9 | 39.9 | 39.9 | 39.9 |
| 7.5° | 54.8 | 49.9 | 49.9 | 44.9 | 44.9 | 44.9 | 39.9 | 39.9 | 39.9 | 39.9 | 39.9 |
| 10° | 54.8 | 49.9 | 49.9 | 44.9 | 44.9 | 44.9 | 39.9 | 39.9 | 39.9 | 39.9 | 34.9 |
| 12.5° | 54.8 | 54.8 | 49.9 | 49.9 | 49.9 | 44.9 | 44.9 | 39.9 | 39.9 | 39.9 | 34.9 |
| 15° | 54.8 | 54.8 | 49.9 | 44.9 | 44.9 | 44.9 | 39.9 | 39.9 | 39.9 | 39.9 | 34.9 |
| 17.5° | 54.8 | 54.8 | 49.9 | 44.9 | 44.9 | 39.9 | 39.9 | 34.9 | 34.9 | 34.9 | 29.9 |
| 20° | 54.8 | 54.8 | 49.9 | 44.9 | 44.9 | 39.9 | 39.9 | 34.9 | 34.9 | 34.9 | 29.9 |
| 22.5° | 54.8 | 54.8 | 49.9 | 44.9 | 44.9 | 39.9 | 39.9 | 34.9 | 34.9 | 29.9 | 29.9 |
| 25° | 54.8 | 54.8 | 49.9 | 44.9 | 39.9 | 39.9 | 34.9 | 29.9 | 29.9 | 24.9 | 24.9 |
| 27.5° | 59.8 | 54.8 | 49.9 | 44.9 | 39.9 | 39.9 | 34.9 | 29.9 | 24.9 | 24.9 | 19.9 |
| 30° | 54.8 | 54.8 | 49.9 | 44.9 | 39.9 | 34.9 | 29.9 | 24.9 | 19.9 | 19.9 | 15.0 |
| 32.5° | 54.8 | 54.8 | 49.9 | 44.9 | 39.9 | 34.9 | 29.9 | 24.9 | 19.9 | 19.9 | 15.0 |
| 35° | 54.8 | 49.9 | 44.9 | 39.9 | 34.9 | 29.9 | 24.9 | 19.9 | 15.0 | 15.0 | 10.0 |
| 37.5° | 54.8 | 49.9 | 44.9 | 39.9 | 34.9 | 29.9 | 24.9 | 19.9 | 15.0 | 10.0 | 5.0 |
| 40° | 54.8 | 49.9 | 44.9 | 39.9 | 34.9 | 29.9 | 19.9 | 15.0 | 10.0 | 10.0 | 5.0 |
| 42.5° | 54.8 | 49.9 | 44.9 | 39.9 | 34.9 | 29.9 | 24.9 | 19.9 | 15.0 | 10.0 | 5.0 |
| 45° | 59.8 | 54.8 | 44.9 | 39.9 | 34.9 | 34.9 | 29.9 | 24.9 | 19.9 | 15.0 | 5.0 |
| 47.5° | 59.8 | 49.9 | 44.9 | 34.9 | 34.9 | 34.9 | 29.9 | 29.9 | 24.9 | 15.0 | 10.0 |
| 50° | 64.8 | 54.8 | 49.9 | 39.9 | 34.9 | 34.9 | 29.9 | 24.9 | 19.9 | 15.0 | 5.0 |
| 52.5° | 64.8 | 59.8 | 49.9 | 44.9 | 39.9 | 29.9 | 24.9 | 15.0 | 10.0 | 10.0 | 5.0 |
| 55° | 64.8 | 64.8 | 59.8 | 54.8 | 44.9 | 34.9 | 19.9 | 10.0 | 10.0 | 5.0 | 5.0 |
| 57.5° | *69.8* | *69.8* | *64.8* | *59.8* | *44.9* | *29.9* | *15.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 79.8 | 74.8 | 69.8 | 64.8 | 49.9 | 34.9 | 15.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 89.7 | 79.8 | 69.8 | 59.8 | 44.9 | 29.9 | 15.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 94.7 | 79.8 | 64.8 | 49.9 | 39.9 | 24.9 | 15.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 99.7 | 79.8 | 64.8 | 44.9 | 34.9 | 24.9 | 10.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 94.7 | 74.8 | 54.8 | 34.9 | 24.9 | 19.9 | 10.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 84.8 | 69.8 | 49.9 | 29.9 | 24.9 | 15.0 | 10.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 74.8 | 59.8 | 39.9 | 24.9 | 19.9 | 15.0 | 5.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 69.8 | 49.9 | 34.9 | 15.0 | 10.0 | 10.0 | 5.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 54.8 | 39.9 | 19.9 | 5.0 | 5.0 | 5.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 29.9 | 19.9 | 10.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 44.9 | 44.9 | 44.9 | 39.9 | 39.9 | 39.9 | 39.9 | 39.9 | 39.9 | 39.9 | 39.9 |
| 5° | 39.9 | 39.9 | 39.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 |
| 7.5° | 39.9 | 39.9 | 39.9 | 34.9 | 34.9 | 34.9 | 34.9 | 29.9 | 29.9 | 29.9 | 29.9 |
| 10° | 34.9 | 34.9 | 34.9 | 29.9 | 29.9 | 29.9 | 29.9 | 24.9 | 24.9 | 24.9 | 24.9 |
| 12.5° | 34.9 | 34.9 | 34.9 | 29.9 | 29.9 | 29.9 | 29.9 | 24.9 | 24.9 | 24.9 | 24.9 |
| 15° | 34.9 | 34.9 | 34.9 | 29.9 | 29.9 | 29.9 | 24.9 | 24.9 | 19.9 | 19.9 | 19.9 |
| 17.5° | 29.9 | 29.9 | 29.9 | 24.9 | 24.9 | 24.9 | 24.9 | 19.9 | 19.9 | 19.9 | 15.0 |
| 20° | 29.9 | 29.9 | 29.9 | 24.9 | 24.9 | 19.9 | 19.9 | 15.0 | 10.0 | 10.0 | 10.0 |
| 22.5° | 24.9 | 24.9 | 19.9 | 19.9 | 15.0 | 15.0 | 10.0 | 10.0 | 5.0 | 5.0 | 5.0 |
| 25° | 19.9 | 19.9 | 15.0 | 15.0 | 10.0 | 10.0 | 5.0 | 5.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 15.0 | 10.0 | 10.0 | 5.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 10.0 | 10.0 | 5.0 | 5.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 10.0 | 10.0 | 5.0 | 5.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 5.0 | 5.0 | 5.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 39.9 | 39.9 | 39.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 |
| 5° | 29.9 | 29.9 | 29.9 | 29.9 | 29.9 | 29.9 | 29.9 | 29.9 | 29.9 | 29.9 | 29.9 |
| 7.5° | 24.9 | 24.9 | 24.9 | 24.9 | 24.9 | 24.9 | 24.9 | 24.9 | 19.9 | 19.9 | 19.9 |
| 10° | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 15.0 | 15.0 | 15.0 |
| 12.5° | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 15.0 | 15.0 | 15.0 | 10.0 | 10.0 | 10.0 |
| 15° | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 10.0 | 10.0 | 10.0 | 5.0 | 5.0 | 5.0 |
| 17.5° | 15.0 | 10.0 | 10.0 | 10.0 | 10.0 | 5.0 | 5.0 | 5.0 | 0.0 | 0.0 | 0.0 |
| 20° | 5.0 | 5.0 | 5.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 | 34.9 |
| 5° | 29.9 | 24.9 | 24.9 | 24.9 | 24.9 | 24.9 | 24.9 | 24.9 | 24.9 | 24.9 | 24.9 |
| 7.5° | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 | 19.9 |
| 10° | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 |
| 12.5° | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 5.0 | 5.0 |
| 15° | 5.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 34.9 | 39.9 | 39.9 | 39.9 | 39.9 | 44.9 | 44.9 | 44.9 | 49.9 | 49.9 | 54.8 |
| 5° | 24.9 | 29.9 | 29.9 | 29.9 | 29.9 | 34.9 | 34.9 | 34.9 | 39.9 | 39.9 | 44.9 |
| 7.5° | 19.9 | 24.9 | 24.9 | 24.9 | 24.9 | 29.9 | 29.9 | 29.9 | 34.9 | 34.9 | 39.9 |
| 10° | 15.0 | 15.0 | 15.0 | 15.0 | 19.9 | 19.9 | 24.9 | 24.9 | 29.9 | 29.9 | 34.9 |
| 12.5° | 5.0 | 10.0 | 10.0 | 10.0 | 10.0 | 15.0 | 15.0 | 15.0 | 19.9 | 24.9 | 24.9 |
| 15° | 0.0 | 5.0 | 5.0 | 5.0 | 5.0 | 10.0 | 10.0 | 10.0 | 15.0 | 19.9 | 19.9 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 10.0 | 10.0 | 15.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 54.8 | 59.8 | 59.8 | 64.8 | 64.8 | 69.8 | 69.8 | 74.8 | 74.8 | 74.8 | 79.8 |
| 5° | 44.9 | 49.9 | 54.8 | 54.8 | 59.8 | 64.8 | 64.8 | 69.8 | 69.8 | 69.8 | 74.8 |
| 7.5° | 39.9 | 44.9 | 49.9 | 49.9 | 54.8 | 59.8 | 59.8 | 64.8 | 64.8 | 64.8 | 69.8 |
| 10° | 34.9 | 39.9 | 44.9 | 44.9 | 49.9 | 54.8 | 54.8 | 59.8 | 59.8 | 64.8 | 64.8 |
| 12.5° | 29.9 | 34.9 | 39.9 | 39.9 | 44.9 | 49.9 | 49.9 | 54.8 | 59.8 | 59.8 | 64.8 |
| 15° | 24.9 | 29.9 | 34.9 | 34.9 | 39.9 | 44.9 | 49.9 | 54.8 | 54.8 | 59.8 | 59.8 |
| 17.5° | 15.0 | 19.9 | 24.9 | 29.9 | 34.9 | 39.9 | 44.9 | 49.9 | 49.9 | 54.8 | 59.8 |
| 20° | 10.0 | 15.0 | 19.9 | 24.9 | 29.9 | 34.9 | 34.9 | 39.9 | 44.9 | 49.9 | 49.9 |
| 22.5° | 5.0 | 10.0 | 15.0 | 15.0 | 19.9 | 24.9 | 29.9 | 34.9 | 34.9 | 39.9 | 44.9 |
| 25° | 0.0 | 5.0 | 10.0 | 10.0 | 15.0 | 19.9 | 19.9 | 24.9 | 29.9 | 34.9 | 34.9 |
| 27.5° | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 | 15.0 | 19.9 | 24.9 | 24.9 | 29.9 | 29.9 |
| 30° | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 | 15.0 | 15.0 | 19.9 | 19.9 | 24.9 | 29.9 |
| 32.5° | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 10.0 | 15.0 | 19.9 | 19.9 | 24.9 | 24.9 |
| 35° | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 10.0 | 10.0 | 15.0 | 15.0 | 19.9 | 19.9 |
| 37.5° | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 10.0 | 10.0 | 15.0 | 15.0 | 19.9 | 19.9 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 10.0 | 15.0 | 15.0 | 15.0 | 19.9 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 | 15.0 | 15.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 | 15.0 | 15.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 | 15.0 | 15.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 | 15.0 | 15.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 | 10.0 | 15.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 | 10.0 | 15.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *5.0* | *5.0* | *5.0* | *10.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 10.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 10.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 10.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 10.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 10.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 10.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 5.0 | 5.0 | 10.0 | 10.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 | 10.0 | 15.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 | 10.0 | 15.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 5.0 | 10.0 | 10.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 79.8 | 79.8 | 79.8 | 79.8 | 79.8 | 79.8 | 79.8 | 79.8 | 74.8 | 74.8 | 74.8 |
| 5° | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 69.8 | 69.8 | 69.8 |
| 7.5° | 69.8 | 69.8 | 69.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 69.8 | 69.8 | 69.8 |
| 10° | 69.8 | 69.8 | 69.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 69.8 | 69.8 | 69.8 |
| 12.5° | 64.8 | 64.8 | 64.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 |
| 15° | 64.8 | 64.8 | 64.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 |
| 17.5° | 59.8 | 64.8 | 64.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 |
| 20° | 54.8 | 54.8 | 59.8 | 59.8 | 64.8 | 64.8 | 64.8 | 69.8 | 69.8 | 69.8 | 69.8 |
| 22.5° | 44.9 | 49.9 | 54.8 | 54.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 25° | 39.9 | 39.9 | 44.9 | 49.9 | 49.9 | 54.8 | 54.8 | 54.8 | 54.8 | 54.8 | 54.8 |
| 27.5° | 34.9 | 34.9 | 39.9 | 39.9 | 44.9 | 44.9 | 44.9 | 49.9 | 49.9 | 49.9 | 49.9 |
| 30° | 29.9 | 34.9 | 34.9 | 39.9 | 39.9 | 39.9 | 44.9 | 44.9 | 49.9 | 49.9 | 49.9 |
| 32.5° | 29.9 | 29.9 | 34.9 | 34.9 | 39.9 | 39.9 | 39.9 | 44.9 | 44.9 | 44.9 | 44.9 |
| 35° | 24.9 | 24.9 | 29.9 | 29.9 | 34.9 | 34.9 | 39.9 | 39.9 | 44.9 | 44.9 | 44.9 |
| 37.5° | 24.9 | 24.9 | 29.9 | 29.9 | 34.9 | 34.9 | 34.9 | 39.9 | 39.9 | 39.9 | 44.9 |
| 40° | 19.9 | 19.9 | 24.9 | 24.9 | 29.9 | 29.9 | 34.9 | 34.9 | 39.9 | 39.9 | 44.9 |
| 42.5° | 19.9 | 19.9 | 24.9 | 24.9 | 29.9 | 29.9 | 34.9 | 34.9 | 39.9 | 39.9 | 44.9 |
| 45° | 19.9 | 19.9 | 24.9 | 24.9 | 29.9 | 29.9 | 34.9 | 34.9 | 39.9 | 39.9 | 44.9 |
| 47.5° | 19.9 | 19.9 | 24.9 | 24.9 | 29.9 | 29.9 | 29.9 | 34.9 | 34.9 | 34.9 | 39.9 |
| 50° | 19.9 | 19.9 | 19.9 | 24.9 | 24.9 | 24.9 | 29.9 | 29.9 | 34.9 | 34.9 | 39.9 |
| 52.5° | 15.0 | 15.0 | 15.0 | 19.9 | 19.9 | 19.9 | 24.9 | 24.9 | 29.9 | 29.9 | 34.9 |
| 55° | 15.0 | 15.0 | 15.0 | 19.9 | 19.9 | 19.9 | 19.9 | 24.9 | 24.9 | 24.9 | 29.9 |
| 57.5° | *10.0* | *10.0* | *10.0* | *15.0* | *15.0* | *15.0* | *15.0* | *19.9* | *19.9* | *19.9* | *24.9* |
| 60° | 10.0 | 10.0 | 10.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 19.9 |
| 62.5° | 10.0 | 10.0 | 10.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 19.9 |
| 65° | 10.0 | 10.0 | 10.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 19.9 |
| 67.5° | 10.0 | 10.0 | 10.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 19.9 |
| 70° | 10.0 | 10.0 | 10.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 19.9 |
| 72.5° | 10.0 | 10.0 | 10.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 19.9 |
| 75° | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 |
| 77.5° | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 |
| 80° | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 |
| 82.5° | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 |
| 85° | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 |
| 87.5° | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 69.8 | 69.8 | 69.8 | 74.8 | 74.8 | 74.8 |
| 5° | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 |
| 7.5° | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 64.8 | 64.8 | 64.8 | 69.8 | 69.8 | 69.8 |
| 10° | 69.8 | 64.8 | 64.8 | 64.8 | 64.8 | 64.8 | 64.8 | 64.8 | 69.8 | 69.8 | 69.8 |
| 12.5° | 69.8 | 64.8 | 64.8 | 64.8 | 64.8 | 64.8 | 64.8 | 64.8 | 69.8 | 69.8 | 69.8 |
| 15° | 69.8 | 64.8 | 64.8 | 64.8 | 64.8 | 64.8 | 64.8 | 69.8 | 69.8 | 74.8 | 74.8 |
| 17.5° | 64.8 | 64.8 | 59.8 | 59.8 | 64.8 | 64.8 | 64.8 | 64.8 | 69.8 | 69.8 | 69.8 |
| 20° | 64.8 | 64.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 64.8 | 64.8 | 69.8 | 69.8 |
| 22.5° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 64.8 | 64.8 | 69.8 | 69.8 |
| 25° | 54.8 | 54.8 | 54.8 | 54.8 | 59.8 | 59.8 | 59.8 | 64.8 | 69.8 | 69.8 | 74.8 |
| 27.5° | 54.8 | 54.8 | 54.8 | 54.8 | 59.8 | 59.8 | 59.8 | 64.8 | 69.8 | 69.8 | 74.8 |
| 30° | 54.8 | 54.8 | 54.8 | 54.8 | 59.8 | 59.8 | 59.8 | 64.8 | 69.8 | 69.8 | 74.8 |
| 32.5° | 49.9 | 49.9 | 49.9 | 54.8 | 54.8 | 59.8 | 59.8 | 64.8 | 69.8 | 69.8 | 74.8 |
| 35° | 49.9 | 49.9 | 49.9 | 54.8 | 54.8 | 59.8 | 59.8 | 64.8 | 69.8 | 69.8 | 74.8 |
| 37.5° | 44.9 | 49.9 | 49.9 | 54.8 | 59.8 | 59.8 | 64.8 | 69.8 | 74.8 | 74.8 | 79.8 |
| 40° | 44.9 | 49.9 | 49.9 | 54.8 | 59.8 | 59.8 | 64.8 | 69.8 | 74.8 | 74.8 | 79.8 |
| 42.5° | 44.9 | 49.9 | 49.9 | 54.8 | 59.8 | 59.8 | 64.8 | 69.8 | 74.8 | 79.8 | 84.8 |
| 45° | 49.9 | 49.9 | 54.8 | 59.8 | 59.8 | 64.8 | 64.8 | 69.8 | 74.8 | 79.8 | 84.8 |
| 47.5° | 49.9 | 54.8 | 59.8 | 59.8 | 64.8 | 64.8 | 64.8 | 69.8 | 79.8 | 84.8 | 89.7 |
| 50° | 44.9 | 49.9 | 54.8 | 59.8 | 59.8 | 64.8 | 64.8 | 69.8 | 79.8 | 84.8 | 89.7 |
| 52.5° | 39.9 | 39.9 | 44.9 | 49.9 | 59.8 | 64.8 | 69.8 | 74.8 | 84.8 | 89.7 | 94.7 |
| 55° | 34.9 | 34.9 | 39.9 | 49.9 | 59.8 | 69.8 | 79.8 | 84.8 | 89.7 | 89.7 | 94.7 |
| 57.5° | *29.9* | *29.9* | *34.9* | *49.9* | *64.8* | *79.8* | *94.7* | *94.7* | *99.7* | *99.7* | *99.7* |
| 60° | 24.9 | 24.9 | 29.9 | 44.9 | 64.8 | 79.8 | 94.7 | 99.7 | 104.7 | 104.7 | 109.7 |
| 62.5° | 24.9 | 24.9 | 29.9 | 44.9 | 59.8 | 69.8 | 84.8 | 94.7 | 104.7 | 114.7 | 124.6 |
| 65° | 19.9 | 24.9 | 24.9 | 39.9 | 49.9 | 64.8 | 74.8 | 89.7 | 104.7 | 119.7 | 134.6 |
| 67.5° | 19.9 | 24.9 | 24.9 | 34.9 | 49.9 | 59.8 | 69.8 | 84.8 | 104.7 | 119.7 | 134.6 |
| 70° | 24.9 | 24.9 | 29.9 | 39.9 | 44.9 | 54.8 | 59.8 | 79.8 | 94.7 | 114.7 | 129.6 |
| 72.5° | 19.9 | 24.9 | 24.9 | 34.9 | 39.9 | 49.9 | 54.8 | 74.8 | 89.7 | 109.7 | 124.6 |
| 75° | 19.9 | 19.9 | 19.9 | 29.9 | 34.9 | 44.9 | 49.9 | 64.8 | 84.8 | 99.7 | 114.7 |
| 77.5° | 15.0 | 15.0 | 15.0 | 24.9 | 29.9 | 39.9 | 44.9 | 59.8 | 79.8 | 94.7 | 109.7 |
| 80° | 15.0 | 15.0 | 15.0 | 19.9 | 24.9 | 24.9 | 29.9 | 44.9 | 64.8 | 79.8 | 94.7 |
| 82.5° | 15.0 | 10.0 | 10.0 | 15.0 | 15.0 | 19.9 | 19.9 | 29.9 | 39.9 | 49.9 | 59.8 |
| 85° | 15.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 |
| 87.5° | 15.0 | 10.0 | 10.0 | 10.0 | 10.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 79.8 | 79.8 | 79.8 | 79.8 | 79.8 | 79.8 |
| 5° | 74.8 | 74.8 | 79.8 | 79.8 | 79.8 | 84.8 | 84.8 | 84.8 | 84.8 | 84.8 | 84.8 |
| 7.5° | 74.8 | 74.8 | 79.8 | 79.8 | 79.8 | 84.8 | 84.8 | 84.8 | 89.7 | 89.7 | 94.7 |
| 10° | 74.8 | 74.8 | 79.8 | 79.8 | 84.8 | 84.8 | 89.7 | 89.7 | 94.7 | 94.7 | 99.7 |
| 12.5° | 74.8 | 79.8 | 79.8 | 84.8 | 89.7 | 94.7 | 94.7 | 99.7 | 104.7 | 104.7 | 109.7 |
| 15° | 79.8 | 79.8 | 84.8 | 84.8 | 89.7 | 94.7 | 99.7 | 104.7 | 109.7 | 114.7 | 119.7 |
| 17.5° | 74.8 | 79.8 | 84.8 | 89.7 | 94.7 | 99.7 | 104.7 | 109.7 | 119.7 | 124.6 | 134.6 |
| 20° | 74.8 | 79.8 | 84.8 | 89.7 | 94.7 | 104.7 | 109.7 | 114.7 | 124.6 | 134.6 | 149.6 |
| 22.5° | 74.8 | 79.8 | 84.8 | 89.7 | 99.7 | 109.7 | 114.7 | 124.6 | 139.6 | 149.6 | 169.5 |
| 25° | 79.8 | 84.8 | 89.7 | 94.7 | 104.7 | 114.7 | 124.6 | 134.6 | 154.5 | 169.5 | 214.4 |
| 27.5° | 79.8 | 89.7 | 94.7 | 99.7 | 109.7 | 124.6 | 134.6 | 144.6 | 174.5 | 199.4 | 299.1 |
| 30° | 79.8 | 89.7 | 94.7 | 99.7 | 114.7 | 129.6 | 144.6 | 159.5 | 209.4 | 254.3 | 423.8 |
| 32.5° | 79.8 | 89.7 | 94.7 | 99.7 | 119.7 | 144.6 | 164.5 | 184.5 | 249.3 | 314.1 | 513.5 |
| 35° | 84.8 | 89.7 | 99.7 | 104.7 | 129.6 | 154.5 | 174.5 | 199.4 | 259.2 | 319.1 | 558.4 |
| 37.5° | 89.7 | 94.7 | 104.7 | 109.7 | 129.6 | 149.6 | 169.5 | 189.4 | 254.3 | 314.1 | 613.2 |
| 40° | 89.7 | 99.7 | 104.7 | 114.7 | 129.6 | 149.6 | 164.5 | 179.5 | 249.3 | 319.1 | 707.9 |
| 42.5° | 94.7 | 104.7 | 109.7 | 119.7 | 134.6 | 149.6 | 159.5 | 174.5 | 264.2 | 354.0 | 922.3 |
| 45° | 94.7 | 99.7 | 109.7 | 114.7 | 129.6 | 144.6 | 159.5 | 174.5 | 334.0 | 488.6 | 1465.7 |
| 47.5° | 94.7 | 99.7 | 104.7 | 109.7 | 129.6 | 149.6 | 164.5 | 184.5 | 493.6 | 802.7 | 2422.9 |
| 50° | 94.7 | 99.7 | 99.7 | 104.7 | 124.6 | 149.6 | 169.5 | 189.4 | 643.1 | 1091.8 | 3494.8 |
| 52.5° | 99.7 | 104.7 | 104.7 | 109.7 | 134.6 | 159.5 | 184.5 | 209.4 | 737.8 | 1266.3 | 3793.9 |
| 55° | 99.7 | 104.7 | 104.7 | 109.7 | 149.6 | 189.4 | 224.3 | 264.2 | 777.7 | 1286.2 | 3484.8 |
| 57.5° | *104.7* | *109.7* | *114.7* | *119.7* | *159.5* | *204.4* | *244.3* | *284.2* | *742.8* | *1201.5* | *2856.7* |
| 60° | 119.7 | 124.6 | 134.6 | 139.6 | 184.5 | 229.3 | 269.2 | 314.1 | 593.3 | 872.5 | 2248.4 |
| 62.5° | 134.6 | 139.6 | 149.6 | 154.5 | 199.4 | 244.3 | 289.2 | 334.0 | 523.5 | 707.9 | 1675.1 |
| 65° | 139.6 | 149.6 | 154.5 | 159.5 | 204.4 | 254.3 | 299.1 | 344.0 | 478.6 | 608.2 | 1241.4 |
| 67.5° | 144.6 | 154.5 | 159.5 | 169.5 | 214.4 | 259.2 | 304.1 | 349.0 | 453.7 | 553.4 | 922.3 |
| 70° | 144.6 | 154.5 | 169.5 | 179.5 | 219.4 | 259.2 | 294.1 | 334.0 | 418.8 | 498.5 | 707.9 |
| 72.5° | 144.6 | 164.5 | 184.5 | 204.4 | 234.3 | 264.2 | 289.2 | 319.1 | 383.9 | 443.7 | 548.4 |
| 75° | 144.6 | 174.5 | 199.4 | 229.3 | 244.3 | 259.2 | 274.2 | 289.2 | 334.0 | 373.9 | 433.7 |
| 77.5° | 139.6 | 164.5 | 194.4 | 219.4 | 224.3 | 229.3 | 234.3 | 239.3 | 239.3 | 239.3 | 239.3 |
| 80° | 114.7 | 139.6 | 159.5 | 179.5 | 169.5 | 154.5 | 144.6 | 129.6 | 119.7 | 109.7 | 119.7 |
| 82.5° | 59.8 | 64.8 | 64.8 | 64.8 | 59.8 | 59.8 | 54.8 | 49.9 | 49.9 | 44.9 | 44.9 |
| 85° | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 |
| 87.5° | 5.0 | 5.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 79.8 | 79.8 | 79.8 | 79.8 | 79.8 | 79.8 | 79.8 | 74.8 | 74.8 | 74.8 | 74.8 |
| 5° | 84.8 | 84.8 | 84.8 | 84.8 | 84.8 | 84.8 | 84.8 | 79.8 | 79.8 | 79.8 | 79.8 |
| 7.5° | 94.7 | 94.7 | 94.7 | 94.7 | 94.7 | 94.7 | 94.7 | 94.7 | 94.7 | 94.7 | 94.7 |
| 10° | 99.7 | 104.7 | 104.7 | 109.7 | 109.7 | 109.7 | 114.7 | 114.7 | 114.7 | 114.7 | 114.7 |
| 12.5° | 114.7 | 119.7 | 119.7 | 124.6 | 124.6 | 129.6 | 129.6 | 134.6 | 134.6 | 134.6 | 139.6 |
| 15° | 124.6 | 129.6 | 134.6 | 139.6 | 144.6 | 154.5 | 159.5 | 169.5 | 174.5 | 179.5 | 184.5 |
| 17.5° | 144.6 | 154.5 | 169.5 | 179.5 | 189.4 | 209.4 | 229.3 | 244.3 | 264.2 | 289.2 | 319.1 |
| 20° | 159.5 | 194.4 | 224.3 | 259.2 | 289.2 | 378.9 | 468.6 | 558.4 | 648.1 | 767.8 | 887.4 |
| 22.5° | 189.4 | 299.1 | 413.8 | 523.5 | 633.2 | 927.3 | 1216.4 | 1505.6 | 1799.7 | 2078.9 | 2358.1 |
| 25° | 259.2 | 493.6 | 732.9 | 967.2 | 1201.5 | 1695.0 | 2183.6 | 2672.2 | 3165.8 | 3639.4 | 4118.0 |
| 27.5° | 393.8 | 772.7 | 1151.6 | 1530.5 | 1909.4 | 2557.5 | 3200.6 | 3843.8 | 4491.9 | 5065.2 | 5633.5 |
| 30° | 593.3 | 1081.8 | 1570.4 | 2059.0 | 2547.6 | 3385.1 | 4222.7 | 5060.2 | 5897.8 | 6456.1 | 7014.5 |
| 32.5° | 707.9 | 1346.1 | 1984.2 | 2617.4 | 3255.5 | 4167.8 | 5080.2 | 5997.5 | 6909.8 | 7547.9 | 8186.1 |
| 35° | 792.7 | 1585.4 | 2373.1 | 3165.8 | 3953.4 | 4970.5 | 5987.5 | 7009.5 | 8026.5 | 8789.3 | 9552.1 |
| 37.5° | 907.3 | 1859.6 | 2806.8 | 3759.0 | 4706.3 | 5803.0 | 6899.8 | 8001.6 | 9098.4 | 10040.7 | 10987.9 |
| 40° | 1091.8 | 2223.5 | 3355.2 | 4481.9 | 5613.6 | 6989.6 | 8365.6 | 9741.5 | 11117.5 | 12368.9 | 13620.2 |
| 42.5° | 1490.6 | 2981.3 | 4476.9 | 5967.6 | 7458.2 | 9517.2 | 11571.2 | 13625.2 | 15684.2 | 17454.0 | 19223.8 |
| 45° | 2442.9 | 4761.1 | 7079.3 | 9397.5 | 11715.8 | 14178.6 | 16636.4 | 19099.2 | 21562.0 | 24179.4 | 26796.7 |
| 47.5° | 4043.2 | 7238.9 | 10434.5 | 13625.2 | 16820.9 | 19358.4 | 21891.0 | 24423.6 | 26961.2 | 29404.1 | 31847.0 |
| 50° | 5897.8 | 9337.7 | 12777.7 | 16217.6 | 19657.6 | 21925.9 | 24189.3 | 26452.7 | 28721.1 | 31119.1 | 33512.1 |
| 52.5° | 6321.5 | 9761.5 | 13201.4 | 16636.4 | 20076.3 | 22364.7 | 24653.0 | 26946.3 | 29234.6 | 31577.7 | 33925.9 |
| 55° | 5678.4 | 9088.4 | 12493.5 | 15903.5 | 19308.6 | 21821.2 | 24333.9 | 26846.6 | 29359.2 | 31986.5 | 34613.9 |
| 57.5° | *4511.8* | *7956.8* | *11396.7* | *14841.6* | *18281.6* | *21262.9* | *24239.2* | *27220.5* | *30201.8* | *32973.7* | *35745.6* |
| 60° | 3624.4 | 7139.1 | 10653.9 | 14168.6 | 17683.3 | 20864.0 | 24039.8 | 27215.5 | 30396.2 | 32754.3 | 35112.4 |
| 62.5° | 2642.3 | 6122.1 | 9601.9 | 13081.8 | 16561.6 | 19413.3 | 22265.0 | 25121.6 | 27973.3 | 29648.4 | 31323.5 |
| 65° | 1874.5 | 4950.5 | 8026.5 | 11097.6 | 14173.6 | 16152.8 | 18132.0 | 20111.2 | 22090.5 | 23541.2 | 24992.0 |
| 67.5° | 1291.2 | 3459.9 | 5623.6 | 7792.2 | 9955.9 | 11641.0 | 13321.1 | 15006.2 | 16691.2 | 17912.7 | 19139.1 |
| 70° | 917.3 | 2098.9 | 3280.4 | 4457.0 | 5638.5 | 7129.2 | 8619.8 | 10110.5 | 11601.1 | 13091.8 | 14587.4 |
| 72.5° | 653.1 | 1171.6 | 1685.1 | 2203.6 | 2717.1 | 4013.3 | 5309.5 | 6610.7 | 7906.9 | 8809.3 | 9716.6 |
| 75° | 493.6 | 633.2 | 767.8 | 907.3 | 1042.0 | 1356.0 | 1670.1 | 1984.2 | 2298.3 | 2617.4 | 2936.4 |
| 77.5° | 234.3 | 259.2 | 279.2 | 304.1 | 324.1 | 403.8 | 483.6 | 563.4 | 643.1 | 777.7 | 912.3 |
| 80° | 124.6 | 134.6 | 144.6 | 154.5 | 164.5 | 169.5 | 174.5 | 179.5 | 184.5 | 199.4 | 219.4 |
| 82.5° | 44.9 | 49.9 | 49.9 | 54.8 | 54.8 | 49.9 | 49.9 | 44.9 | 39.9 | 44.9 | 44.9 |
| 85° | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | *59.8* | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 69.8 | 69.8 | 69.8 | 69.8 | 64.8 | *64.8* | 64.8 | 64.8 | 59.8 | 59.8 | 59.8 |
| 5° | 79.8 | 79.8 | 79.8 | 79.8 | 74.8 | *74.8* | 74.8 | 74.8 | 69.8 | 69.8 | 69.8 |
| 7.5° | 94.7 | 94.7 | 94.7 | 94.7 | 89.7 | *89.7* | 89.7 | 89.7 | 84.8 | 84.8 | 84.8 |
| 10° | 114.7 | 114.7 | 114.7 | 114.7 | 114.7 | *114.7* | 114.7 | 114.7 | 109.7 | 109.7 | 109.7 |
| 12.5° | 139.6 | 139.6 | 139.6 | 139.6 | 139.6 | *139.6* | 139.6 | 139.6 | 134.6 | 134.6 | 134.6 |
| 15° | 184.5 | 189.4 | 194.4 | 199.4 | 199.4 | *204.4* | 199.4 | 194.4 | 189.4 | 184.5 | 179.5 |
| 17.5° | 344.0 | 368.9 | 378.9 | 383.9 | 393.8 | *398.8* | 393.8 | 383.9 | 378.9 | 368.9 | 344.0 |
| 20° | 1002.1 | 1121.7 | 1206.5 | 1291.2 | 1376.0 | *1460.7* | 1410.9 | 1361.0 | 1311.2 | 1261.3 | 1131.7 |
| 22.5° | 2637.3 | 2916.5 | 3110.9 | 3305.3 | 3499.8 | *3694.2* | 3559.6 | 3425.0 | 3285.4 | 3150.8 | 2821.8 |
| 25° | 4591.6 | 5065.2 | 5314.5 | 5568.7 | 5818.0 | *6067.3* | 5837.9 | 5608.6 | 5374.3 | 5145.0 | 4686.3 |
| 27.5° | 6206.9 | 6775.2 | 6989.6 | 7199.0 | 7413.3 | *7622.7* | 7418.3 | 7218.9 | 7014.5 | 6810.1 | 6276.7 |
| 30° | 7572.9 | 8131.2 | 8340.6 | 8550.0 | 8759.4 | *8968.8* | 8739.5 | 8505.2 | 8275.8 | 8041.5 | 7513.0 |
| 32.5° | 8819.2 | 9457.4 | 9746.5 | 10035.7 | 10324.8 | *10614.0* | 10270.0 | 9926.0 | 9582.0 | 9238.0 | 8634.8 |
| 35° | 10314.9 | 11077.6 | 11416.6 | 11760.6 | 12099.6 | *12438.7* | 12029.9 | 11616.1 | 11207.3 | 10793.5 | 10030.7 |
| 37.5° | 11930.1 | 12872.4 | 13326.1 | 13779.7 | 14233.4 | *14687.1* | 14178.6 | 13670.1 | 13161.5 | 12653.0 | 11680.9 |
| 40° | 14871.6 | 16122.9 | 16795.9 | 17464.0 | 18137.0 | *18805.1* | 18042.3 | 17274.5 | 16511.8 | 15744.0 | 14407.9 |
| 42.5° | 20988.7 | 22758.5 | 23715.7 | 24672.9 | 25630.1 | *26587.3* | 25475.6 | 24358.8 | 23247.1 | 22130.3 | 20285.7 |
| 45° | 29414.1 | 32031.4 | 33088.3 | 34140.3 | 35197.2 | *36249.1* | 34992.8 | 33736.4 | 32475.1 | 31218.8 | 28741.0 |
| 47.5° | 34289.8 | 36732.7 | 37769.7 | 38806.6 | 39838.6 | *40875.6* | 39694.0 | 38512.5 | 37330.9 | 36149.4 | 33731.5 |
| 50° | 35910.1 | 38303.1 | 39444.8 | 40591.4 | 41733.1 | *42874.7* | 41523.7 | 40167.6 | 38816.6 | 37460.6 | 35137.3 |
| 52.5° | 36269.0 | 38612.2 | 39958.3 | 41304.3 | 42645.4 | *43991.5* | 42431.0 | 40870.6 | 39305.2 | 37744.7 | 35441.5 |
| 55° | 37236.2 | 39863.5 | 41414.0 | 42959.5 | 44510.0 | *46055.4* | 44235.8 | 42411.1 | 40591.4 | 38766.7 | 36239.1 |
| 57.5° | *38517.5* | *41289.4* | *42705.2* | *44121.1* | *45532.0* | *46947.8* | *45188.0* | *43433.1* | *41673.2* | *39913.4* | *37276.1* |
| 60° | 37465.5 | 39823.7 | 41005.2 | 42181.8 | 43363.3 | *44539.9* | 42949.5 | 41364.2 | 39773.8 | 38183.4 | 35984.9 |
| 62.5° | 32993.6 | 34668.7 | 35581.0 | 36493.4 | 37400.7 | *38313.1* | 37006.9 | 35700.7 | 34394.5 | 33088.3 | 31493.0 |
| 65° | 26437.8 | 27888.5 | 28546.6 | 29199.7 | 29857.8 | *30510.9* | 29603.5 | 28696.2 | 27783.8 | 26876.5 | 25535.4 |
| 67.5° | 20360.5 | 21581.9 | 22599.0 | 23611.0 | 24628.0 | *25640.1* | 24538.3 | 23436.5 | 22329.8 | 21228.0 | 19941.7 |
| 70° | 16078.0 | 17568.7 | 18406.2 | 19243.8 | 20081.3 | *20918.9* | 19961.7 | 19004.5 | 18042.3 | 17085.1 | 15739.0 |
| 72.5° | 10619.0 | 11521.3 | 11820.5 | 12124.6 | 12423.7 | *12722.8* | 12373.8 | 12029.9 | 11680.9 | 11331.9 | 10479.4 |
| 75° | 3250.5 | 3569.6 | 3923.5 | 4282.5 | 4636.5 | *4990.4* | 4671.4 | 4352.3 | 4033.2 | 3714.1 | 3425.0 |
| 77.5° | 1042.0 | 1176.6 | 1281.3 | 1386.0 | 1485.7 | *1590.4* | 1595.3 | 1600.3 | 1600.3 | 1605.3 | 1450.8 |
| 80° | 234.3 | 249.3 | 249.3 | 249.3 | 244.3 | *244.3* | 269.2 | 289.2 | 314.1 | 334.0 | 314.1 |
| 82.5° | 49.9 | 49.9 | 49.9 | 49.9 | 49.9 | *49.9* | 49.9 | 49.9 | 44.9 | 44.9 | 44.9 |
| 85° | 5.0 | 5.0 | 5.0 | 5.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 |
| 2.5° | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 59.8 | 54.8 | 54.8 |
| 5° | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 69.8 | 64.8 | 64.8 |
| 7.5° | 84.8 | 84.8 | 84.8 | 84.8 | 84.8 | 79.8 | 79.8 | 79.8 | 79.8 | 74.8 | 74.8 |
| 10° | 109.7 | 104.7 | 104.7 | 104.7 | 99.7 | 99.7 | 94.7 | 94.7 | 89.7 | 89.7 | 84.8 |
| 12.5° | 134.6 | 129.6 | 129.6 | 124.6 | 124.6 | 119.7 | 114.7 | 109.7 | 104.7 | 99.7 | 94.7 |
| 15° | 174.5 | 169.5 | 164.5 | 159.5 | 149.6 | 144.6 | 134.6 | 129.6 | 124.6 | 119.7 | 114.7 |
| 17.5° | 319.1 | 294.1 | 269.2 | 244.3 | 224.3 | 199.4 | 174.5 | 164.5 | 149.6 | 139.6 | 124.6 |
| 20° | 1007.1 | 877.4 | 747.8 | 633.2 | 518.5 | 398.8 | 284.2 | 249.3 | 214.4 | 179.5 | 144.6 |
| 22.5° | 2497.7 | 2168.7 | 1839.6 | 1555.5 | 1271.3 | 987.1 | 702.9 | 573.3 | 443.7 | 314.1 | 184.5 |
| 25° | 4227.6 | 3764.0 | 3305.3 | 2806.8 | 2313.2 | 1814.7 | 1316.2 | 1056.9 | 792.7 | 528.5 | 269.2 |
| 27.5° | 5743.2 | 5209.8 | 4676.3 | 4018.3 | 3360.2 | 2697.1 | 2039.0 | 1640.2 | 1236.4 | 832.6 | 433.7 |
| 30° | 6989.6 | 6461.1 | 5932.7 | 5125.0 | 4312.4 | 3504.8 | 2692.1 | 2173.6 | 1655.2 | 1131.7 | 613.2 |
| 32.5° | 8031.5 | 7428.3 | 6825.1 | 5937.7 | 5055.2 | 4167.8 | 3280.4 | 2637.3 | 1999.2 | 1356.0 | 712.9 |
| 35° | 9262.9 | 8500.2 | 7732.4 | 6785.2 | 5842.9 | 4895.7 | 3948.5 | 3165.8 | 2378.1 | 1590.4 | 807.6 |
| 37.5° | 10708.7 | 9736.6 | 8764.4 | 7737.4 | 6715.4 | 5688.4 | 4661.4 | 3734.1 | 2811.8 | 1884.5 | 957.2 |
| 40° | 13076.8 | 11740.7 | 10404.6 | 9173.2 | 7936.8 | 6705.4 | 5469.0 | 4397.2 | 3325.3 | 2248.4 | 1176.6 |
| 42.5° | 18441.1 | 16596.5 | 14751.9 | 12907.3 | 11057.7 | 9213.1 | 7363.5 | 5902.8 | 4447.0 | 2986.3 | 1525.5 |
| 45° | 26263.3 | 23785.5 | 21307.7 | 18835.0 | 16362.2 | 13889.4 | 11416.6 | 9148.3 | 6879.9 | 4606.5 | 2338.2 |
| 47.5° | 31313.5 | 28895.6 | 26477.6 | 24109.6 | 21746.5 | 19378.4 | 17010.3 | 13819.6 | 10628.9 | 7433.3 | 4242.6 |
| 50° | 32819.1 | 30495.9 | 28172.7 | 26058.9 | 23950.0 | 21836.2 | 19722.4 | 16347.2 | 12977.1 | 9601.9 | 6226.8 |
| 52.5° | 33138.2 | 30829.9 | 28526.7 | 26407.8 | 24294.0 | 22175.2 | 20056.4 | 16696.2 | 13336.0 | 9970.9 | 6610.7 |
| 55° | 33711.5 | 31183.9 | 28656.3 | 26278.2 | 23900.2 | 21517.1 | 19139.1 | 15783.9 | 12428.7 | 9073.5 | 5718.3 |
| 57.5° | *34638.8* | *31996.5* | *29359.2* | *26527.5* | *23695.8* | *20864.0* | *18032.3* | *14647.2* | *11262.1* | *7877.0* | *4491.9* |
| 60° | 33786.3 | 31582.7 | 29384.2 | 26333.1 | 23277.0 | 20225.9 | 17169.8 | 13729.9 | 10285.0 | 6840.0 | 3400.1 |
| 62.5° | 29892.7 | 28297.3 | 26697.0 | 23989.9 | 21282.8 | 18575.7 | 15868.6 | 12518.4 | 9168.2 | 5818.0 | 2467.8 |
| 65° | 24189.3 | 22848.2 | 21502.2 | 19358.4 | 17214.7 | 15066.0 | 12922.2 | 10100.5 | 7283.7 | 4462.0 | 1640.2 |
| 67.5° | 18655.5 | 17369.3 | 16083.0 | 14392.9 | 12702.9 | 11012.8 | 9322.8 | 7268.8 | 5214.8 | 3155.8 | 1101.8 |
| 70° | 14392.9 | 13046.9 | 11700.8 | 10180.3 | 8659.7 | 7139.1 | 5618.6 | 4422.1 | 3230.6 | 2034.1 | 837.6 |
| 72.5° | 9626.9 | 8774.4 | 7921.9 | 6660.5 | 5399.2 | 4137.9 | 2876.6 | 2328.2 | 1779.8 | 1226.4 | 678.0 |
| 75° | 3130.9 | 2841.7 | 2547.6 | 2203.6 | 1859.6 | 1510.6 | 1166.6 | 1012.0 | 852.5 | 693.0 | 538.4 |
| 77.5° | 1291.2 | 1136.7 | 977.1 | 832.6 | 683.0 | 538.4 | 388.9 | 363.9 | 339.0 | 314.1 | 289.2 |
| 80° | 289.2 | 269.2 | 244.3 | 229.3 | 214.4 | 199.4 | 184.5 | 174.5 | 159.5 | 149.6 | 134.6 |
| 82.5° | 39.9 | 39.9 | 34.9 | 39.9 | 44.9 | 49.9 | 54.8 | 49.9 | 49.9 | 44.9 | 39.9 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 0° | 59.8 | 59.8 |
| 2.5° | 54.8 | 54.8 |
| 5° | 64.8 | 59.8 |
| 7.5° | 74.8 | 69.8 |
| 10° | 84.8 | 79.8 |
| 12.5° | 94.7 | 89.7 |
| 15° | 109.7 | 99.7 |
| 17.5° | 119.7 | 109.7 |
| 20° | 134.6 | 119.7 |
| 22.5° | 159.5 | 134.6 |
| 25° | 209.4 | 154.5 |
| 27.5° | 309.1 | 189.4 |
| 30° | 433.7 | 254.3 |
| 32.5° | 513.5 | 314.1 |
| 35° | 558.4 | 314.1 |
| 37.5° | 633.2 | 309.1 |
| 40° | 747.8 | 324.1 |
| 42.5° | 937.3 | 354.0 |
| 45° | 1390.9 | 443.7 |
| 47.5° | 2522.6 | 802.7 |
| 50° | 3739.1 | 1256.3 |
| 52.5° | 3988.3 | 1366.0 |
| 55° | 3474.8 | 1231.4 |
| 57.5° | *2766.9* | *1042.0* |
| 60° | 2088.9 | 782.7 |
| 62.5° | 1550.5 | 638.1 |
| 65° | 1101.8 | 563.4 |
| 67.5° | 812.6 | 523.5 |
| 70° | 668.0 | 503.5 |
| 72.5° | 573.3 | 468.6 |
| 75° | 478.6 | 418.8 |
| 77.5° | 299.1 | 304.1 |
| 80° | 129.6 | 119.7 |
| 82.5° | 39.9 | 34.9 |
| 85° | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390056
CATALOG NUMBER: GSS-SA5B-830-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 112.5° | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-9

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-830-U-5WQ

Data in this report applies to families of products including GSS-SB1A-830-U-5WQ

Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04


## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-184-9 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 10/15/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | McGraw-Edison |
| Catalog Number: | **GSS-SB1A-830-U-5WQ** |
| Description: | GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 80 CRI 3000K CCT 26 LEDS |

## Spectral Parameters

| | |
|---|---|
| CCT (K): | 3055 |
| CIE u': | 0.2475 |
| CIE v': | 0.5247 |
| Duv: | 0.0032 |
| CIE x: | 0.4377 |
| CIE y: | 0.4124 |
| CIE z: | 0.1499 |
| Peak Wavelength (nm): | 604 |
| Dominant Wavelength (nm): | 581 |
| Purity: | 55.16339 |
| Rf: | 81.5 |
| Rg: | 99.2 |

| | |
|---|---|
| CRI (Ra): | 80.9 |
| R1: | 79.5 |
| R2: | 85.6 |
| R3: | 92.1 |
| R4: | 82.4 |
| R5: | 78.9 |
| R6: | 81.7 |
| R7: | 85.1 |
| R8: | 61.9 |
| R9: | 6.8 |
| R10: | 67.1 |
| R11: | 82.5 |
| R12: | 63.4 |
| R13: | 80.2 |
| R14: | 95.1 |
| R15: | 71.7 |

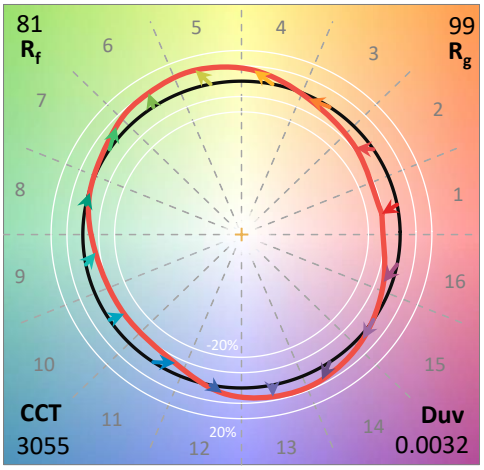


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 20M |
| Operation Time: | 1H 20M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-184-9


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-184-9

## CIE 1931 Chromaticity Diagram

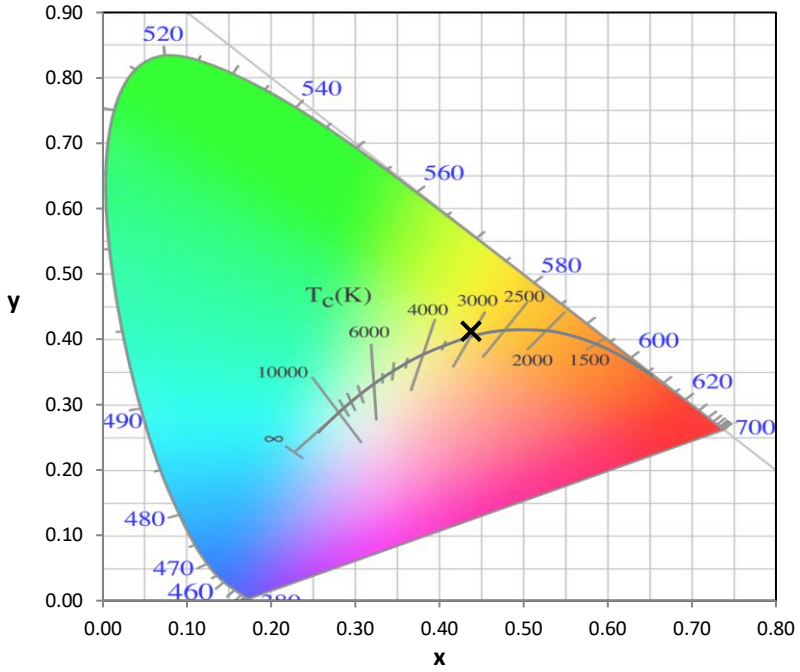


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

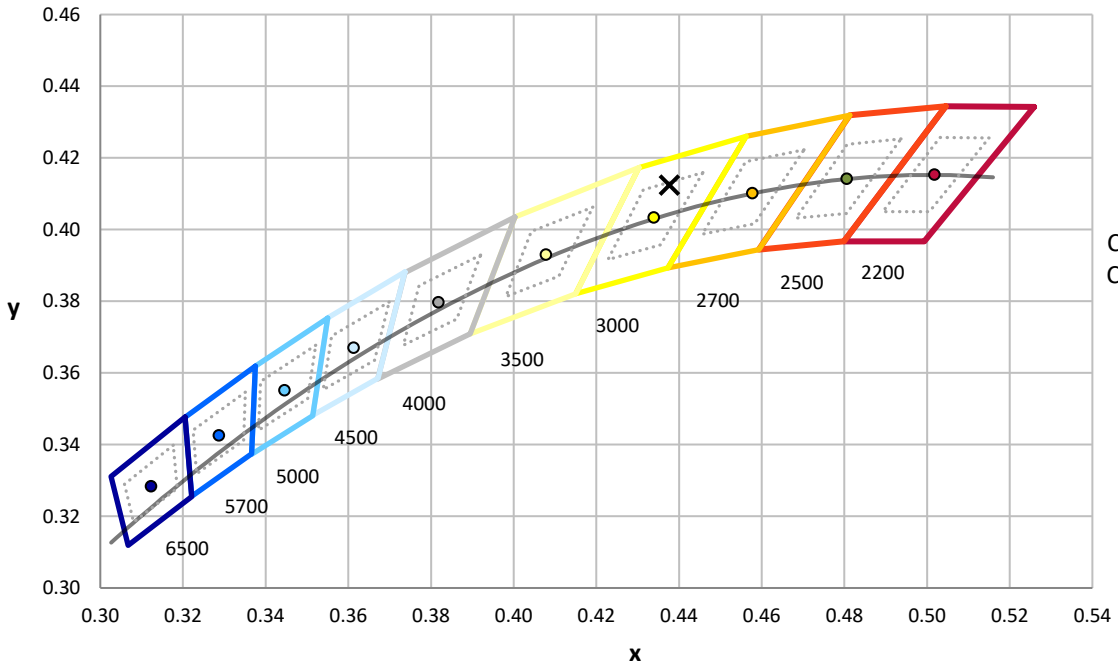



CCT = 3055K
CIE x = 0.4377
CIE y = 0.4124
Duv = 0.0032

Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-9

## Photopic Flux vs. Wavelength

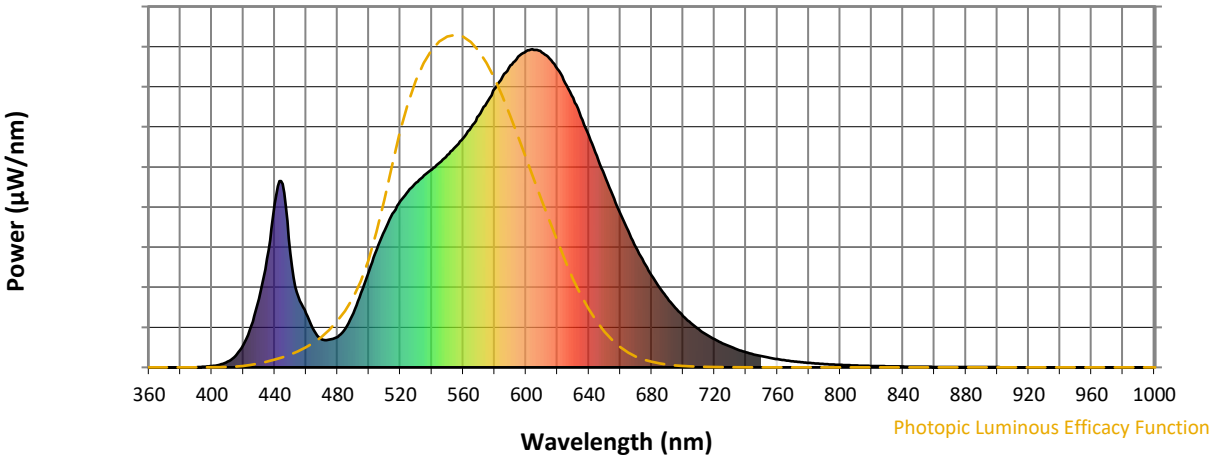



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 170 | NR | 620 | 938 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 234 | NR | 625 | 894 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 302 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 371 | NR | 635 | 788 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 431 | NR | 640 | 728 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 482 | NR | 645 | 665 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 523 | NR | 650 | 603 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 553 | NR | 655 | 542 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 580 | NR | 660 | 484 | NR | 790 | 11 | NR | 920 | 0 | NR |
| 405 | 8 | NR | 535 | 603 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 18 | NR | 540 | 622 | NR | 670 | 377 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 36 | NR | 545 | 644 | NR | 675 | 330 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 71 | NR | 550 | 668 | NR | 680 | 289 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 131 | NR | 555 | 693 | NR | 685 | 250 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 215 | NR | 560 | 720 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 341 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 514 | NR | 570 | 792 | NR | 700 | 161 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 576 | NR | 575 | 832 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 358 | NR | 580 | 875 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 222 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 170 | NR | 590 | 950 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 115 | NR | 595 | 977 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 88 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 87 | NR | 605 | 997 | NR | 735 | 56 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 96 | NR | 610 | 990 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 122 | NR | 615 | 971 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-9

## Scotopic Flux vs. Wavelength

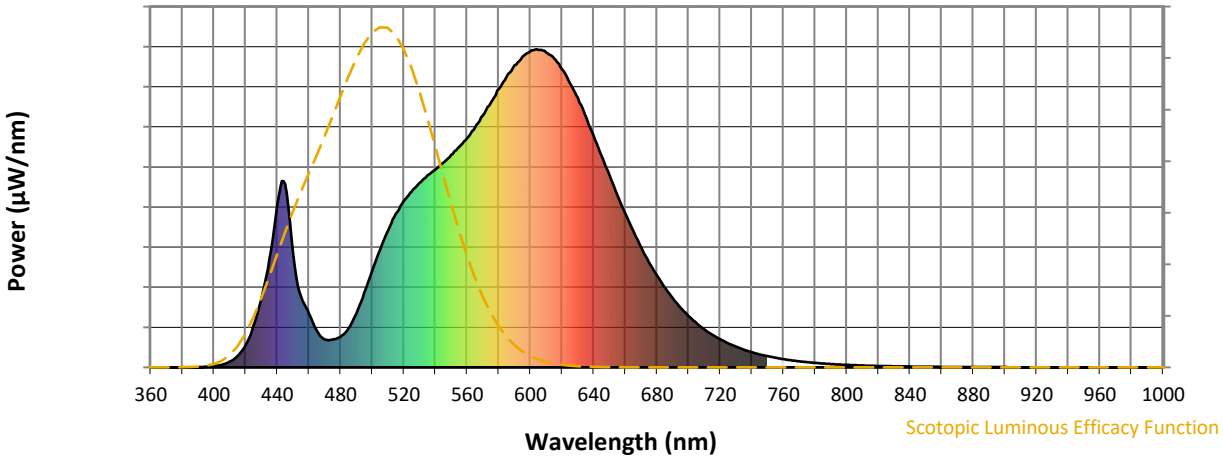



**Scotopic Lumens: NR** **S/P: 1.28**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 170 | NR | 620 | 938 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 234 | NR | 625 | 894 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 302 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 371 | NR | 635 | 788 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 431 | NR | 640 | 728 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 482 | NR | 645 | 665 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 523 | NR | 650 | 603 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 553 | NR | 655 | 542 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 580 | NR | 660 | 484 | NR | 790 | 11 | NR | 920 | 0 | NR |
| 405 | 8 | NR | 535 | 603 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 18 | NR | 540 | 622 | NR | 670 | 377 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 36 | NR | 545 | 644 | NR | 675 | 330 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 71 | NR | 550 | 668 | NR | 680 | 289 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 131 | NR | 555 | 693 | NR | 685 | 250 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 215 | NR | 560 | 720 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 341 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 514 | NR | 570 | 792 | NR | 700 | 161 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 576 | NR | 575 | 832 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 358 | NR | 580 | 875 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 222 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 170 | NR | 590 | 950 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 115 | NR | 595 | 977 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 88 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 87 | NR | 605 | 997 | NR | 735 | 56 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 96 | NR | 610 | 990 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 122 | NR | 615 | 971 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-9

## Melanopic Flux vs. Wavelength

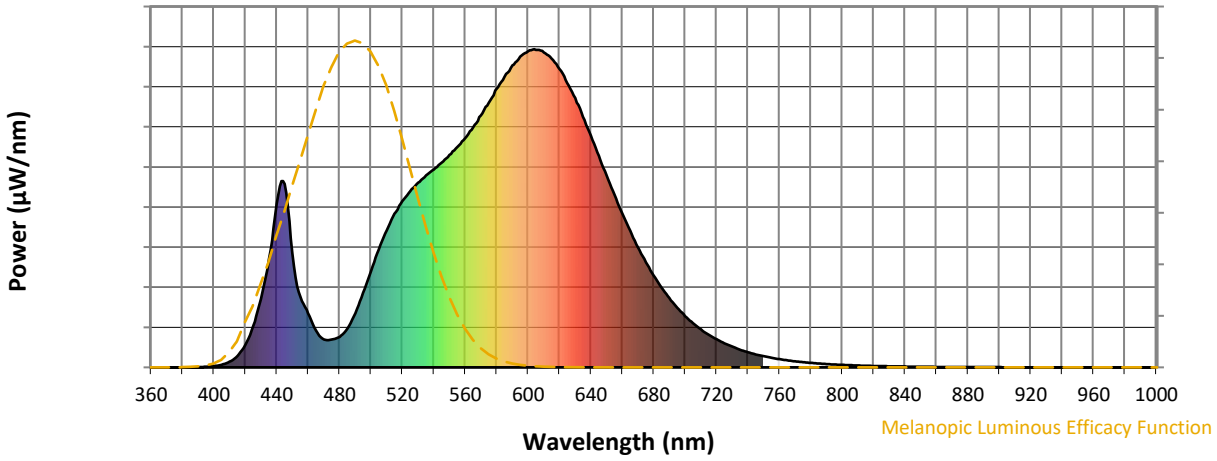


**Melanopic Lumens: NR** **M/P: 2.33**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 170 | NR | 620 | 938 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 234 | NR | 625 | 894 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 302 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 371 | NR | 635 | 788 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 431 | NR | 640 | 728 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 482 | NR | 645 | 665 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 523 | NR | 650 | 603 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 553 | NR | 655 | 542 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 580 | NR | 660 | 484 | NR | 790 | 11 | NR | 920 | 0 | NR |
| 405 | 8 | NR | 535 | 603 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 18 | NR | 540 | 622 | NR | 670 | 377 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 36 | NR | 545 | 644 | NR | 675 | 330 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 71 | NR | 550 | 668 | NR | 680 | 289 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 131 | NR | 555 | 693 | NR | 685 | 250 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 215 | NR | 560 | 720 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 341 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 514 | NR | 570 | 792 | NR | 700 | 161 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 576 | NR | 575 | 832 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 358 | NR | 580 | 875 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 222 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 170 | NR | 590 | 950 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 115 | NR | 595 | 977 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 88 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 87 | NR | 605 | 997 | NR | 735 | 56 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 96 | NR | 610 | 990 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 122 | NR | 615 | 971 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |


REPORT NUMBER: SP1-2407-184-9

# TM-30-18


## Summary


$R_f$ = 81.5
$R_g$ = 99.2
CIE $R_a$ = 80.9
$R_9$ = 6.8


## Spectral Power Distribution Comparison

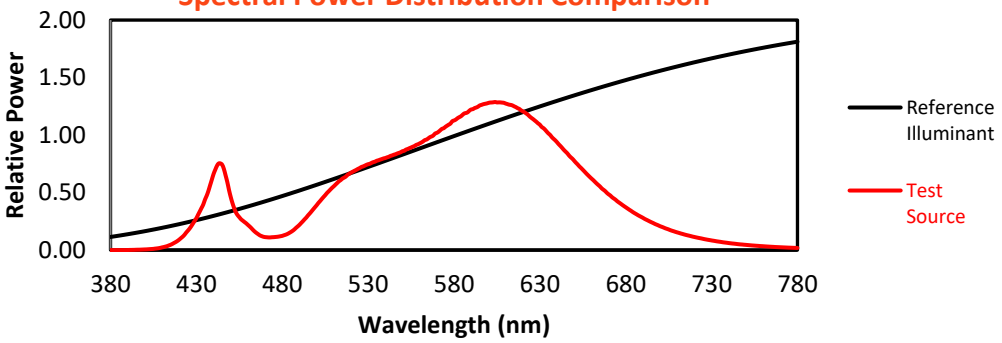



## Color Vector Graphics

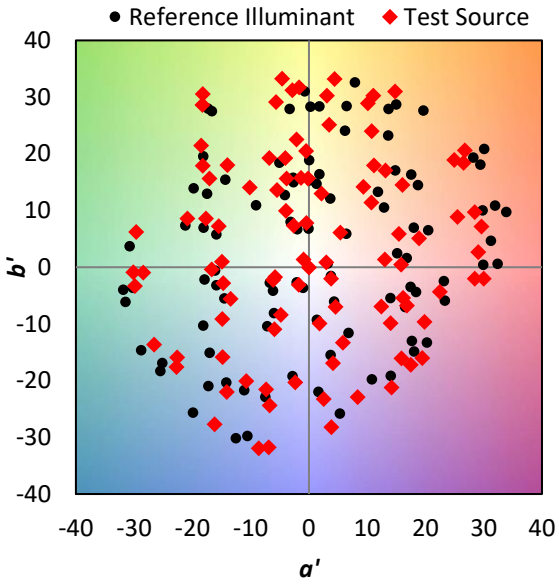

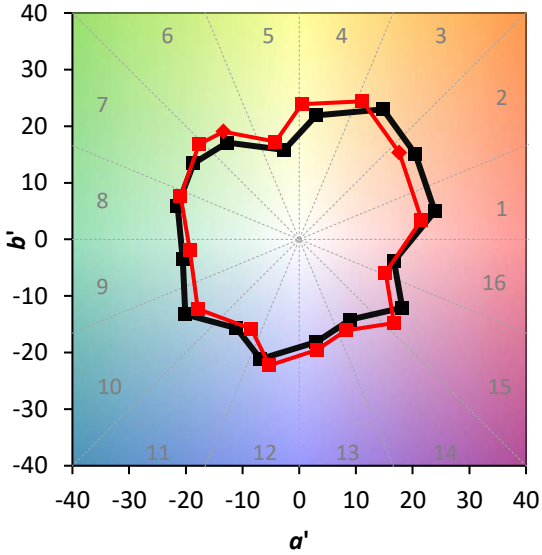


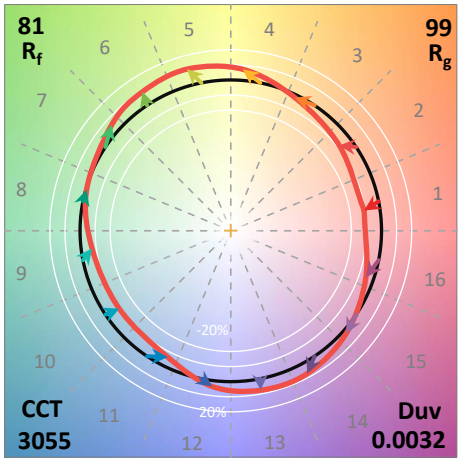
REPORT NUMBER: SP1-2407-184-9
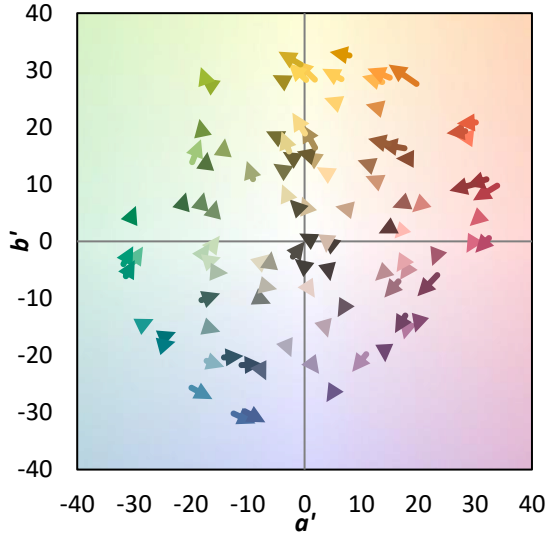
# TM-30-18

## Individual Sample Fidelity Index ($R_{f,i}$)


| | | | |
|---|---|---|---|
| CES01 = 86 | CES26 = 74 | CES51 = 89 | CES76 = 70 |
| CES02 = 63 | CES27 = 88 | CES52 = 91 | CES77 = 86 |
| CES03 = 31 | CES28 = 89 | CES53 = 81 | CES78 = 72 |
| CES04 = 70 | CES29 = 67 | CES54 = 87 | CES79 = 90 |
| CES05 = 50 | CES30 = 68 | CES55 = 85 | CES80 = 88 |
| CES06 = 51 | CES31 = 71 | CES56 = 78 | CES81 = 78 |
| CES07 = 42 | CES32 = 70 | CES57 = 76 | CES82 = 95 |
| CES08 = 41 | CES33 = 71 | CES58 = 78 | CES83 = 90 |
| CES09 = 29 | CES34 = 82 | CES59 = 92 | CES84 = 93 |
| CES10 = 76 | CES35 = 90 | CES60 = 95 | CES85 = 86 |
| CES11 = 59 | CES36 = 93 | CES61 = 93 | CES86 = 72 |
| CES12 = 65 | CES37 = 87 | CES62 = 83 | CES87 = 85 |
| CES13 = 43 | CES38 = 75 | CES63 = 77 | CES88 = 83 |
| CES14 = 74 | CES39 = 94 | CES64 = 83 | CES89 = 75 |
| CES15 = 71 | CES40 = 89 | CES65 = 77 | CES90 = 81 |
| CES16 = 47 | CES41 = 85 | CES66 = 80 | CES91 = 96 |
| CES17 = 50 | CES42 = 86 | CES67 = 79 | CES92 = 73 |
| CES18 = 56 | CES43 = 81 | CES68 = 84 | CES93 = 84 |
| CES19 = 72 | CES44 = 99 | CES69 = 90 | CES94 = 64 |
| CES20 = 66 | CES45 = 87 | CES70 = 77 | CES95 = 80 |
| CES21 = 87 | CES46 = 82 | CES71 = 76 | CES96 = 84 |
| CES22 = 79 | CES47 = 77 | CES72 = 92 | CES97 = 87 |
| CES23 = 92 | CES48 = 71 | CES73 = 71 | CES98 = 81 |
| CES24 = 91 | CES49 = 81 | CES74 = 93 | CES99 = 74 |
| CES25 = 72 | CES50 = 89 | CES75 = 74 | |

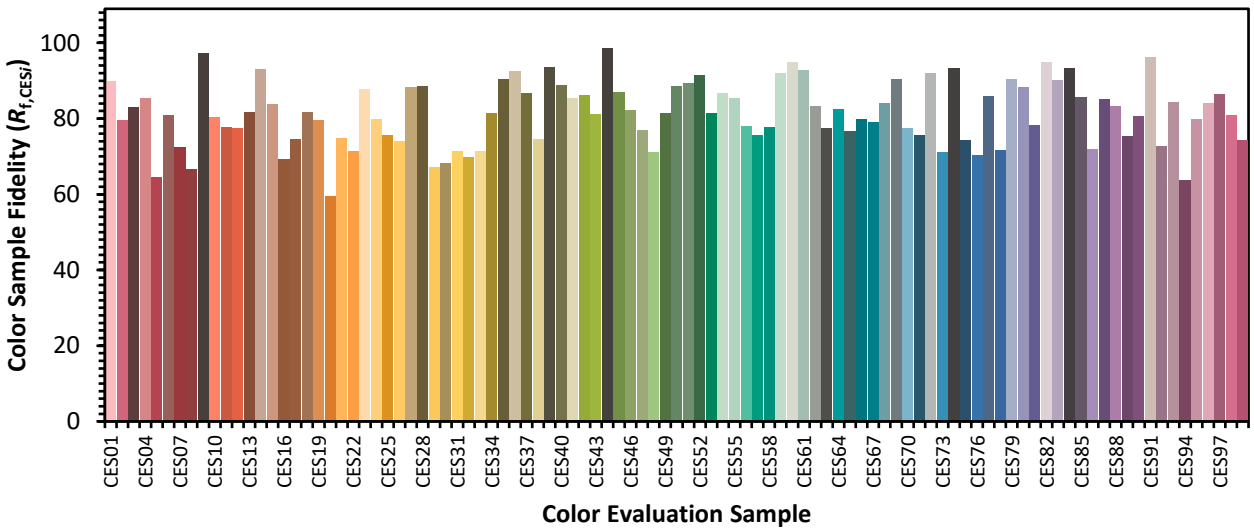



REPORT NUMBER: SP1-2407-184-9

**TM-30-18**

## Color Rendition by Hue-Angle Bin

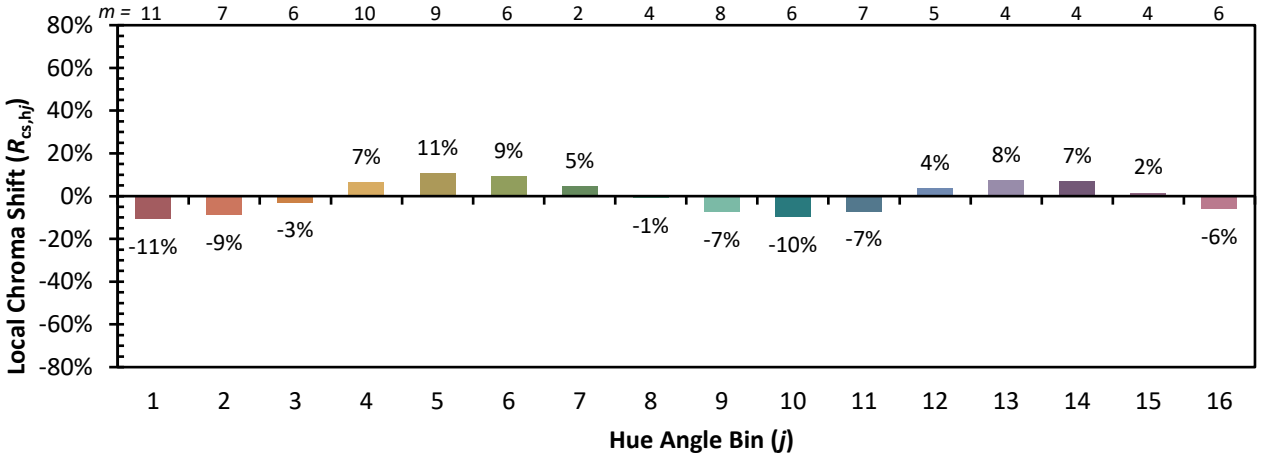

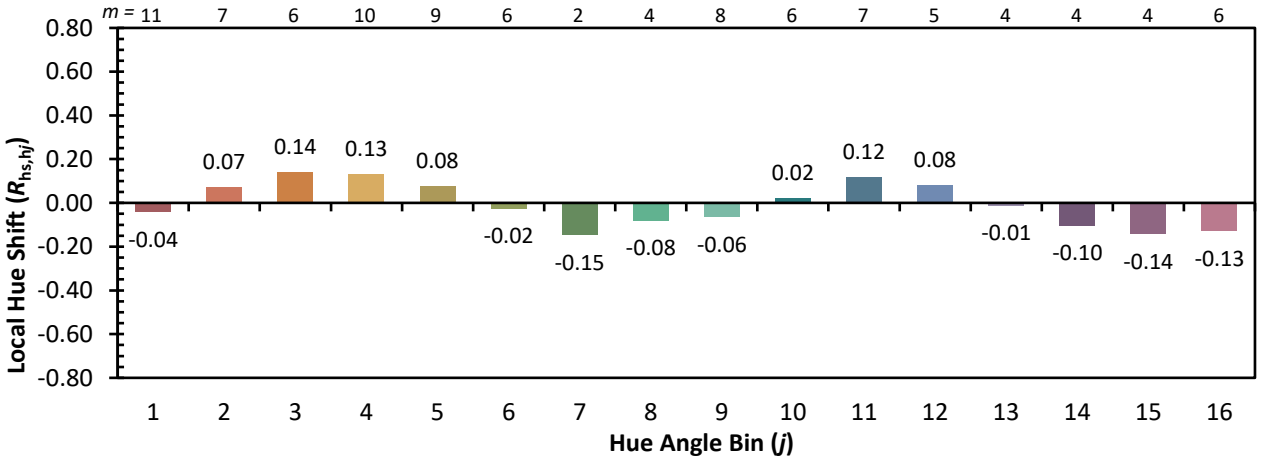


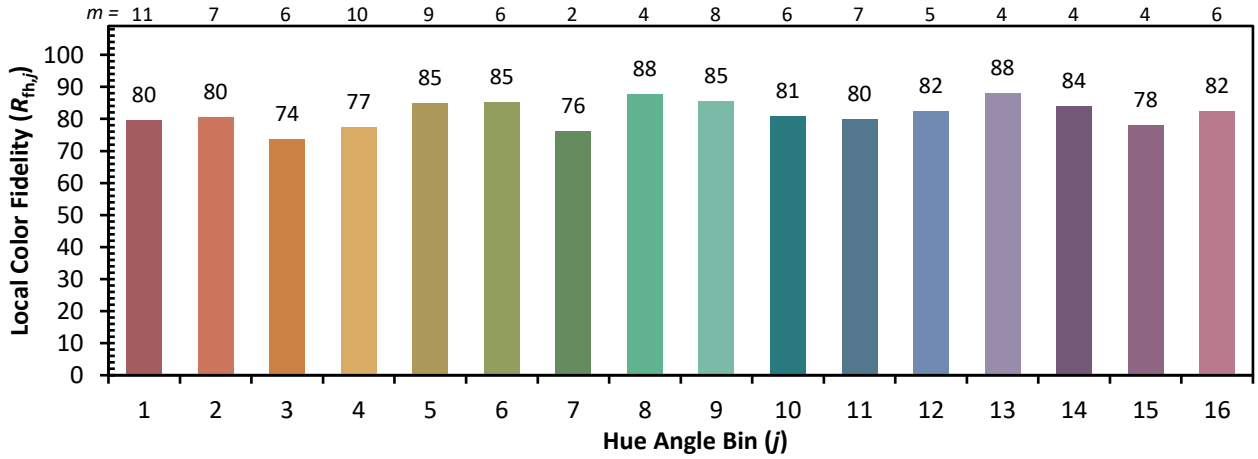
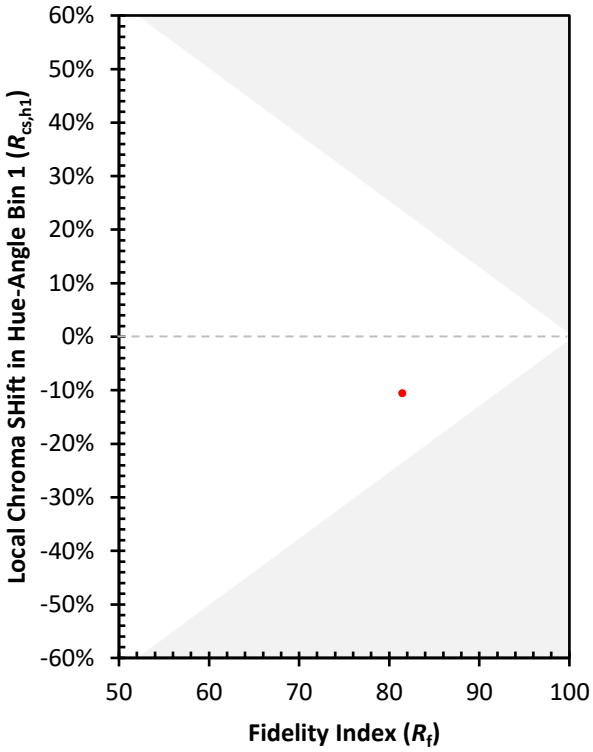



REPORT NUMBER: SP1-2407-184-9

# TM-30-18

## Measure Comparisons

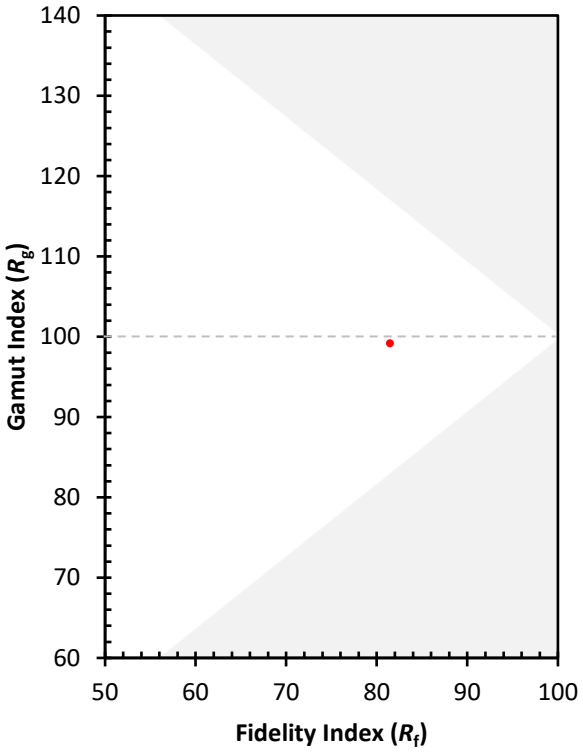


(END OF REPORT)