Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1390073

Luminaire Tested: **GSS-SA3C-835-U-RBC**

Issue Date: 02/18/2026

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P1390073 |
| Test Lab: | INNOVATION CENTER(G3) |
| Issue Date: | 02/18/2026 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | GSS-SA3C-835-U-RBC |
| Description: | GALLEON SLIM SITE LUMINAIRE 1050mA 3xLight Square PACKAGE 80CRI 3500K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL |
| Light Source: | (42) 3500K CCT, 80 CRI LEDS |
| Ballast/Driver: | ELECTRONIC DRIVER |

Luminaire Equipment:

| Sample No. | Condition | Description |
|---|---|---|
| a | good | reflector |
| b | good | lens |
| c | good | housing |
| d | good | cord |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 12238.7 lumens |
| Efficiency: | N/A |
| Efficacy: | 87.2 lumens/watt |
| Luminous Opening: | Rectangular (W 1.5' x L: 0.5' x H: 0') |
| IES Classification: | Type III - Short |
| BUG Rating: | B0 - U0 - G2 |


| | |
|---|---|
| Input Watts (W): | 140.4 |
| Input Voltage (V): | 120 |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | 0.97 |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 28.75 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

## Iso-Footcandle Lines of Horizontal Illumination

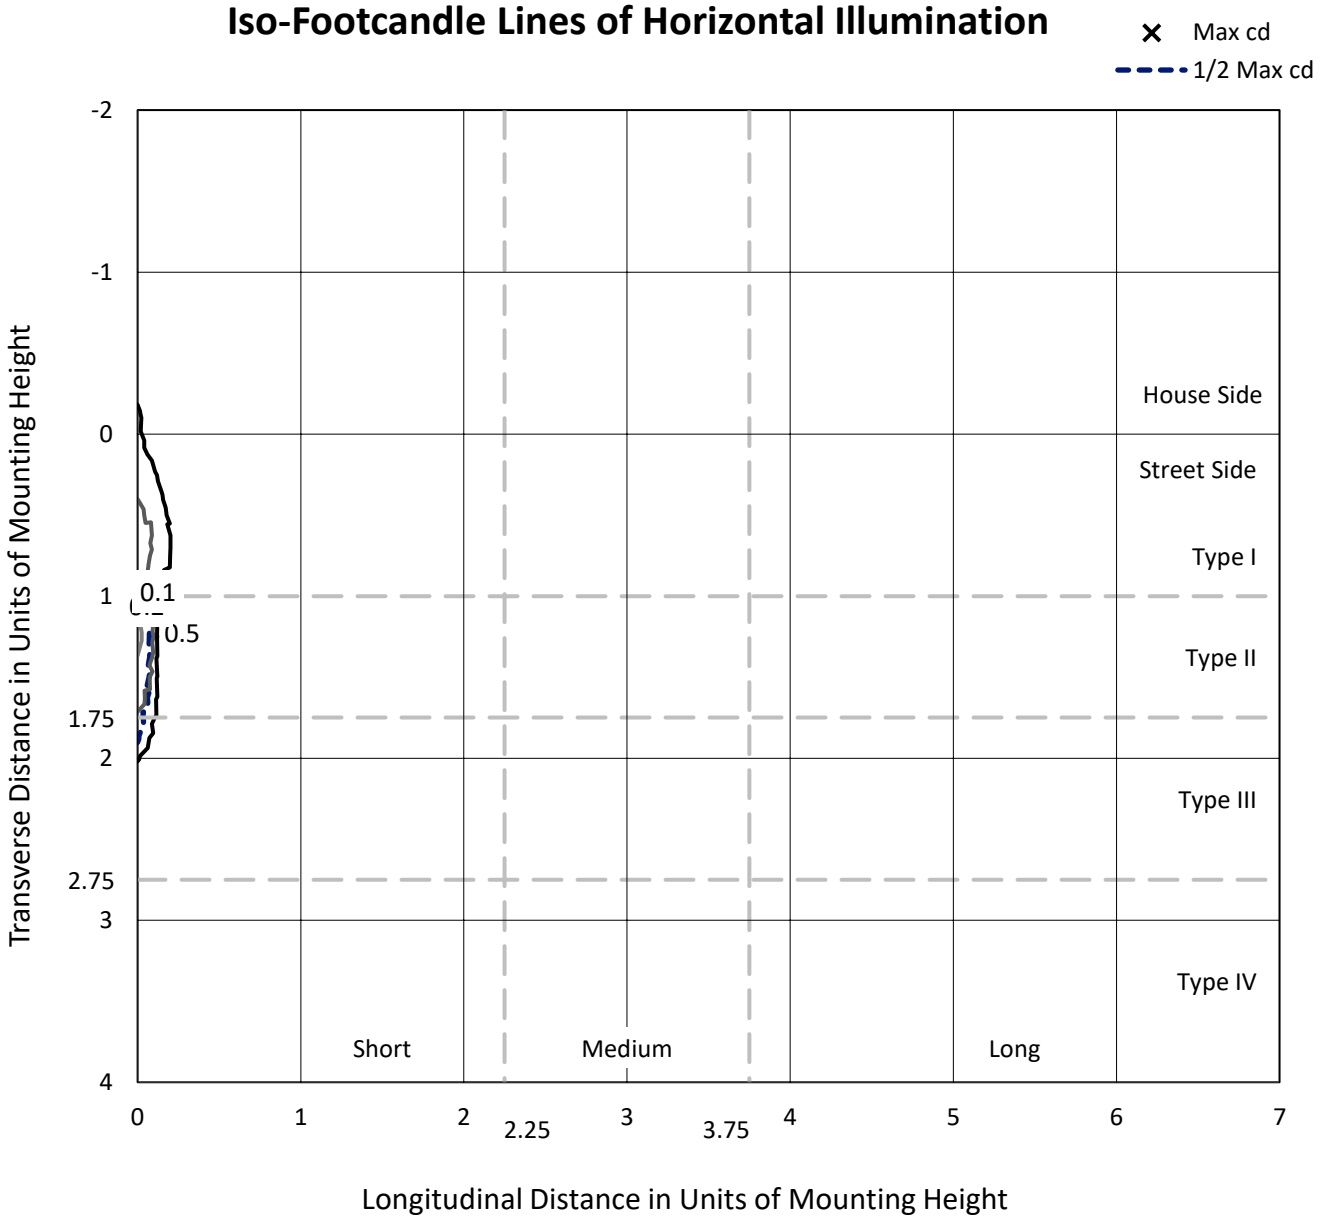



Based on 20 foot mounting height. Maximum calculated value = 0.6 fc
Type III - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

## Luminous Intensity Polar Plot

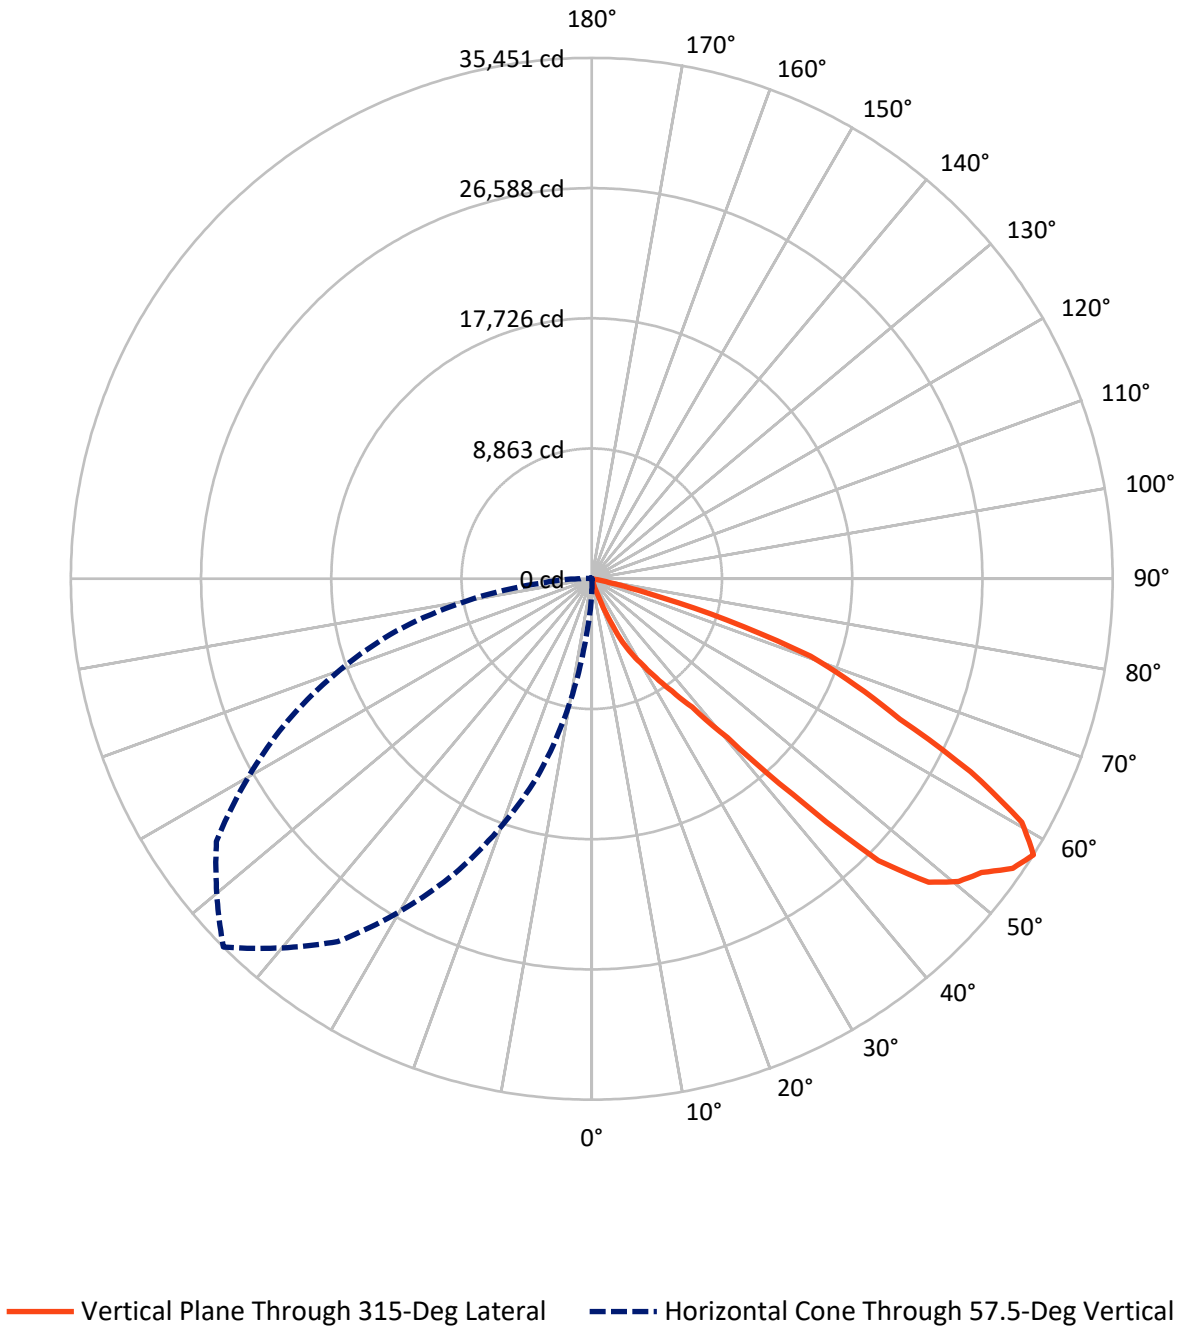

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 87.4 | 0.0 | 87.4 |
| | % Fixture | 0.7 | 0.0 | 0.7 |
| **Street Side** | Lumens | 12151.3 | 0.0 | 12151.3 |
| | % Fixture | 99.3 | 0.0 | 99.3 |
| **Total** | Lumens | 12238.7 | 0.0 | 12238.7 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 4.2 | 0.0 |
| 10°-20° | 20.6 | 0.2 |
| 20°-30° | 264.9 | 2.2 |
| 30°-40° | 826.0 | 6.7 |
| 40°-50° | 2697.7 | 22.0 |
| 50°-60° | 4330.0 | 35.4 |
| 60°-70° | 3324.6 | 27.2 |
| 70°-80° | 757.1 | 6.2 |
| 80°-90° | 13.5 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 12238.7 | 100.0 |
| 0°-180° | 12238.7 | 100.0 |

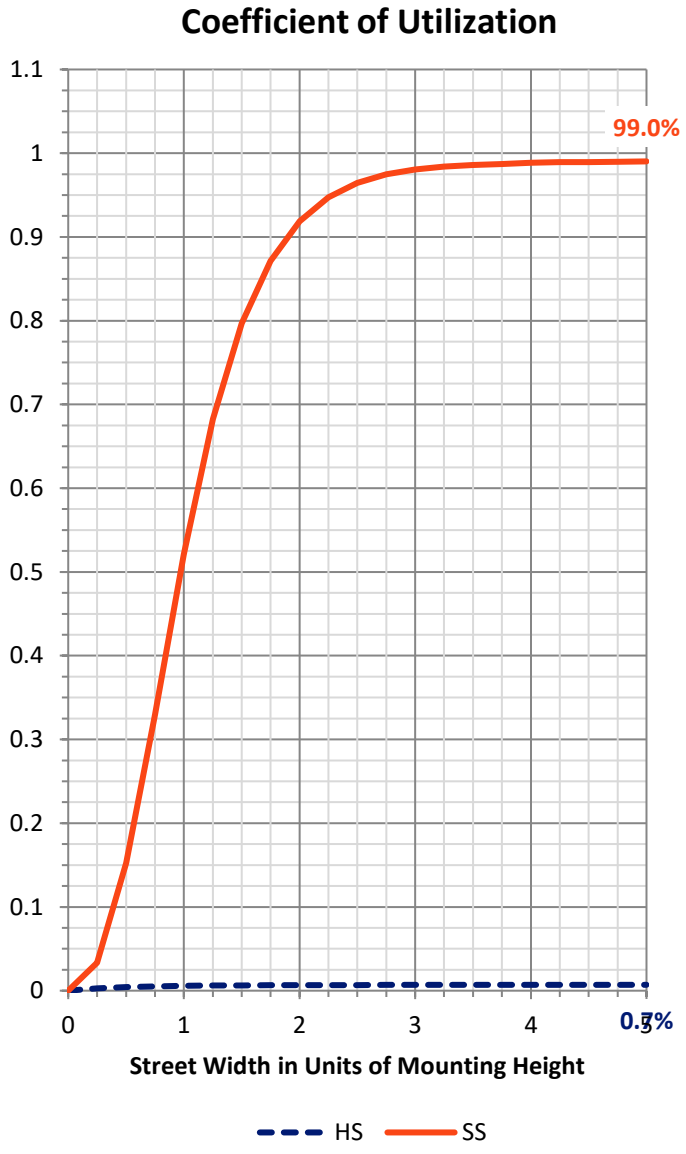

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 277.2 | 2.3 | | | |
| FM | (30°-60°) | 7816.8 | 63.9 | | | |
| FH | (60°-80°) | 4047.7 | 33.1 | | | G2/5000 |
| FVH | (80°-90°) | 9.6 | 0.1 | | | G0/10 |
| BL | (0°-30°) | 12.6 | 0.1 | B0/110 | | |
| BM | (30°-60°) | 36.8 | 0.3 | B0/220 | | |
| BH | (60°-80°) | 34.1 | 0.3 | B0/110 | | G0/110 |
| BVH | (80°-90°) | 3.9 | 0.0 | | | G0/10 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B0-U0-G2**
Type III Short

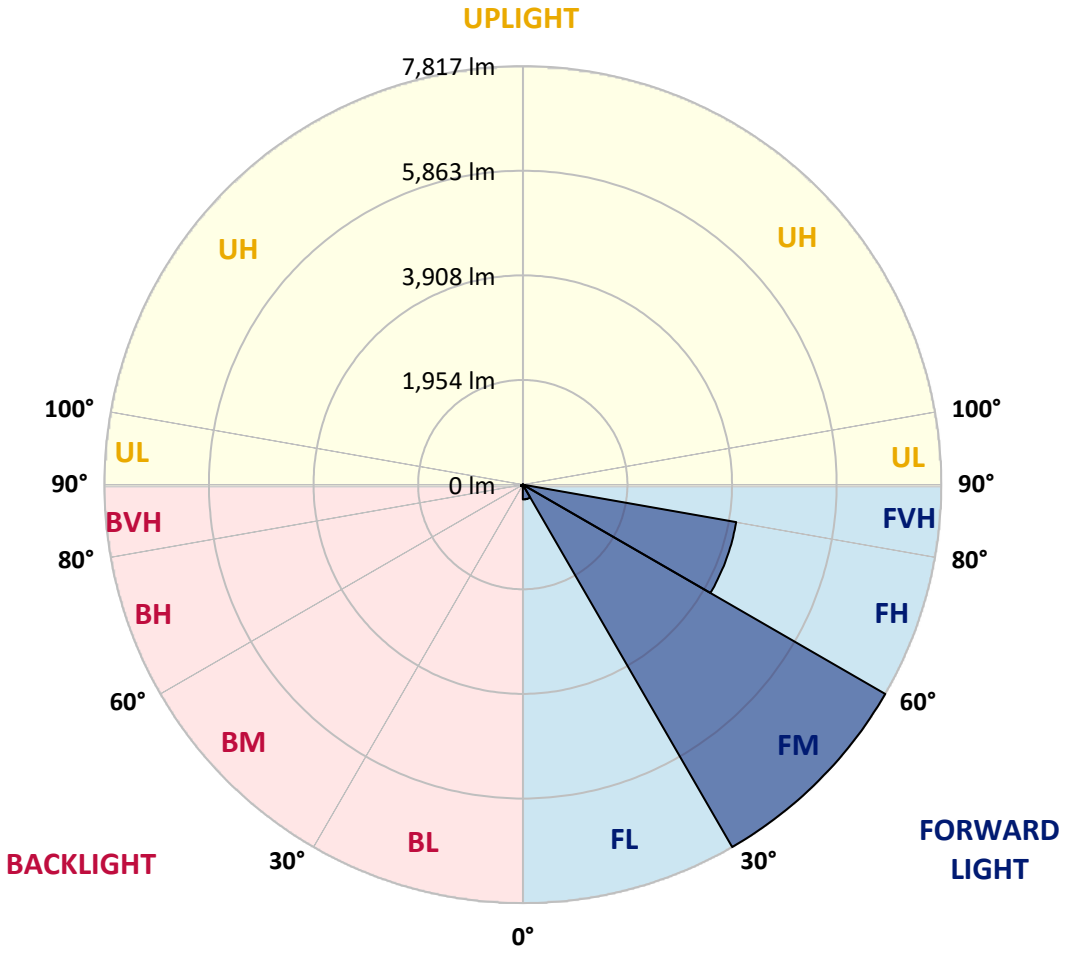

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 41.4 | 41.4 | 41.4 | 41.4 | 41.4 | 37.6 | 37.6 | 37.6 | 37.6 | 37.6 | 37.6 |
| 5° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 41.4 | 41.4 | 41.4 | 41.4 | 37.6 | 37.6 |
| 7.5° | 52.7 | 52.7 | 48.9 | 48.9 | 48.9 | 45.2 | 45.2 | 45.2 | 45.2 | 41.4 | 41.4 |
| 10° | 60.2 | 60.2 | 56.5 | 56.5 | 52.7 | 52.7 | 48.9 | 48.9 | 45.2 | 45.2 | 41.4 |
| 12.5° | 67.8 | 67.8 | 64.0 | 60.2 | 60.2 | 56.5 | 52.7 | 48.9 | 48.9 | 45.2 | 41.4 |
| 15° | 75.3 | 71.5 | 67.8 | 64.0 | 64.0 | 60.2 | 56.5 | 52.7 | 52.7 | 48.9 | 45.2 |
| 17.5° | 82.8 | 79.1 | 75.3 | 71.5 | 67.8 | 60.2 | 56.5 | 52.7 | 52.7 | 48.9 | 45.2 |
| 20° | 90.4 | 82.8 | 75.3 | 71.5 | 67.8 | 60.2 | 56.5 | 52.7 | 52.7 | 48.9 | 45.2 |
| 22.5° | 101.6 | 94.1 | 82.8 | 79.1 | 71.5 | 67.8 | 60.2 | 56.5 | 52.7 | 48.9 | 45.2 |
| 25° | 116.7 | 101.6 | 90.4 | 82.8 | 75.3 | 67.8 | 60.2 | 56.5 | 52.7 | 48.9 | 45.2 |
| 27.5° | 143.1 | 120.5 | 101.6 | 94.1 | 82.8 | 75.3 | 64.0 | 60.2 | 56.5 | 52.7 | 48.9 |
| 30° | 192.0 | 150.6 | 109.2 | 97.9 | 90.4 | 79.1 | 67.8 | 64.0 | 56.5 | 52.7 | 45.2 |
| 32.5° | 237.2 | 184.5 | 131.8 | 116.7 | 101.6 | 82.8 | 67.8 | 64.0 | 56.5 | 52.7 | 45.2 |
| 35° | 237.2 | 188.2 | 139.3 | 120.5 | 105.4 | 86.6 | 67.8 | 64.0 | 56.5 | 52.7 | 45.2 |
| 37.5° | 233.4 | 184.5 | 135.5 | 120.5 | 105.4 | 86.6 | 71.5 | 64.0 | 60.2 | 52.7 | 45.2 |
| 40° | 244.7 | 180.7 | 120.5 | 109.2 | 97.9 | 82.8 | 71.5 | 64.0 | 60.2 | 52.7 | 45.2 |
| 42.5° | 267.3 | 192.0 | 116.7 | 105.4 | 97.9 | 86.6 | 75.3 | 67.8 | 60.2 | 52.7 | 45.2 |
| 45° | 335.0 | 225.9 | 120.5 | 109.2 | 97.9 | 82.8 | 71.5 | 67.8 | 60.2 | 56.5 | 48.9 |
| 47.5° | 606.1 | 365.2 | 124.2 | 109.2 | 97.9 | 82.8 | 67.8 | 64.0 | 60.2 | 52.7 | 48.9 |
| 50° | 948.7 | 538.3 | 128.0 | 112.9 | 97.9 | 82.8 | 67.8 | 64.0 | 60.2 | 56.5 | 52.7 |
| 52.5° | 1031.5 | 587.3 | 143.1 | 124.2 | 105.4 | 86.6 | 67.8 | 64.0 | 60.2 | 56.5 | 52.7 |
| 55° | 929.9 | 545.9 | 165.6 | 143.1 | 116.7 | 94.1 | 67.8 | 64.0 | 60.2 | 56.5 | 52.7 |
| 57.5° | *786.8* | *485.6* | *184.5* | *158.1* | *128.0* | *101.6* | *71.5* | *67.8* | *64.0* | *60.2* | *56.5* |
| 60° | 591.0 | 402.8 | 214.6 | 180.7 | 150.6 | 116.7 | 82.8 | 79.1 | 75.3 | 67.8 | 64.0 |
| 62.5° | 481.9 | 357.6 | 237.2 | 203.3 | 165.6 | 131.8 | 94.1 | 90.4 | 86.6 | 79.1 | 75.3 |
| 65° | 425.4 | 338.8 | 252.2 | 214.6 | 176.9 | 135.5 | 97.9 | 94.1 | 90.4 | 86.6 | 82.8 |
| 67.5° | 395.3 | 327.5 | 263.5 | 222.1 | 184.5 | 143.1 | 101.6 | 97.9 | 94.1 | 90.4 | 86.6 |
| 70° | 380.2 | 320.0 | 259.8 | 222.1 | 184.5 | 146.8 | 109.2 | 105.4 | 97.9 | 94.1 | 86.6 |
| 72.5° | 353.9 | 304.9 | 256.0 | 225.9 | 192.0 | 161.9 | 128.0 | 116.7 | 105.4 | 90.4 | 79.1 |
| 75° | 316.2 | 271.1 | 225.9 | 207.1 | 188.2 | 165.6 | 146.8 | 128.0 | 109.2 | 86.6 | 67.8 |
| 77.5° | 229.6 | 210.8 | 192.0 | 180.7 | 169.4 | 154.3 | 143.1 | 124.2 | 105.4 | 82.8 | 64.0 |
| 80° | 90.4 | 101.6 | 109.2 | 109.2 | 112.9 | 112.9 | 112.9 | 97.9 | 82.8 | 67.8 | 52.7 |
| 82.5° | 26.4 | 26.4 | 26.4 | 30.1 | 33.9 | 37.6 | 41.4 | 37.6 | 37.6 | 33.9 | 30.1 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 37.6 | 37.6 | 33.9 | 33.9 | 33.9 | 33.9 | 33.9 | 33.9 | 33.9 | 33.9 | 33.9 |
| 5° | 37.6 | 37.6 | 33.9 | 33.9 | 33.9 | 33.9 | 30.1 | 30.1 | 30.1 | 30.1 | 30.1 |
| 7.5° | 41.4 | 37.6 | 37.6 | 33.9 | 33.9 | 33.9 | 30.1 | 30.1 | 30.1 | 30.1 | 30.1 |
| 10° | 41.4 | 37.6 | 37.6 | 33.9 | 33.9 | 33.9 | 30.1 | 30.1 | 30.1 | 30.1 | 26.4 |
| 12.5° | 41.4 | 41.4 | 37.6 | 37.6 | 37.6 | 33.9 | 33.9 | 30.1 | 30.1 | 30.1 | 26.4 |
| 15° | 41.4 | 41.4 | 37.6 | 33.9 | 33.9 | 33.9 | 30.1 | 30.1 | 30.1 | 30.1 | 26.4 |
| 17.5° | 41.4 | 41.4 | 37.6 | 33.9 | 33.9 | 30.1 | 30.1 | 26.4 | 26.4 | 26.4 | 22.6 |
| 20° | 41.4 | 41.4 | 37.6 | 33.9 | 33.9 | 30.1 | 30.1 | 26.4 | 26.4 | 26.4 | 22.6 |
| 22.5° | 41.4 | 41.4 | 37.6 | 33.9 | 33.9 | 30.1 | 30.1 | 26.4 | 26.4 | 22.6 | 22.6 |
| 25° | 41.4 | 41.4 | 37.6 | 33.9 | 30.1 | 30.1 | 26.4 | 22.6 | 22.6 | 18.8 | 18.8 |
| 27.5° | 45.2 | 41.4 | 37.6 | 33.9 | 30.1 | 30.1 | 26.4 | 22.6 | 18.8 | 18.8 | 15.1 |
| 30° | 41.4 | 41.4 | 37.6 | 33.9 | 30.1 | 26.4 | 22.6 | 18.8 | 15.1 | 15.1 | 11.3 |
| 32.5° | 41.4 | 41.4 | 37.6 | 33.9 | 30.1 | 26.4 | 22.6 | 18.8 | 15.1 | 15.1 | 11.3 |
| 35° | 41.4 | 37.6 | 33.9 | 30.1 | 26.4 | 22.6 | 18.8 | 15.1 | 11.3 | 11.3 | 7.5 |
| 37.5° | 41.4 | 37.6 | 33.9 | 30.1 | 26.4 | 22.6 | 18.8 | 15.1 | 11.3 | 7.5 | 3.8 |
| 40° | 41.4 | 37.6 | 33.9 | 30.1 | 26.4 | 22.6 | 15.1 | 11.3 | 7.5 | 7.5 | 3.8 |
| 42.5° | 41.4 | 37.6 | 33.9 | 30.1 | 26.4 | 22.6 | 18.8 | 15.1 | 11.3 | 7.5 | 3.8 |
| 45° | 45.2 | 41.4 | 33.9 | 30.1 | 26.4 | 26.4 | 22.6 | 18.8 | 15.1 | 11.3 | 3.8 |
| 47.5° | 45.2 | 37.6 | 33.9 | 26.4 | 26.4 | 26.4 | 22.6 | 22.6 | 18.8 | 11.3 | 7.5 |
| 50° | 48.9 | 41.4 | 37.6 | 30.1 | 26.4 | 26.4 | 22.6 | 18.8 | 15.1 | 11.3 | 3.8 |
| 52.5° | 48.9 | 45.2 | 37.6 | 33.9 | 30.1 | 22.6 | 18.8 | 11.3 | 7.5 | 7.5 | 3.8 |
| 55° | 48.9 | 48.9 | 45.2 | 41.4 | 33.9 | 26.4 | 15.1 | 7.5 | 7.5 | 3.8 | 3.8 |
| 57.5° | *52.7* | *52.7* | *48.9* | *45.2* | *33.9* | *22.6* | *11.3* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 60.2 | 56.5 | 52.7 | 48.9 | 37.6 | 26.4 | 11.3 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 67.8 | 60.2 | 52.7 | 45.2 | 33.9 | 22.6 | 11.3 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 71.5 | 60.2 | 48.9 | 37.6 | 30.1 | 18.8 | 11.3 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 75.3 | 60.2 | 48.9 | 33.9 | 26.4 | 18.8 | 7.5 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 71.5 | 56.5 | 41.4 | 26.4 | 18.8 | 15.1 | 7.5 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 64.0 | 52.7 | 37.6 | 22.6 | 18.8 | 11.3 | 7.5 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 56.5 | 45.2 | 30.1 | 18.8 | 15.1 | 11.3 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 52.7 | 37.6 | 26.4 | 11.3 | 7.5 | 7.5 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 41.4 | 30.1 | 15.1 | 3.8 | 3.8 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 22.6 | 15.1 | 7.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 33.9 | 33.9 | 33.9 | 30.1 | 30.1 | 30.1 | 30.1 | 30.1 | 30.1 | 30.1 | 30.1 |
| 5° | 30.1 | 30.1 | 30.1 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 |
| 7.5° | 30.1 | 30.1 | 30.1 | 26.4 | 26.4 | 26.4 | 26.4 | 22.6 | 22.6 | 22.6 | 22.6 |
| 10° | 26.4 | 26.4 | 26.4 | 22.6 | 22.6 | 22.6 | 22.6 | 18.8 | 18.8 | 18.8 | 18.8 |
| 12.5° | 26.4 | 26.4 | 26.4 | 22.6 | 22.6 | 22.6 | 22.6 | 18.8 | 18.8 | 18.8 | 18.8 |
| 15° | 26.4 | 26.4 | 26.4 | 22.6 | 22.6 | 22.6 | 18.8 | 18.8 | 15.1 | 15.1 | 15.1 |
| 17.5° | 22.6 | 22.6 | 22.6 | 18.8 | 18.8 | 18.8 | 18.8 | 15.1 | 15.1 | 15.1 | 11.3 |
| 20° | 22.6 | 22.6 | 22.6 | 18.8 | 18.8 | 15.1 | 15.1 | 11.3 | 7.5 | 7.5 | 7.5 |
| 22.5° | 18.8 | 18.8 | 15.1 | 15.1 | 11.3 | 11.3 | 7.5 | 7.5 | 3.8 | 3.8 | 3.8 |
| 25° | 15.1 | 15.1 | 11.3 | 11.3 | 7.5 | 7.5 | 3.8 | 3.8 | 0.0 | 0.0 | 0.0 |
| 27.5° | 11.3 | 7.5 | 7.5 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 7.5 | 7.5 | 3.8 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 7.5 | 7.5 | 3.8 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 3.8 | 3.8 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 30.1 | 30.1 | 30.1 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 |
| 5° | 22.6 | 22.6 | 22.6 | 22.6 | 22.6 | 22.6 | 22.6 | 22.6 | 22.6 | 22.6 | 22.6 |
| 7.5° | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 15.1 | 15.1 | 15.1 |
| 10° | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 11.3 | 11.3 | 11.3 |
| 12.5° | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 11.3 | 11.3 | 11.3 | 7.5 | 7.5 | 7.5 |
| 15° | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 7.5 | 7.5 | 7.5 | 3.8 | 3.8 | 3.8 |
| 17.5° | 11.3 | 7.5 | 7.5 | 7.5 | 7.5 | 3.8 | 3.8 | 3.8 | 0.0 | 0.0 | 0.0 |
| 20° | 3.8 | 3.8 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 | 26.4 |
| 5° | 22.6 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 |
| 7.5° | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 | 15.1 |
| 10° | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 |
| 12.5° | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 3.8 | 3.8 |
| 15° | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 26.4 | 30.1 | 30.1 | 30.1 | 30.1 | 33.9 | 33.9 | 33.9 | 37.6 | 37.6 | 41.4 |
| 5° | 18.8 | 22.6 | 22.6 | 22.6 | 22.6 | 26.4 | 26.4 | 26.4 | 30.1 | 30.1 | 33.9 |
| 7.5° | 15.1 | 18.8 | 18.8 | 18.8 | 18.8 | 22.6 | 22.6 | 22.6 | 26.4 | 26.4 | 30.1 |
| 10° | 11.3 | 11.3 | 11.3 | 11.3 | 15.1 | 15.1 | 18.8 | 18.8 | 22.6 | 22.6 | 26.4 |
| 12.5° | 3.8 | 7.5 | 7.5 | 7.5 | 7.5 | 11.3 | 11.3 | 11.3 | 15.1 | 18.8 | 18.8 |
| 15° | 0.0 | 3.8 | 3.8 | 3.8 | 3.8 | 7.5 | 7.5 | 7.5 | 11.3 | 15.1 | 15.1 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 7.5 | 7.5 | 11.3 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 41.4 | 45.2 | 45.2 | 48.9 | 48.9 | 52.7 | 52.7 | 56.5 | 56.5 | 56.5 | 60.2 |
| 5° | 33.9 | 37.6 | 41.4 | 41.4 | 45.2 | 48.9 | 48.9 | 52.7 | 52.7 | 52.7 | 56.5 |
| 7.5° | 30.1 | 33.9 | 37.6 | 37.6 | 41.4 | 45.2 | 45.2 | 48.9 | 48.9 | 48.9 | 52.7 |
| 10° | 26.4 | 30.1 | 33.9 | 33.9 | 37.6 | 41.4 | 41.4 | 45.2 | 45.2 | 48.9 | 48.9 |
| 12.5° | 22.6 | 26.4 | 30.1 | 30.1 | 33.9 | 37.6 | 37.6 | 41.4 | 45.2 | 45.2 | 48.9 |
| 15° | 18.8 | 22.6 | 26.4 | 26.4 | 30.1 | 33.9 | 37.6 | 41.4 | 41.4 | 45.2 | 45.2 |
| 17.5° | 11.3 | 15.1 | 18.8 | 22.6 | 26.4 | 30.1 | 33.9 | 37.6 | 37.6 | 41.4 | 45.2 |
| 20° | 7.5 | 11.3 | 15.1 | 18.8 | 22.6 | 26.4 | 26.4 | 30.1 | 33.9 | 37.6 | 37.6 |
| 22.5° | 3.8 | 7.5 | 11.3 | 11.3 | 15.1 | 18.8 | 22.6 | 26.4 | 26.4 | 30.1 | 33.9 |
| 25° | 0.0 | 3.8 | 7.5 | 7.5 | 11.3 | 15.1 | 15.1 | 18.8 | 22.6 | 26.4 | 26.4 |
| 27.5° | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 | 11.3 | 15.1 | 18.8 | 18.8 | 22.6 | 22.6 |
| 30° | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 | 11.3 | 11.3 | 15.1 | 15.1 | 18.8 | 22.6 |
| 32.5° | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 7.5 | 11.3 | 15.1 | 15.1 | 18.8 | 18.8 |
| 35° | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 7.5 | 7.5 | 11.3 | 11.3 | 15.1 | 15.1 |
| 37.5° | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 7.5 | 7.5 | 11.3 | 11.3 | 15.1 | 15.1 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 7.5 | 11.3 | 11.3 | 11.3 | 15.1 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 | 11.3 | 11.3 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 | 11.3 | 11.3 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 | 11.3 | 11.3 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 | 11.3 | 11.3 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 | 7.5 | 11.3 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 | 7.5 | 11.3 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *3.8* | *3.8* | *3.8* | *7.5* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 7.5 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 7.5 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 7.5 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 7.5 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 7.5 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 7.5 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 3.8 | 3.8 | 7.5 | 7.5 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 | 7.5 | 11.3 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 | 7.5 | 11.3 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 3.8 | 7.5 | 7.5 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 60.2 | 60.2 | 60.2 | 60.2 | 60.2 | 60.2 | 60.2 | 60.2 | 56.5 | 56.5 | 56.5 |
| 5° | 56.5 | 56.5 | 56.5 | 56.5 | 56.5 | 56.5 | 56.5 | 56.5 | 52.7 | 52.7 | 52.7 |
| 7.5° | 52.7 | 52.7 | 52.7 | 56.5 | 56.5 | 56.5 | 56.5 | 56.5 | 52.7 | 52.7 | 52.7 |
| 10° | 52.7 | 52.7 | 52.7 | 56.5 | 56.5 | 56.5 | 56.5 | 56.5 | 52.7 | 52.7 | 52.7 |
| 12.5° | 48.9 | 48.9 | 48.9 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 |
| 15° | 48.9 | 48.9 | 48.9 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 |
| 17.5° | 45.2 | 48.9 | 48.9 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 |
| 20° | 41.4 | 41.4 | 45.2 | 45.2 | 48.9 | 48.9 | 48.9 | 52.7 | 52.7 | 52.7 | 52.7 |
| 22.5° | 33.9 | 37.6 | 41.4 | 41.4 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 25° | 30.1 | 30.1 | 33.9 | 37.6 | 37.6 | 41.4 | 41.4 | 41.4 | 41.4 | 41.4 | 41.4 |
| 27.5° | 26.4 | 26.4 | 30.1 | 30.1 | 33.9 | 33.9 | 33.9 | 37.6 | 37.6 | 37.6 | 37.6 |
| 30° | 22.6 | 26.4 | 26.4 | 30.1 | 30.1 | 30.1 | 33.9 | 33.9 | 37.6 | 37.6 | 37.6 |
| 32.5° | 22.6 | 22.6 | 26.4 | 26.4 | 30.1 | 30.1 | 30.1 | 33.9 | 33.9 | 33.9 | 33.9 |
| 35° | 18.8 | 18.8 | 22.6 | 22.6 | 26.4 | 26.4 | 30.1 | 30.1 | 33.9 | 33.9 | 33.9 |
| 37.5° | 18.8 | 18.8 | 22.6 | 22.6 | 26.4 | 26.4 | 26.4 | 30.1 | 30.1 | 30.1 | 33.9 |
| 40° | 15.1 | 15.1 | 18.8 | 18.8 | 22.6 | 22.6 | 26.4 | 26.4 | 30.1 | 30.1 | 33.9 |
| 42.5° | 15.1 | 15.1 | 18.8 | 18.8 | 22.6 | 22.6 | 26.4 | 26.4 | 30.1 | 30.1 | 33.9 |
| 45° | 15.1 | 15.1 | 18.8 | 18.8 | 22.6 | 22.6 | 26.4 | 26.4 | 30.1 | 30.1 | 33.9 |
| 47.5° | 15.1 | 15.1 | 18.8 | 18.8 | 22.6 | 22.6 | 22.6 | 26.4 | 26.4 | 26.4 | 30.1 |
| 50° | 15.1 | 15.1 | 15.1 | 18.8 | 18.8 | 18.8 | 22.6 | 22.6 | 26.4 | 26.4 | 30.1 |
| 52.5° | 11.3 | 11.3 | 11.3 | 15.1 | 15.1 | 15.1 | 18.8 | 18.8 | 22.6 | 22.6 | 26.4 |
| 55° | 11.3 | 11.3 | 11.3 | 15.1 | 15.1 | 15.1 | 15.1 | 18.8 | 18.8 | 18.8 | 22.6 |
| 57.5° | *7.5* | *7.5* | *7.5* | *11.3* | *11.3* | *11.3* | *11.3* | *15.1* | *15.1* | *15.1* | *18.8* |
| 60° | 7.5 | 7.5 | 7.5 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 15.1 |
| 62.5° | 7.5 | 7.5 | 7.5 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 15.1 |
| 65° | 7.5 | 7.5 | 7.5 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 15.1 |
| 67.5° | 7.5 | 7.5 | 7.5 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 15.1 |
| 70° | 7.5 | 7.5 | 7.5 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 15.1 |
| 72.5° | 7.5 | 7.5 | 7.5 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 15.1 |
| 75° | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 |
| 77.5° | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 |
| 80° | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 |
| 82.5° | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 |
| 85° | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 |
| 87.5° | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 56.5 | 56.5 | 56.5 | 56.5 | 56.5 | 52.7 | 52.7 | 52.7 | 56.5 | 56.5 | 56.5 |
| 5° | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 |
| 7.5° | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 48.9 | 48.9 | 48.9 | 52.7 | 52.7 | 52.7 |
| 10° | 52.7 | 48.9 | 48.9 | 48.9 | 48.9 | 48.9 | 48.9 | 48.9 | 52.7 | 52.7 | 52.7 |
| 12.5° | 52.7 | 48.9 | 48.9 | 48.9 | 48.9 | 48.9 | 48.9 | 48.9 | 52.7 | 52.7 | 52.7 |
| 15° | 52.7 | 48.9 | 48.9 | 48.9 | 48.9 | 48.9 | 48.9 | 52.7 | 52.7 | 56.5 | 56.5 |
| 17.5° | 48.9 | 48.9 | 45.2 | 45.2 | 48.9 | 48.9 | 48.9 | 48.9 | 52.7 | 52.7 | 52.7 |
| 20° | 48.9 | 48.9 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 48.9 | 48.9 | 52.7 | 52.7 |
| 22.5° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 48.9 | 48.9 | 52.7 | 52.7 |
| 25° | 41.4 | 41.4 | 41.4 | 41.4 | 45.2 | 45.2 | 45.2 | 48.9 | 52.7 | 52.7 | 56.5 |
| 27.5° | 41.4 | 41.4 | 41.4 | 41.4 | 45.2 | 45.2 | 45.2 | 48.9 | 52.7 | 52.7 | 56.5 |
| 30° | 41.4 | 41.4 | 41.4 | 41.4 | 45.2 | 45.2 | 45.2 | 48.9 | 52.7 | 52.7 | 56.5 |
| 32.5° | 37.6 | 37.6 | 37.6 | 41.4 | 41.4 | 45.2 | 45.2 | 48.9 | 52.7 | 52.7 | 56.5 |
| 35° | 37.6 | 37.6 | 37.6 | 41.4 | 41.4 | 45.2 | 45.2 | 48.9 | 52.7 | 52.7 | 56.5 |
| 37.5° | 33.9 | 37.6 | 37.6 | 41.4 | 45.2 | 45.2 | 48.9 | 52.7 | 56.5 | 56.5 | 60.2 |
| 40° | 33.9 | 37.6 | 37.6 | 41.4 | 45.2 | 45.2 | 48.9 | 52.7 | 56.5 | 56.5 | 60.2 |
| 42.5° | 33.9 | 37.6 | 37.6 | 41.4 | 45.2 | 45.2 | 48.9 | 52.7 | 56.5 | 60.2 | 64.0 |
| 45° | 37.6 | 37.6 | 41.4 | 45.2 | 45.2 | 48.9 | 48.9 | 52.7 | 56.5 | 60.2 | 64.0 |
| 47.5° | 37.6 | 41.4 | 45.2 | 45.2 | 48.9 | 48.9 | 48.9 | 52.7 | 60.2 | 64.0 | 67.8 |
| 50° | 33.9 | 37.6 | 41.4 | 45.2 | 45.2 | 48.9 | 48.9 | 52.7 | 60.2 | 64.0 | 67.8 |
| 52.5° | 30.1 | 30.1 | 33.9 | 37.6 | 45.2 | 48.9 | 52.7 | 56.5 | 64.0 | 67.8 | 71.5 |
| 55° | 26.4 | 26.4 | 30.1 | 37.6 | 45.2 | 52.7 | 60.2 | 64.0 | 67.8 | 67.8 | 71.5 |
| 57.5° | *22.6* | *22.6* | *26.4* | *37.6* | *48.9* | *60.2* | *71.5* | *71.5* | *75.3* | *75.3* | *75.3* |
| 60° | 18.8 | 18.8 | 22.6 | 33.9 | 48.9 | 60.2 | 71.5 | 75.3 | 79.1 | 79.1 | 82.8 |
| 62.5° | 18.8 | 18.8 | 22.6 | 33.9 | 45.2 | 52.7 | 64.0 | 71.5 | 79.1 | 86.6 | 94.1 |
| 65° | 15.1 | 18.8 | 18.8 | 30.1 | 37.6 | 48.9 | 56.5 | 67.8 | 79.1 | 90.4 | 101.6 |
| 67.5° | 15.1 | 18.8 | 18.8 | 26.4 | 37.6 | 45.2 | 52.7 | 64.0 | 79.1 | 90.4 | 101.6 |
| 70° | 18.8 | 18.8 | 22.6 | 30.1 | 33.9 | 41.4 | 45.2 | 60.2 | 71.5 | 86.6 | 97.9 |
| 72.5° | 15.1 | 18.8 | 18.8 | 26.4 | 30.1 | 37.6 | 41.4 | 56.5 | 67.8 | 82.8 | 94.1 |
| 75° | 15.1 | 15.1 | 15.1 | 22.6 | 26.4 | 33.9 | 37.6 | 48.9 | 64.0 | 75.3 | 86.6 |
| 77.5° | 11.3 | 11.3 | 11.3 | 18.8 | 22.6 | 30.1 | 33.9 | 45.2 | 60.2 | 71.5 | 82.8 |
| 80° | 11.3 | 11.3 | 11.3 | 15.1 | 18.8 | 18.8 | 22.6 | 33.9 | 48.9 | 60.2 | 71.5 |
| 82.5° | 11.3 | 7.5 | 7.5 | 11.3 | 11.3 | 15.1 | 15.1 | 22.6 | 30.1 | 37.6 | 45.2 |
| 85° | 11.3 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 |
| 87.5° | 11.3 | 7.5 | 7.5 | 7.5 | 7.5 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 56.5 | 56.5 | 56.5 | 56.5 | 56.5 | 60.2 | 60.2 | 60.2 | 60.2 | 60.2 | 60.2 |
| 5° | 56.5 | 56.5 | 60.2 | 60.2 | 60.2 | 64.0 | 64.0 | 64.0 | 64.0 | 64.0 | 64.0 |
| 7.5° | 56.5 | 56.5 | 60.2 | 60.2 | 60.2 | 64.0 | 64.0 | 64.0 | 67.8 | 67.8 | 71.5 |
| 10° | 56.5 | 56.5 | 60.2 | 60.2 | 64.0 | 64.0 | 67.8 | 67.8 | 71.5 | 71.5 | 75.3 |
| 12.5° | 56.5 | 60.2 | 60.2 | 64.0 | 67.8 | 71.5 | 71.5 | 75.3 | 79.1 | 79.1 | 82.8 |
| 15° | 60.2 | 60.2 | 64.0 | 64.0 | 67.8 | 71.5 | 75.3 | 79.1 | 82.8 | 86.6 | 90.4 |
| 17.5° | 56.5 | 60.2 | 64.0 | 67.8 | 71.5 | 75.3 | 79.1 | 82.8 | 90.4 | 94.1 | 101.6 |
| 20° | 56.5 | 60.2 | 64.0 | 67.8 | 71.5 | 79.1 | 82.8 | 86.6 | 94.1 | 101.6 | 112.9 |
| 22.5° | 56.5 | 60.2 | 64.0 | 67.8 | 75.3 | 82.8 | 86.6 | 94.1 | 105.4 | 112.9 | 128.0 |
| 25° | 60.2 | 64.0 | 67.8 | 71.5 | 79.1 | 86.6 | 94.1 | 101.6 | 116.7 | 128.0 | 161.9 |
| 27.5° | 60.2 | 67.8 | 71.5 | 75.3 | 82.8 | 94.1 | 101.6 | 109.2 | 131.8 | 150.6 | 225.9 |
| 30° | 60.2 | 67.8 | 71.5 | 75.3 | 86.6 | 97.9 | 109.2 | 120.5 | 158.1 | 192.0 | 320.0 |
| 32.5° | 60.2 | 67.8 | 71.5 | 75.3 | 90.4 | 109.2 | 124.2 | 139.3 | 188.2 | 237.2 | 387.8 |
| 35° | 64.0 | 67.8 | 75.3 | 79.1 | 97.9 | 116.7 | 131.8 | 150.6 | 195.8 | 240.9 | 421.6 |
| 37.5° | 67.8 | 71.5 | 79.1 | 82.8 | 97.9 | 112.9 | 128.0 | 143.1 | 192.0 | 237.2 | 463.0 |
| 40° | 67.8 | 75.3 | 79.1 | 86.6 | 97.9 | 112.9 | 124.2 | 135.5 | 188.2 | 240.9 | 534.6 |
| 42.5° | 71.5 | 79.1 | 82.8 | 90.4 | 101.6 | 112.9 | 120.5 | 131.8 | 199.5 | 267.3 | 696.5 |
| 45° | 71.5 | 75.3 | 82.8 | 86.6 | 97.9 | 109.2 | 120.5 | 131.8 | 252.2 | 368.9 | 1106.8 |
| 47.5° | 71.5 | 75.3 | 79.1 | 82.8 | 97.9 | 112.9 | 124.2 | 139.3 | 372.7 | 606.1 | 1829.6 |
| 50° | 71.5 | 75.3 | 75.3 | 79.1 | 94.1 | 112.9 | 128.0 | 143.1 | 485.6 | 824.4 | 2639.0 |
| 52.5° | 75.3 | 79.1 | 79.1 | 82.8 | 101.6 | 120.5 | 139.3 | 158.1 | 557.2 | 956.2 | 2864.9 |
| 55° | 75.3 | 79.1 | 79.1 | 82.8 | 112.9 | 143.1 | 169.4 | 199.5 | 587.3 | 971.3 | 2631.5 |
| 57.5° | *79.1* | *82.8* | *86.6* | *90.4* | *120.5* | *154.3* | *184.5* | *214.6* | *560.9* | *907.3* | *2157.1* |
| 60° | 90.4 | 94.1 | 101.6 | 105.4 | 139.3 | 173.2 | 203.3 | 237.2 | 448.0 | 658.8 | 1697.8 |
| 62.5° | 101.6 | 105.4 | 112.9 | 116.7 | 150.6 | 184.5 | 218.3 | 252.2 | 395.3 | 534.6 | 1264.9 |
| 65° | 105.4 | 112.9 | 116.7 | 120.5 | 154.3 | 192.0 | 225.9 | 259.8 | 361.4 | 459.3 | 937.4 |
| 67.5° | 109.2 | 116.7 | 120.5 | 128.0 | 161.9 | 195.8 | 229.6 | 263.5 | 342.6 | 417.9 | 696.5 |
| 70° | 109.2 | 116.7 | 128.0 | 135.5 | 165.6 | 195.8 | 222.1 | 252.2 | 316.2 | 376.5 | 534.6 |
| 72.5° | 109.2 | 124.2 | 139.3 | 154.3 | 176.9 | 199.5 | 218.3 | 240.9 | 289.9 | 335.0 | 414.1 |
| 75° | 109.2 | 131.8 | 150.6 | 173.2 | 184.5 | 195.8 | 207.1 | 218.3 | 252.2 | 282.3 | 327.5 |
| 77.5° | 105.4 | 124.2 | 146.8 | 165.6 | 169.4 | 173.2 | 176.9 | 180.7 | 180.7 | 180.7 | 180.7 |
| 80° | 86.6 | 105.4 | 120.5 | 135.5 | 128.0 | 116.7 | 109.2 | 97.9 | 90.4 | 82.8 | 90.4 |
| 82.5° | 45.2 | 48.9 | 48.9 | 48.9 | 45.2 | 45.2 | 41.4 | 37.6 | 37.6 | 33.9 | 33.9 |
| 85° | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 7.5 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 |
| 87.5° | 3.8 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 60.2 | 60.2 | 60.2 | 60.2 | 60.2 | 60.2 | 60.2 | 56.5 | 56.5 | 56.5 | 56.5 |
| 5° | 64.0 | 64.0 | 64.0 | 64.0 | 64.0 | 64.0 | 64.0 | 60.2 | 60.2 | 60.2 | 60.2 |
| 7.5° | 71.5 | 71.5 | 71.5 | 71.5 | 71.5 | 71.5 | 71.5 | 71.5 | 71.5 | 71.5 | 71.5 |
| 10° | 75.3 | 79.1 | 79.1 | 82.8 | 82.8 | 82.8 | 86.6 | 86.6 | 86.6 | 86.6 | 86.6 |
| 12.5° | 86.6 | 90.4 | 90.4 | 94.1 | 94.1 | 97.9 | 97.9 | 101.6 | 101.6 | 101.6 | 105.4 |
| 15° | 94.1 | 97.9 | 101.6 | 105.4 | 109.2 | 116.7 | 120.5 | 128.0 | 131.8 | 135.5 | 139.3 |
| 17.5° | 109.2 | 116.7 | 128.0 | 135.5 | 143.1 | 158.1 | 173.2 | 184.5 | 199.5 | 218.3 | 240.9 |
| 20° | 120.5 | 146.8 | 169.4 | 195.8 | 218.3 | 286.1 | 353.9 | 421.6 | 489.4 | 579.7 | 670.1 |
| 22.5° | 143.1 | 225.9 | 312.5 | 395.3 | 478.1 | 700.2 | 918.6 | 1136.9 | 1359.0 | 1569.8 | 1780.7 |
| 25° | 195.8 | 372.7 | 553.4 | 730.3 | 907.3 | 1280.0 | 1648.9 | 2017.8 | 2390.5 | 2748.2 | 3109.6 |
| 27.5° | 297.4 | 583.5 | 869.6 | 1155.7 | 1441.8 | 1931.2 | 2416.9 | 2902.5 | 3391.9 | 3824.8 | 4254.0 |
| 30° | 448.0 | 816.9 | 1185.9 | 1554.8 | 1923.7 | 2556.2 | 3188.6 | 3821.1 | 4453.5 | 4875.2 | 5296.8 |
| 32.5° | 534.6 | 1016.4 | 1498.3 | 1976.4 | 2458.3 | 3147.2 | 3836.1 | 4528.8 | 5217.7 | 5699.6 | 6181.5 |
| 35° | 598.6 | 1197.1 | 1792.0 | 2390.5 | 2985.3 | 3753.3 | 4521.3 | 5293.0 | 6061.0 | 6637.0 | 7213.0 |
| 37.5° | 685.2 | 1404.2 | 2119.5 | 2838.5 | 3553.8 | 4382.0 | 5210.2 | 6042.2 | 6870.4 | 7581.9 | 8297.2 |
| 40° | 824.4 | 1679.0 | 2533.6 | 3384.4 | 4238.9 | 5278.0 | 6317.0 | 7356.0 | 8395.1 | 9340.0 | 10284.9 |
| 42.5° | 1125.6 | 2251.2 | 3380.6 | 4506.2 | 5631.8 | 7186.6 | 8737.6 | 10288.7 | 11843.4 | 13179.9 | 14516.3 |
| 45° | 1844.7 | 3595.2 | 5345.7 | 7096.3 | 8846.8 | 10706.5 | 12562.5 | 14422.2 | 16281.9 | 18258.3 | 20234.7 |
| 47.5° | 3053.1 | 5466.2 | 7879.3 | 10288.7 | 12701.8 | 14618.0 | 16530.4 | 18442.8 | 20359.0 | 22203.6 | 24048.3 |
| 50° | 4453.5 | 7051.1 | 9648.7 | 12246.3 | 14843.8 | 16556.7 | 18265.9 | 19975.0 | 21687.9 | 23498.7 | 25305.7 |
| 52.5° | 4773.5 | 7371.1 | 9968.7 | 12562.5 | 15160.1 | 16888.0 | 18616.0 | 20347.7 | 22075.6 | 23845.0 | 25618.1 |
| 55° | 4287.9 | 6862.9 | 9434.1 | 12009.1 | 14580.3 | 16477.7 | 18375.0 | 20272.4 | 22169.8 | 24153.7 | 26137.6 |
| 57.5° | *3407.0* | *6008.3* | *8605.9* | *11207.2* | *13804.8* | *16056.0* | *18303.5* | *20554.7* | *22806.0* | *24899.1* | *26992.2* |
| 60° | 2736.9 | 5390.9 | 8045.0 | 10699.0 | 13353.1 | 15754.9 | 18152.9 | 20551.0 | 22952.8 | 24733.4 | 26514.1 |
| 62.5° | 1995.2 | 4622.9 | 7250.6 | 9878.3 | 12506.0 | 14659.4 | 16812.7 | 18969.8 | 21123.2 | 22388.1 | 23653.0 |
| 65° | 1415.5 | 3738.3 | 6061.0 | 8380.0 | 10702.8 | 12197.3 | 13691.9 | 15186.4 | 16681.0 | 17776.5 | 18872.0 |
| 67.5° | 975.0 | 2612.6 | 4246.5 | 5884.1 | 7517.9 | 8790.4 | 10059.0 | 11331.5 | 12603.9 | 13526.2 | 14452.3 |
| 70° | 692.7 | 1584.9 | 2477.1 | 3365.6 | 4257.8 | 5383.4 | 6509.0 | 7634.6 | 8760.2 | 9885.9 | 11015.2 |
| 72.5° | 493.2 | 884.7 | 1272.4 | 1664.0 | 2051.7 | 3030.5 | 4009.3 | 4991.9 | 5970.7 | 6652.1 | 7337.2 |
| 75° | 372.7 | 478.1 | 579.7 | 685.2 | 786.8 | 1024.0 | 1261.1 | 1498.3 | 1735.5 | 1976.4 | 2217.4 |
| 77.5° | 176.9 | 195.8 | 210.8 | 229.6 | 244.7 | 304.9 | 365.2 | 425.4 | 485.6 | 587.3 | 688.9 |
| 80° | 94.1 | 101.6 | 109.2 | 116.7 | 124.2 | 128.0 | 131.8 | 135.5 | 139.3 | 150.6 | 165.6 |
| 82.5° | 33.9 | 37.6 | 37.6 | 41.4 | 41.4 | 37.6 | 37.6 | 33.9 | 30.1 | 33.9 | 33.9 |
| 85° | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 52.7 | 52.7 | 52.7 | 52.7 | 48.9 | 48.9 | 48.9 | 48.9 | 45.2 | 45.2 | 45.2 |
| 5° | 60.2 | 60.2 | 60.2 | 60.2 | 56.5 | 56.5 | 56.5 | 56.5 | 52.7 | 52.7 | 52.7 |
| 7.5° | 71.5 | 71.5 | 71.5 | 71.5 | 67.8 | 67.8 | 67.8 | 67.8 | 64.0 | 64.0 | 64.0 |
| 10° | 86.6 | 86.6 | 86.6 | 86.6 | 86.6 | 86.6 | 86.6 | 86.6 | 82.8 | 82.8 | 82.8 |
| 12.5° | 105.4 | 105.4 | 105.4 | 105.4 | 105.4 | 105.4 | 105.4 | 105.4 | 101.6 | 101.6 | 101.6 |
| 15° | 139.3 | 143.1 | 146.8 | 150.6 | 150.6 | 154.3 | 150.6 | 146.8 | 143.1 | 139.3 | 135.5 |
| 17.5° | 259.8 | 278.6 | 286.1 | 289.9 | 297.4 | 301.2 | 297.4 | 289.9 | 286.1 | 278.6 | 259.8 |
| 20° | 756.7 | 847.0 | 911.0 | 975.0 | 1039.0 | 1103.0 | 1065.4 | 1027.7 | 990.1 | 952.4 | 854.6 |
| 22.5° | 1991.5 | 2202.3 | 2349.1 | 2495.9 | 2642.8 | 2789.6 | 2687.9 | 2586.3 | 2480.9 | 2379.2 | 2130.8 |
| 25° | 3467.2 | 3824.8 | 4013.1 | 4205.1 | 4393.3 | 4581.5 | 4408.4 | 4235.2 | 4058.2 | 3885.1 | 3538.7 |
| 27.5° | 4686.9 | 5116.1 | 5278.0 | 5436.1 | 5598.0 | 5756.1 | 5601.7 | 5451.1 | 5296.8 | 5142.4 | 4739.6 |
| 30° | 5718.4 | 6140.1 | 6298.2 | 6456.3 | 6614.4 | 6772.5 | 6599.4 | 6422.4 | 6249.2 | 6072.3 | 5673.3 |
| 32.5° | 6659.6 | 7141.5 | 7359.8 | 7578.1 | 7796.5 | 8014.8 | 7755.1 | 7495.3 | 7235.6 | 6975.8 | 6520.3 |
| 35° | 7789.0 | 8365.0 | 8620.9 | 8880.7 | 9136.7 | 9392.7 | 9084.0 | 8771.5 | 8462.8 | 8150.4 | 7574.4 |
| 37.5° | 9008.7 | 9720.2 | 10062.8 | 10405.4 | 10747.9 | 11090.5 | 10706.5 | 10322.5 | 9938.6 | 9554.6 | 8820.5 |
| 40° | 11229.8 | 12174.7 | 12683.0 | 13187.4 | 13695.6 | 14200.1 | 13624.1 | 13044.4 | 12468.4 | 11888.6 | 10879.7 |
| 42.5° | 15849.0 | 17185.4 | 17908.2 | 18631.0 | 19353.8 | 20076.6 | 19237.1 | 18393.9 | 17554.3 | 16711.1 | 15318.2 |
| 45° | 22211.2 | 24187.6 | 24985.7 | 25780.0 | 26578.1 | 27372.4 | 26423.8 | 25475.1 | 24522.6 | 23574.0 | 21702.9 |
| 47.5° | 25892.9 | 27737.6 | 28520.6 | 29303.7 | 30083.0 | 30866.0 | 29973.8 | 29081.6 | 28189.4 | 27297.1 | 25471.3 |
| 50° | 27116.4 | 28923.5 | 29785.5 | 30651.4 | 31513.5 | 32375.6 | 31355.4 | 30331.4 | 29311.2 | 28287.2 | 26532.9 |
| 52.5° | 27387.5 | 29156.9 | 30173.3 | 31189.7 | 32202.4 | 33218.9 | 32040.5 | 30862.2 | 29680.1 | 28501.8 | 26762.6 |
| 55° | 28117.8 | 30101.8 | 31272.6 | 32439.6 | 33610.4 | 34777.4 | 33403.3 | 32025.5 | 30651.4 | 29273.6 | 27364.9 |
| 57.5° | 29085.3 | 31178.5 | 32247.6 | 33316.7 | 34382.1 | 35451.3 | 34122.4 | 32797.2 | 31468.3 | 30139.4 | 28147.9 |
| 60° | 28291.0 | 30071.7 | 30963.9 | 31852.3 | 32744.5 | 33633.0 | 32432.1 | 31234.9 | 30034.0 | 28833.1 | 27172.9 |
| 62.5° | 24914.1 | 26179.1 | 26868.0 | 27556.9 | 28242.1 | 28931.0 | 27944.7 | 26958.3 | 25972.0 | 24985.7 | 23781.0 |
| 65° | 19963.7 | 21059.2 | 21556.1 | 22049.3 | 22546.2 | 23039.4 | 22354.2 | 21669.1 | 20980.1 | 20295.0 | 19282.3 |
| 67.5° | 15374.6 | 16297.0 | 17065.0 | 17829.2 | 18597.1 | 19361.4 | 18529.4 | 17697.4 | 16861.7 | 16029.7 | 15058.4 |
| 70° | 12140.8 | 13266.5 | 13898.9 | 14531.4 | 15163.8 | 15796.3 | 15073.5 | 14350.7 | 13624.1 | 12901.3 | 11884.9 |
| 72.5° | 8018.6 | 8700.0 | 8925.9 | 9155.5 | 9381.4 | 9607.3 | 9343.7 | 9084.0 | 8820.5 | 8556.9 | 7913.2 |
| 75° | 2454.5 | 2695.5 | 2962.7 | 3233.8 | 3501.1 | 3768.4 | 3527.4 | 3286.5 | 3045.6 | 2804.6 | 2586.3 |
| 77.5° | 786.8 | 888.4 | 967.5 | 1046.6 | 1121.9 | 1200.9 | 1204.7 | 1208.4 | 1208.4 | 1212.2 | 1095.5 |
| 80° | 176.9 | 188.2 | 188.2 | 188.2 | 184.5 | 184.5 | 203.3 | 218.3 | 237.2 | 252.2 | 237.2 |
| 82.5° | 37.6 | 37.6 | 37.6 | 37.6 | 37.6 | 37.6 | 37.6 | 37.6 | 33.9 | 33.9 | 33.9 |
| 85° | 3.8 | 3.8 | 3.8 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 |
| 2.5° | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 45.2 | 41.4 | 41.4 |
| 5° | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 52.7 | 48.9 | 48.9 |
| 7.5° | 64.0 | 64.0 | 64.0 | 64.0 | 64.0 | 60.2 | 60.2 | 60.2 | 60.2 | 56.5 | 56.5 |
| 10° | 82.8 | 79.1 | 79.1 | 79.1 | 75.3 | 75.3 | 71.5 | 71.5 | 67.8 | 67.8 | 64.0 |
| 12.5° | 101.6 | 97.9 | 97.9 | 94.1 | 94.1 | 90.4 | 86.6 | 82.8 | 79.1 | 75.3 | 71.5 |
| 15° | 131.8 | 128.0 | 124.2 | 120.5 | 112.9 | 109.2 | 101.6 | 97.9 | 94.1 | 90.4 | 86.6 |
| 17.5° | 240.9 | 222.1 | 203.3 | 184.5 | 169.4 | 150.6 | 131.8 | 124.2 | 112.9 | 105.4 | 94.1 |
| 20° | 760.5 | 662.6 | 564.7 | 478.1 | 391.5 | 301.2 | 214.6 | 188.2 | 161.9 | 135.5 | 109.2 |
| 22.5° | 1886.1 | 1637.6 | 1389.1 | 1174.6 | 960.0 | 745.4 | 530.8 | 432.9 | 335.0 | 237.2 | 139.3 |
| 25° | 3192.4 | 2842.3 | 2495.9 | 2119.5 | 1746.8 | 1370.3 | 993.9 | 798.1 | 598.6 | 399.0 | 203.3 |
| 27.5° | 4336.8 | 3934.0 | 3531.2 | 3034.3 | 2537.3 | 2036.7 | 1539.7 | 1238.6 | 933.6 | 628.7 | 327.5 |
| 30° | 5278.0 | 4878.9 | 4479.9 | 3870.0 | 3256.4 | 2646.5 | 2032.9 | 1641.4 | 1249.8 | 854.6 | 463.0 |
| 32.5° | 6064.8 | 5609.3 | 5153.7 | 4483.6 | 3817.3 | 3147.2 | 2477.1 | 1991.5 | 1509.6 | 1024.0 | 538.3 |
| 35° | 6994.6 | 6418.6 | 5838.9 | 5123.6 | 4412.1 | 3696.8 | 2981.6 | 2390.5 | 1795.7 | 1200.9 | 609.9 |
| 37.5° | 8086.4 | 7352.3 | 6618.2 | 5842.7 | 5070.9 | 4295.4 | 3519.9 | 2819.7 | 2123.2 | 1423.0 | 722.8 |
| 40° | 9874.6 | 8865.6 | 7856.7 | 6926.9 | 5993.2 | 5063.4 | 4129.8 | 3320.4 | 2511.0 | 1697.8 | 888.4 |
| 42.5° | 13925.3 | 12532.4 | 11139.5 | 9746.6 | 8349.9 | 6957.0 | 5560.3 | 4457.3 | 3358.0 | 2255.0 | 1152.0 |
| 45° | 19831.9 | 17960.9 | 16089.9 | 14222.7 | 12355.4 | 10488.2 | 8620.9 | 6908.0 | 5195.2 | 3478.5 | 1765.6 |
| 47.5° | 23645.5 | 21819.6 | 19993.8 | 18205.6 | 16421.2 | 14633.0 | 12844.8 | 10435.5 | 8026.1 | 5613.0 | 3203.7 |
| 50° | 24782.4 | 23028.1 | 21273.8 | 19677.6 | 18085.2 | 16489.0 | 14892.8 | 12344.1 | 9799.3 | 7250.6 | 4702.0 |
| 52.5° | 25023.3 | 23280.3 | 21541.1 | 19941.1 | 18344.9 | 16745.0 | 15145.0 | 12607.7 | 10070.3 | 7529.2 | 4991.9 |
| 55° | 25456.3 | 23547.6 | 21638.9 | 19843.2 | 18047.5 | 16248.0 | 14452.3 | 11918.7 | 9385.2 | 6851.6 | 4318.0 |
| 57.5° | *26156.5* | *24161.2* | *22169.8* | *20031.5* | *17893.2* | *15754.9* | *13616.6* | *11060.4* | *8504.2* | *5948.1* | *3391.9* |
| 60° | 25512.7 | 23848.8 | 22188.6 | 19884.6 | 17576.9 | 15273.0 | 12965.3 | 10367.7 | 7766.4 | 5165.0 | 2567.5 |
| 62.5° | 22572.6 | 21367.9 | 20159.5 | 18115.3 | 16071.1 | 14026.9 | 11982.7 | 9452.9 | 6923.1 | 4393.3 | 1863.5 |
| 65° | 18265.9 | 17253.2 | 16236.7 | 14618.0 | 12999.2 | 11376.6 | 9757.9 | 7627.1 | 5500.1 | 3369.3 | 1238.6 |
| 67.5° | 14087.1 | 13115.9 | 12144.6 | 10868.4 | 9592.2 | 8316.0 | 7039.8 | 5488.8 | 3937.8 | 2383.0 | 832.0 |
| 70° | 10868.4 | 9852.0 | 8835.5 | 7687.3 | 6539.1 | 5390.9 | 4242.7 | 3339.2 | 2439.5 | 1536.0 | 632.5 |
| 72.5° | 7269.5 | 6625.7 | 5982.0 | 5029.5 | 4077.1 | 3124.6 | 2172.2 | 1758.1 | 1344.0 | 926.1 | 512.0 |
| 75° | 2364.2 | 2145.8 | 1923.7 | 1664.0 | 1404.2 | 1140.7 | 880.9 | 764.2 | 643.7 | 523.3 | 406.6 |
| 77.5° | 975.0 | 858.3 | 737.9 | 628.7 | 515.8 | 406.6 | 293.6 | 274.8 | 256.0 | 237.2 | 218.3 |
| 80° | 218.3 | 203.3 | 184.5 | 173.2 | 161.9 | 150.6 | 139.3 | 131.8 | 120.5 | 112.9 | 101.6 |
| 82.5° | 30.1 | 30.1 | 26.4 | 30.1 | 33.9 | 37.6 | 41.4 | 37.6 | 37.6 | 33.9 | 30.1 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 0° | 45.2 | 45.2 |
| 2.5° | 41.4 | 41.4 |
| 5° | 48.9 | 45.2 |
| 7.5° | 56.5 | 52.7 |
| 10° | 64.0 | 60.2 |
| 12.5° | 71.5 | 67.8 |
| 15° | 82.8 | 75.3 |
| 17.5° | 90.4 | 82.8 |
| 20° | 101.6 | 90.4 |
| 22.5° | 120.5 | 101.6 |
| 25° | 158.1 | 116.7 |
| 27.5° | 233.4 | 143.1 |
| 30° | 327.5 | 192.0 |
| 32.5° | 387.8 | 237.2 |
| 35° | 421.6 | 237.2 |
| 37.5° | 478.1 | 233.4 |
| 40° | 564.7 | 244.7 |
| 42.5° | 707.7 | 267.3 |
| 45° | 1050.3 | 335.0 |
| 47.5° | 1904.9 | 606.1 |
| 50° | 2823.5 | 948.7 |
| 52.5° | 3011.7 | 1031.5 |
| 55° | 2623.9 | 929.9 |
| 57.5° | *2089.4* | *786.8* |
| 60° | 1577.4 | 591.0 |
| 62.5° | 1170.8 | 481.9 |
| 65° | 832.0 | 425.4 |
| 67.5° | 613.6 | 395.3 |
| 70° | 504.5 | 380.2 |
| 72.5° | 432.9 | 353.9 |
| 75° | 361.4 | 316.2 |
| 77.5° | 225.9 | 229.6 |
| 80° | 97.9 | 90.4 |
| 82.5° | 30.1 | 26.4 |
| 85° | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390073
CATALOG NUMBER: GSS-SA3C-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 112.5° | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-10

Test Date: 10/11/2024

Luminaire Tested: GSS-SB1A-835-U-5WQ

Data in this report applies to families of products including GSS-SB1A-835-U-5WQ

Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04


## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-184-10 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 10/15/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | McGraw-Edison |
| Catalog Number: | **GSS-SB1A-835-U-5WQ** |
| Description: | GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 80 CRI 3500K CCT 26 LEDS |

## Spectral Parameters

| | |
|---|---|
| CCT (K): | 3411 |
| CIE u': | 0.2360 |
| CIE v': | 0.5189 |
| Duv: | 0.0044 |
| CIE x: | 0.4154 |
| CIE y: | 0.4059 |
| CIE z: | 0.1787 |
| Peak Wavelength (nm): | 601 |
| Dominant Wavelength (nm): | 579 |
| Purity: | 46.51914 |
| Rf: | 86.6 |
| Rg: | 95.9 |

| | |
|---|---|
| CRI (Ra): | 83.5 |
| R1: | 81.1 |
| R2: | 88.9 |
| R3: | 97.2 |
| R4: | 83.8 |
| R5: | 81.7 |
| R6: | 86.9 |
| R7: | 86.1 |
| R8: | 62.2 |
| R9: | 6.3 |
| R10: | 75.4 |
| R11: | 84.1 |
| R12: | 69.7 |
| R13: | 82.8 |
| R14: | 98.5 |
| R15: | 72.6 |

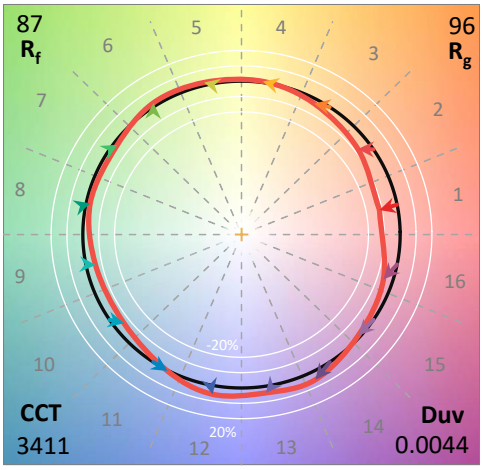


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 35M |
| Operation Time: | 1H 35M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-184-10


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-184-10

## CIE 1931 Chromaticity Diagram

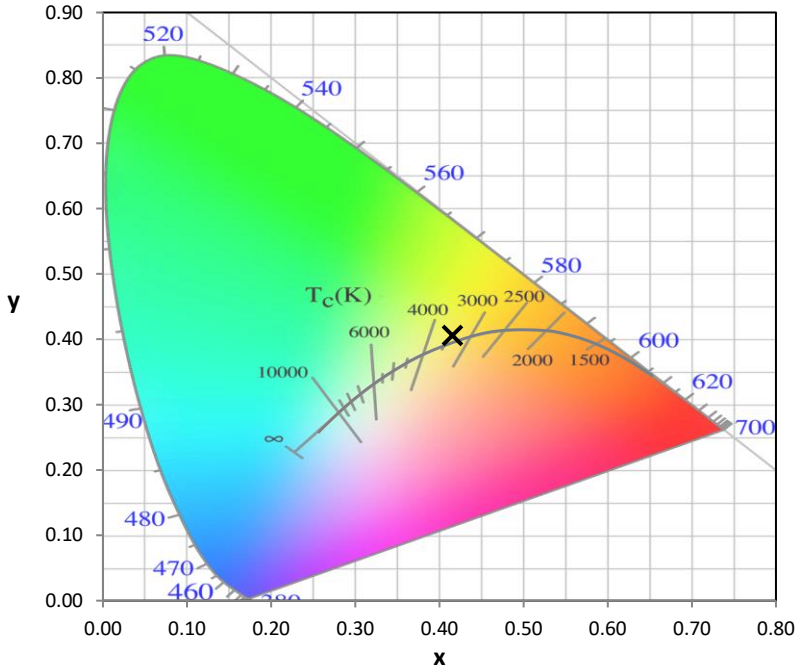


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

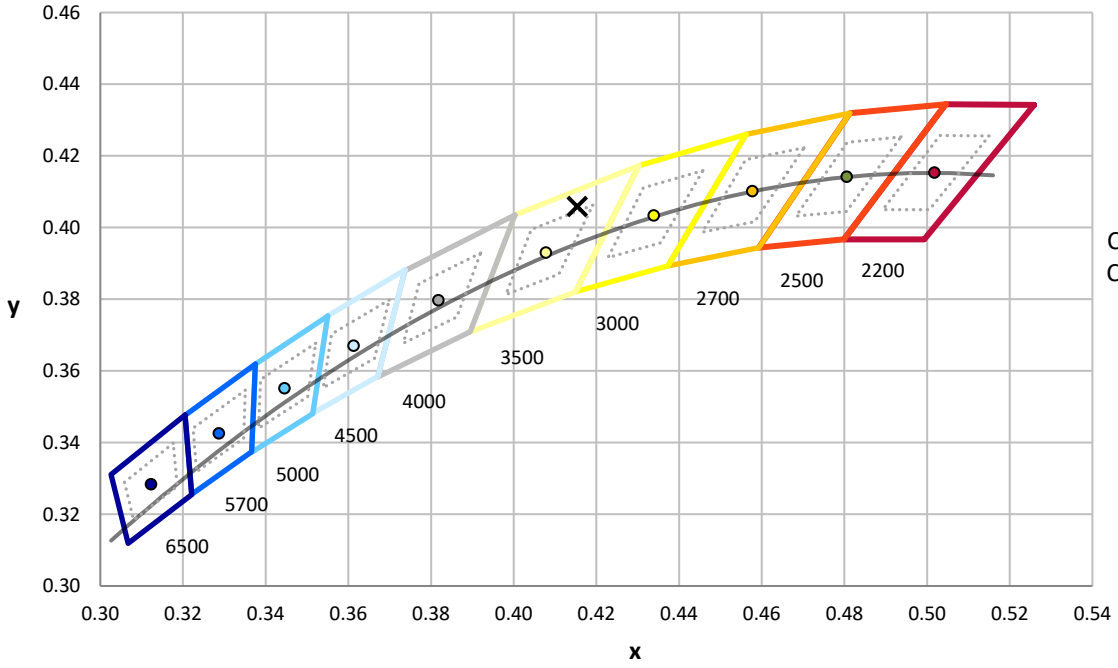



CCT = 3411K
CIE x = 0.4154
CIE y = 0.4059
Duv = 0.0044

Point lies inside the ANSI 3500K 7-step quadrangle

REPORT NUMBER: SP1-2407-184-10

## Photopic Flux vs. Wavelength

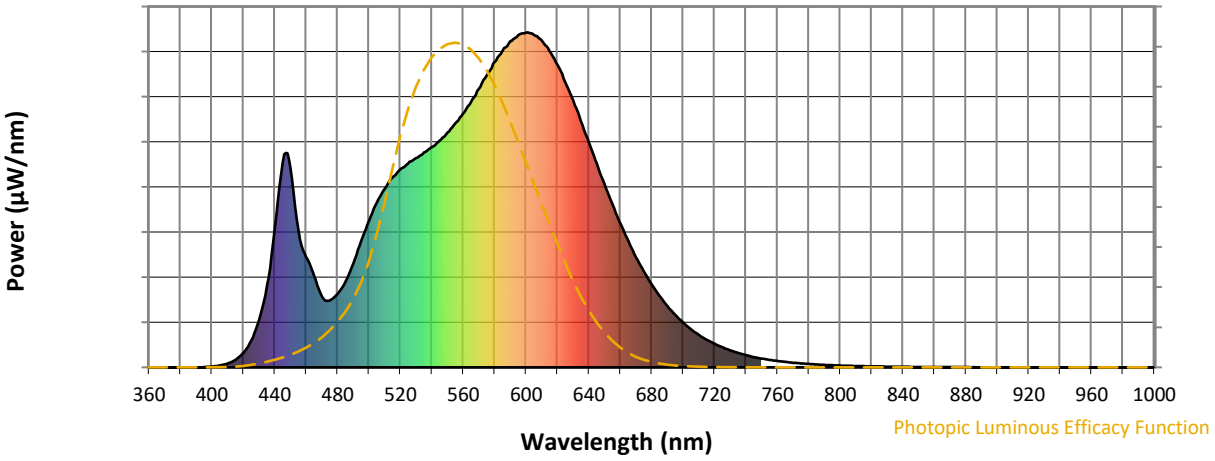



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 311 | NR | 620 | 903 | NR | 750 | 26 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 376 | NR | 625 | 851 | NR | 755 | 22 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 438 | NR | 630 | 797 | NR | 760 | 19 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 491 | NR | 635 | 735 | NR | 765 | 16 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 533 | NR | 640 | 672 | NR | 770 | 14 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 566 | NR | 645 | 607 | NR | 775 | 12 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 592 | NR | 650 | 546 | NR | 780 | 10 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 608 | NR | 655 | 487 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 3 | NR | 530 | 625 | NR | 660 | 429 | NR | 790 | 7 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 642 | NR | 665 | 378 | NR | 795 | 6 | NR | 925 | 0 | NR |
| 410 | 12 | NR | 540 | 657 | NR | 670 | 329 | NR | 800 | 5 | NR | 930 | 0 | NR |
| 415 | 22 | NR | 545 | 677 | NR | 675 | 286 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 43 | NR | 550 | 701 | NR | 680 | 248 | NR | 810 | 4 | NR | 940 | 0 | NR |
| 425 | 80 | NR | 555 | 728 | NR | 685 | 213 | NR | 815 | 3 | NR | 945 | 0 | NR |
| 430 | 140 | NR | 560 | 757 | NR | 690 | 184 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 243 | NR | 565 | 793 | NR | 695 | 156 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 412 | NR | 570 | 831 | NR | 700 | 134 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 610 | NR | 575 | 872 | NR | 705 | 114 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 597 | NR | 580 | 911 | NR | 710 | 97 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 412 | NR | 585 | 944 | NR | 715 | 83 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 330 | NR | 590 | 974 | NR | 720 | 70 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 274 | NR | 595 | 992 | NR | 725 | 60 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 211 | NR | 600 | 999 | NR | 730 | 51 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 200 | NR | 605 | 992 | NR | 735 | 43 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 220 | NR | 610 | 975 | NR | 740 | 36 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 255 | NR | 615 | 944 | NR | 745 | 31 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-10

## Scotopic Flux vs. Wavelength

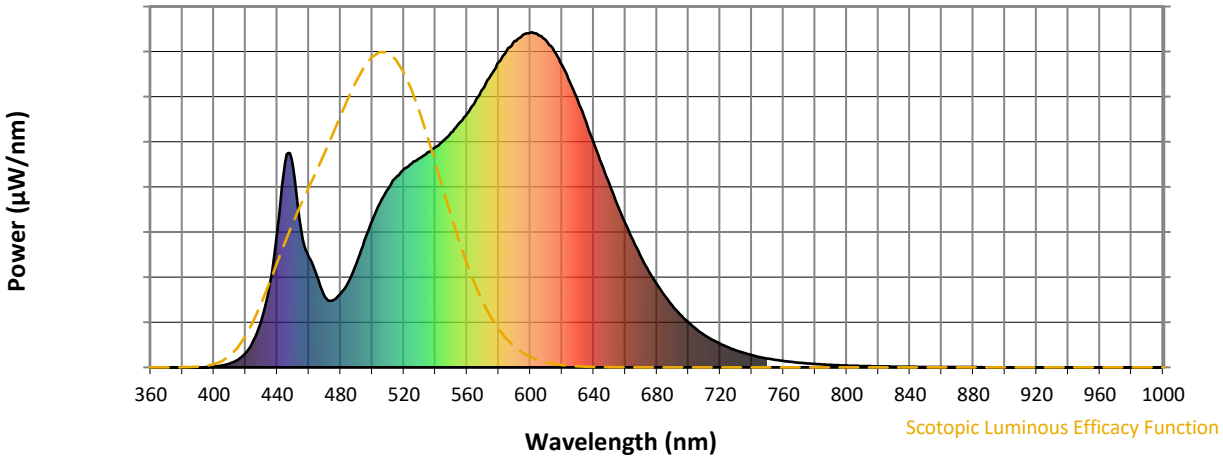



**Scotopic Lumens: NR** **S/P: 1.48**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 311 | NR | 620 | 903 | NR | 750 | 26 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 376 | NR | 625 | 851 | NR | 755 | 22 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 438 | NR | 630 | 797 | NR | 760 | 19 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 491 | NR | 635 | 735 | NR | 765 | 16 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 533 | NR | 640 | 672 | NR | 770 | 14 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 566 | NR | 645 | 607 | NR | 775 | 12 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 592 | NR | 650 | 546 | NR | 780 | 10 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 608 | NR | 655 | 487 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 3 | NR | 530 | 625 | NR | 660 | 429 | NR | 790 | 7 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 642 | NR | 665 | 378 | NR | 795 | 6 | NR | 925 | 0 | NR |
| 410 | 12 | NR | 540 | 657 | NR | 670 | 329 | NR | 800 | 5 | NR | 930 | 0 | NR |
| 415 | 22 | NR | 545 | 677 | NR | 675 | 286 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 43 | NR | 550 | 701 | NR | 680 | 248 | NR | 810 | 4 | NR | 940 | 0 | NR |
| 425 | 80 | NR | 555 | 728 | NR | 685 | 213 | NR | 815 | 3 | NR | 945 | 0 | NR |
| 430 | 140 | NR | 560 | 757 | NR | 690 | 184 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 243 | NR | 565 | 793 | NR | 695 | 156 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 412 | NR | 570 | 831 | NR | 700 | 134 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 610 | NR | 575 | 872 | NR | 705 | 114 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 597 | NR | 580 | 911 | NR | 710 | 97 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 412 | NR | 585 | 944 | NR | 715 | 83 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 330 | NR | 590 | 974 | NR | 720 | 70 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 274 | NR | 595 | 992 | NR | 725 | 60 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 211 | NR | 600 | 999 | NR | 730 | 51 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 200 | NR | 605 | 992 | NR | 735 | 43 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 220 | NR | 610 | 975 | NR | 740 | 36 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 255 | NR | 615 | 944 | NR | 745 | 31 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-10

## Melanopic Flux vs. Wavelength

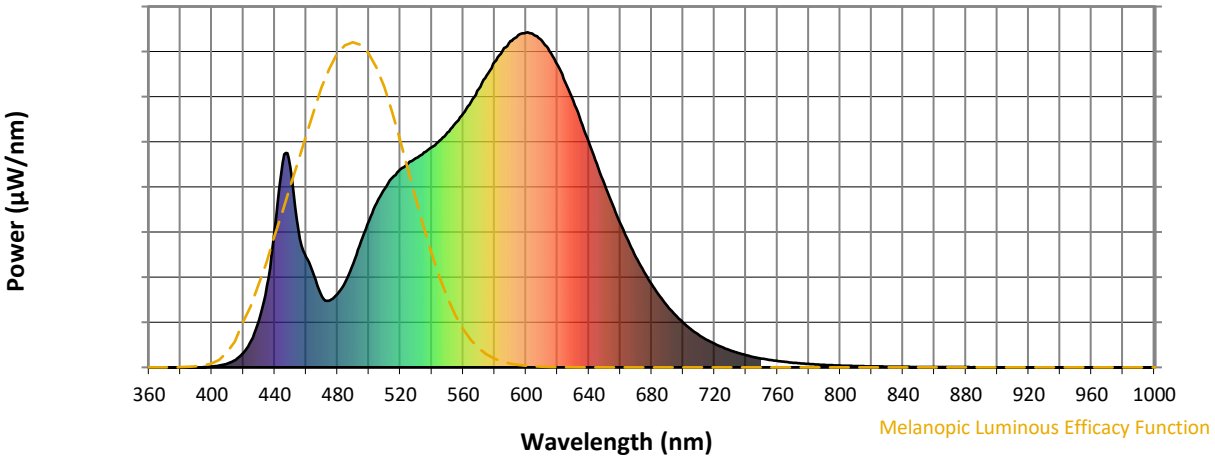


**Melanopic Lumens: NR** **M/P: 2.88**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 311 | NR | 620 | 903 | NR | 750 | 26 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 376 | NR | 625 | 851 | NR | 755 | 22 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 438 | NR | 630 | 797 | NR | 760 | 19 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 491 | NR | 635 | 735 | NR | 765 | 16 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 533 | NR | 640 | 672 | NR | 770 | 14 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 566 | NR | 645 | 607 | NR | 775 | 12 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 592 | NR | 650 | 546 | NR | 780 | 10 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 608 | NR | 655 | 487 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 3 | NR | 530 | 625 | NR | 660 | 429 | NR | 790 | 7 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 642 | NR | 665 | 378 | NR | 795 | 6 | NR | 925 | 0 | NR |
| 410 | 12 | NR | 540 | 657 | NR | 670 | 329 | NR | 800 | 5 | NR | 930 | 0 | NR |
| 415 | 22 | NR | 545 | 677 | NR | 675 | 286 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 43 | NR | 550 | 701 | NR | 680 | 248 | NR | 810 | 4 | NR | 940 | 0 | NR |
| 425 | 80 | NR | 555 | 728 | NR | 685 | 213 | NR | 815 | 3 | NR | 945 | 0 | NR |
| 430 | 140 | NR | 560 | 757 | NR | 690 | 184 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 243 | NR | 565 | 793 | NR | 695 | 156 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 412 | NR | 570 | 831 | NR | 700 | 134 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 610 | NR | 575 | 872 | NR | 705 | 114 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 597 | NR | 580 | 911 | NR | 710 | 97 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 412 | NR | 585 | 944 | NR | 715 | 83 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 330 | NR | 590 | 974 | NR | 720 | 70 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 274 | NR | 595 | 992 | NR | 725 | 60 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 211 | NR | 600 | 999 | NR | 730 | 51 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 200 | NR | 605 | 992 | NR | 735 | 43 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 220 | NR | 610 | 975 | NR | 740 | 36 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 255 | NR | 615 | 944 | NR | 745 | 31 | NR | 875 | 1 | NR | | | |


REPORT NUMBER: SP1-2407-184-10

# TM-30-18


## Summary


$R_f$ = 86.6
$R_g$ = 95.9
CIE $R_a$ = 83.5
$R_9$ = 6.3


## Spectral Power Distribution Comparison

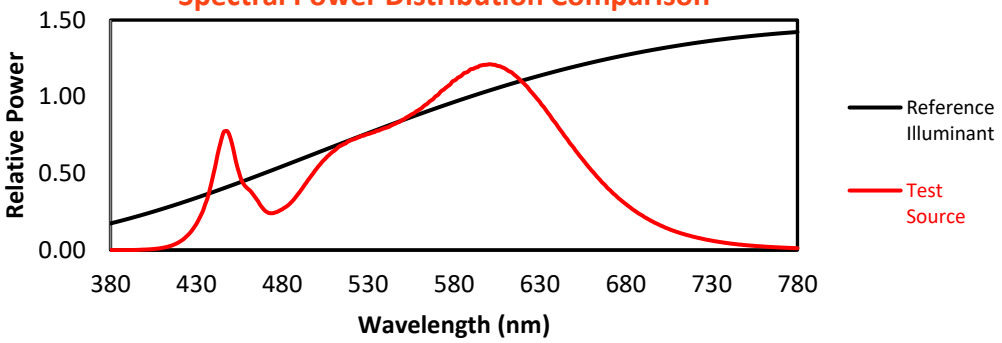



## Color Vector Graphics

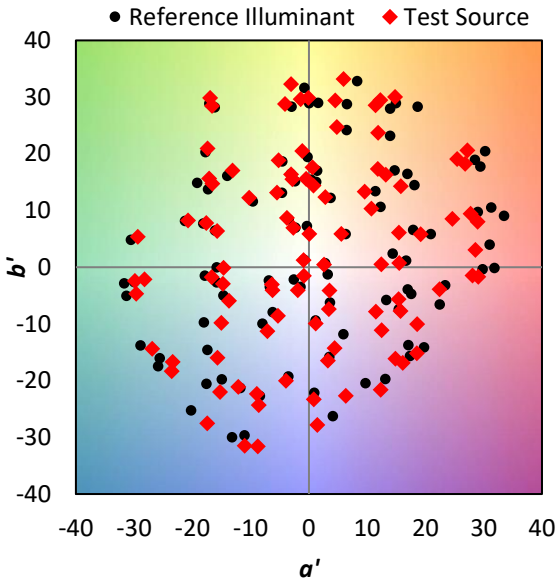

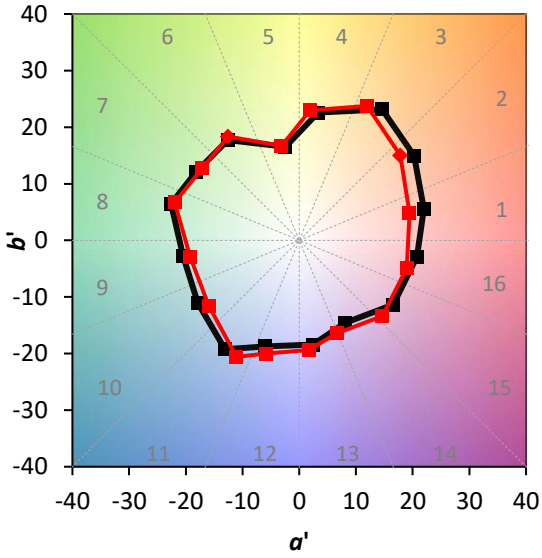


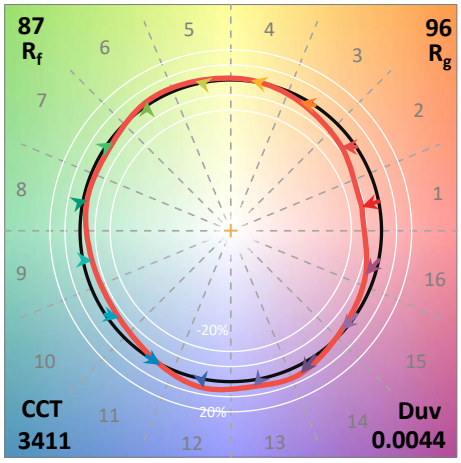
REPORT NUMBER: SP1-2407-184-10
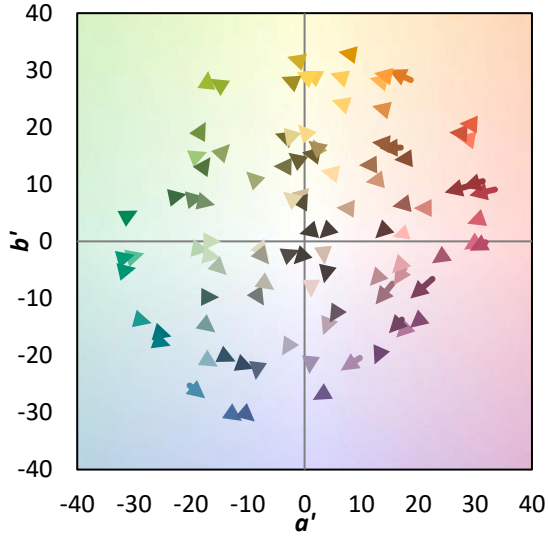
# TM-30-18

**Individual Sample Fidelity Index ($R_{f,i}$)**


| | | | |
|---|---|---|---|
| CES01 = 86 | CES26 = 85 | CES51 = 97 | CES76 = 81 |
| CES02 = 62 | CES27 = 95 | CES52 = 96 | CES77 = 87 |
| CES03 = 31 | CES28 = 94 | CES53 = 91 | CES78 = 80 |
| CES04 = 70 | CES29 = 87 | CES54 = 92 | CES79 = 93 |
| CES05 = 49 | CES30 = 93 | CES55 = 92 | CES80 = 91 |
| CES06 = 51 | CES31 = 89 | CES56 = 88 | CES81 = 77 |
| CES07 = 41 | CES32 = 84 | CES57 = 87 | CES82 = 96 |
| CES08 = 40 | CES33 = 91 | CES58 = 88 | CES83 = 95 |
| CES09 = 29 | CES34 = 91 | CES59 = 93 | CES84 = 92 |
| CES10 = 75 | CES35 = 95 | CES60 = 94 | CES85 = 80 |
| CES11 = 58 | CES36 = 90 | CES61 = 91 | CES86 = 72 |
| CES12 = 64 | CES37 = 95 | CES62 = 95 | CES87 = 86 |
| CES13 = 43 | CES38 = 100 | CES63 = 88 | CES88 = 88 |
| CES14 = 74 | CES39 = 97 | CES64 = 85 | CES89 = 77 |
| CES15 = 71 | CES40 = 94 | CES65 = 80 | CES90 = 88 |
| CES16 = 47 | CES41 = 97 | CES66 = 84 | CES91 = 81 |
| CES17 = 49 | CES42 = 96 | CES67 = 82 | CES92 = 67 |
| CES18 = 56 | CES43 = 93 | CES68 = 85 | CES93 = 81 |
| CES19 = 72 | CES44 = 99 | CES69 = 89 | CES94 = 63 |
| CES20 = 66 | CES45 = 95 | CES70 = 81 | CES95 = 76 |
| CES21 = 86 | CES46 = 91 | CES71 = 79 | CES96 = 84 |
| CES22 = 78 | CES47 = 93 | CES72 = 93 | CES97 = 92 |
| CES23 = 91 | CES48 = 85 | CES73 = 76 | CES98 = 86 |
| CES24 = 90 | CES49 = 92 | CES74 = 95 | CES99 = 77 |
| CES25 = 72 | CES50 = 96 | CES75 = 80 | |

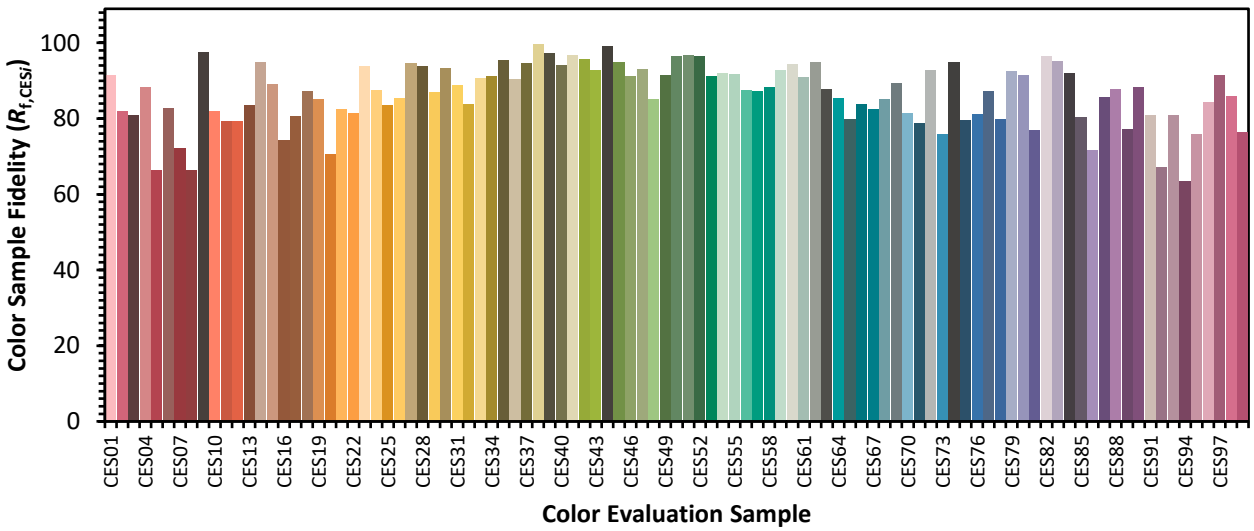



REPORT NUMBER: SP1-2407-184-10

# TM-30-18

## Color Rendition by Hue-Angle Bin

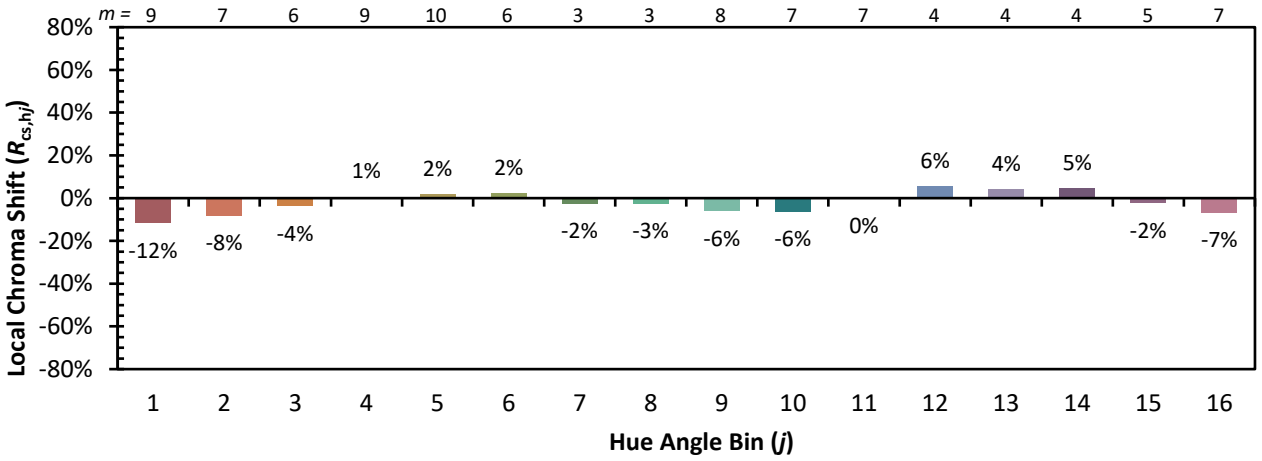

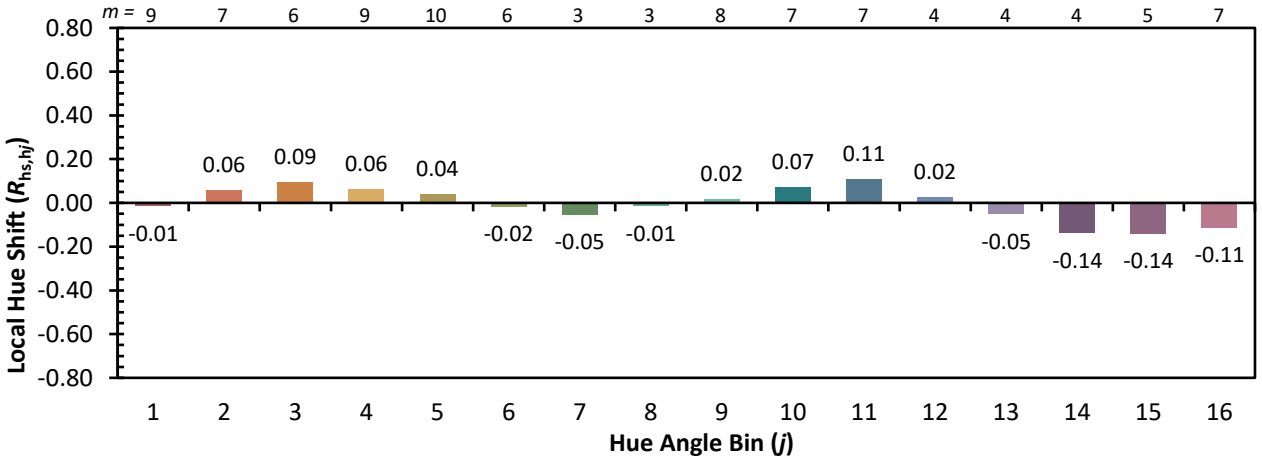


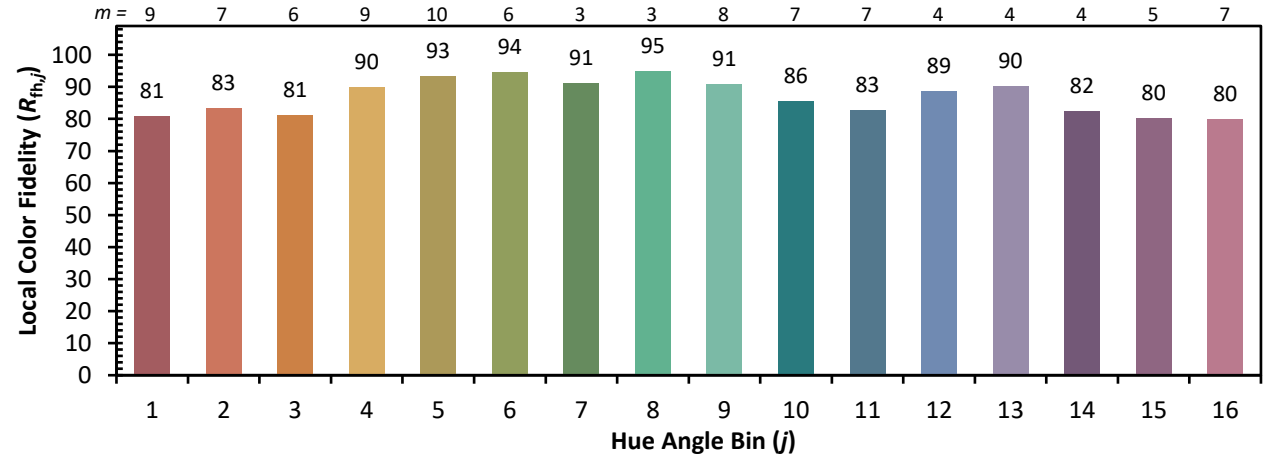
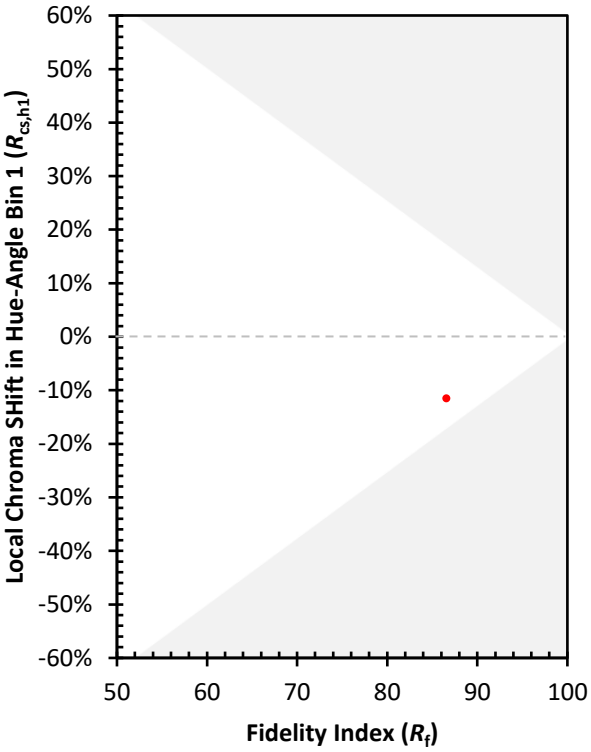



REPORT NUMBER: SP1-2407-184-10

# TM-30-18

## Measure Comparisons

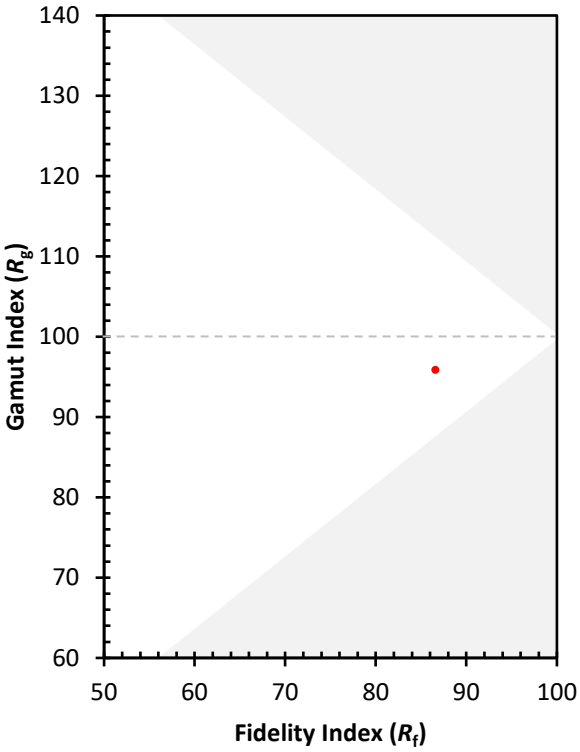


(END OF REPORT)