Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1390075

Luminaire Tested: **GSS-SA4A-835-U-RBC**

Issue Date: 02/18/2026

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P1390075 |
| Test Lab: | INNOVATION CENTER(G3) |
| Issue Date: | 02/18/2026 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | GSS-SA4A-835-U-RBC |
| Description: | GALLEON SLIM SITE LUMINAIRE 615mA 4xLight Square PACKAGE 80CRI 3500K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL |
| Light Source: | (56) 3500K CCT, 80 CRI LEDS |
| Ballast/Driver: | ELECTRONIC DRIVER |

Luminaire Equipment:

| Sample No. | Condition | Description |
|---|---|---|
| a | good | reflector |
| b | good | lens |
| c | good | housing |
| d | good | cord |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 10696.3 lumens |
| Efficiency: | N/A |
| Efficacy: | 96.6 lumens/watt |
| Luminous Opening: | Rectangular (W 1.5' x L: 1' x H: 0') |
| IES Classification: | Type III - Short |
| BUG Rating: | B0 - U0 - G2 |


| | |
|---|---|
| Input Watts (W): | 110.7 |
| Input Voltage (V): | 120 |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | 0.97 |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 28.75 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

## Iso-Footcandle Lines of Horizontal Illumination

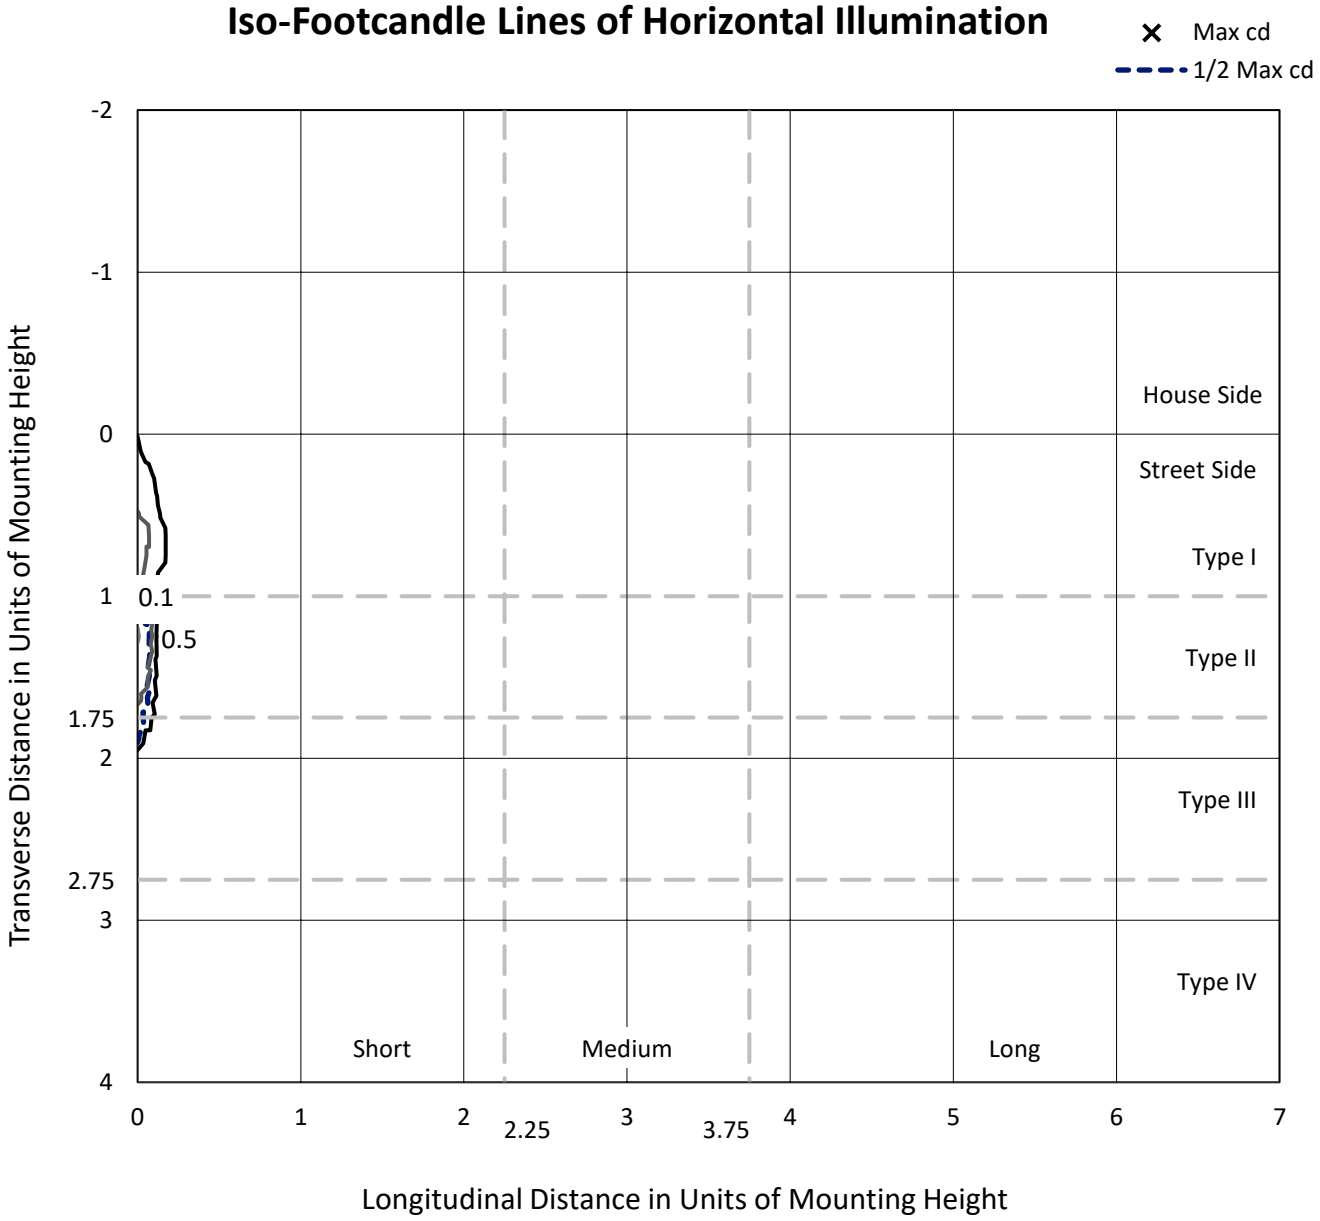



Based on 20 foot mounting height. Maximum calculated value = 0.5 fc
Type III - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

## Luminous Intensity Polar Plot

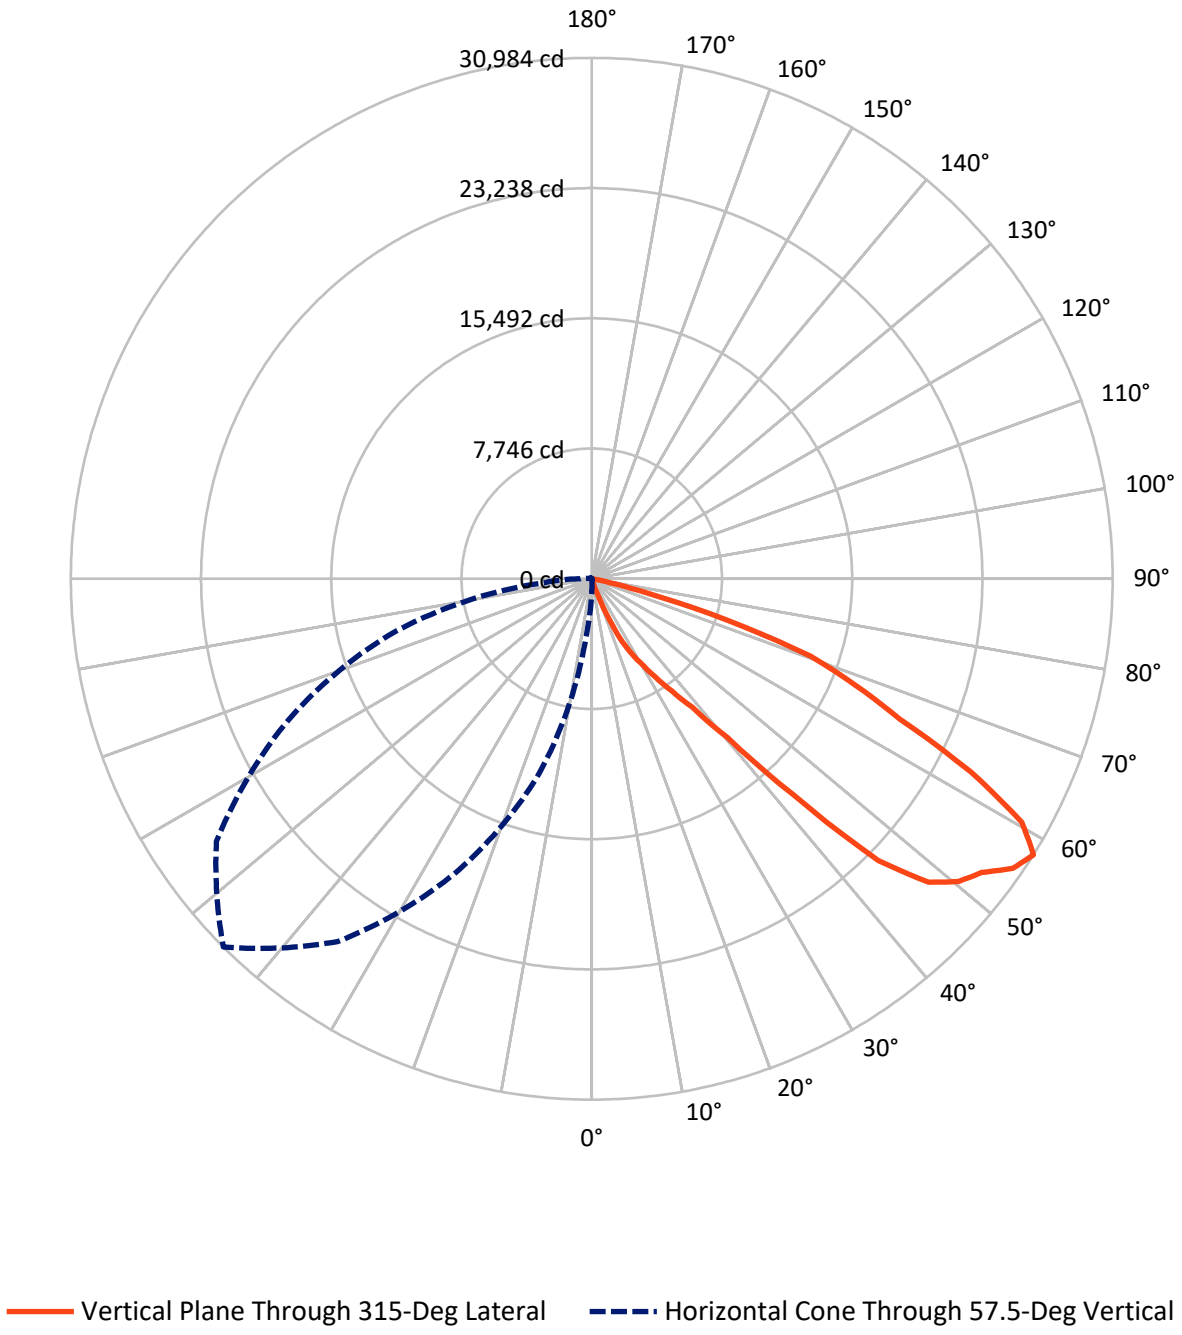

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 76.4 | 0.0 | 76.4 |
| | % Fixture | 0.7 | 0.0 | 0.7 |
| **Street Side** | Lumens | 10619.9 | 0.0 | 10619.9 |
| | % Fixture | 99.3 | 0.0 | 99.3 |
| **Total** | Lumens | 10696.3 | 0.0 | 10696.3 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 3.7 | 0.0 |
| 10°-20° | 18.0 | 0.2 |
| 20°-30° | 231.5 | 2.2 |
| 30°-40° | 721.9 | 6.7 |
| 40°-50° | 2357.7 | 22.0 |
| 50°-60° | 3784.3 | 35.4 |
| 60°-70° | 2905.7 | 27.2 |
| 70°-80° | 661.7 | 6.2 |
| 80°-90° | 11.8 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 10696.3 | 100.0 |
| 0°-180° | 10696.3 | 100.0 |

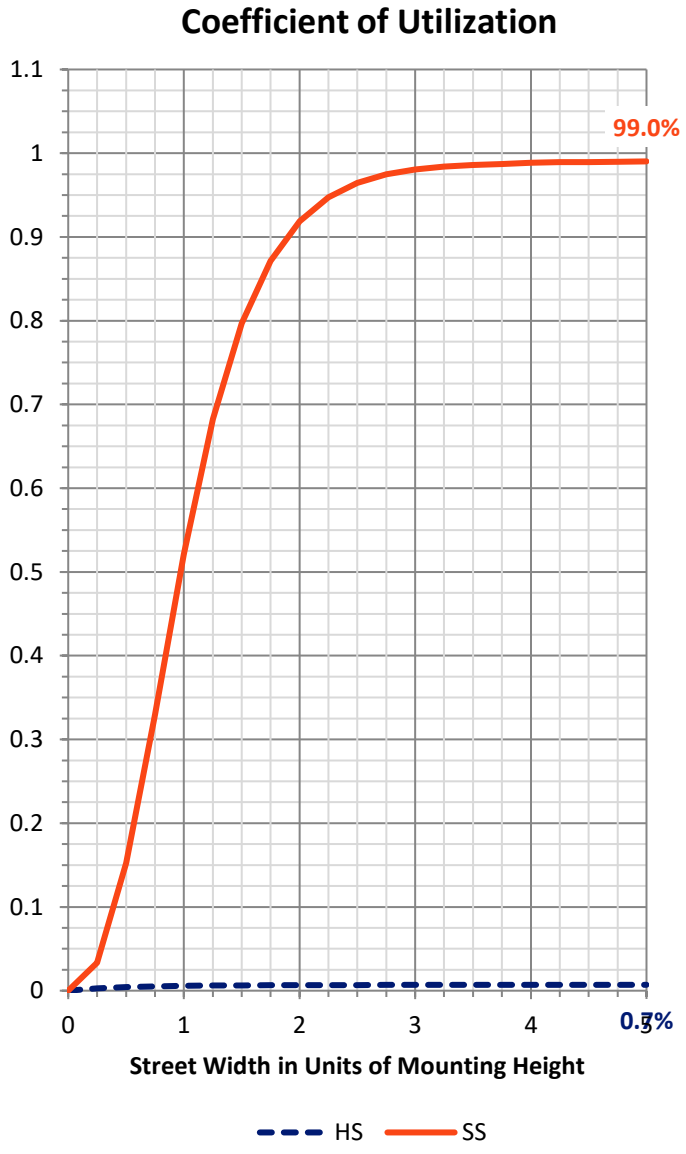

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 242.3 | 2.3 | | | |
| FM | (30°-60°) | 6831.7 | 63.9 | | | |
| FH | (60°-80°) | 3537.6 | 33.1 | | | G2/5000 |
| FVH | (80°-90°) | 8.4 | 0.1 | | | G0/10 |
| BL | (0°-30°) | 11.0 | 0.1 | B0/110 | | |
| BM | (30°-60°) | 32.2 | 0.3 | B0/220 | | |
| BH | (60°-80°) | 29.8 | 0.3 | B0/110 | | G0/110 |
| BVH | (80°-90°) | 3.4 | 0.0 | | | G0/10 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B0-U0-G2**
Type III Short

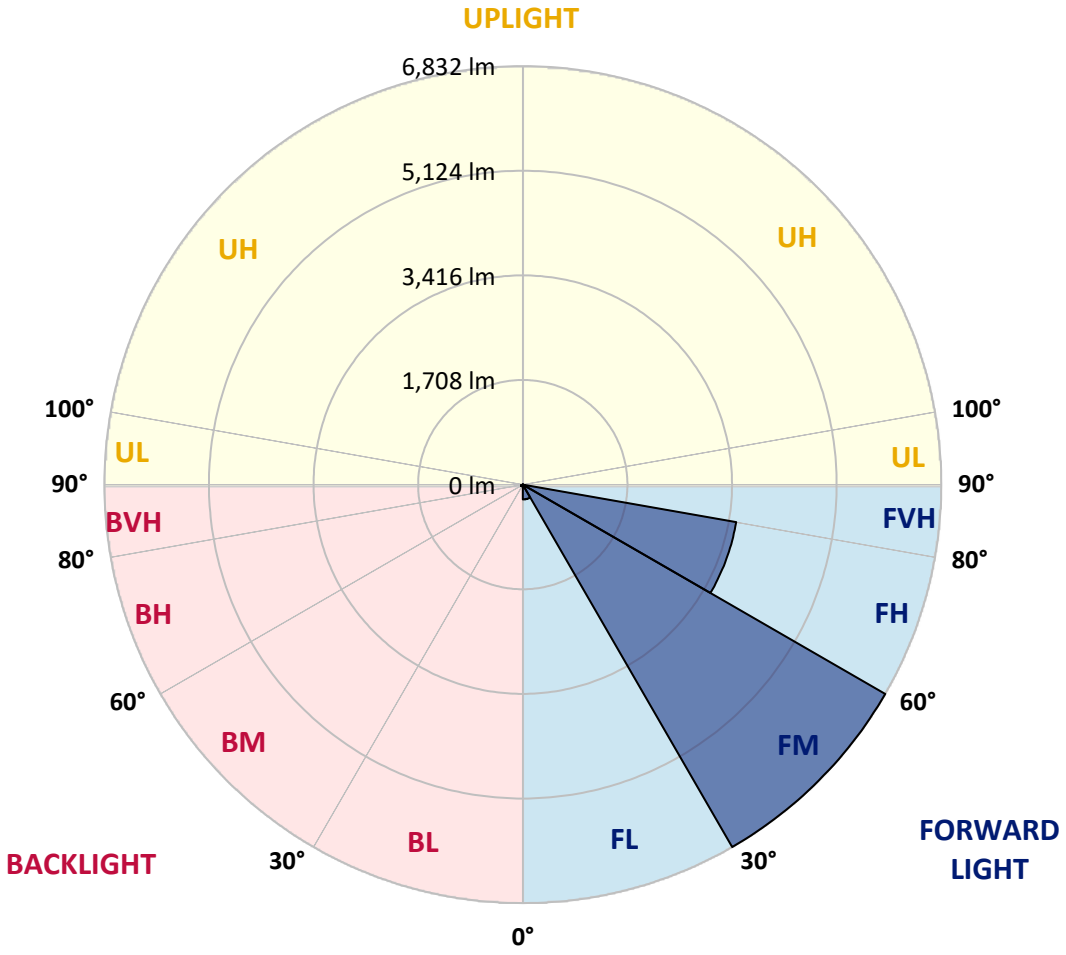

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 36.2 | 36.2 | 36.2 | 36.2 | 36.2 | 32.9 | 32.9 | 32.9 | 32.9 | 32.9 | 32.9 |
| 5° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 36.2 | 36.2 | 36.2 | 36.2 | 32.9 | 32.9 |
| 7.5° | 46.1 | 46.1 | 42.8 | 42.8 | 42.8 | 39.5 | 39.5 | 39.5 | 39.5 | 36.2 | 36.2 |
| 10° | 52.6 | 52.6 | 49.4 | 49.4 | 46.1 | 46.1 | 42.8 | 42.8 | 39.5 | 39.5 | 36.2 |
| 12.5° | 59.2 | 59.2 | 55.9 | 52.6 | 52.6 | 49.4 | 46.1 | 42.8 | 42.8 | 39.5 | 36.2 |
| 15° | 65.8 | 62.5 | 59.2 | 55.9 | 55.9 | 52.6 | 49.4 | 46.1 | 46.1 | 42.8 | 39.5 |
| 17.5° | 72.4 | 69.1 | 65.8 | 62.5 | 59.2 | 52.6 | 49.4 | 46.1 | 46.1 | 42.8 | 39.5 |
| 20° | 79.0 | 72.4 | 65.8 | 62.5 | 59.2 | 52.6 | 49.4 | 46.1 | 46.1 | 42.8 | 39.5 |
| 22.5° | 88.8 | 82.3 | 72.4 | 69.1 | 62.5 | 59.2 | 52.6 | 49.4 | 46.1 | 42.8 | 39.5 |
| 25° | 102.0 | 88.8 | 79.0 | 72.4 | 65.8 | 59.2 | 52.6 | 49.4 | 46.1 | 42.8 | 39.5 |
| 27.5° | 125.0 | 105.3 | 88.8 | 82.3 | 72.4 | 65.8 | 55.9 | 52.6 | 49.4 | 46.1 | 42.8 |
| 30° | 167.8 | 131.6 | 95.4 | 85.5 | 79.0 | 69.1 | 59.2 | 55.9 | 49.4 | 46.1 | 39.5 |
| 32.5° | 207.3 | 161.2 | 115.2 | 102.0 | 88.8 | 72.4 | 59.2 | 55.9 | 49.4 | 46.1 | 39.5 |
| 35° | 207.3 | 164.5 | 121.7 | 105.3 | 92.1 | 75.7 | 59.2 | 55.9 | 49.4 | 46.1 | 39.5 |
| 37.5° | 204.0 | 161.2 | 118.4 | 105.3 | 92.1 | 75.7 | 62.5 | 55.9 | 52.6 | 46.1 | 39.5 |
| 40° | 213.9 | 157.9 | 105.3 | 95.4 | 85.5 | 72.4 | 62.5 | 55.9 | 52.6 | 46.1 | 39.5 |
| 42.5° | 233.6 | 167.8 | 102.0 | 92.1 | 85.5 | 75.7 | 65.8 | 59.2 | 52.6 | 46.1 | 39.5 |
| 45° | 292.8 | 197.4 | 105.3 | 95.4 | 85.5 | 72.4 | 62.5 | 59.2 | 52.6 | 49.4 | 42.8 |
| 47.5° | 529.7 | 319.1 | 108.6 | 95.4 | 85.5 | 72.4 | 59.2 | 55.9 | 52.6 | 46.1 | 42.8 |
| 50° | 829.1 | 470.5 | 111.9 | 98.7 | 85.5 | 72.4 | 59.2 | 55.9 | 52.6 | 49.4 | 46.1 |
| 52.5° | 901.5 | 513.3 | 125.0 | 108.6 | 92.1 | 75.7 | 59.2 | 55.9 | 52.6 | 49.4 | 46.1 |
| 55° | 812.7 | 477.1 | 144.8 | 125.0 | 102.0 | 82.3 | 59.2 | 55.9 | 52.6 | 49.4 | 46.1 |
| 57.5° | *687.6* | *424.4* | *161.2* | *138.2* | *111.9* | *88.8* | *62.5* | *59.2* | *55.9* | *52.6* | *49.4* |
| 60° | 516.6 | 352.0 | 187.5 | 157.9 | 131.6 | 102.0 | 72.4 | 69.1 | 65.8 | 59.2 | 55.9 |
| 62.5° | 421.1 | 312.6 | 207.3 | 177.7 | 144.8 | 115.2 | 82.3 | 79.0 | 75.7 | 69.1 | 65.8 |
| 65° | 371.8 | 296.1 | 220.4 | 187.5 | 154.6 | 118.4 | 85.5 | 82.3 | 79.0 | 75.7 | 72.4 |
| 67.5° | 345.5 | 286.2 | 230.3 | 194.1 | 161.2 | 125.0 | 88.8 | 85.5 | 82.3 | 79.0 | 75.7 |
| 70° | 332.3 | 279.7 | 227.0 | 194.1 | 161.2 | 128.3 | 95.4 | 92.1 | 85.5 | 82.3 | 75.7 |
| 72.5° | 309.3 | 266.5 | 223.7 | 197.4 | 167.8 | 141.5 | 111.9 | 102.0 | 92.1 | 79.0 | 69.1 |
| 75° | 276.4 | 236.9 | 197.4 | 181.0 | 164.5 | 144.8 | 128.3 | 111.9 | 95.4 | 75.7 | 59.2 |
| 77.5° | 200.7 | 184.2 | 167.8 | 157.9 | 148.1 | 134.9 | 125.0 | 108.6 | 92.1 | 72.4 | 55.9 |
| 80° | 79.0 | 88.8 | 95.4 | 95.4 | 98.7 | 98.7 | 98.7 | 85.5 | 72.4 | 59.2 | 46.1 |
| 82.5° | 23.0 | 23.0 | 23.0 | 26.3 | 29.6 | 32.9 | 36.2 | 32.9 | 32.9 | 29.6 | 26.3 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 0° | 2.5° | 5° | 7.5° | 10° | 12.5° | 15° | 17.5° | 20° | 22.5° | 25° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 32.9 | 32.9 | 29.6 | 29.6 | 29.6 | 29.6 | 29.6 | 29.6 | 29.6 | 29.6 | 29.6 |
| 5° | 32.9 | 32.9 | 29.6 | 29.6 | 29.6 | 29.6 | 26.3 | 26.3 | 26.3 | 26.3 | 26.3 |
| 7.5° | 36.2 | 32.9 | 32.9 | 29.6 | 29.6 | 29.6 | 26.3 | 26.3 | 26.3 | 26.3 | 26.3 |
| 10° | 36.2 | 32.9 | 32.9 | 29.6 | 29.6 | 29.6 | 26.3 | 26.3 | 26.3 | 26.3 | 23.0 |
| 12.5° | 36.2 | 36.2 | 32.9 | 32.9 | 32.9 | 29.6 | 29.6 | 26.3 | 26.3 | 26.3 | 23.0 |
| 15° | 36.2 | 36.2 | 32.9 | 29.6 | 29.6 | 29.6 | 26.3 | 26.3 | 26.3 | 26.3 | 23.0 |
| 17.5° | 36.2 | 36.2 | 32.9 | 29.6 | 29.6 | 26.3 | 26.3 | 23.0 | 23.0 | 23.0 | 19.7 |
| 20° | 36.2 | 36.2 | 32.9 | 29.6 | 29.6 | 26.3 | 26.3 | 23.0 | 23.0 | 23.0 | 19.7 |
| 22.5° | 36.2 | 36.2 | 32.9 | 29.6 | 29.6 | 26.3 | 26.3 | 23.0 | 23.0 | 19.7 | 19.7 |
| 25° | 36.2 | 36.2 | 32.9 | 29.6 | 26.3 | 26.3 | 23.0 | 19.7 | 19.7 | 16.5 | 16.5 |
| 27.5° | 39.5 | 36.2 | 32.9 | 29.6 | 26.3 | 26.3 | 23.0 | 19.7 | 16.5 | 16.5 | 13.2 |
| 30° | 36.2 | 36.2 | 32.9 | 29.6 | 26.3 | 23.0 | 19.7 | 16.5 | 13.2 | 13.2 | 9.9 |
| 32.5° | 36.2 | 36.2 | 32.9 | 29.6 | 26.3 | 23.0 | 19.7 | 16.5 | 13.2 | 13.2 | 9.9 |
| 35° | 36.2 | 32.9 | 29.6 | 26.3 | 23.0 | 19.7 | 16.5 | 13.2 | 9.9 | 9.9 | 6.6 |
| 37.5° | 36.2 | 32.9 | 29.6 | 26.3 | 23.0 | 19.7 | 16.5 | 13.2 | 9.9 | 6.6 | 3.3 |
| 40° | 36.2 | 32.9 | 29.6 | 26.3 | 23.0 | 19.7 | 13.2 | 9.9 | 6.6 | 6.6 | 3.3 |
| 42.5° | 36.2 | 32.9 | 29.6 | 26.3 | 23.0 | 19.7 | 16.5 | 13.2 | 9.9 | 6.6 | 3.3 |
| 45° | 39.5 | 36.2 | 29.6 | 26.3 | 23.0 | 23.0 | 19.7 | 16.5 | 13.2 | 9.9 | 3.3 |
| 47.5° | 39.5 | 32.9 | 29.6 | 23.0 | 23.0 | 23.0 | 19.7 | 19.7 | 16.5 | 9.9 | 6.6 |
| 50° | 42.8 | 36.2 | 32.9 | 26.3 | 23.0 | 23.0 | 19.7 | 16.5 | 13.2 | 9.9 | 3.3 |
| 52.5° | 42.8 | 39.5 | 32.9 | 29.6 | 26.3 | 19.7 | 16.5 | 9.9 | 6.6 | 6.6 | 3.3 |
| 55° | 42.8 | 42.8 | 39.5 | 36.2 | 29.6 | 23.0 | 13.2 | 6.6 | 6.6 | 3.3 | 3.3 |
| 57.5° | *46.1* | *46.1* | *42.8* | *39.5* | *29.6* | *19.7* | *9.9* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 52.6 | 49.4 | 46.1 | 42.8 | 32.9 | 23.0 | 9.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 59.2 | 52.6 | 46.1 | 39.5 | 29.6 | 19.7 | 9.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 62.5 | 52.6 | 42.8 | 32.9 | 26.3 | 16.5 | 9.9 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 65.8 | 52.6 | 42.8 | 29.6 | 23.0 | 16.5 | 6.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 62.5 | 49.4 | 36.2 | 23.0 | 16.5 | 13.2 | 6.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 55.9 | 46.1 | 32.9 | 19.7 | 16.5 | 9.9 | 6.6 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 49.4 | 39.5 | 26.3 | 16.5 | 13.2 | 9.9 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 46.1 | 32.9 | 23.0 | 9.9 | 6.6 | 6.6 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 36.2 | 26.3 | 13.2 | 3.3 | 3.3 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 19.7 | 13.2 | 6.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 27.5° | 30° | 32.5° | 35° | 37.5° | 40° | 42.5° | 45° | 47.5° | 50° | 52.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 29.6 | 29.6 | 29.6 | 26.3 | 26.3 | 26.3 | 26.3 | 26.3 | 26.3 | 26.3 | 26.3 |
| 5° | 26.3 | 26.3 | 26.3 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 |
| 7.5° | 26.3 | 26.3 | 26.3 | 23.0 | 23.0 | 23.0 | 23.0 | 19.7 | 19.7 | 19.7 | 19.7 |
| 10° | 23.0 | 23.0 | 23.0 | 19.7 | 19.7 | 19.7 | 19.7 | 16.5 | 16.5 | 16.5 | 16.5 |
| 12.5° | 23.0 | 23.0 | 23.0 | 19.7 | 19.7 | 19.7 | 19.7 | 16.5 | 16.5 | 16.5 | 16.5 |
| 15° | 23.0 | 23.0 | 23.0 | 19.7 | 19.7 | 19.7 | 16.5 | 16.5 | 13.2 | 13.2 | 13.2 |
| 17.5° | 19.7 | 19.7 | 19.7 | 16.5 | 16.5 | 16.5 | 16.5 | 13.2 | 13.2 | 13.2 | 9.9 |
| 20° | 19.7 | 19.7 | 19.7 | 16.5 | 16.5 | 13.2 | 13.2 | 9.9 | 6.6 | 6.6 | 6.6 |
| 22.5° | 16.5 | 16.5 | 13.2 | 13.2 | 9.9 | 9.9 | 6.6 | 6.6 | 3.3 | 3.3 | 3.3 |
| 25° | 13.2 | 13.2 | 9.9 | 9.9 | 6.6 | 6.6 | 3.3 | 3.3 | 0.0 | 0.0 | 0.0 |
| 27.5° | 9.9 | 6.6 | 6.6 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 6.6 | 6.6 | 3.3 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 6.6 | 6.6 | 3.3 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 3.3 | 3.3 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 55° | 57.5° | 60° | 62.5° | 65° | 67.5° | 70° | 72.5° | 75° | 77.5° | 80° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 26.3 | 26.3 | 26.3 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 |
| 5° | 19.7 | 19.7 | 19.7 | 19.7 | 19.7 | 19.7 | 19.7 | 19.7 | 19.7 | 19.7 | 19.7 |
| 7.5° | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 13.2 | 13.2 | 13.2 |
| 10° | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 9.9 | 9.9 | 9.9 |
| 12.5° | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 9.9 | 9.9 | 9.9 | 6.6 | 6.6 | 6.6 |
| 15° | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 6.6 | 6.6 | 6.6 | 3.3 | 3.3 | 3.3 |
| 17.5° | 9.9 | 6.6 | 6.6 | 6.6 | 6.6 | 3.3 | 3.3 | 3.3 | 0.0 | 0.0 | 0.0 |
| 20° | 3.3 | 3.3 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 82.5° | 85° | 87.5° | 90° | 92.5° | 95° | 97.5° | 100° | 102.5° | 105° | 107.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 | 23.0 |
| 5° | 19.7 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 |
| 7.5° | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 |
| 10° | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 |
| 12.5° | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 3.3 | 3.3 |
| 15° | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 110° | 112.5° | 115° | 117.5° | 120° | 122.5° | 125° | 127.5° | 130° | 132.5° | 135° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 23.0 | 26.3 | 26.3 | 26.3 | 26.3 | 29.6 | 29.6 | 29.6 | 32.9 | 32.9 | 36.2 |
| 5° | 16.5 | 19.7 | 19.7 | 19.7 | 19.7 | 23.0 | 23.0 | 23.0 | 26.3 | 26.3 | 29.6 |
| 7.5° | 13.2 | 16.5 | 16.5 | 16.5 | 16.5 | 19.7 | 19.7 | 19.7 | 23.0 | 23.0 | 26.3 |
| 10° | 9.9 | 9.9 | 9.9 | 9.9 | 13.2 | 13.2 | 16.5 | 16.5 | 19.7 | 19.7 | 23.0 |
| 12.5° | 3.3 | 6.6 | 6.6 | 6.6 | 6.6 | 9.9 | 9.9 | 9.9 | 13.2 | 16.5 | 16.5 |
| 15° | 0.0 | 3.3 | 3.3 | 3.3 | 3.3 | 6.6 | 6.6 | 6.6 | 9.9 | 13.2 | 13.2 |
| 17.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 6.6 | 6.6 | 9.9 |
| 20° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 |
| 22.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 |
| 25° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 27.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 30° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 32.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 35° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 37.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 137.5° | 140° | 142.5° | 145° | 147.5° | 150° | 152.5° | 155° | 157.5° | 160° | 162.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 36.2 | 39.5 | 39.5 | 42.8 | 42.8 | 46.1 | 46.1 | 49.4 | 49.4 | 49.4 | 52.6 |
| 5° | 29.6 | 32.9 | 36.2 | 36.2 | 39.5 | 42.8 | 42.8 | 46.1 | 46.1 | 46.1 | 49.4 |
| 7.5° | 26.3 | 29.6 | 32.9 | 32.9 | 36.2 | 39.5 | 39.5 | 42.8 | 42.8 | 42.8 | 46.1 |
| 10° | 23.0 | 26.3 | 29.6 | 29.6 | 32.9 | 36.2 | 36.2 | 39.5 | 39.5 | 42.8 | 42.8 |
| 12.5° | 19.7 | 23.0 | 26.3 | 26.3 | 29.6 | 32.9 | 32.9 | 36.2 | 39.5 | 39.5 | 42.8 |
| 15° | 16.5 | 19.7 | 23.0 | 23.0 | 26.3 | 29.6 | 32.9 | 36.2 | 36.2 | 39.5 | 39.5 |
| 17.5° | 9.9 | 13.2 | 16.5 | 19.7 | 23.0 | 26.3 | 29.6 | 32.9 | 32.9 | 36.2 | 39.5 |
| 20° | 6.6 | 9.9 | 13.2 | 16.5 | 19.7 | 23.0 | 23.0 | 26.3 | 29.6 | 32.9 | 32.9 |
| 22.5° | 3.3 | 6.6 | 9.9 | 9.9 | 13.2 | 16.5 | 19.7 | 23.0 | 23.0 | 26.3 | 29.6 |
| 25° | 0.0 | 3.3 | 6.6 | 6.6 | 9.9 | 13.2 | 13.2 | 16.5 | 19.7 | 23.0 | 23.0 |
| 27.5° | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 | 9.9 | 13.2 | 16.5 | 16.5 | 19.7 | 19.7 |
| 30° | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 | 9.9 | 9.9 | 13.2 | 13.2 | 16.5 | 19.7 |
| 32.5° | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 6.6 | 9.9 | 13.2 | 13.2 | 16.5 | 16.5 |
| 35° | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 6.6 | 6.6 | 9.9 | 9.9 | 13.2 | 13.2 |
| 37.5° | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 6.6 | 6.6 | 9.9 | 9.9 | 13.2 | 13.2 |
| 40° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 6.6 | 9.9 | 9.9 | 9.9 | 13.2 |
| 42.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 | 9.9 | 9.9 |
| 45° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 | 9.9 | 9.9 |
| 47.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 | 9.9 | 9.9 |
| 50° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 | 9.9 | 9.9 |
| 52.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 | 6.6 | 9.9 |
| 55° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 | 6.6 | 9.9 |
| 57.5° | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *0.0* | *3.3* | *3.3* | *3.3* | *6.6* |
| 60° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 6.6 |
| 62.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 6.6 |
| 65° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 6.6 |
| 67.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 6.6 |
| 70° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 6.6 |
| 72.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 6.6 |
| 75° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 |
| 77.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 3.3 | 3.3 | 6.6 | 6.6 |
| 80° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 | 6.6 | 9.9 |
| 82.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 | 6.6 | 9.9 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 3.3 | 6.6 | 6.6 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 165° | 167.5° | 170° | 172.5° | 175° | 177.5° | 180° | 182.5° | 185° | 187.5° | 190° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 52.6 | 52.6 | 52.6 | 52.6 | 52.6 | 52.6 | 52.6 | 52.6 | 49.4 | 49.4 | 49.4 |
| 5° | 49.4 | 49.4 | 49.4 | 49.4 | 49.4 | 49.4 | 49.4 | 49.4 | 46.1 | 46.1 | 46.1 |
| 7.5° | 46.1 | 46.1 | 46.1 | 49.4 | 49.4 | 49.4 | 49.4 | 49.4 | 46.1 | 46.1 | 46.1 |
| 10° | 46.1 | 46.1 | 46.1 | 49.4 | 49.4 | 49.4 | 49.4 | 49.4 | 46.1 | 46.1 | 46.1 |
| 12.5° | 42.8 | 42.8 | 42.8 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 |
| 15° | 42.8 | 42.8 | 42.8 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 |
| 17.5° | 39.5 | 42.8 | 42.8 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 |
| 20° | 36.2 | 36.2 | 39.5 | 39.5 | 42.8 | 42.8 | 42.8 | 46.1 | 46.1 | 46.1 | 46.1 |
| 22.5° | 29.6 | 32.9 | 36.2 | 36.2 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 25° | 26.3 | 26.3 | 29.6 | 32.9 | 32.9 | 36.2 | 36.2 | 36.2 | 36.2 | 36.2 | 36.2 |
| 27.5° | 23.0 | 23.0 | 26.3 | 26.3 | 29.6 | 29.6 | 29.6 | 32.9 | 32.9 | 32.9 | 32.9 |
| 30° | 19.7 | 23.0 | 23.0 | 26.3 | 26.3 | 26.3 | 29.6 | 29.6 | 32.9 | 32.9 | 32.9 |
| 32.5° | 19.7 | 19.7 | 23.0 | 23.0 | 26.3 | 26.3 | 26.3 | 29.6 | 29.6 | 29.6 | 29.6 |
| 35° | 16.5 | 16.5 | 19.7 | 19.7 | 23.0 | 23.0 | 26.3 | 26.3 | 29.6 | 29.6 | 29.6 |
| 37.5° | 16.5 | 16.5 | 19.7 | 19.7 | 23.0 | 23.0 | 23.0 | 26.3 | 26.3 | 26.3 | 29.6 |
| 40° | 13.2 | 13.2 | 16.5 | 16.5 | 19.7 | 19.7 | 23.0 | 23.0 | 26.3 | 26.3 | 29.6 |
| 42.5° | 13.2 | 13.2 | 16.5 | 16.5 | 19.7 | 19.7 | 23.0 | 23.0 | 26.3 | 26.3 | 29.6 |
| 45° | 13.2 | 13.2 | 16.5 | 16.5 | 19.7 | 19.7 | 23.0 | 23.0 | 26.3 | 26.3 | 29.6 |
| 47.5° | 13.2 | 13.2 | 16.5 | 16.5 | 19.7 | 19.7 | 19.7 | 23.0 | 23.0 | 23.0 | 26.3 |
| 50° | 13.2 | 13.2 | 13.2 | 16.5 | 16.5 | 16.5 | 19.7 | 19.7 | 23.0 | 23.0 | 26.3 |
| 52.5° | 9.9 | 9.9 | 9.9 | 13.2 | 13.2 | 13.2 | 16.5 | 16.5 | 19.7 | 19.7 | 23.0 |
| 55° | 9.9 | 9.9 | 9.9 | 13.2 | 13.2 | 13.2 | 13.2 | 16.5 | 16.5 | 16.5 | 19.7 |
| 57.5° | *6.6* | *6.6* | *6.6* | *9.9* | *9.9* | *9.9* | *9.9* | *13.2* | *13.2* | *13.2* | *16.5* |
| 60° | 6.6 | 6.6 | 6.6 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 13.2 |
| 62.5° | 6.6 | 6.6 | 6.6 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 13.2 |
| 65° | 6.6 | 6.6 | 6.6 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 13.2 |
| 67.5° | 6.6 | 6.6 | 6.6 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 13.2 |
| 70° | 6.6 | 6.6 | 6.6 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 13.2 |
| 72.5° | 6.6 | 6.6 | 6.6 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 13.2 |
| 75° | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 |
| 77.5° | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 |
| 80° | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 |
| 82.5° | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 |
| 85° | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 |
| 87.5° | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 | 9.9 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 192.5° | 195° | 197.5° | 200° | 202.5° | 205° | 207.5° | 210° | 212.5° | 215° | 217.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 49.4 | 49.4 | 49.4 | 49.4 | 49.4 | 46.1 | 46.1 | 46.1 | 49.4 | 49.4 | 49.4 |
| 5° | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 |
| 7.5° | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 42.8 | 42.8 | 42.8 | 46.1 | 46.1 | 46.1 |
| 10° | 46.1 | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 | 46.1 | 46.1 | 46.1 |
| 12.5° | 46.1 | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 | 46.1 | 46.1 | 46.1 |
| 15° | 46.1 | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 | 42.8 | 46.1 | 46.1 | 49.4 | 49.4 |
| 17.5° | 42.8 | 42.8 | 39.5 | 39.5 | 42.8 | 42.8 | 42.8 | 42.8 | 46.1 | 46.1 | 46.1 |
| 20° | 42.8 | 42.8 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 42.8 | 42.8 | 46.1 | 46.1 |
| 22.5° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 42.8 | 42.8 | 46.1 | 46.1 |
| 25° | 36.2 | 36.2 | 36.2 | 36.2 | 39.5 | 39.5 | 39.5 | 42.8 | 46.1 | 46.1 | 49.4 |
| 27.5° | 36.2 | 36.2 | 36.2 | 36.2 | 39.5 | 39.5 | 39.5 | 42.8 | 46.1 | 46.1 | 49.4 |
| 30° | 36.2 | 36.2 | 36.2 | 36.2 | 39.5 | 39.5 | 39.5 | 42.8 | 46.1 | 46.1 | 49.4 |
| 32.5° | 32.9 | 32.9 | 32.9 | 36.2 | 36.2 | 39.5 | 39.5 | 42.8 | 46.1 | 46.1 | 49.4 |
| 35° | 32.9 | 32.9 | 32.9 | 36.2 | 36.2 | 39.5 | 39.5 | 42.8 | 46.1 | 46.1 | 49.4 |
| 37.5° | 29.6 | 32.9 | 32.9 | 36.2 | 39.5 | 39.5 | 42.8 | 46.1 | 49.4 | 49.4 | 52.6 |
| 40° | 29.6 | 32.9 | 32.9 | 36.2 | 39.5 | 39.5 | 42.8 | 46.1 | 49.4 | 49.4 | 52.6 |
| 42.5° | 29.6 | 32.9 | 32.9 | 36.2 | 39.5 | 39.5 | 42.8 | 46.1 | 49.4 | 52.6 | 55.9 |
| 45° | 32.9 | 32.9 | 36.2 | 39.5 | 39.5 | 42.8 | 42.8 | 46.1 | 49.4 | 52.6 | 55.9 |
| 47.5° | 32.9 | 36.2 | 39.5 | 39.5 | 42.8 | 42.8 | 42.8 | 46.1 | 52.6 | 55.9 | 59.2 |
| 50° | 29.6 | 32.9 | 36.2 | 39.5 | 39.5 | 42.8 | 42.8 | 46.1 | 52.6 | 55.9 | 59.2 |
| 52.5° | 26.3 | 26.3 | 29.6 | 32.9 | 39.5 | 42.8 | 46.1 | 49.4 | 55.9 | 59.2 | 62.5 |
| 55° | 23.0 | 23.0 | 26.3 | 32.9 | 39.5 | 46.1 | 52.6 | 55.9 | 59.2 | 59.2 | 62.5 |
| 57.5° | *19.7* | *19.7* | *23.0* | *32.9* | *42.8* | *52.6* | *62.5* | *62.5* | *65.8* | *65.8* | *65.8* |
| 60° | 16.5 | 16.5 | 19.7 | 29.6 | 42.8 | 52.6 | 62.5 | 65.8 | 69.1 | 69.1 | 72.4 |
| 62.5° | 16.5 | 16.5 | 19.7 | 29.6 | 39.5 | 46.1 | 55.9 | 62.5 | 69.1 | 75.7 | 82.3 |
| 65° | 13.2 | 16.5 | 16.5 | 26.3 | 32.9 | 42.8 | 49.4 | 59.2 | 69.1 | 79.0 | 88.8 |
| 67.5° | 13.2 | 16.5 | 16.5 | 23.0 | 32.9 | 39.5 | 46.1 | 55.9 | 69.1 | 79.0 | 88.8 |
| 70° | 16.5 | 16.5 | 19.7 | 26.3 | 29.6 | 36.2 | 39.5 | 52.6 | 62.5 | 75.7 | 85.5 |
| 72.5° | 13.2 | 16.5 | 16.5 | 23.0 | 26.3 | 32.9 | 36.2 | 49.4 | 59.2 | 72.4 | 82.3 |
| 75° | 13.2 | 13.2 | 13.2 | 19.7 | 23.0 | 29.6 | 32.9 | 42.8 | 55.9 | 65.8 | 75.7 |
| 77.5° | 9.9 | 9.9 | 9.9 | 16.5 | 19.7 | 26.3 | 29.6 | 39.5 | 52.6 | 62.5 | 72.4 |
| 80° | 9.9 | 9.9 | 9.9 | 13.2 | 16.5 | 16.5 | 19.7 | 29.6 | 42.8 | 52.6 | 62.5 |
| 82.5° | 9.9 | 6.6 | 6.6 | 9.9 | 9.9 | 13.2 | 13.2 | 19.7 | 26.3 | 32.9 | 39.5 |
| 85° | 9.9 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 |
| 87.5° | 9.9 | 6.6 | 6.6 | 6.6 | 6.6 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 220° | 222.5° | 225° | 227.5° | 230° | 232.5° | 235° | 237.5° | 240° | 242.5° | 245° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 49.4 | 49.4 | 49.4 | 49.4 | 49.4 | 52.6 | 52.6 | 52.6 | 52.6 | 52.6 | 52.6 |
| 5° | 49.4 | 49.4 | 52.6 | 52.6 | 52.6 | 55.9 | 55.9 | 55.9 | 55.9 | 55.9 | 55.9 |
| 7.5° | 49.4 | 49.4 | 52.6 | 52.6 | 52.6 | 55.9 | 55.9 | 55.9 | 59.2 | 59.2 | 62.5 |
| 10° | 49.4 | 49.4 | 52.6 | 52.6 | 55.9 | 55.9 | 59.2 | 59.2 | 62.5 | 62.5 | 65.8 |
| 12.5° | 49.4 | 52.6 | 52.6 | 55.9 | 59.2 | 62.5 | 62.5 | 65.8 | 69.1 | 69.1 | 72.4 |
| 15° | 52.6 | 52.6 | 55.9 | 55.9 | 59.2 | 62.5 | 65.8 | 69.1 | 72.4 | 75.7 | 79.0 |
| 17.5° | 49.4 | 52.6 | 55.9 | 59.2 | 62.5 | 65.8 | 69.1 | 72.4 | 79.0 | 82.3 | 88.8 |
| 20° | 49.4 | 52.6 | 55.9 | 59.2 | 62.5 | 69.1 | 72.4 | 75.7 | 82.3 | 88.8 | 98.7 |
| 22.5° | 49.4 | 52.6 | 55.9 | 59.2 | 65.8 | 72.4 | 75.7 | 82.3 | 92.1 | 98.7 | 111.9 |
| 25° | 52.6 | 55.9 | 59.2 | 62.5 | 69.1 | 75.7 | 82.3 | 88.8 | 102.0 | 111.9 | 141.5 |
| 27.5° | 52.6 | 59.2 | 62.5 | 65.8 | 72.4 | 82.3 | 88.8 | 95.4 | 115.2 | 131.6 | 197.4 |
| 30° | 52.6 | 59.2 | 62.5 | 65.8 | 75.7 | 85.5 | 95.4 | 105.3 | 138.2 | 167.8 | 279.7 |
| 32.5° | 52.6 | 59.2 | 62.5 | 65.8 | 79.0 | 95.4 | 108.6 | 121.7 | 164.5 | 207.3 | 338.9 |
| 35° | 55.9 | 59.2 | 65.8 | 69.1 | 85.5 | 102.0 | 115.2 | 131.6 | 171.1 | 210.6 | 368.5 |
| 37.5° | 59.2 | 62.5 | 69.1 | 72.4 | 85.5 | 98.7 | 111.9 | 125.0 | 167.8 | 207.3 | 404.7 |
| 40° | 59.2 | 65.8 | 69.1 | 75.7 | 85.5 | 98.7 | 108.6 | 118.4 | 164.5 | 210.6 | 467.2 |
| 42.5° | 62.5 | 69.1 | 72.4 | 79.0 | 88.8 | 98.7 | 105.3 | 115.2 | 174.4 | 233.6 | 608.7 |
| 45° | 62.5 | 65.8 | 72.4 | 75.7 | 85.5 | 95.4 | 105.3 | 115.2 | 220.4 | 322.4 | 967.3 |
| 47.5° | 62.5 | 65.8 | 69.1 | 72.4 | 85.5 | 98.7 | 108.6 | 121.7 | 325.7 | 529.7 | 1599.0 |
| 50° | 62.5 | 65.8 | 65.8 | 69.1 | 82.3 | 98.7 | 111.9 | 125.0 | 424.4 | 720.5 | 2306.4 |
| 52.5° | 65.8 | 69.1 | 69.1 | 72.4 | 88.8 | 105.3 | 121.7 | 138.2 | 486.9 | 835.7 | 2503.8 |
| 55° | 65.8 | 69.1 | 69.1 | 72.4 | 98.7 | 125.0 | 148.1 | 174.4 | 513.3 | 848.9 | 2299.8 |
| 57.5° | *69.1* | *72.4* | *75.7* | *79.0* | *105.3* | *134.9* | *161.2* | *187.5* | *490.2* | *792.9* | *1885.3* |
| 60° | 79.0 | 82.3 | 88.8 | 92.1 | 121.7 | 151.3 | 177.7 | 207.3 | 391.5 | 575.8 | 1483.9 |
| 62.5° | 88.8 | 92.1 | 98.7 | 102.0 | 131.6 | 161.2 | 190.8 | 220.4 | 345.5 | 467.2 | 1105.5 |
| 65° | 92.1 | 98.7 | 102.0 | 105.3 | 134.9 | 167.8 | 197.4 | 227.0 | 315.9 | 401.4 | 819.3 |
| 67.5° | 95.4 | 102.0 | 105.3 | 111.9 | 141.5 | 171.1 | 200.7 | 230.3 | 299.4 | 365.2 | 608.7 |
| 70° | 95.4 | 102.0 | 111.9 | 118.4 | 144.8 | 171.1 | 194.1 | 220.4 | 276.4 | 329.0 | 467.2 |
| 72.5° | 95.4 | 108.6 | 121.7 | 134.9 | 154.6 | 174.4 | 190.8 | 210.6 | 253.3 | 292.8 | 361.9 |
| 75° | 95.4 | 115.2 | 131.6 | 151.3 | 161.2 | 171.1 | 181.0 | 190.8 | 220.4 | 246.8 | 286.2 |
| 77.5° | 92.1 | 108.6 | 128.3 | 144.8 | 148.1 | 151.3 | 154.6 | 157.9 | 157.9 | 157.9 | 157.9 |
| 80° | 75.7 | 92.1 | 105.3 | 118.4 | 111.9 | 102.0 | 95.4 | 85.5 | 79.0 | 72.4 | 79.0 |
| 82.5° | 39.5 | 42.8 | 42.8 | 42.8 | 39.5 | 39.5 | 36.2 | 32.9 | 32.9 | 29.6 | 29.6 |
| 85° | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 |
| 87.5° | 3.3 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 247.5° | 250° | 252.5° | 255° | 257.5° | 260° | 262.5° | 265° | 267.5° | 270° | 272.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 52.6 | 52.6 | 52.6 | 52.6 | 52.6 | 52.6 | 52.6 | 49.4 | 49.4 | 49.4 | 49.4 |
| 5° | 55.9 | 55.9 | 55.9 | 55.9 | 55.9 | 55.9 | 55.9 | 52.6 | 52.6 | 52.6 | 52.6 |
| 7.5° | 62.5 | 62.5 | 62.5 | 62.5 | 62.5 | 62.5 | 62.5 | 62.5 | 62.5 | 62.5 | 62.5 |
| 10° | 65.8 | 69.1 | 69.1 | 72.4 | 72.4 | 72.4 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 |
| 12.5° | 75.7 | 79.0 | 79.0 | 82.3 | 82.3 | 85.5 | 85.5 | 88.8 | 88.8 | 88.8 | 92.1 |
| 15° | 82.3 | 85.5 | 88.8 | 92.1 | 95.4 | 102.0 | 105.3 | 111.9 | 115.2 | 118.4 | 121.7 |
| 17.5° | 95.4 | 102.0 | 111.9 | 118.4 | 125.0 | 138.2 | 151.3 | 161.2 | 174.4 | 190.8 | 210.6 |
| 20° | 105.3 | 128.3 | 148.1 | 171.1 | 190.8 | 250.1 | 309.3 | 368.5 | 427.7 | 506.7 | 585.7 |
| 22.5° | 125.0 | 197.4 | 273.1 | 345.5 | 417.9 | 612.0 | 802.8 | 993.6 | 1187.8 | 1372.0 | 1556.3 |
| 25° | 171.1 | 325.7 | 483.7 | 638.3 | 792.9 | 1118.7 | 1441.1 | 1763.5 | 2089.3 | 2401.8 | 2717.7 |
| 27.5° | 259.9 | 510.0 | 760.0 | 1010.1 | 1260.1 | 1687.9 | 2112.3 | 2536.7 | 2964.4 | 3342.8 | 3717.9 |
| 30° | 391.5 | 714.0 | 1036.4 | 1358.8 | 1681.3 | 2234.0 | 2786.8 | 3339.5 | 3892.3 | 4260.8 | 4629.3 |
| 32.5° | 467.2 | 888.3 | 1309.5 | 1727.3 | 2148.5 | 2750.6 | 3352.7 | 3958.1 | 4560.2 | 4981.3 | 5402.5 |
| 35° | 523.1 | 1046.3 | 1566.1 | 2089.3 | 2609.1 | 3280.3 | 3951.5 | 4626.0 | 5297.2 | 5800.6 | 6304.0 |
| 37.5° | 598.8 | 1227.2 | 1852.4 | 2480.8 | 3105.9 | 3829.8 | 4553.6 | 5280.7 | 6004.6 | 6626.4 | 7251.5 |
| 40° | 720.5 | 1467.4 | 2214.3 | 2957.9 | 3704.7 | 4612.8 | 5520.9 | 6429.0 | 7337.1 | 8162.9 | 8988.7 |
| 42.5° | 983.8 | 1967.5 | 2954.6 | 3938.3 | 4922.1 | 6280.9 | 7636.5 | 8992.0 | 10350.9 | 11518.9 | 12686.9 |
| 45° | 1612.2 | 3142.1 | 4672.0 | 6202.0 | 7731.9 | 9357.2 | 10979.3 | 12604.6 | 14230.0 | 15957.3 | 17684.7 |
| 47.5° | 2668.3 | 4777.3 | 6886.3 | 8992.0 | 11101.0 | 12775.7 | 14447.1 | 16118.6 | 17793.2 | 19405.4 | 21017.6 |
| 50° | 3892.3 | 6162.5 | 8432.7 | 10702.9 | 12973.1 | 14470.2 | 15963.9 | 17457.7 | 18954.7 | 20537.3 | 22116.5 |
| 52.5° | 4171.9 | 6442.2 | 8712.4 | 10979.3 | 13249.5 | 14759.7 | 16269.9 | 17783.4 | 19293.6 | 20839.9 | 22389.6 |
| 55° | 3747.5 | 5998.0 | 8245.2 | 10495.6 | 12742.8 | 14401.1 | 16059.3 | 17717.6 | 19375.8 | 21109.7 | 22843.7 |
| 57.5° | *2977.6* | *5251.1* | *7521.3* | *9794.8* | *12065.1* | *14032.6* | *15996.8* | *17964.3* | *19931.9* | *21761.2* | *23590.5* |
| 60° | 2392.0 | 4711.5 | 7031.1 | 9350.7 | 11670.2 | 13769.4 | 15865.2 | 17961.0 | 20060.2 | 21616.4 | 23172.7 |
| 62.5° | 1743.8 | 4040.3 | 6336.9 | 8633.4 | 10930.0 | 12811.9 | 14693.9 | 16579.2 | 18461.2 | 19566.7 | 20672.1 |
| 65° | 1237.1 | 3267.1 | 5297.2 | 7323.9 | 9354.0 | 10660.2 | 11966.4 | 13272.6 | 14578.8 | 15536.2 | 16493.6 |
| 67.5° | 852.2 | 2283.4 | 3711.3 | 5142.5 | 6570.5 | 7682.6 | 8791.3 | 9903.4 | 11015.5 | 11821.6 | 12631.0 |
| 70° | 605.4 | 1385.2 | 2164.9 | 2941.4 | 3721.2 | 4704.9 | 5688.7 | 6672.5 | 7656.2 | 8640.0 | 9627.0 |
| 72.5° | 431.0 | 773.2 | 1112.1 | 1454.3 | 1793.1 | 2648.6 | 3504.0 | 4362.8 | 5218.2 | 5813.7 | 6412.5 |
| 75° | 325.7 | 417.9 | 506.7 | 598.8 | 687.6 | 894.9 | 1102.2 | 1309.5 | 1516.8 | 1727.3 | 1937.9 |
| 77.5° | 154.6 | 171.1 | 184.2 | 200.7 | 213.9 | 266.5 | 319.1 | 371.8 | 424.4 | 513.3 | 602.1 |
| 80° | 82.3 | 88.8 | 95.4 | 102.0 | 108.6 | 111.9 | 115.2 | 118.4 | 121.7 | 131.6 | 144.8 |
| 82.5° | 29.6 | 32.9 | 32.9 | 36.2 | 36.2 | 32.9 | 32.9 | 29.6 | 26.3 | 29.6 | 29.6 |
| 85° | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 275° | 277.5° | 280° | 282.5° | 285° | 287.5° | 290° | 292.5° | 295° | 297.5° | 300° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 46.1 | 46.1 | 46.1 | 46.1 | 42.8 | 42.8 | 42.8 | 42.8 | 39.5 | 39.5 | 39.5 |
| 5° | 52.6 | 52.6 | 52.6 | 52.6 | 49.4 | 49.4 | 49.4 | 49.4 | 46.1 | 46.1 | 46.1 |
| 7.5° | 62.5 | 62.5 | 62.5 | 62.5 | 59.2 | 59.2 | 59.2 | 59.2 | 55.9 | 55.9 | 55.9 |
| 10° | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 75.7 | 72.4 | 72.4 | 72.4 |
| 12.5° | 92.1 | 92.1 | 92.1 | 92.1 | 92.1 | 92.1 | 92.1 | 92.1 | 88.8 | 88.8 | 88.8 |
| 15° | 121.7 | 125.0 | 128.3 | 131.6 | 131.6 | 134.9 | 131.6 | 128.3 | 125.0 | 121.7 | 118.4 |
| 17.5° | 227.0 | 243.5 | 250.1 | 253.3 | 259.9 | 263.2 | 259.9 | 253.3 | 250.1 | 243.5 | 227.0 |
| 20° | 661.3 | 740.3 | 796.2 | 852.2 | 908.1 | 964.0 | 931.1 | 898.2 | 865.3 | 832.4 | 746.9 |
| 22.5° | 1740.5 | 1924.8 | 2053.1 | 2181.4 | 2309.7 | 2438.0 | 2349.2 | 2260.3 | 2168.2 | 2079.4 | 1862.2 |
| 25° | 3030.2 | 3342.8 | 3507.3 | 3675.1 | 3839.6 | 4004.1 | 3852.8 | 3701.4 | 3546.8 | 3395.5 | 3092.8 |
| 27.5° | 4096.3 | 4471.3 | 4612.8 | 4751.0 | 4892.5 | 5030.7 | 4895.8 | 4764.2 | 4629.3 | 4494.4 | 4142.3 |
| 30° | 4997.8 | 5366.3 | 5504.5 | 5642.6 | 5780.8 | 5919.0 | 5767.7 | 5613.0 | 5461.7 | 5307.0 | 4958.3 |
| 32.5° | 5820.3 | 6241.5 | 6432.3 | 6623.1 | 6813.9 | 7004.8 | 6777.8 | 6550.7 | 6323.7 | 6096.7 | 5698.6 |
| 35° | 6807.4 | 7310.8 | 7534.5 | 7761.5 | 7985.2 | 8209.0 | 7939.2 | 7666.1 | 7396.3 | 7123.2 | 6619.8 |
| 37.5° | 7873.4 | 8495.2 | 8794.6 | 9094.0 | 9393.4 | 9692.8 | 9357.2 | 9021.7 | 8686.1 | 8350.5 | 7708.9 |
| 40° | 9814.6 | 10640.4 | 11084.6 | 11525.5 | 11969.6 | 12410.5 | 11907.1 | 11400.4 | 10897.0 | 10390.4 | 9508.6 |
| 42.5° | 13851.6 | 15019.6 | 15651.3 | 16283.1 | 16914.8 | 17546.5 | 16812.8 | 16075.8 | 15342.1 | 14605.1 | 13387.7 |
| 45° | 19412.0 | 21139.4 | 21836.9 | 22531.1 | 23228.6 | 23922.8 | 23093.7 | 22264.6 | 21432.2 | 20603.1 | 18967.8 |
| 47.5° | 22629.8 | 24242.0 | 24926.3 | 25610.7 | 26291.8 | 26976.1 | 26196.3 | 25416.6 | 24636.8 | 23857.0 | 22261.3 |
| 50° | 23699.1 | 25278.4 | 26031.8 | 26788.6 | 27542.0 | 28295.5 | 27403.8 | 26508.9 | 25617.3 | 24722.3 | 23189.1 |
| 52.5° | 23936.0 | 25482.4 | 26370.7 | 27259.1 | 28144.1 | 29032.5 | 28002.7 | 26972.8 | 25939.7 | 24909.9 | 23389.8 |
| 55° | 24574.3 | 26308.2 | 27331.5 | 28351.4 | 29374.7 | 30394.6 | 29193.7 | 27989.5 | 26788.6 | 25584.4 | 23916.3 |
| 57.5° | 25419.9 | 27249.2 | 28183.6 | 29118.0 | 30049.1 | 30983.5 | 29822.1 | 28664.0 | 27502.5 | 26341.1 | 24600.6 |
| 60° | 24725.6 | 26281.9 | 27061.7 | 27838.1 | 28617.9 | 29394.4 | 28344.8 | 27298.6 | 26249.0 | 25199.4 | 23748.5 |
| 62.5° | 21774.4 | 22879.9 | 23482.0 | 24084.1 | 24682.9 | 25285.0 | 24422.9 | 23560.9 | 22698.9 | 21836.9 | 20784.0 |
| 65° | 17447.8 | 18405.2 | 18839.5 | 19270.5 | 19704.8 | 20135.9 | 19537.0 | 18938.2 | 18336.1 | 17737.3 | 16852.3 |
| 67.5° | 13437.1 | 14243.2 | 14914.3 | 15582.3 | 16253.4 | 16921.4 | 16194.2 | 15467.1 | 14736.7 | 14009.6 | 13160.7 |
| 70° | 10610.8 | 11594.6 | 12147.3 | 12700.1 | 13252.8 | 13805.6 | 13173.8 | 12542.1 | 11907.1 | 11275.4 | 10387.1 |
| 72.5° | 7008.1 | 7603.6 | 7801.0 | 8001.7 | 8199.1 | 8396.5 | 8166.2 | 7939.2 | 7708.9 | 7478.6 | 6915.9 |
| 75° | 2145.2 | 2355.8 | 2589.4 | 2826.3 | 3059.9 | 3293.5 | 3082.9 | 2872.3 | 2661.7 | 2451.2 | 2260.3 |
| 77.5° | 687.6 | 776.5 | 845.6 | 914.7 | 980.5 | 1049.6 | 1052.9 | 1056.1 | 1056.1 | 1059.4 | 957.4 |
| 80° | 154.6 | 164.5 | 164.5 | 164.5 | 161.2 | 161.2 | 177.7 | 190.8 | 207.3 | 220.4 | 207.3 |
| 82.5° | 32.9 | 32.9 | 32.9 | 32.9 | 32.9 | 32.9 | 32.9 | 32.9 | 29.6 | 29.6 | 29.6 |
| 85° | 3.3 | 3.3 | 3.3 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 302.5° | 305° | 307.5° | 310° | 312.5° | 315° | 317.5° | 320° | 322.5° | 325° | 327.5° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 |
| 2.5° | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 39.5 | 36.2 | 36.2 |
| 5° | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 46.1 | 42.8 | 42.8 |
| 7.5° | 55.9 | 55.9 | 55.9 | 55.9 | 55.9 | 52.6 | 52.6 | 52.6 | 52.6 | 49.4 | 49.4 |
| 10° | 72.4 | 69.1 | 69.1 | 69.1 | 65.8 | 65.8 | 62.5 | 62.5 | 59.2 | 59.2 | 55.9 |
| 12.5° | 88.8 | 85.5 | 85.5 | 82.3 | 82.3 | 79.0 | 75.7 | 72.4 | 69.1 | 65.8 | 62.5 |
| 15° | 115.2 | 111.9 | 108.6 | 105.3 | 98.7 | 95.4 | 88.8 | 85.5 | 82.3 | 79.0 | 75.7 |
| 17.5° | 210.6 | 194.1 | 177.7 | 161.2 | 148.1 | 131.6 | 115.2 | 108.6 | 98.7 | 92.1 | 82.3 |
| 20° | 664.6 | 579.1 | 493.5 | 417.9 | 342.2 | 263.2 | 187.5 | 164.5 | 141.5 | 118.4 | 95.4 |
| 22.5° | 1648.4 | 1431.2 | 1214.1 | 1026.5 | 839.0 | 651.5 | 463.9 | 378.4 | 292.8 | 207.3 | 121.7 |
| 25° | 2790.1 | 2484.1 | 2181.4 | 1852.4 | 1526.6 | 1197.6 | 868.6 | 697.5 | 523.1 | 348.8 | 177.7 |
| 27.5° | 3790.3 | 3438.2 | 3086.2 | 2651.9 | 2217.6 | 1780.0 | 1345.7 | 1082.5 | 816.0 | 549.5 | 286.2 |
| 30° | 4612.8 | 4264.1 | 3915.3 | 3382.3 | 2846.0 | 2313.0 | 1776.7 | 1434.5 | 1092.3 | 746.9 | 404.7 |
| 32.5° | 5300.5 | 4902.4 | 4504.2 | 3918.6 | 3336.2 | 2750.6 | 2164.9 | 1740.5 | 1319.4 | 894.9 | 470.5 |
| 35° | 6113.1 | 5609.7 | 5103.1 | 4477.9 | 3856.1 | 3230.9 | 2605.8 | 2089.3 | 1569.4 | 1049.6 | 533.0 |
| 37.5° | 7067.3 | 6425.7 | 5784.1 | 5106.3 | 4431.9 | 3754.1 | 3076.3 | 2464.3 | 1855.7 | 1243.7 | 631.7 |
| 40° | 8630.1 | 7748.4 | 6866.6 | 6053.9 | 5238.0 | 4425.3 | 3609.3 | 2901.9 | 2194.5 | 1483.9 | 776.5 |
| 42.5° | 12170.3 | 10953.0 | 9735.6 | 8518.3 | 7297.6 | 6080.2 | 4859.6 | 3895.6 | 2934.8 | 1970.8 | 1006.8 |
| 45° | 17332.6 | 15697.4 | 14062.2 | 12430.3 | 10798.3 | 9166.4 | 7534.5 | 6037.5 | 4540.4 | 3040.1 | 1543.1 |
| 47.5° | 20665.6 | 19069.8 | 17474.1 | 15911.3 | 14351.7 | 12788.9 | 11226.1 | 9120.4 | 7014.6 | 4905.6 | 2799.9 |
| 50° | 21659.2 | 20126.0 | 18592.8 | 17197.7 | 15806.0 | 14411.0 | 13015.9 | 10788.5 | 8564.3 | 6336.9 | 4109.4 |
| 52.5° | 21869.8 | 20346.4 | 18826.4 | 17428.0 | 16033.0 | 14634.7 | 13236.4 | 11018.8 | 8801.2 | 6580.3 | 4362.8 |
| 55° | 22248.1 | 20580.0 | 18911.9 | 17342.5 | 15773.1 | 14200.4 | 12631.0 | 10416.7 | 8202.4 | 5988.1 | 3773.8 |
| 57.5° | *22860.1* | *21116.3* | *19375.8* | *17507.0* | *15638.2* | *13769.4* | *11900.6* | *9666.5* | *7432.5* | *5198.5* | *2964.4* |
| 60° | 22297.5 | 20843.2 | 19392.3 | 17378.7 | 15361.8 | 13348.2 | 11331.4 | 9061.1 | 6787.6 | 4514.1 | 2243.9 |
| 62.5° | 19727.9 | 18675.0 | 17618.9 | 15832.3 | 14045.7 | 12259.2 | 10472.6 | 8261.6 | 6050.6 | 3839.6 | 1628.6 |
| 65° | 15963.9 | 15078.9 | 14190.5 | 12775.7 | 11361.0 | 9942.9 | 8528.1 | 6665.9 | 4806.9 | 2944.7 | 1082.5 |
| 67.5° | 12311.8 | 11463.0 | 10614.1 | 9498.7 | 8383.4 | 7268.0 | 6152.6 | 4797.1 | 3441.5 | 2082.7 | 727.1 |
| 70° | 9498.7 | 8610.4 | 7722.0 | 6718.5 | 5715.0 | 4711.5 | 3708.0 | 2918.4 | 2132.0 | 1342.4 | 552.7 |
| 72.5° | 6353.3 | 5790.7 | 5228.1 | 4395.7 | 3563.3 | 2730.8 | 1898.4 | 1536.5 | 1174.6 | 809.4 | 447.5 |
| 75° | 2066.2 | 1875.4 | 1681.3 | 1454.3 | 1227.2 | 996.9 | 769.9 | 667.9 | 562.6 | 457.3 | 355.3 |
| 77.5° | 852.2 | 750.2 | 644.9 | 549.5 | 450.8 | 355.3 | 256.6 | 240.2 | 223.7 | 207.3 | 190.8 |
| 80° | 190.8 | 177.7 | 161.2 | 151.3 | 141.5 | 131.6 | 121.7 | 115.2 | 105.3 | 98.7 | 88.8 |
| 82.5° | 26.3 | 26.3 | 23.0 | 26.3 | 29.6 | 32.9 | 36.2 | 32.9 | 32.9 | 29.6 | 26.3 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 330° | 332.5° | 335° | 337.5° | 340° | 342.5° | 345° | 347.5° | 350° | 352.5° | 355° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 112.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 0° | 39.5 | 39.5 |
| 2.5° | 36.2 | 36.2 |
| 5° | 42.8 | 39.5 |
| 7.5° | 49.4 | 46.1 |
| 10° | 55.9 | 52.6 |
| 12.5° | 62.5 | 59.2 |
| 15° | 72.4 | 65.8 |
| 17.5° | 79.0 | 72.4 |
| 20° | 88.8 | 79.0 |
| 22.5° | 105.3 | 88.8 |
| 25° | 138.2 | 102.0 |
| 27.5° | 204.0 | 125.0 |
| 30° | 286.2 | 167.8 |
| 32.5° | 338.9 | 207.3 |
| 35° | 368.5 | 207.3 |
| 37.5° | 417.9 | 204.0 |
| 40° | 493.5 | 213.9 |
| 42.5° | 618.6 | 233.6 |
| 45° | 918.0 | 292.8 |
| 47.5° | 1664.8 | 529.7 |
| 50° | 2467.6 | 829.1 |
| 52.5° | 2632.1 | 901.5 |
| 55° | 2293.2 | 812.7 |
| 57.5° | *1826.0* | *687.6* |
| 60° | 1378.6 | 516.6 |
| 62.5° | 1023.2 | 421.1 |
| 65° | 727.1 | 371.8 |
| 67.5° | 536.3 | 345.5 |
| 70° | 440.9 | 332.3 |
| 72.5° | 378.4 | 309.3 |
| 75° | 315.9 | 276.4 |
| 77.5° | 197.4 | 200.7 |
| 80° | 85.5 | 79.0 |
| 82.5° | 26.3 | 23.0 |
| 85° | 0.0 | 0.0 |
| 87.5° | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 |
| 92.5° | 0.0 | 0.0 |
| 95° | 0.0 | 0.0 |
| 97.5° | 0.0 | 0.0 |
| 100° | 0.0 | 0.0 |
| 102.5° | 0.0 | 0.0 |
| 105° | 0.0 | 0.0 |
| 107.5° | 0.0 | 0.0 |
| 110° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P1390075
CATALOG NUMBER: GSS-SA4A-835-U-RBC

**CANDELA DISTRIBUTION (continued):**

| | 357.5° | 360° |
|---|---|---|
| 112.5° | 0.0 | 0.0 |
| 115° | 0.0 | 0.0 |
| 117.5° | 0.0 | 0.0 |
| 120° | 0.0 | 0.0 |
| 122.5° | 0.0 | 0.0 |
| 125° | 0.0 | 0.0 |
| 127.5° | 0.0 | 0.0 |
| 130° | 0.0 | 0.0 |
| 132.5° | 0.0 | 0.0 |
| 135° | 0.0 | 0.0 |
| 137.5° | 0.0 | 0.0 |
| 140° | 0.0 | 0.0 |
| 142.5° | 0.0 | 0.0 |
| 145° | 0.0 | 0.0 |
| 147.5° | 0.0 | 0.0 |
| 150° | 0.0 | 0.0 |
| 152.5° | 0.0 | 0.0 |
| 155° | 0.0 | 0.0 |
| 157.5° | 0.0 | 0.0 |
| 160° | 0.0 | 0.0 |
| 162.5° | 0.0 | 0.0 |
| 165° | 0.0 | 0.0 |
| 167.5° | 0.0 | 0.0 |
| 170° | 0.0 | 0.0 |
| 172.5° | 0.0 | 0.0 |
| 175° | 0.0 | 0.0 |
| 177.5° | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-10

Test Date: 10/11/2024

Luminaire Tested: GSS-SB1A-835-U-5WQ

Data in this report applies to families of products including GSS-SB1A-835-U-5WQ

Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04


## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-184-10 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 10/15/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | McGraw-Edison |
| Catalog Number: | **GSS-SB1A-835-U-5WQ** |
| Description: | GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 80 CRI 3500K CCT 26 LEDS |

## Spectral Parameters

| | |
|---|---|
| CCT (K): | 3411 |
| CIE u': | 0.2360 |
| CIE v': | 0.5189 |
| Duv: | 0.0044 |
| CIE x: | 0.4154 |
| CIE y: | 0.4059 |
| CIE z: | 0.1787 |
| Peak Wavelength (nm): | 601 |
| Dominant Wavelength (nm): | 579 |
| Purity: | 46.51914 |
| Rf: | 86.6 |
| Rg: | 95.9 |

| | |
|---|---|
| CRI (Ra): | 83.5 |
| R1: | 81.1 |
| R2: | 88.9 |
| R3: | 97.2 |
| R4: | 83.8 |
| R5: | 81.7 |
| R6: | 86.9 |
| R7: | 86.1 |
| R8: | 62.2 |
| R9: | 6.3 |
| R10: | 75.4 |
| R11: | 84.1 |
| R12: | 69.7 |
| R13: | 82.8 |
| R14: | 98.5 |
| R15: | 72.6 |

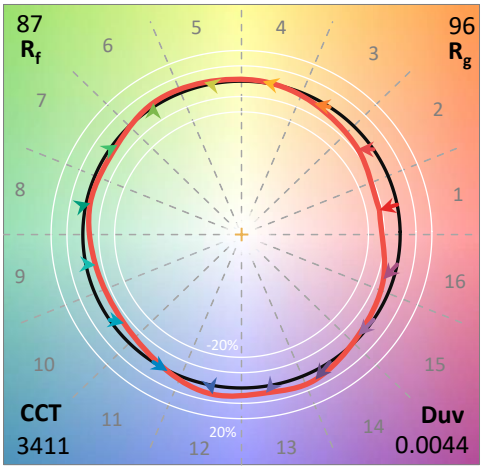


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 35M |
| Operation Time: | 1H 35M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-184-10


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-184-10

## CIE 1931 Chromaticity Diagram

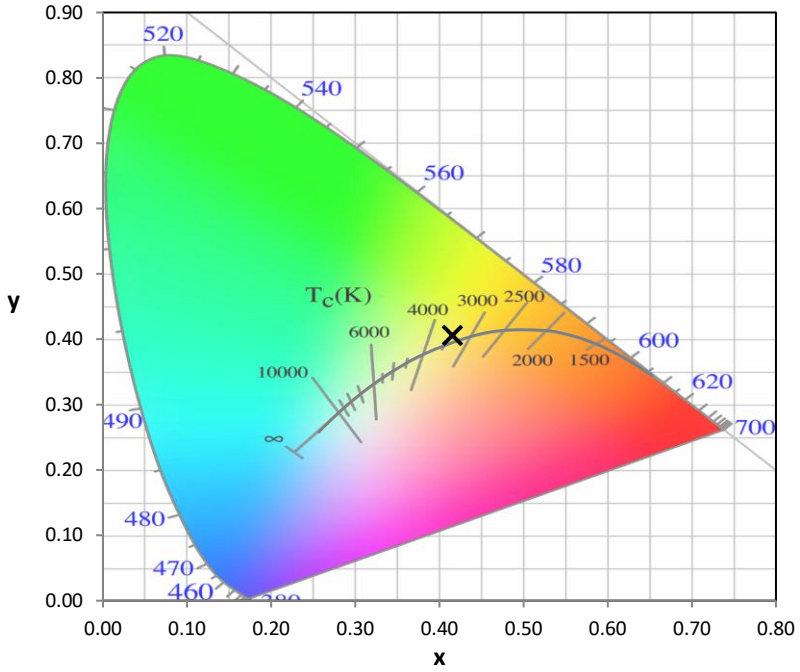


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

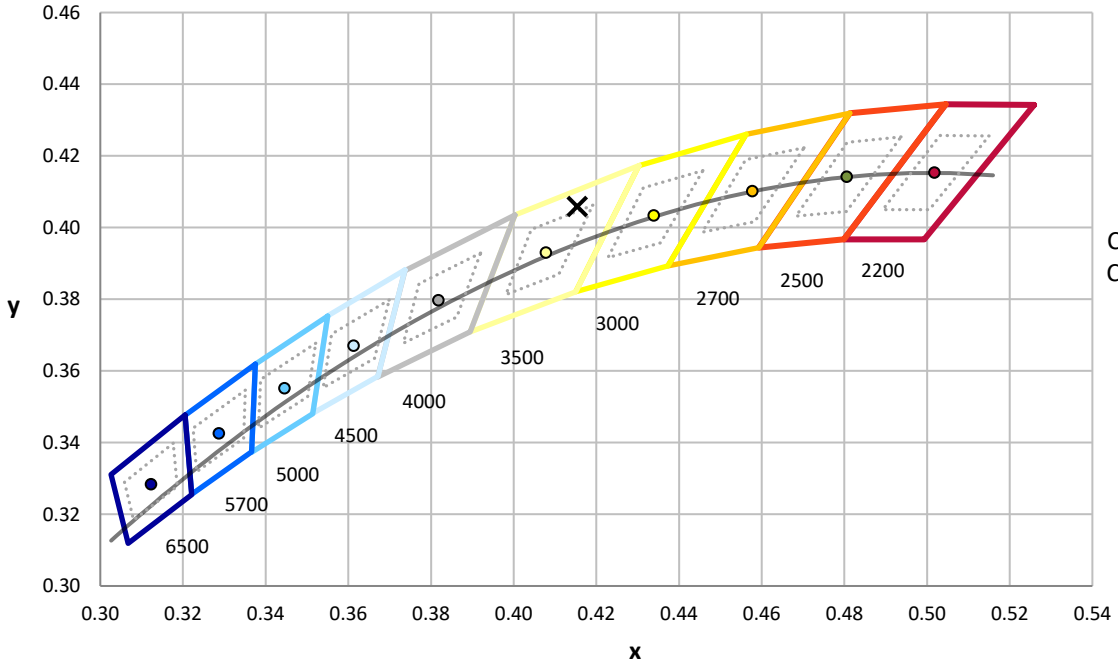



CCT = 3411K
CIE x = 0.4154
CIE y = 0.4059
Duv = 0.0044

Point lies inside the ANSI 3500K 7-step quadrangle

REPORT NUMBER: SP1-2407-184-10

## Photopic Flux vs. Wavelength

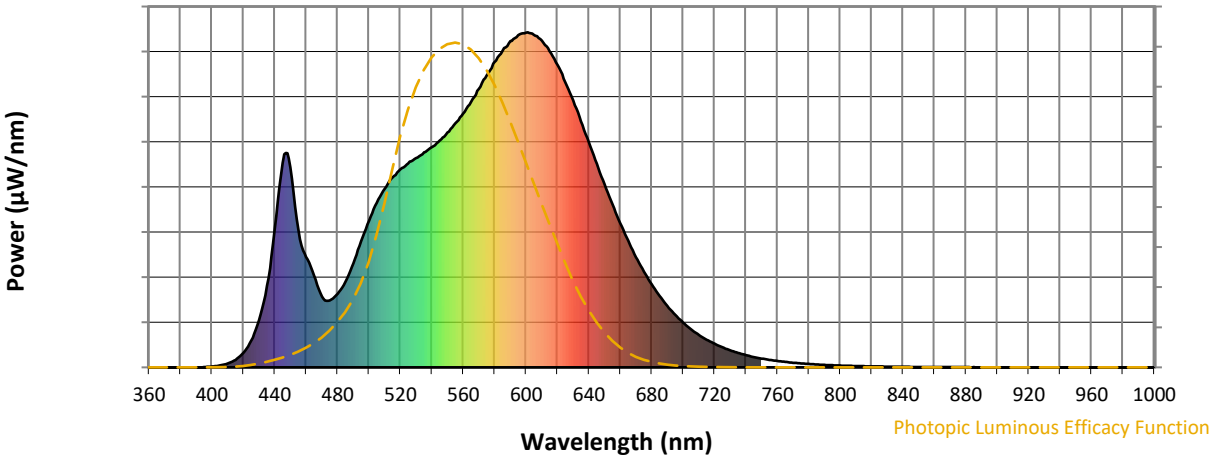



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 311 | NR | 620 | 903 | NR | 750 | 26 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 376 | NR | 625 | 851 | NR | 755 | 22 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 438 | NR | 630 | 797 | NR | 760 | 19 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 491 | NR | 635 | 735 | NR | 765 | 16 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 533 | NR | 640 | 672 | NR | 770 | 14 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 566 | NR | 645 | 607 | NR | 775 | 12 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 592 | NR | 650 | 546 | NR | 780 | 10 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 608 | NR | 655 | 487 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 3 | NR | 530 | 625 | NR | 660 | 429 | NR | 790 | 7 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 642 | NR | 665 | 378 | NR | 795 | 6 | NR | 925 | 0 | NR |
| 410 | 12 | NR | 540 | 657 | NR | 670 | 329 | NR | 800 | 5 | NR | 930 | 0 | NR |
| 415 | 22 | NR | 545 | 677 | NR | 675 | 286 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 43 | NR | 550 | 701 | NR | 680 | 248 | NR | 810 | 4 | NR | 940 | 0 | NR |
| 425 | 80 | NR | 555 | 728 | NR | 685 | 213 | NR | 815 | 3 | NR | 945 | 0 | NR |
| 430 | 140 | NR | 560 | 757 | NR | 690 | 184 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 243 | NR | 565 | 793 | NR | 695 | 156 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 412 | NR | 570 | 831 | NR | 700 | 134 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 610 | NR | 575 | 872 | NR | 705 | 114 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 597 | NR | 580 | 911 | NR | 710 | 97 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 412 | NR | 585 | 944 | NR | 715 | 83 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 330 | NR | 590 | 974 | NR | 720 | 70 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 274 | NR | 595 | 992 | NR | 725 | 60 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 211 | NR | 600 | 999 | NR | 730 | 51 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 200 | NR | 605 | 992 | NR | 735 | 43 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 220 | NR | 610 | 975 | NR | 740 | 36 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 255 | NR | 615 | 944 | NR | 745 | 31 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-10

## Scotopic Flux vs. Wavelength

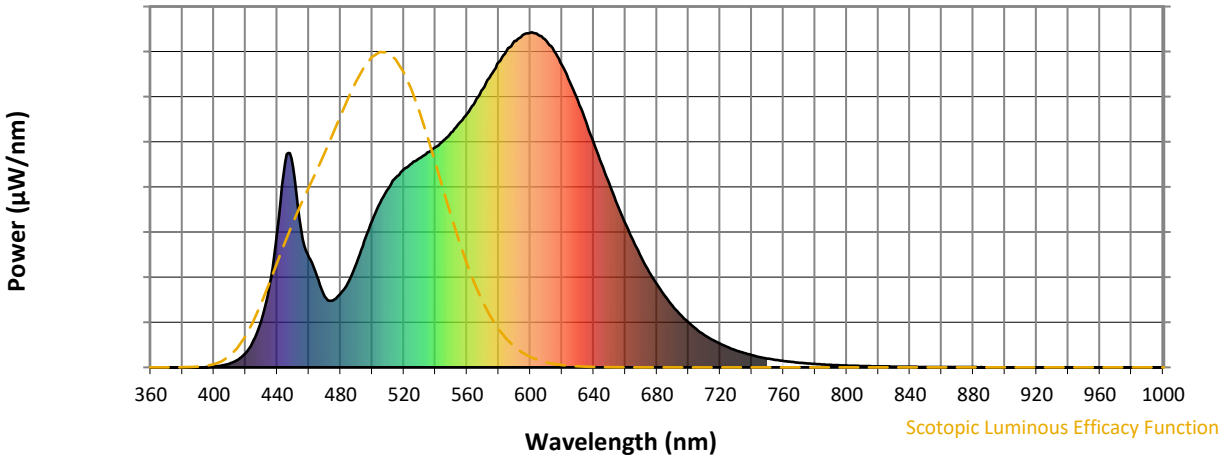



**Scotopic Lumens: NR** **S/P: 1.48**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 311 | NR | 620 | 903 | NR | 750 | 26 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 376 | NR | 625 | 851 | NR | 755 | 22 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 438 | NR | 630 | 797 | NR | 760 | 19 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 491 | NR | 635 | 735 | NR | 765 | 16 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 533 | NR | 640 | 672 | NR | 770 | 14 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 566 | NR | 645 | 607 | NR | 775 | 12 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 592 | NR | 650 | 546 | NR | 780 | 10 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 608 | NR | 655 | 487 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 3 | NR | 530 | 625 | NR | 660 | 429 | NR | 790 | 7 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 642 | NR | 665 | 378 | NR | 795 | 6 | NR | 925 | 0 | NR |
| 410 | 12 | NR | 540 | 657 | NR | 670 | 329 | NR | 800 | 5 | NR | 930 | 0 | NR |
| 415 | 22 | NR | 545 | 677 | NR | 675 | 286 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 43 | NR | 550 | 701 | NR | 680 | 248 | NR | 810 | 4 | NR | 940 | 0 | NR |
| 425 | 80 | NR | 555 | 728 | NR | 685 | 213 | NR | 815 | 3 | NR | 945 | 0 | NR |
| 430 | 140 | NR | 560 | 757 | NR | 690 | 184 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 243 | NR | 565 | 793 | NR | 695 | 156 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 412 | NR | 570 | 831 | NR | 700 | 134 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 610 | NR | 575 | 872 | NR | 705 | 114 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 597 | NR | 580 | 911 | NR | 710 | 97 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 412 | NR | 585 | 944 | NR | 715 | 83 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 330 | NR | 590 | 974 | NR | 720 | 70 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 274 | NR | 595 | 992 | NR | 725 | 60 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 211 | NR | 600 | 999 | NR | 730 | 51 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 200 | NR | 605 | 992 | NR | 735 | 43 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 220 | NR | 610 | 975 | NR | 740 | 36 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 255 | NR | 615 | 944 | NR | 745 | 31 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-184-10

## Melanopic Flux vs. Wavelength

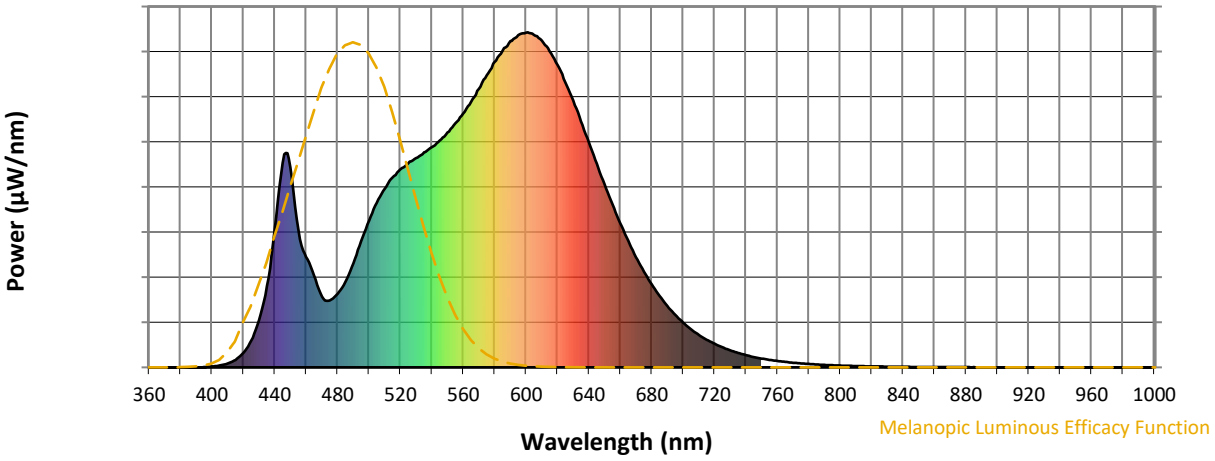


**Melanopic Lumens: NR** **M/P: 2.88**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 311 | NR | 620 | 903 | NR | 750 | 26 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 376 | NR | 625 | 851 | NR | 755 | 22 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 438 | NR | 630 | 797 | NR | 760 | 19 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 491 | NR | 635 | 735 | NR | 765 | 16 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 533 | NR | 640 | 672 | NR | 770 | 14 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 566 | NR | 645 | 607 | NR | 775 | 12 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 592 | NR | 650 | 546 | NR | 780 | 10 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 608 | NR | 655 | 487 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 3 | NR | 530 | 625 | NR | 660 | 429 | NR | 790 | 7 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 642 | NR | 665 | 378 | NR | 795 | 6 | NR | 925 | 0 | NR |
| 410 | 12 | NR | 540 | 657 | NR | 670 | 329 | NR | 800 | 5 | NR | 930 | 0 | NR |
| 415 | 22 | NR | 545 | 677 | NR | 675 | 286 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 43 | NR | 550 | 701 | NR | 680 | 248 | NR | 810 | 4 | NR | 940 | 0 | NR |
| 425 | 80 | NR | 555 | 728 | NR | 685 | 213 | NR | 815 | 3 | NR | 945 | 0 | NR |
| 430 | 140 | NR | 560 | 757 | NR | 690 | 184 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 243 | NR | 565 | 793 | NR | 695 | 156 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 412 | NR | 570 | 831 | NR | 700 | 134 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 610 | NR | 575 | 872 | NR | 705 | 114 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 597 | NR | 580 | 911 | NR | 710 | 97 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 412 | NR | 585 | 944 | NR | 715 | 83 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 330 | NR | 590 | 974 | NR | 720 | 70 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 274 | NR | 595 | 992 | NR | 725 | 60 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 211 | NR | 600 | 999 | NR | 730 | 51 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 200 | NR | 605 | 992 | NR | 735 | 43 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 220 | NR | 610 | 975 | NR | 740 | 36 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 255 | NR | 615 | 944 | NR | 745 | 31 | NR | 875 | 1 | NR | | | |


REPORT NUMBER: SP1-2407-184-10

# TM-30-18


## Summary


$R_f$ = 86.6
$R_g$ = 95.9
CIE $R_a$ = 83.5
$R_9$ = 6.3


## Spectral Power Distribution Comparison

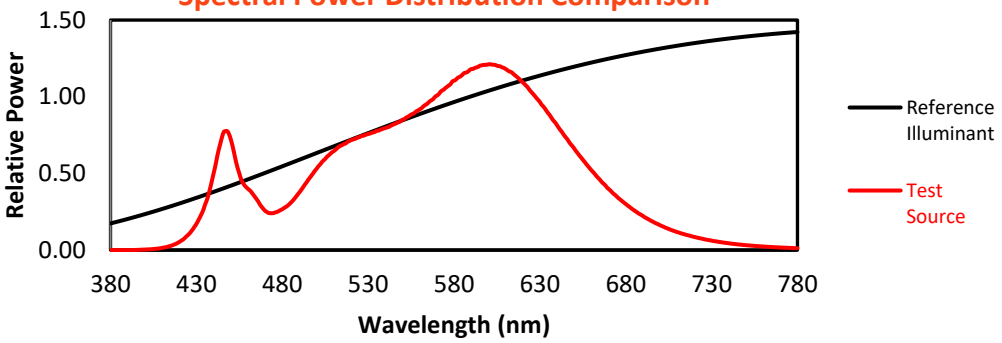



## Color Vector Graphics

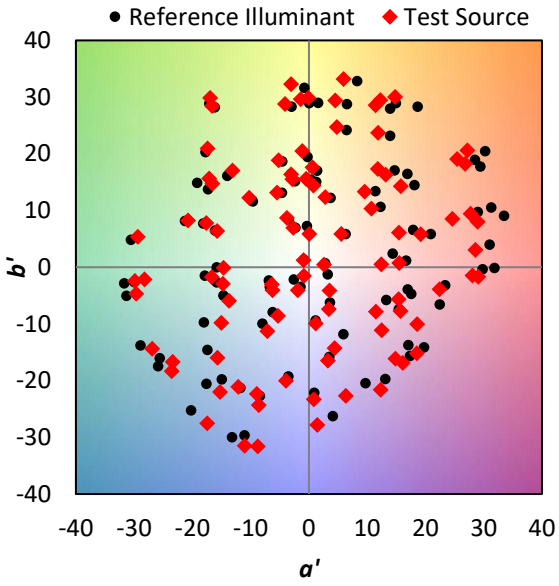

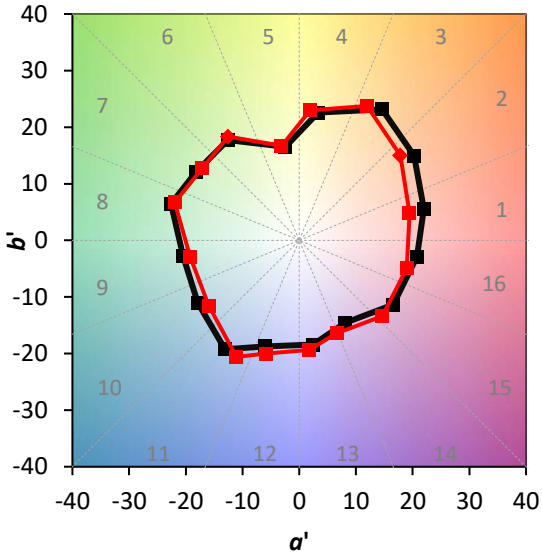


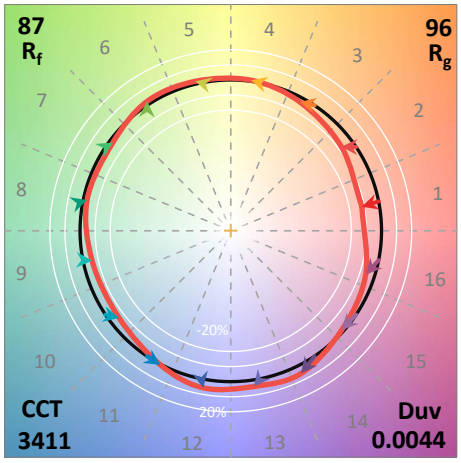
REPORT NUMBER: SP1-2407-184-10
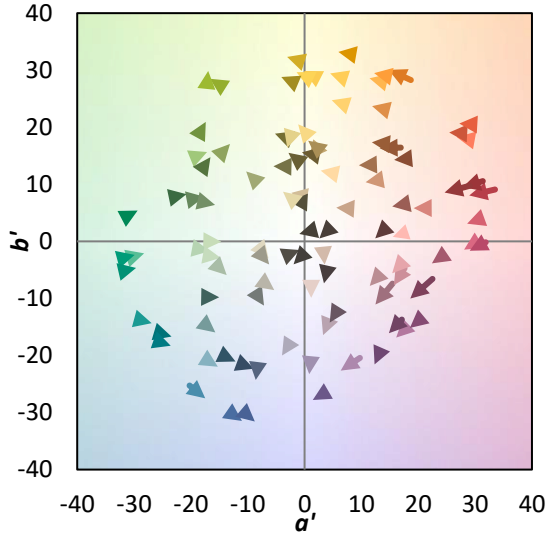
# TM-30-18

**Individual Sample Fidelity Index ($R_{f,i}$)**


| | | | |
|---|---|---|---|
| CES01 = 86 | CES26 = 85 | CES51 = 97 | CES76 = 81 |
| CES02 = 62 | CES27 = 95 | CES52 = 96 | CES77 = 87 |
| CES03 = 31 | CES28 = 94 | CES53 = 91 | CES78 = 80 |
| CES04 = 70 | CES29 = 87 | CES54 = 92 | CES79 = 93 |
| CES05 = 49 | CES30 = 93 | CES55 = 92 | CES80 = 91 |
| CES06 = 51 | CES31 = 89 | CES56 = 88 | CES81 = 77 |
| CES07 = 41 | CES32 = 84 | CES57 = 87 | CES82 = 96 |
| CES08 = 40 | CES33 = 91 | CES58 = 88 | CES83 = 95 |
| CES09 = 29 | CES34 = 91 | CES59 = 93 | CES84 = 92 |
| CES10 = 75 | CES35 = 95 | CES60 = 94 | CES85 = 80 |
| CES11 = 58 | CES36 = 90 | CES61 = 91 | CES86 = 72 |
| CES12 = 64 | CES37 = 95 | CES62 = 95 | CES87 = 86 |
| CES13 = 43 | CES38 = 100 | CES63 = 88 | CES88 = 88 |
| CES14 = 74 | CES39 = 97 | CES64 = 85 | CES89 = 77 |
| CES15 = 71 | CES40 = 94 | CES65 = 80 | CES90 = 88 |
| CES16 = 47 | CES41 = 97 | CES66 = 84 | CES91 = 81 |
| CES17 = 49 | CES42 = 96 | CES67 = 82 | CES92 = 67 |
| CES18 = 56 | CES43 = 93 | CES68 = 85 | CES93 = 81 |
| CES19 = 72 | CES44 = 99 | CES69 = 89 | CES94 = 63 |
| CES20 = 66 | CES45 = 95 | CES70 = 81 | CES95 = 76 |
| CES21 = 86 | CES46 = 91 | CES71 = 79 | CES96 = 84 |
| CES22 = 78 | CES47 = 93 | CES72 = 93 | CES97 = 92 |
| CES23 = 91 | CES48 = 85 | CES73 = 76 | CES98 = 86 |
| CES24 = 90 | CES49 = 92 | CES74 = 95 | CES99 = 77 |
| CES25 = 72 | CES50 = 96 | CES75 = 80 | |

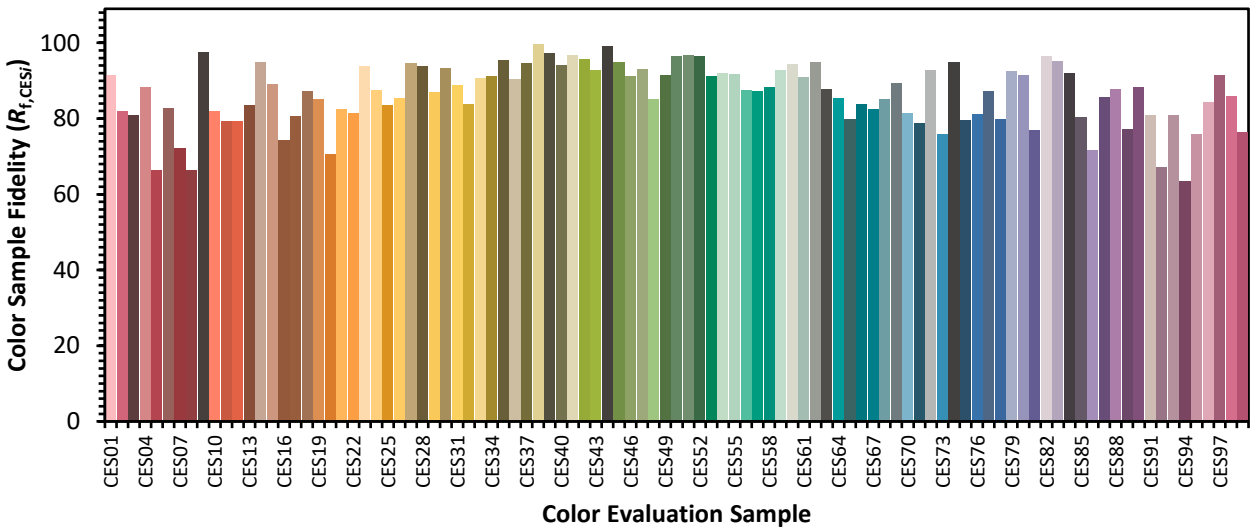



REPORT NUMBER: SP1-2407-184-10

# TM-30-18

## Color Rendition by Hue-Angle Bin

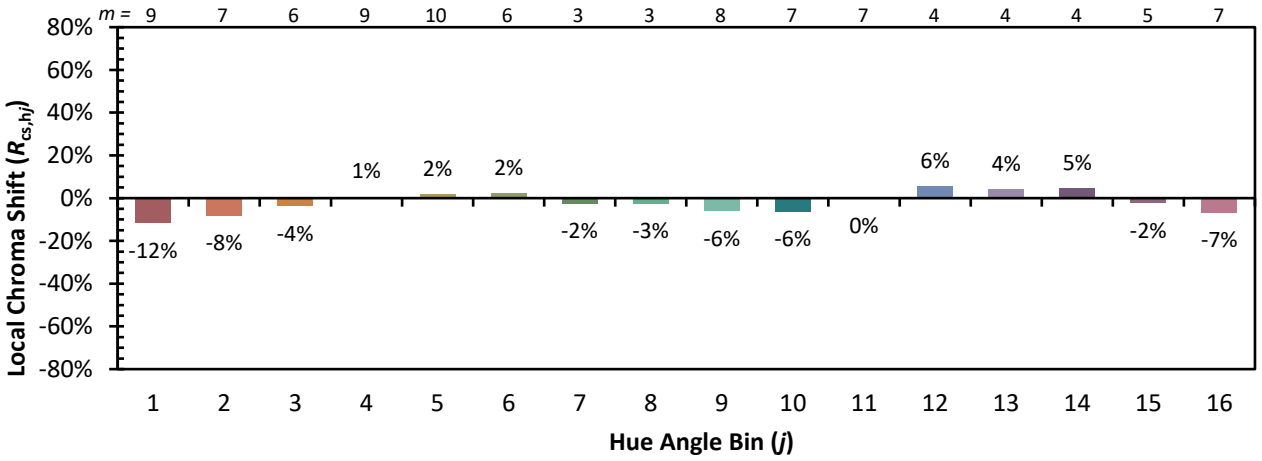

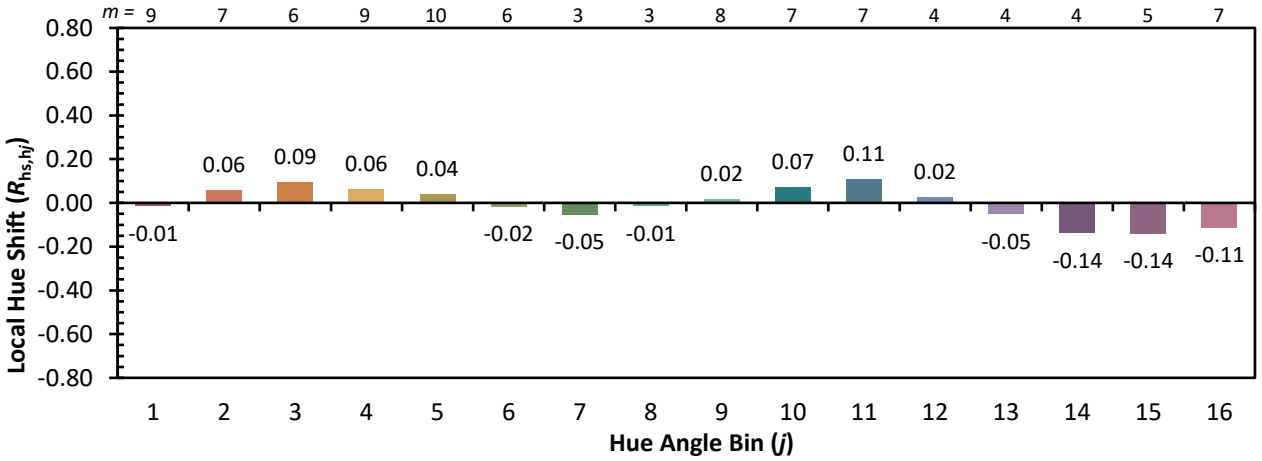


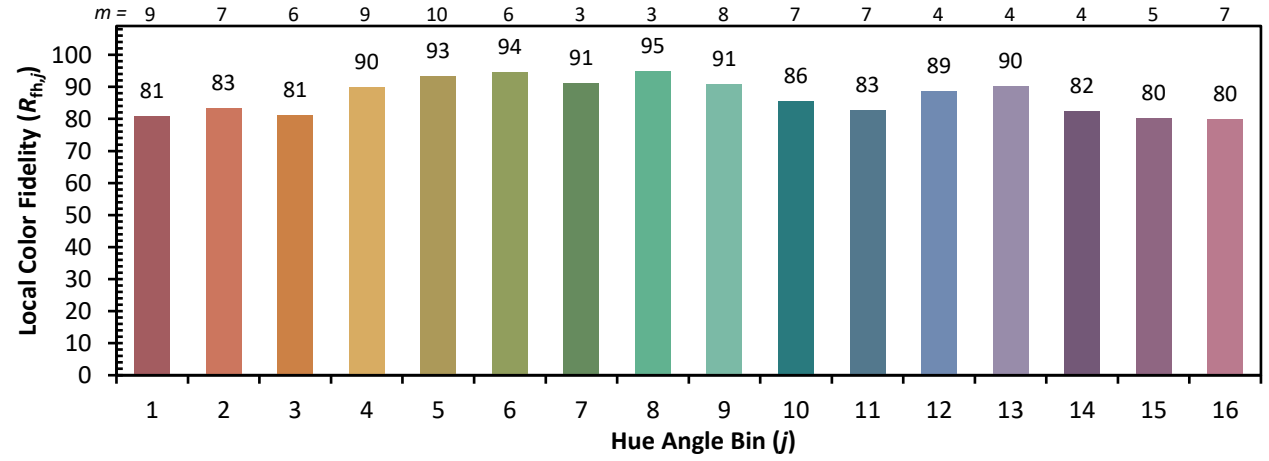
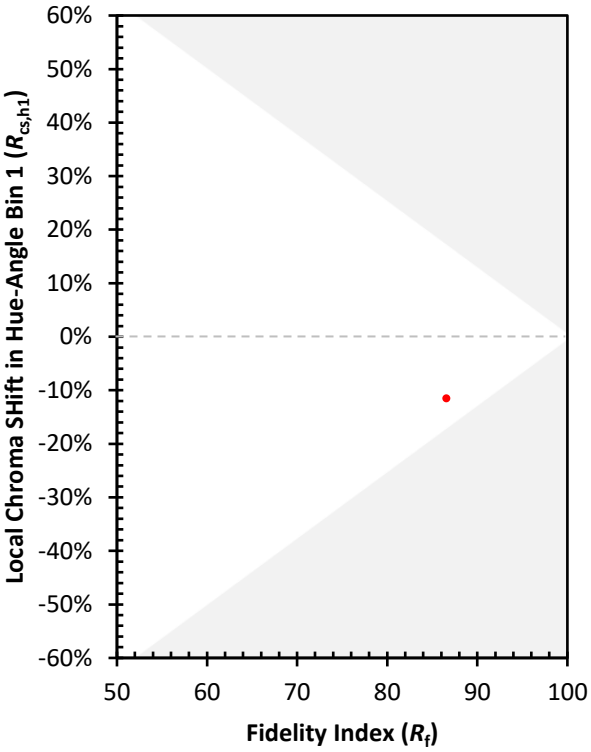



REPORT NUMBER: SP1-2407-184-10

# TM-30-18

## Measure Comparisons

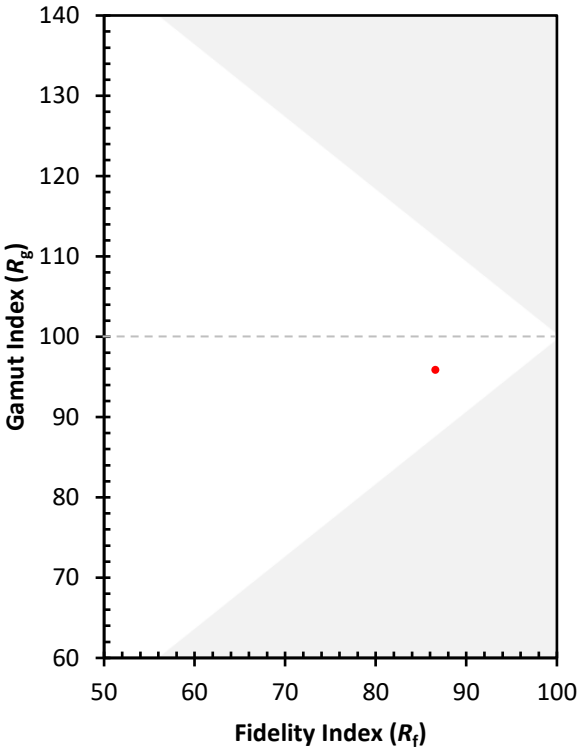


(END OF REPORT)