

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P436799

Luminaire Tested: **TT-D3-735-U-T4-PM-HSS**

Issue Date: 12/2/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P436799  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2010-017-4)  
Test Lab: INNOVATION CENTER  
Issue Date: 12/2/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: McGRAW-EDISON  
Catalog Number: TT-D3-735-U-T4-PM-HSS  
Description: TOPTIER LED SITE LUMINAIRE  
3500K, 70 CRI LEDS AND DRIVE LANE DISTRIBUTION WITH HOUSE SIDE SHIELD  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4456.9 lumens  
Efficiency: N/A  
Efficacy: 91.3 lumens/watt  
Luminous Opening: Circular (Dia: 1.12' x H: 0')  
IES Classification: Type IV - Short  
BUG Rating: B1 - U1 - G3  
  
Input Watts (W): 48.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT



REPORT NUMBER: P436799  
 CATALOG NUMBER: TT-D3-735-U-T4-PM-HSS

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

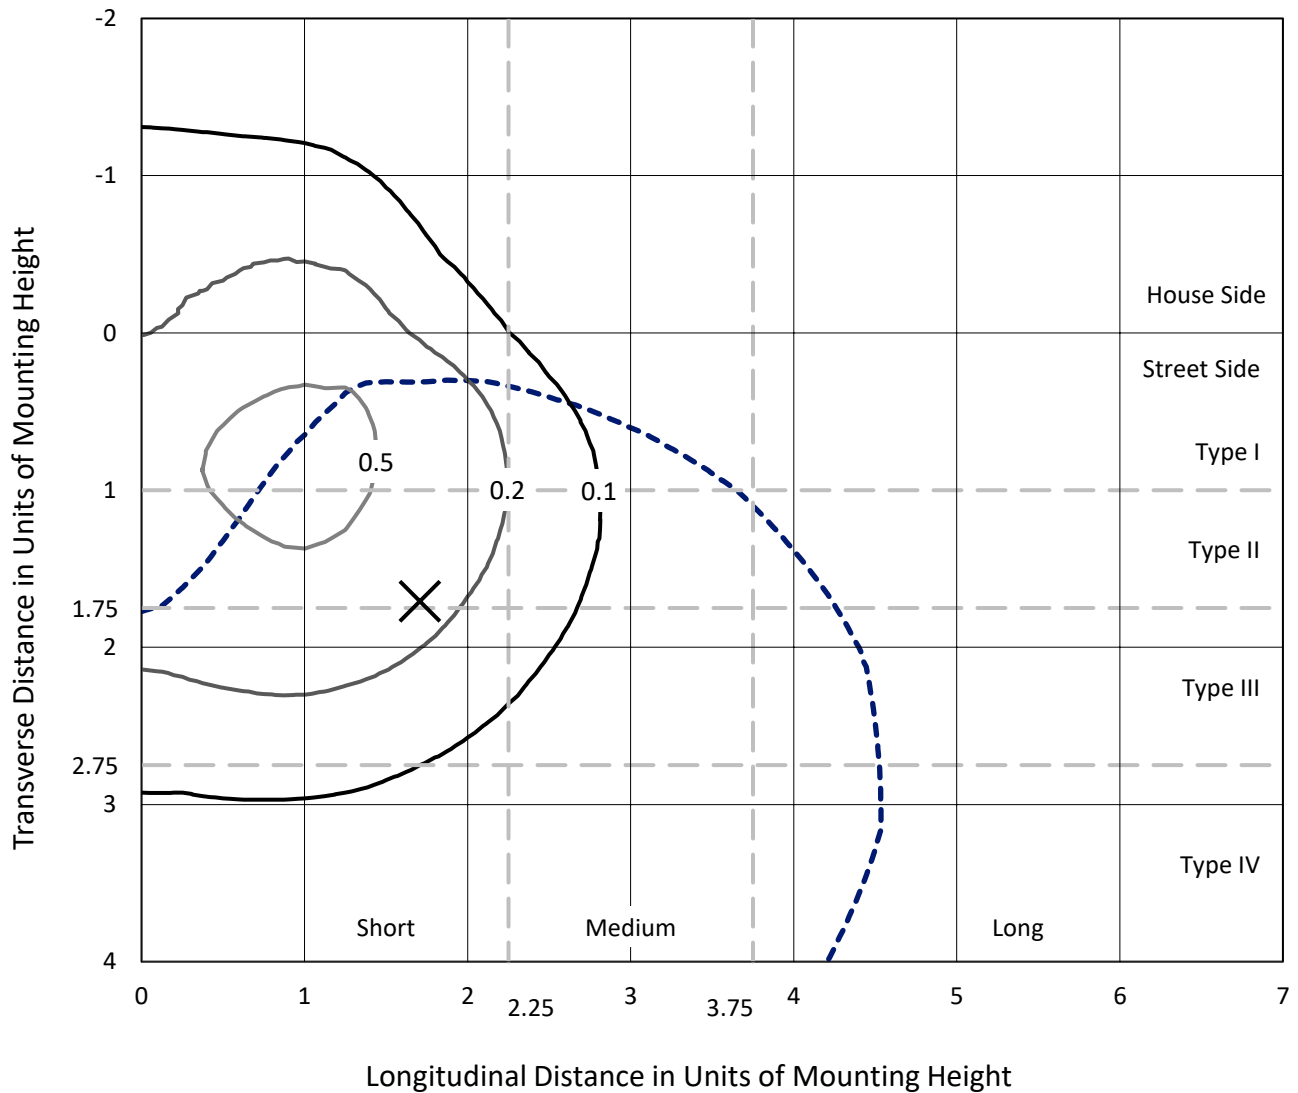

Based on 25 foot mounting height. Maximum calculated value = 0.6 fc  
 Type IV - Short - N/A

REPORT NUMBER: P436799  
CATALOG NUMBER: TT-D3-735-U-T4-PM-HSS

### Luminous Intensity Polar Plot

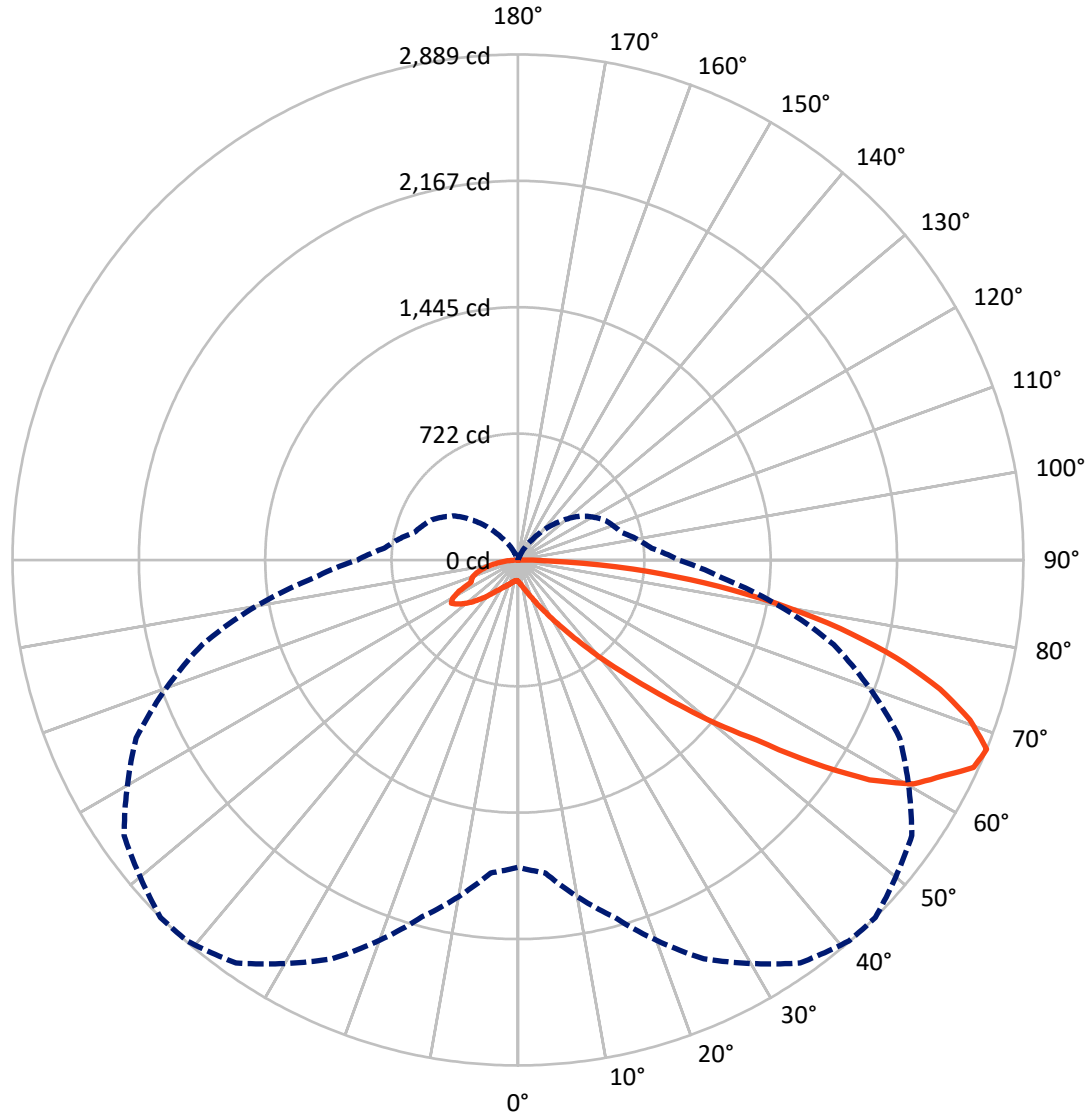

— Vertical Plane Through 45-Deg Lateral      - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P436799

CATALOG NUMBER: TT-D3-735-U-T4-PM-HSS


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	809.8	0.9	810.7
	% Fixture	18.2	0.0	18.2
<b>Street Side</b>	Lumens	3636.4	9.9	3646.2
	% Fixture	81.6	0.2	81.8
<b>Total</b>	Lumens	4446.1	10.8	4456.9
	% Fixture	99.8	0.2	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	12.6	0.3
10°-20°	46.9	1.1
20°-30°	108.1	2.4
30°-40°	230.6	5.2
40°-50°	482.7	10.8
50°-60°	915.6	20.5
60°-70°	1246.1	28.0
70°-80°	1071.3	24.0
80°-90°	332.2	7.5
90°-100°	7.0	0.2
100°-110°	2.0	0.0
110°-120°	0.5	0.0
120°-130°	0.4	0.0
130°-140°	0.3	0.0
140°-150°	0.2	0.0
150°-160°	0.1	0.0
160°-170°	0.1	0.0
170°-180°	0.0	0.0
0°-90°	4446.1	99.8
0°-180°	4456.9	100.0

**Coefficient of Utilization**

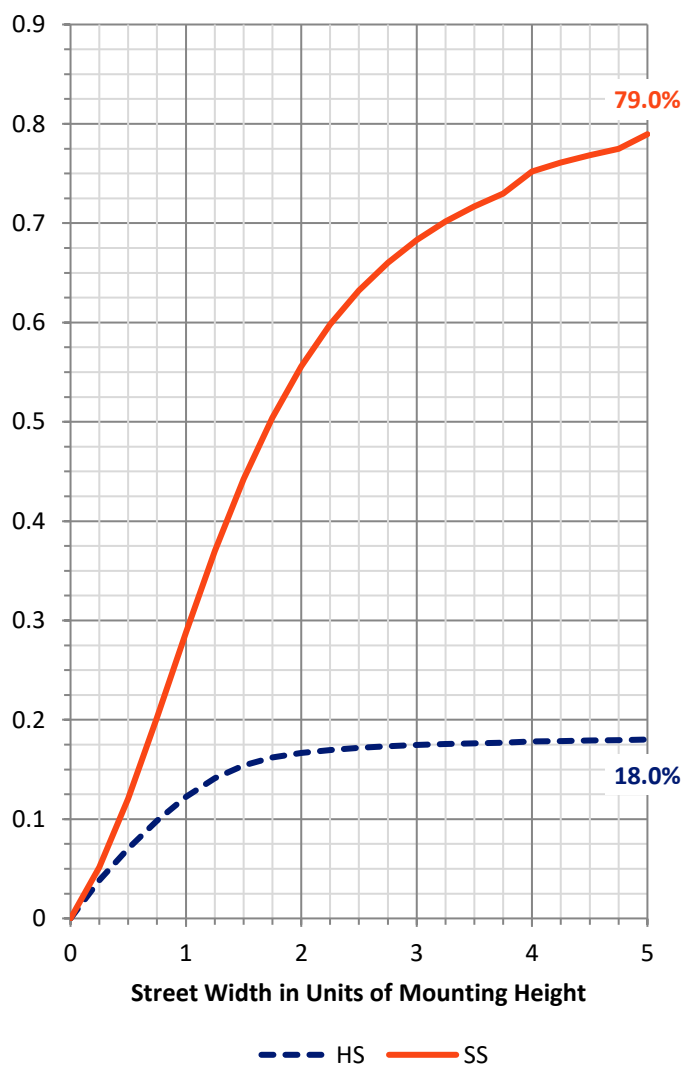

REPORT NUMBER: P436799


CATALOG NUMBER: TT-D3-735-U-T4-PM-HSS

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	101.6	2.3			
FM (30°-60°)	1224.9	27.5			
FH (60°-80°)	2018.3	45.3			G2/5000
FVH (80°-90°)	291.5	6.5			G3/500
BL (0°-30°)	66.0	1.5	B0/110		
BM (30°-60°)	403.9	9.1	B1/1000		
BH (60°-80°)	299.1	6.7	B1/500		G1/500
BVH (80°-90°)	40.7	0.9			G1/100
UL (90°-100°)	7.0	0.2		U1/10	
UH (100°-180°)	3.7	0.1		U1/10	

**BUG Rating: B1-U1-G3**

Type IV Short

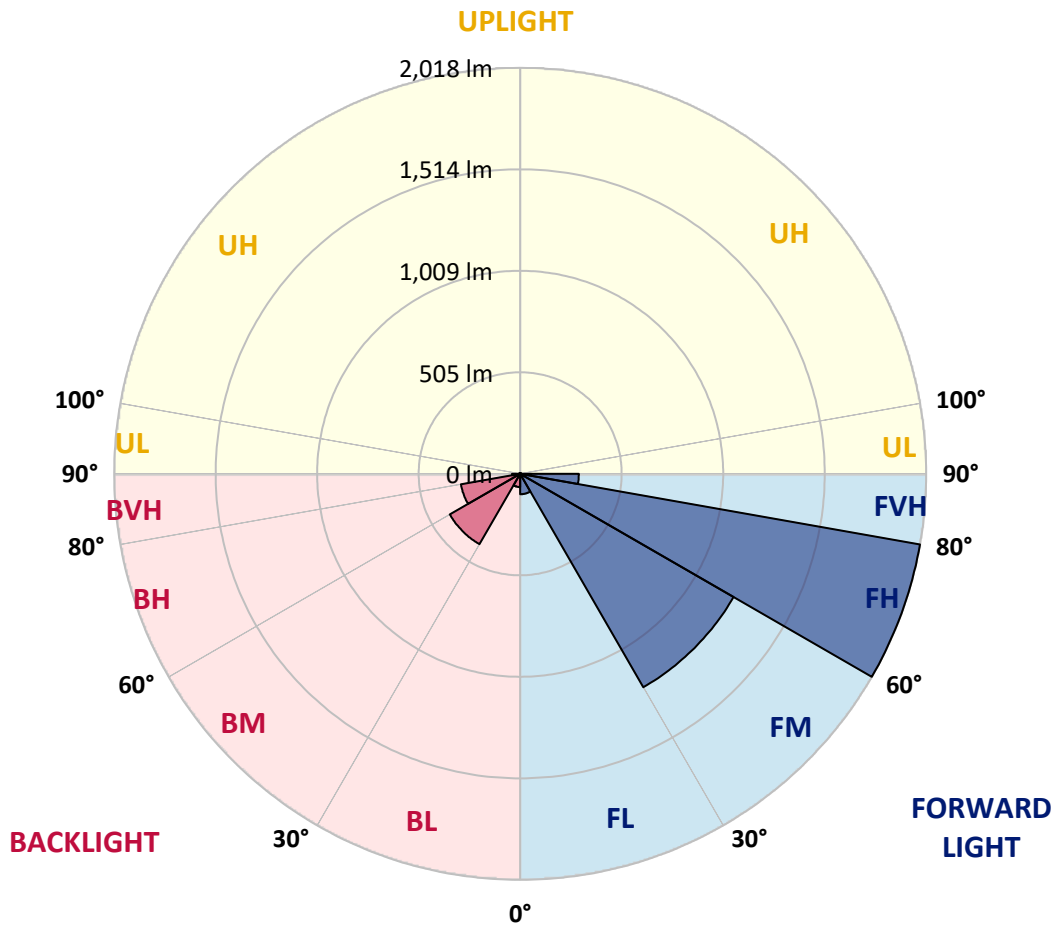



REPORT NUMBER: P436799  
 CATALOG NUMBER: TT-D3-735-U-T4-PM-HSS

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	41°	45°	55°	65°	75°	85°
0°	122.0	122.0	122.0	122.0	122.0	122.0	122.0	122.0	122.0	122.0	122.0
2.5°	132.4	131.4	131.4	130.5	130.5	128.6	128.6	127.6	126.7	125.7	123.8
5°	141.8	140.9	140.9	139.9	139.0	137.1	136.1	134.2	132.4	130.5	128.6
7.5°	153.2	152.2	152.2	151.3	149.4	146.5	145.6	142.8	139.9	137.1	134.2
10°	167.3	166.4	166.4	164.5	162.6	159.8	157.9	154.1	151.3	146.5	141.8
12.5°	182.5	181.5	181.5	179.6	175.8	173.9	172.1	167.3	162.6	156.9	151.3
15°	199.5	199.5	199.5	198.5	194.7	191.0	189.1	183.4	177.7	169.2	161.7
17.5°	221.2	220.3	220.3	218.4	213.7	211.8	208.9	202.3	193.8	184.3	174.9
20°	247.7	246.7	244.9	243.9	239.2	237.3	233.5	225.9	214.6	202.3	189.1
22.5°	274.2	274.2	273.2	274.2	270.4	268.5	263.8	253.4	240.1	222.2	206.1
25°	304.4	305.4	307.2	310.1	305.4	303.5	299.7	286.4	270.4	247.7	225.0
27.5°	342.2	342.2	347.0	351.7	347.9	347.0	341.3	327.1	304.4	277.0	250.5
30°	382.9	383.8	391.4	399.9	398.0	398.0	393.3	377.2	349.8	317.6	280.8
32.5°	430.1	433.9	441.5	450.9	457.6	457.6	455.7	438.7	406.5	363.0	317.6
35°	492.5	485.9	500.1	514.3	528.5	531.3	532.2	516.2	479.3	424.5	363.0
37.5°	546.4	545.5	567.2	591.8	615.4	624.9	627.7	612.6	565.3	493.5	412.2
40°	608.8	614.5	643.8	680.7	720.4	736.4	744.0	727.0	668.4	575.7	468.9
42.5°	674.1	691.1	727.9	783.7	844.2	867.9	876.4	860.3	791.3	678.8	540.8
45°	750.6	774.3	823.4	902.8	982.2	1017.2	1036.1	1030.5	959.6	819.6	633.4
47.5°	845.2	862.2	929.3	1036.1	1148.6	1206.3	1232.8	1248.8	1147.7	965.2	714.7
50°	952.0	954.8	1047.5	1182.7	1347.2	1423.7	1470.1	1462.5	1342.4	1132.6	817.7
52.5°	1059.8	1056.9	1177.9	1361.3	1576.9	1677.1	1708.3	1739.5	1621.3	1387.8	983.2
55°	1182.7	1177.0	1329.2	1561.8	1829.3	1961.7	2049.6	2093.1	1906.8	1556.1	1055.0
57.5°	1284.8	1302.7	1493.7	1773.5	2146.9	2313.3	2371.0	2347.4	2063.8	1641.2	1090.0
60°	1414.3	1440.8	1658.2	2050.5	2422.0	2545.9	2598.8	2491.1	2164.0	1705.5	1114.6
62.5°	1536.2	1570.3	1838.8	2275.5	2594.1	2707.6	2720.8	2603.6	2304.8	1832.1	1186.4
65°	1650.6	1689.4	2018.4	2408.8	2744.4	2839.0	2861.6	2769.0	2454.2	1906.8	1214.8
67.5°	1755.6	1796.2	2111.0	2515.6	2811.5	2884.3	2889.1	2748.2	2407.9	1868.1	1169.4
70°	1835.9	1853.9	2155.5	2512.8	2732.1	2760.5	2741.6	2599.8	2299.2	1788.6	1104.2
72.5°	1852.0	1865.2	2094.0	2372.9	2511.9	2538.3	2523.2	2398.4	2128.0	1646.8	998.3
75°	1770.7	1773.5	1928.6	2121.4	2222.6	2254.7	2234.9	2119.5	1870.9	1446.4	859.3
77.5°	1558.0	1563.6	1657.2	1786.8	1871.8	1899.3	1884.1	1778.2	1567.4	1214.8	710.9
80°	1234.7	1246.0	1313.1	1402.9	1480.5	1508.8	1490.9	1405.8	1233.7	954.8	554.9
82.5°	841.4	855.6	917.0	991.7	1059.8	1087.2	1072.1	1018.2	889.6	688.2	396.1
85°	425.4	440.5	503.9	573.8	633.4	662.7	658.0	635.3	547.4	424.5	239.2
87.5°	67.1	73.7	100.2	133.3	170.2	197.6	180.6	178.7	141.8	113.4	57.7
90°	27.4	27.4	26.5	25.5	22.7	20.8	19.9	16.1	12.3	7.6	2.8
92.5°	24.6	24.6	23.6	21.7	19.9	18.9	17.0	14.2	10.4	6.6	2.8
95°	19.9	19.9	18.9	18.0	16.1	15.1	13.2	11.3	8.5	5.7	2.8
97.5°	15.1	15.1	14.2	13.2	12.3	10.4	10.4	8.5	5.7	3.8	1.9
100°	11.3	11.3	10.4	9.5	8.5	7.6	7.6	5.7	3.8	2.8	1.9
102.5°	7.6	7.6	7.6	6.6	5.7	5.7	4.7	3.8	2.8	1.9	1.9
105°	4.7	4.7	4.7	4.7	3.8	2.8	2.8	1.9	1.9	1.9	1.9
107.5°	2.8	2.8	2.8	2.8	1.9	1.9	1.9	1.9	1.9	1.9	1.9
110°	1.9	1.9	1.9	0.9	0.9	0.9	0.9	0.9	0.9	1.9	0.9



REPORT NUMBER: P436799  
 CATALOG NUMBER: TT-D3-735-U-T4-PM-HSS

**CANDELA DISTRIBUTION (continued):**

	0°	5°	15°	25°	35°	41°	45°	55°	65°	75°	85°
112.5°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
115°	0.0	0.0	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
117.5°	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9	0.9
120°	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9	0.9
122.5°	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9	0.9
125°	0.0	0.0	0.0	0.9	0.0	0.9	0.9	0.9	0.9	0.9	0.9
127.5°	0.0	0.0	0.0	0.9	0.0	0.0	0.9	0.9	0.9	0.9	0.9
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9
142.5°	0.9	0.9	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
145°	0.9	0.9	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
147.5°	0.9	0.9	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
175°	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9	0.9
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.9	0.9	0.9	0.9
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





REPORT NUMBER: P436799  
 CATALOG NUMBER: TT-D3-735-U-T4-PM-HSS

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	122.0	122.0	122.0	122.0	122.0	122.0	122.0	122.0	122.0	122.0	122.0
2.5°	123.8	122.9	121.0	120.1	118.2	118.2	117.2	116.3	116.3	116.3	116.3
5°	126.7	125.7	123.8	122.0	120.1	118.2	117.2	116.3	116.3	116.3	115.3
7.5°	132.4	130.5	127.6	124.8	122.0	120.1	119.1	118.2	117.2	117.2	117.2
10°	139.0	137.1	132.4	129.5	125.7	122.9	122.0	121.0	120.1	120.1	120.1
12.5°	147.5	144.6	139.0	134.2	130.5	127.6	125.7	124.8	124.8	123.8	124.8
15°	157.9	154.1	146.5	140.9	136.1	133.3	131.4	130.5	130.5	130.5	129.5
17.5°	169.2	164.5	155.0	148.4	142.8	139.9	138.0	137.1	137.1	137.1	137.1
20°	182.5	175.8	165.4	156.9	151.3	147.5	145.6	145.6	144.6	145.6	145.6
22.5°	196.6	189.1	175.8	166.4	158.8	155.0	153.2	153.2	153.2	154.1	155.0
25°	213.7	204.2	188.1	175.8	167.3	163.5	161.7	162.6	162.6	163.5	163.5
27.5°	236.3	222.2	202.3	187.2	177.7	173.0	171.1	172.1	173.0	173.0	173.0
30°	261.9	244.9	217.4	201.4	190.0	184.3	182.5	183.4	184.3	186.2	185.3
32.5°	293.1	272.3	240.1	217.4	205.1	198.5	196.6	195.7	197.6	199.5	199.5
35°	330.9	304.4	266.6	240.1	222.2	213.7	211.8	210.8	211.8	213.7	215.5
37.5°	371.5	339.4	293.1	265.7	245.8	236.3	231.6	227.8	228.8	229.7	232.6
40°	417.9	378.1	323.3	290.2	272.3	260.9	254.3	248.6	250.5	250.5	251.5
42.5°	476.5	426.4	361.1	319.5	300.6	288.3	277.9	271.3	267.5	268.5	264.7
45°	553.0	490.6	408.4	361.1	334.7	315.8	303.5	290.2	280.8	282.7	277.0
47.5°	616.4	541.7	452.8	400.8	372.5	348.8	323.3	304.4	291.2	289.3	285.5
50°	693.9	604.1	503.9	444.3	414.1	378.1	347.9	315.8	294.0	288.3	289.3
52.5°	824.4	713.8	576.7	502.9	450.0	407.5	361.1	316.7	287.4	278.9	281.7
55°	871.6	750.6	614.5	551.2	499.2	433.0	366.8	306.3	268.5	260.9	261.9
57.5°	882.0	750.6	617.3	566.3	522.8	453.8	364.0	282.7	232.6	225.9	225.0
60°	887.7	745.9	606.9	554.9	507.7	433.9	327.1	227.8	178.7	173.9	171.1
62.5°	940.6	785.6	617.3	546.4	479.3	381.0	248.6	145.6	99.3	98.3	96.4
65°	956.7	799.8	630.6	552.1	448.1	295.9	147.5	49.2	10.4	11.3	9.5
67.5°	917.0	767.6	611.7	543.6	438.7	288.3	141.8	41.6	0.0	0.0	0.0
70°	862.2	721.3	578.6	514.3	418.8	277.0	139.0	41.6	0.0	0.0	0.0
72.5°	775.2	655.1	525.6	474.6	384.8	254.3	129.5	39.7	0.0	0.0	0.0
75°	673.1	570.1	460.4	420.7	341.3	223.1	116.3	35.9	0.0	0.0	0.0
77.5°	563.4	475.5	384.8	354.5	288.3	190.0	98.3	30.3	0.0	0.0	0.0
80°	442.4	376.3	303.5	282.7	227.8	151.3	78.5	23.6	0.0	0.0	0.0
82.5°	318.6	273.2	224.1	207.0	167.3	109.7	56.7	16.1	0.0	0.0	0.0
85°	196.6	171.1	144.6	134.2	105.9	68.1	34.0	8.5	0.0	0.0	0.0
87.5°	58.6	56.7	51.1	50.1	35.9	20.8	7.6	0.9	0.0	0.0	0.0
90°	0.9	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.9	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.9	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P436799  
 CATALOG NUMBER: TT-D3-735-U-T4-PM-HSS

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
112.5°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.9	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.9	0.9	0.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)