

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P436898

Luminaire Tested: **TT-D6-735-U-RW-PM-HSS**

Issue Date: 12/2/2020

Test Information

Test Method: LM-79-08
Report Number: P436898
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2010-017-5)
Test Lab: INNOVATION CENTER
Issue Date: 12/2/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: TT-D6-735-U-RW-PM-HSS
Description: TOPTIER LED SITE LUMINAIRE
3500K, 70 CRI LEDS AND RECTANGULAR DISTRIBUTION WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7477.1 lumens
Efficiency: N/A
Efficacy: 71.1 lumens/watt
Luminous Opening: Circular (Dia: 1.12' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B2 - U2 - G3


Input Watts (W): 105.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P436898
 CATALOG NUMBER: TT-D6-735-U-RW-PM-HSS

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

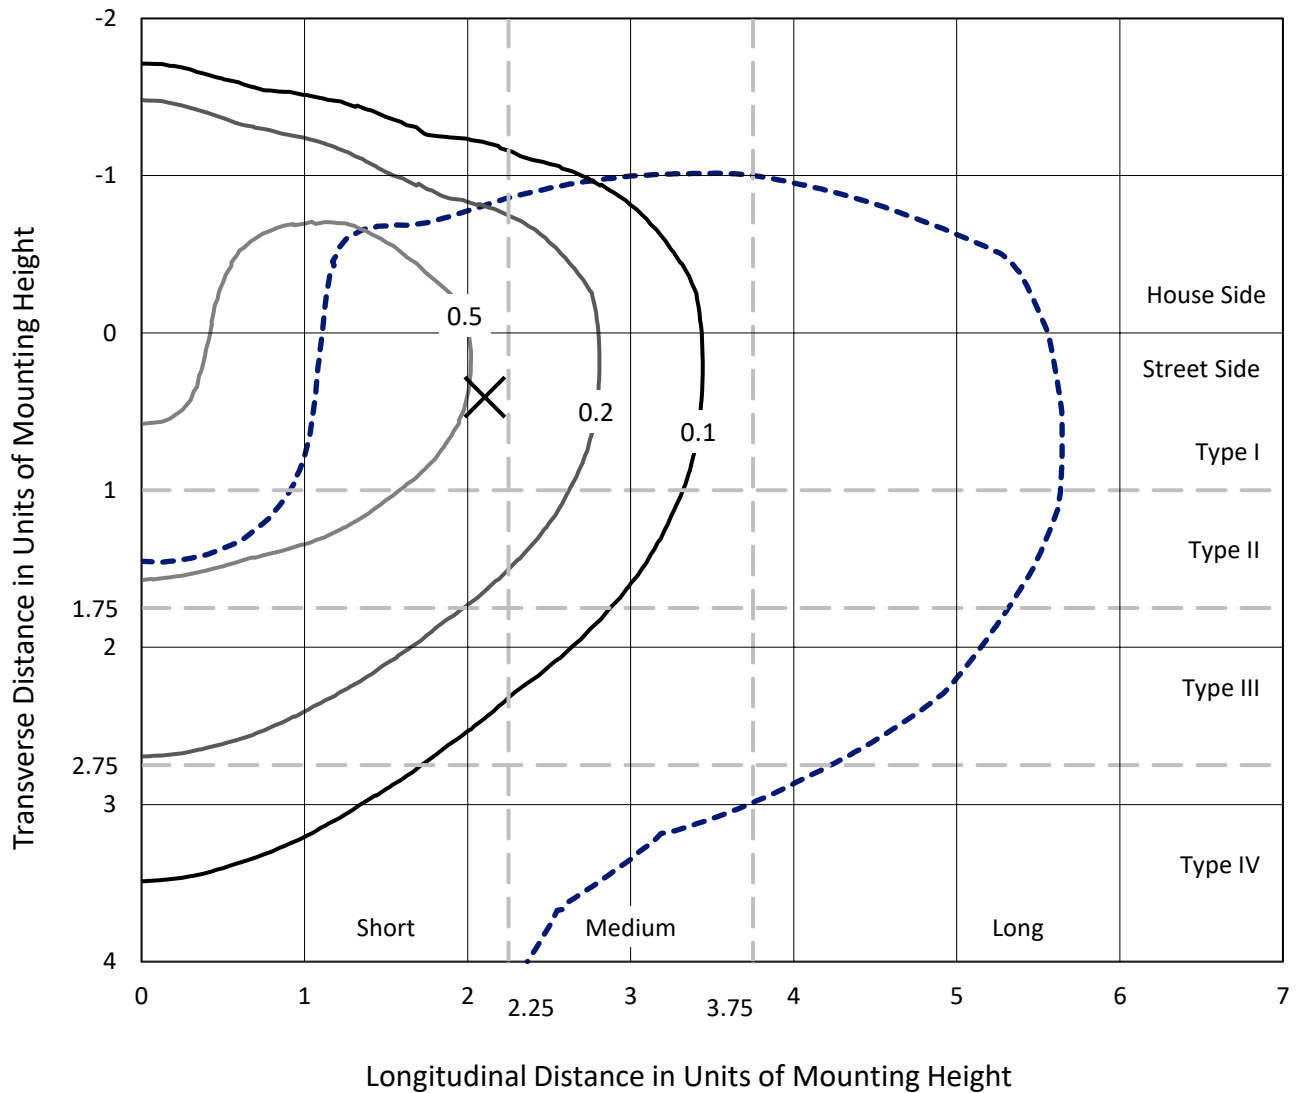

Based on 25 foot mounting height. Maximum calculated value = 1 fc
 Type IV - Short - N/A

REPORT NUMBER: P436898
CATALOG NUMBER: TT-D6-735-U-RW-PM-HSS

Luminous Intensity Polar Plot

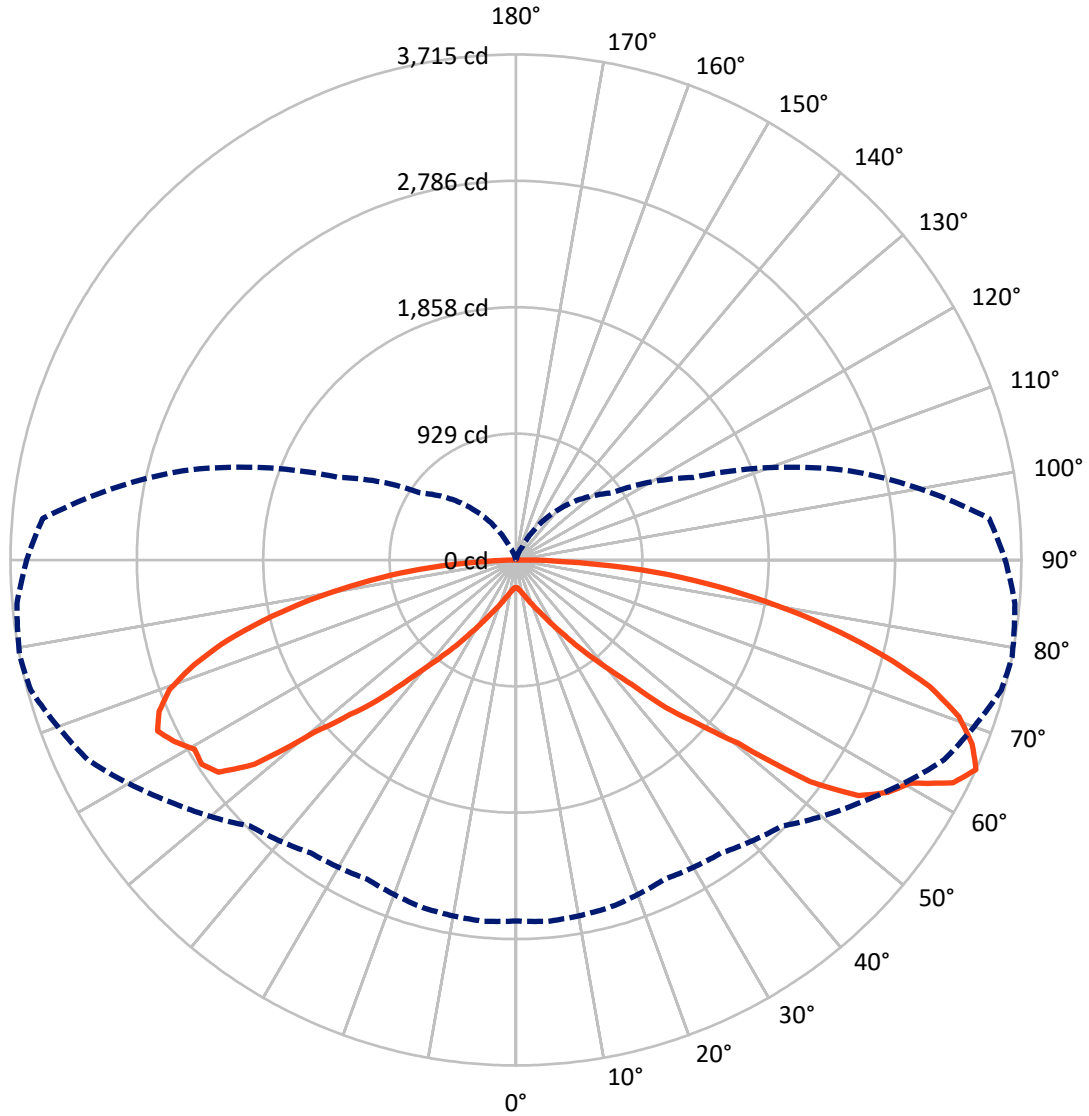

— Vertical Plane Through 79-Deg Lateral - - - Horizontal Cone Through 65-Deg Vertical

REPORT NUMBER: P436898

CATALOG NUMBER: TT-D6-735-U-RW-PM-HSS


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	2361.1	3.1	2364.2
	% Fixture	31.6	0.0	31.6
Street Side	Lumens	5079.9	33.0	5112.9
	% Fixture	67.9	0.4	68.4
Total	Lumens	7441.0	36.1	7477.1
	% Fixture	99.5	0.5	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	21.3	0.3
10°-20°	80.5	1.1
20°-30°	185.8	2.5
30°-40°	398.0	5.3
40°-50°	852.5	11.4
50°-60°	1609.9	21.5
60°-70°	2000.8	26.8
70°-80°	1712.8	22.9
80°-90°	579.4	7.7
90°-100°	25.1	0.3
100°-110°	7.2	0.1
110°-120°	1.6	0.0
120°-130°	0.9	0.0
130°-140°	0.6	0.0
140°-150°	0.4	0.0
150°-160°	0.2	0.0
160°-170°	0.1	0.0
170°-180°	0.0	0.0
0°-90°	7441.0	99.5
0°-180°	7477.1	100.0

Coefficient of Utilization

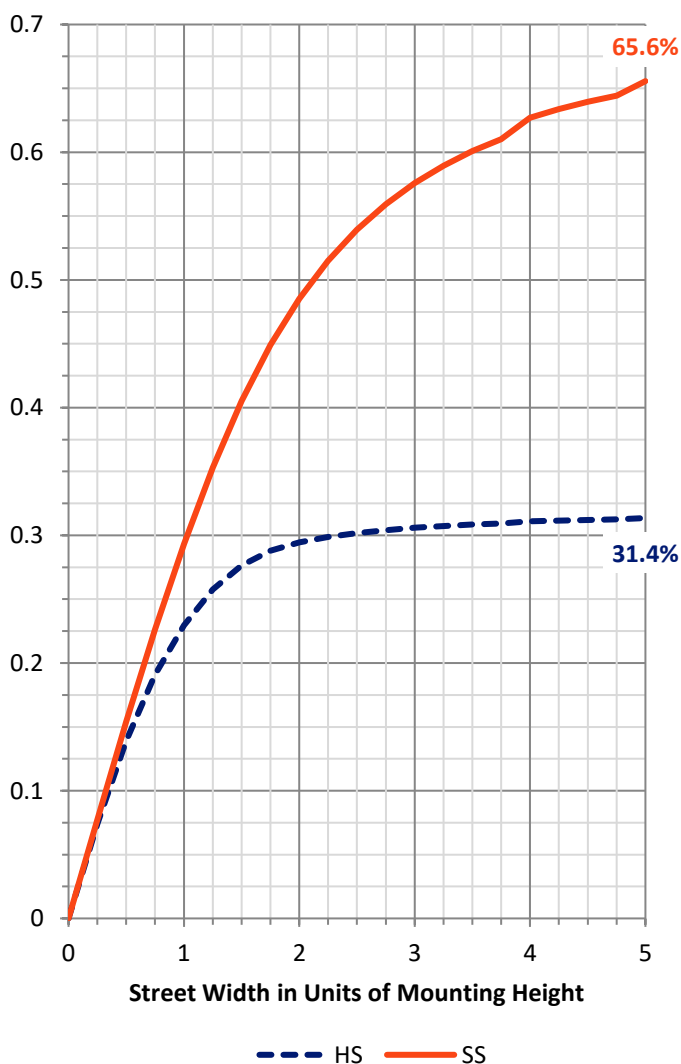

REPORT NUMBER: P436898


CATALOG NUMBER: TT-D6-735-U-RW-PM-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	152.9	2.0			
FM (30°-60°)	1711.1	22.9			
FH (60°-80°)	2767.7	37.0			G2/5000
FVH (80°-90°)	448.2	6.0			G3/500
BL (0°-30°)	134.7	1.8	B1/500		
BM (30°-60°)	1149.3	15.4	B2/2500		
BH (60°-80°)	945.9	12.7	B2/1000		G2/1000
BVH (80°-90°)	131.2	1.8			G2/225
UL (90°-100°)	25.1	0.3		U2/50	
UH (100°-180°)	11.0	0.1		U2/50	

BUG Rating: B2-U2-G3

Type IV Short

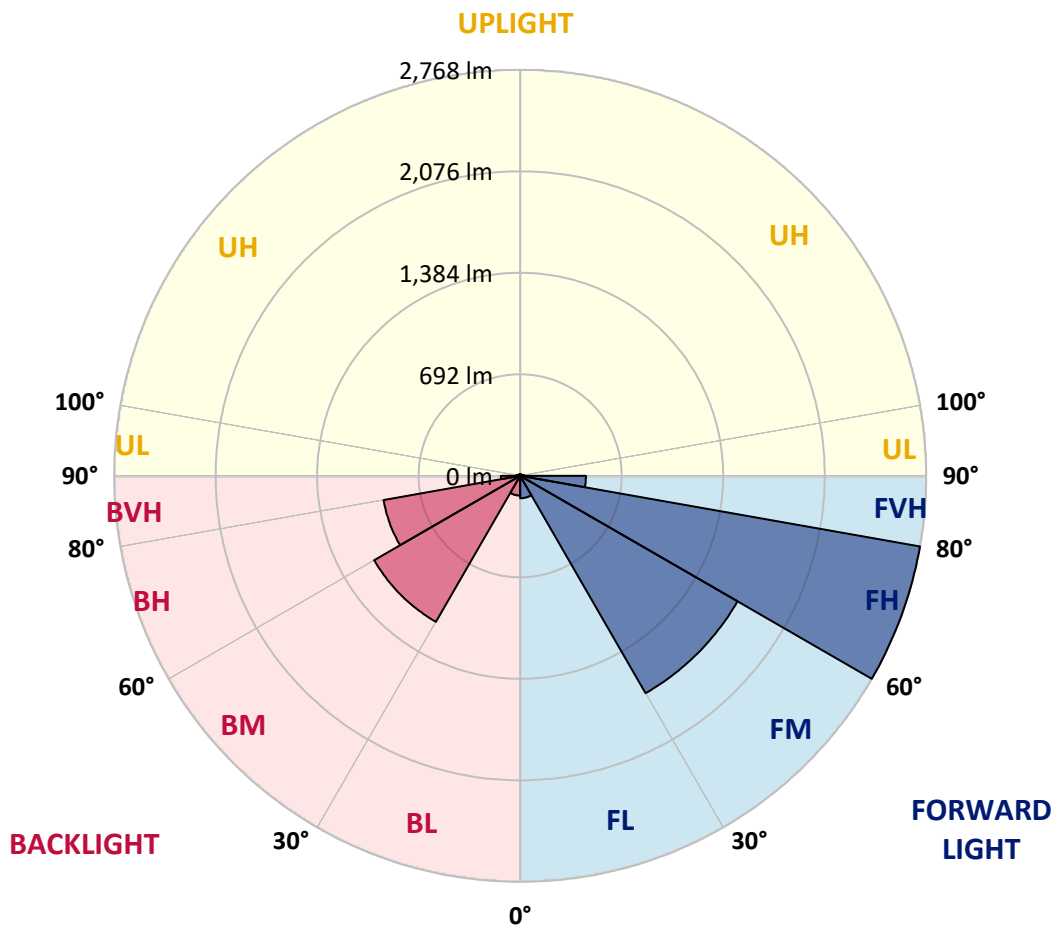



REPORT NUMBER: P436898

CATALOG NUMBER: TT-D6-735-U-RW-PM-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	79°	85°
0°	203.1	203.1	203.1	203.1	203.1	203.1	203.1	203.1	203.1	203.1	203.1
2.5°	214.3	214.3	214.3	212.4	212.4	212.4	210.5	208.7	206.8	206.8	206.8
5°	225.4	225.4	225.4	225.4	223.6	221.7	219.8	218.0	216.1	216.1	214.3
7.5°	240.3	238.5	240.3	238.5	238.5	236.6	234.8	232.9	229.2	229.2	227.3
10°	255.2	255.2	255.2	255.2	255.2	253.4	251.5	249.7	247.8	245.9	244.1
12.5°	273.9	273.9	273.9	272.0	273.9	272.0	270.2	270.2	268.3	264.6	264.6
15°	292.5	292.5	292.5	292.5	294.4	294.4	294.4	292.5	292.5	290.6	288.8
17.5°	314.9	313.0	314.9	314.9	316.7	318.6	320.5	322.3	322.3	320.5	320.5
20°	339.1	337.2	339.1	339.1	342.8	346.5	352.1	355.9	357.7	354.0	354.0
22.5°	365.2	363.3	367.0	367.0	372.6	378.2	387.5	391.3	396.8	395.0	395.0
25°	396.8	395.0	396.8	398.7	406.2	415.5	426.7	436.0	441.6	441.6	443.4
27.5°	432.2	432.2	434.1	436.0	443.4	458.3	475.1	491.9	504.9	503.0	504.9
30°	480.7	480.7	484.4	486.3	495.6	512.4	534.7	557.1	575.7	575.7	579.4
32.5°	534.7	532.9	538.4	540.3	549.6	572.0	603.7	639.1	663.3	663.3	667.0
35°	599.9	598.1	603.7	603.7	614.8	646.5	687.5	735.9	776.9	778.8	784.4
37.5°	681.9	678.2	678.2	683.8	696.8	737.8	793.7	860.8	903.6	907.3	916.7
40°	778.8	776.9	780.7	778.8	795.6	845.9	916.7	994.9	1045.2	1054.5	1065.7
42.5°	898.0	901.8	896.2	896.2	916.7	974.4	1058.3	1149.6	1240.8	1252.0	1257.6
45°	1043.4	1050.8	1043.4	1041.5	1060.1	1127.2	1242.7	1402.9	1509.1	1546.4	1557.6
47.5°	1218.5	1222.2	1212.9	1209.2	1229.7	1315.4	1464.4	1643.3	1768.1	1796.1	1825.9
50°	1414.1	1408.5	1401.1	1395.5	1434.6	1540.8	1714.1	1898.5	2112.8	2116.5	2127.7
52.5°	1615.3	1598.6	1600.4	1598.6	1652.6	1768.1	1999.1	2312.1	2638.2	2705.3	2712.7
55°	1816.6	1796.1	1794.2	1812.8	1889.2	2055.0	2345.7	2751.8	3016.4	3057.4	3051.8
57.5°	2017.8	2008.5	2004.7	2021.5	2133.3	2330.8	2658.7	3001.5	3226.9	3223.2	3184.1
60°	2226.4	2233.9	2220.9	2252.5	2368.0	2565.5	2804.0	3137.5	3346.2	3329.4	3290.3
62.5°	2440.7	2459.3	2446.3	2450.0	2524.5	2669.9	2904.6	3292.1	3580.9	3605.2	3560.4
65°	2653.1	2666.1	2645.6	2587.9	2628.9	2764.9	3100.2	3472.9	3692.7	3715.1	3681.5
67.5°	2832.0	2845.0	2774.2	2682.9	2688.5	2787.2	3081.6	3437.5	3633.1	3618.2	3564.2
70°	2984.7	2960.5	2845.0	2688.5	2623.3	2669.9	2947.5	3262.3	3461.7	3454.2	3390.9
72.5°	3035.0	3003.4	2807.7	2565.5	2437.0	2453.7	2723.9	3005.2	3167.3	3180.4	3104.0
75°	2954.9	2900.9	2632.6	2328.9	2163.1	2174.3	2405.3	2664.3	2794.7	2779.8	2720.2
77.5°	2666.1	2612.1	2321.5	1997.3	1835.2	1852.0	2034.5	2237.6	2345.7	2340.1	2299.1
80°	2213.4	2165.0	1909.7	1607.9	1460.7	1470.0	1609.7	1770.0	1853.8	1872.4	1850.1
82.5°	1635.8	1602.3	1421.6	1177.5	1058.3	1056.4	1162.6	1285.6	1367.5	1406.7	1391.8
85°	1011.7	994.9	894.3	735.9	652.1	650.2	713.6	804.9	879.4	931.6	898.0
87.5°	402.4	396.8	367.0	296.2	259.0	245.9	231.0	288.8	294.4	348.4	346.5
90°	98.7	96.9	95.0	89.4	80.1	68.9	55.9	41.0	26.1	20.5	11.2
92.5°	87.6	87.6	85.7	80.1	72.7	61.5	50.3	37.3	24.2	18.6	9.3
95°	70.8	70.8	68.9	65.2	57.8	50.3	39.1	29.8	18.6	14.9	7.5
97.5°	54.0	52.2	52.2	48.4	44.7	37.3	29.8	22.4	14.9	11.2	5.6
100°	39.1	39.1	37.3	35.4	31.7	27.9	22.4	16.8	9.3	7.5	3.7
102.5°	27.9	26.1	26.1	26.1	22.4	18.6	14.9	11.2	7.5	5.6	1.9
105°	18.6	16.8	16.8	16.8	14.9	13.0	9.3	7.5	3.7	3.7	1.9
107.5°	11.2	11.2	11.2	11.2	9.3	7.5	5.6	3.7	1.9	1.9	1.9
110°	5.6	5.6	5.6	7.5	5.6	5.6	3.7	1.9	1.9	1.9	1.9



REPORT NUMBER: P436898
 CATALOG NUMBER: TT-D6-735-U-RW-PM-HSS

CANDELA DISTRIBUTION (continued):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	79°	85°
112.5°	3.7	3.7	3.7	3.7	3.7	3.7	1.9	1.9	1.9	1.9	1.9
115°	1.9	1.9	1.9	3.7	3.7	1.9	1.9	0.0	0.0	1.9	1.9
117.5°	0.0	0.0	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	1.9
120°	0.0	0.0	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	1.9
122.5°	0.0	0.0	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	1.9
125°	0.0	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	1.9
127.5°	0.0	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	1.9
130°	0.0	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	1.9
132.5°	0.0	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	1.9
135°	0.0	0.0	0.0	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	1.9	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	1.9	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	1.9	1.9	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	1.9	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	1.9	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	1.9	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	1.9	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	1.9	0.0	1.9	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P436898

CATALOG NUMBER: TT-D6-735-U-RW-PM-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	203.1	203.1	203.1	203.1	203.1	203.1	203.1	203.1	203.1	203.1	203.1
2.5°	204.9	204.9	204.9	203.1	203.1	203.1	201.2	201.2	199.4	199.4	199.4
5°	212.4	212.4	210.5	210.5	208.7	206.8	206.8	204.9	204.9	203.1	203.1
7.5°	225.4	225.4	223.6	221.7	218.0	216.1	214.3	212.4	212.4	210.5	210.5
10°	242.2	242.2	238.5	234.8	231.0	227.3	225.4	221.7	219.8	219.8	219.8
12.5°	262.7	260.8	257.1	251.5	247.8	242.2	238.5	234.8	231.0	231.0	231.0
15°	286.9	286.9	279.5	273.9	266.4	259.0	253.4	247.8	244.1	242.2	242.2
17.5°	316.7	316.7	307.4	298.1	288.8	279.5	272.0	264.6	260.8	259.0	259.0
20°	350.3	350.3	341.0	329.8	316.7	303.7	292.5	283.2	277.6	275.7	275.7
22.5°	391.3	391.3	378.2	363.3	346.5	327.9	313.0	301.8	296.2	292.5	292.5
25°	437.8	434.1	421.1	402.4	378.2	355.9	335.4	324.2	316.7	311.1	313.0
27.5°	501.2	495.6	478.8	447.2	417.3	387.5	363.3	348.4	339.1	335.4	337.2
30°	573.8	568.3	544.0	508.6	463.9	424.8	395.0	378.2	368.9	363.3	365.2
32.5°	661.4	654.0	624.1	575.7	523.5	467.6	430.4	409.9	400.6	395.0	393.1
35°	776.9	767.6	730.3	663.3	590.6	523.5	471.4	445.3	436.0	430.4	432.2
37.5°	907.3	894.3	844.0	762.0	670.7	585.0	525.4	491.9	480.7	471.4	471.4
40°	1056.4	1041.5	976.3	868.2	758.3	652.1	575.7	538.4	525.4	525.4	525.4
42.5°	1242.7	1227.8	1153.3	994.9	849.6	724.8	633.5	590.6	577.6	581.3	581.3
45°	1531.5	1511.0	1391.8	1183.1	968.8	799.3	693.1	644.6	635.3	644.6	644.6
47.5°	1796.1	1770.0	1594.8	1358.2	1086.2	873.8	752.7	696.8	693.1	713.6	713.6
50°	2092.3	2058.8	1874.3	1499.8	1181.2	955.8	806.7	739.7	741.5	771.3	780.7
52.5°	2666.1	2630.7	2312.1	1756.9	1283.7	985.6	829.1	749.0	749.0	782.5	795.6
55°	3007.1	2934.4	2519.0	1924.6	1326.5	1021.0	819.8	711.7	708.0	745.3	756.4
57.5°	3118.9	3044.4	2561.8	1876.2	1298.6	976.3	765.7	611.1	603.7	652.1	648.4
60°	3210.2	3111.4	2492.9	1714.1	1140.2	881.3	661.4	454.6	422.9	465.8	463.9
62.5°	3467.3	3361.1	2496.6	1524.0	953.9	735.9	497.5	255.2	190.0	223.6	208.7
65°	3595.8	3491.5	2535.7	1434.6	858.9	609.2	355.9	104.3	7.5	7.5	3.7
67.5°	3485.9	3392.8	2485.4	1412.3	845.9	605.5	361.4	102.5	0.0	0.0	0.0
70°	3325.7	3236.3	2369.9	1334.0	803.0	583.2	354.0	102.5	0.0	0.0	0.0
72.5°	3044.4	2953.1	2170.5	1222.2	737.8	534.7	327.9	96.9	0.0	0.0	0.0
75°	2673.6	2604.7	1917.2	1076.9	650.2	471.4	290.6	85.7	0.0	0.0	0.0
77.5°	2263.7	2181.7	1607.9	896.2	544.0	391.3	245.9	70.8	0.0	0.0	0.0
80°	1816.6	1756.9	1266.9	702.4	421.1	305.6	191.9	54.0	0.0	0.0	0.0
82.5°	1350.8	1300.5	937.2	503.0	300.0	212.4	132.3	35.4	0.0	0.0	0.0
85°	886.8	873.8	601.8	305.6	178.9	117.4	70.8	16.8	0.0	0.0	0.0
87.5°	320.5	331.6	219.8	87.6	48.4	20.5	9.3	1.9	0.0	0.0	0.0
90°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
92.5°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
95°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
97.5°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
100°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
102.5°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
105°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
107.5°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
110°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P436898
 CATALOG NUMBER: TT-D6-735-U-RW-PM-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
112.5°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
115°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
117.5°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
120°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
122.5°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
125°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
127.5°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
130°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
132.5°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
135°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
145°	1.9	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
150°	0.0	1.9	1.9	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	1.9	1.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)