

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P436903

Luminaire Tested: **TT-D6-740-U-5WQ-PM-HSS**

Issue Date: 12/2/2020

Test Information

Test Method: LM-79-08
Report Number: P436903
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2010-017-2)
Test Lab: INNOVATION CENTER
Issue Date: 12/2/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: TT-D6-740-U-5WQ-PM-HSS
Description: TOPTIER LED SITE LUMINAIRE
4000K, 70 CRI LEDS AND WIDE DISTRIBUTION WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10097.1 lumens
Efficiency: N/A
Efficacy: 96.0 lumens/watt
Luminous Opening: Circular (Dia: 1.12' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B3 - U2 - G3


Input Watts (W): 105.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P436903
 CATALOG NUMBER: TT-D6-740-U-5WQ-PM-HSS

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

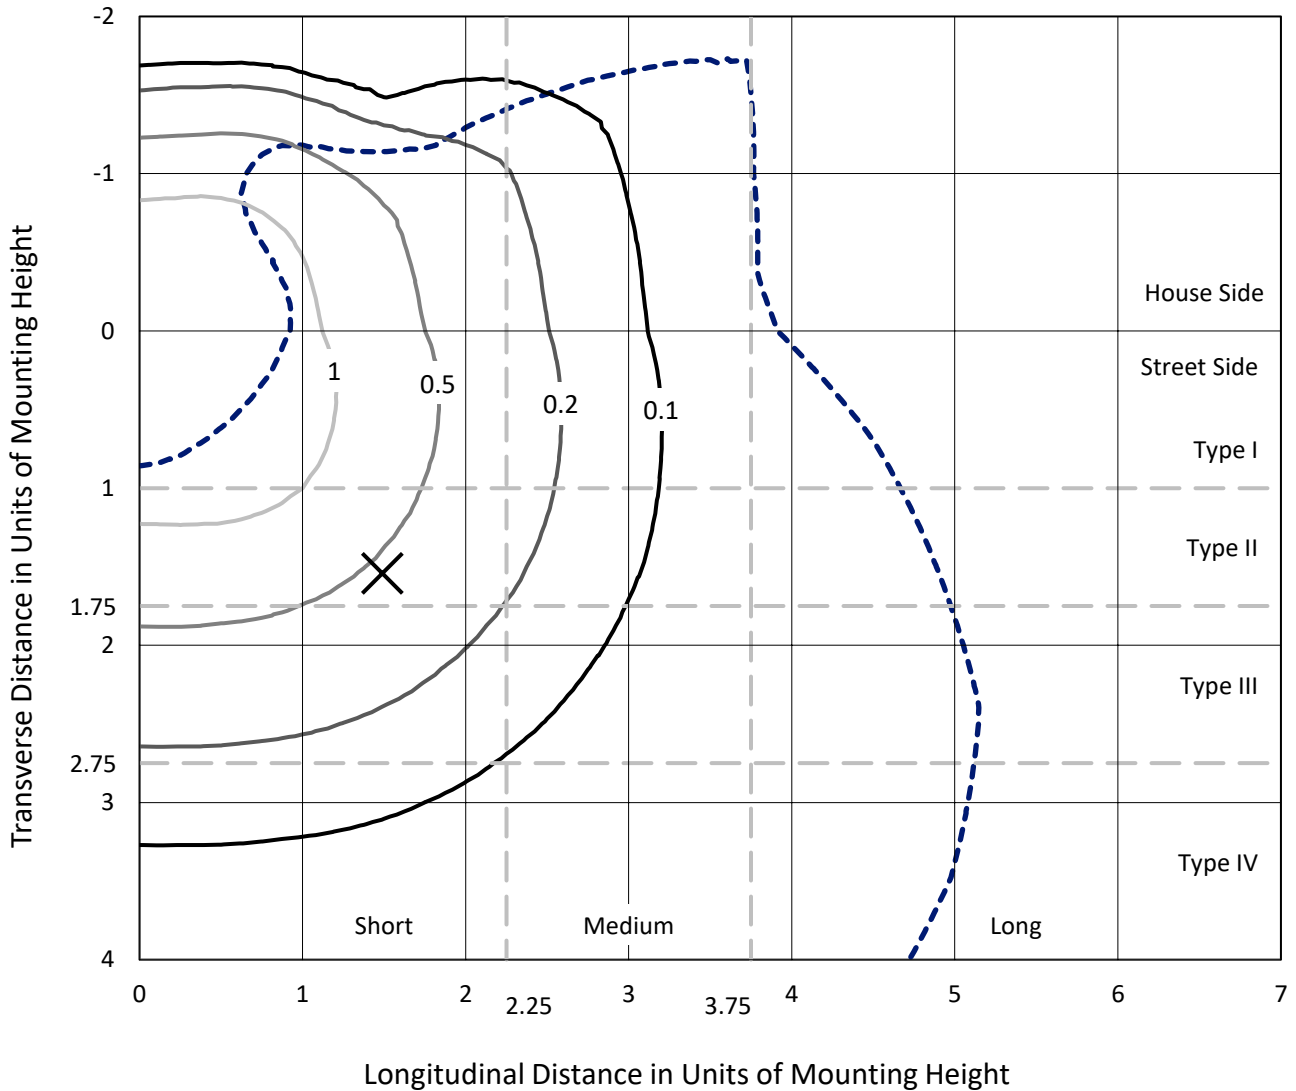

Based on 25 foot mounting height. Maximum calculated value = 1.4 fc
 Type IV - Short - N/A

REPORT NUMBER: P436903
CATALOG NUMBER: TT-D6-740-U-5WQ-PM-HSS

Luminous Intensity Polar Plot

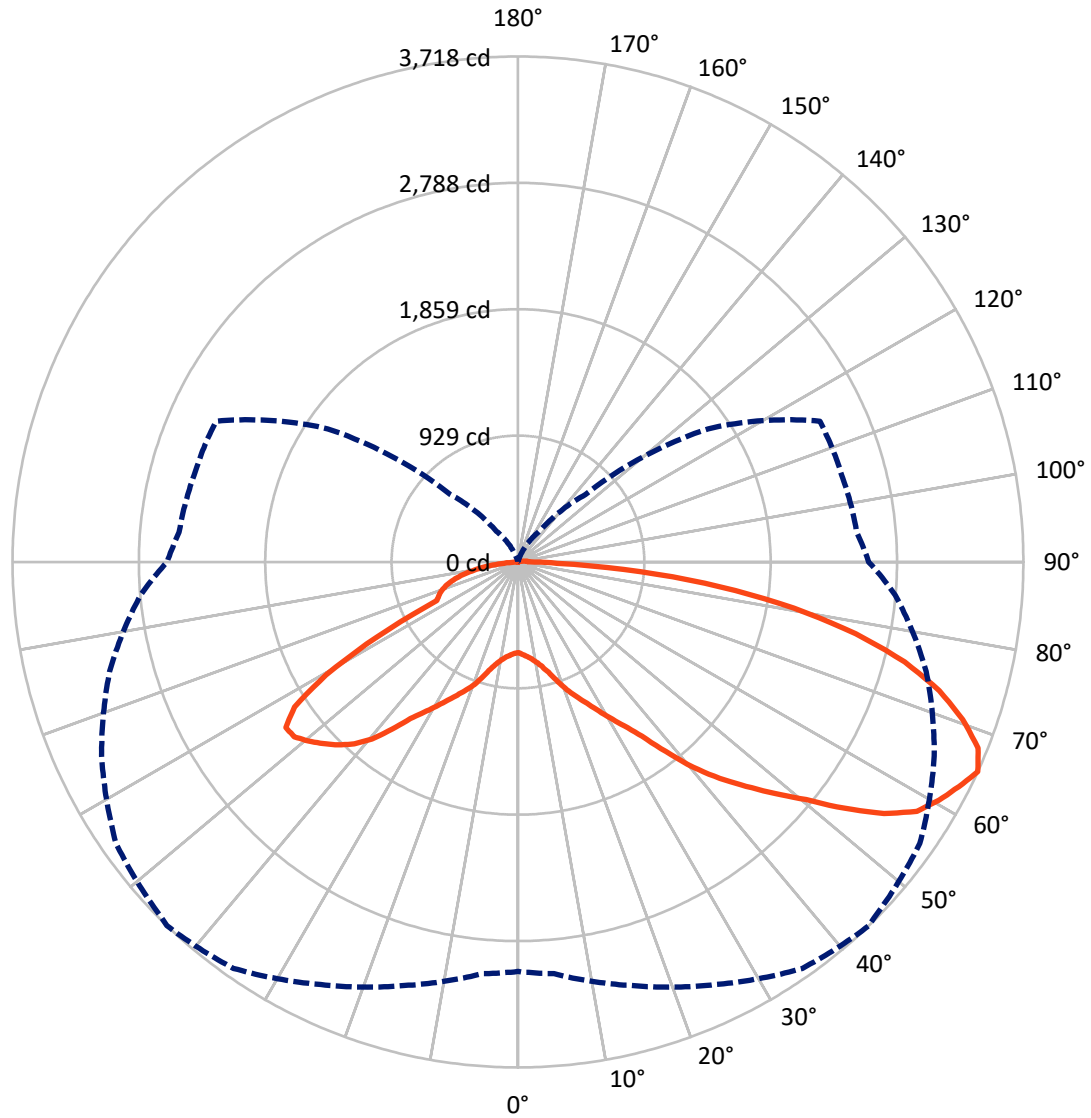

— Vertical Plane Through 44-Deg Lateral - - - Horizontal Cone Through 65-Deg Vertical

REPORT NUMBER: P436903
 CATALOG NUMBER: TT-D6-740-U-5WQ-PM-HSS


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	3556.4	2.4	3558.8
	% Fixture	35.2	0.0	35.2
Street Side	Lumens	6497.4	40.9	6538.3
	% Fixture	64.3	0.4	64.8
Total	Lumens	10053.8	43.3	10097.1
	% Fixture	99.6	0.4	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	67.5	0.7
10°-20°	239.9	2.4
20°-30°	513.9	5.1
30°-40°	930.8	9.2
40°-50°	1553.1	15.4
50°-60°	2151.2	21.3
60°-70°	2229.3	22.1
70°-80°	1794.2	17.8
80°-90°	573.9	5.7
90°-100°	29.1	0.3
100°-110°	9.3	0.1
110°-120°	1.8	0.0
120°-130°	1.2	0.0
130°-140°	0.8	0.0
140°-150°	0.6	0.0
150°-160°	0.3	0.0
160°-170°	0.2	0.0
170°-180°	0.1	0.0
0°-90°	10053.8	99.6
0°-180°	10097.1	100.0

Coefficient of Utilization

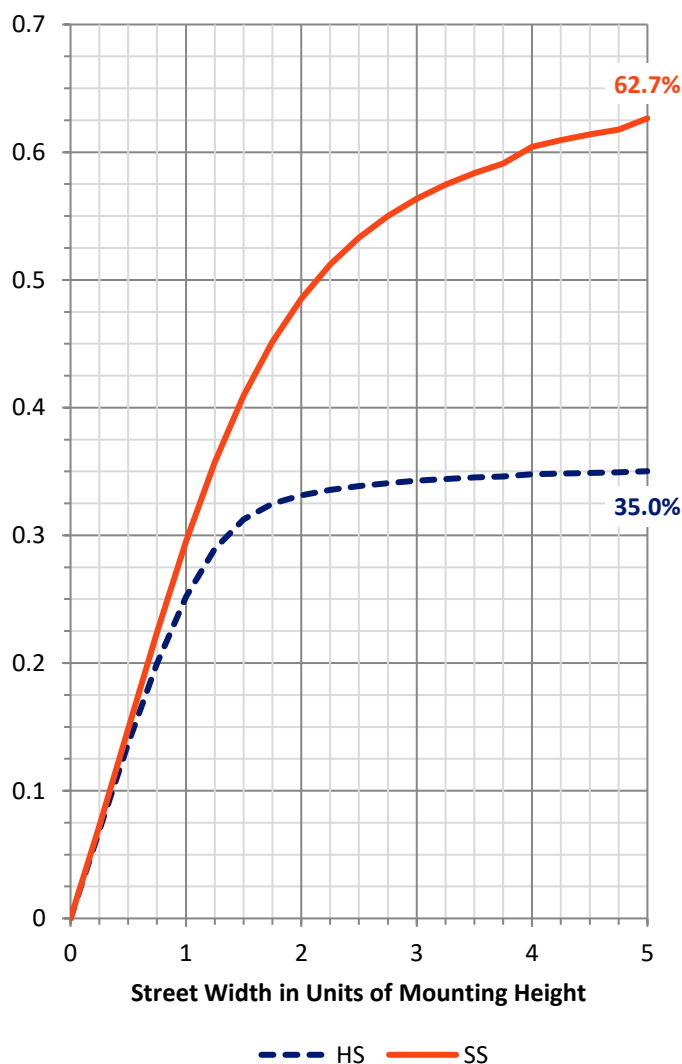


REPORT NUMBER: P436903
 CATALOG NUMBER: TT-D6-740-U-5WQ-PM-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	419.8	4.2			
FM (30°-60°)	2684.3	26.6			
FH (60°-80°)	2956.6	29.3			G2/5000
FVH (80°-90°)	436.6	4.3			G3/500
BL (0°-30°)	401.5	4.0	B1/500		
BM (30°-60°)	1950.7	19.3	B2/2500		
BH (60°-80°)	1067.0	10.6	B3/2500		G3/2500
BVH (80°-90°)	137.3	1.4			G2/225
UL (90°-100°)	29.1	0.3		U2/50	
UH (100°-180°)	14.2	0.1		U2/50	

BUG Rating: B3-U2-G3
 Type IV Short

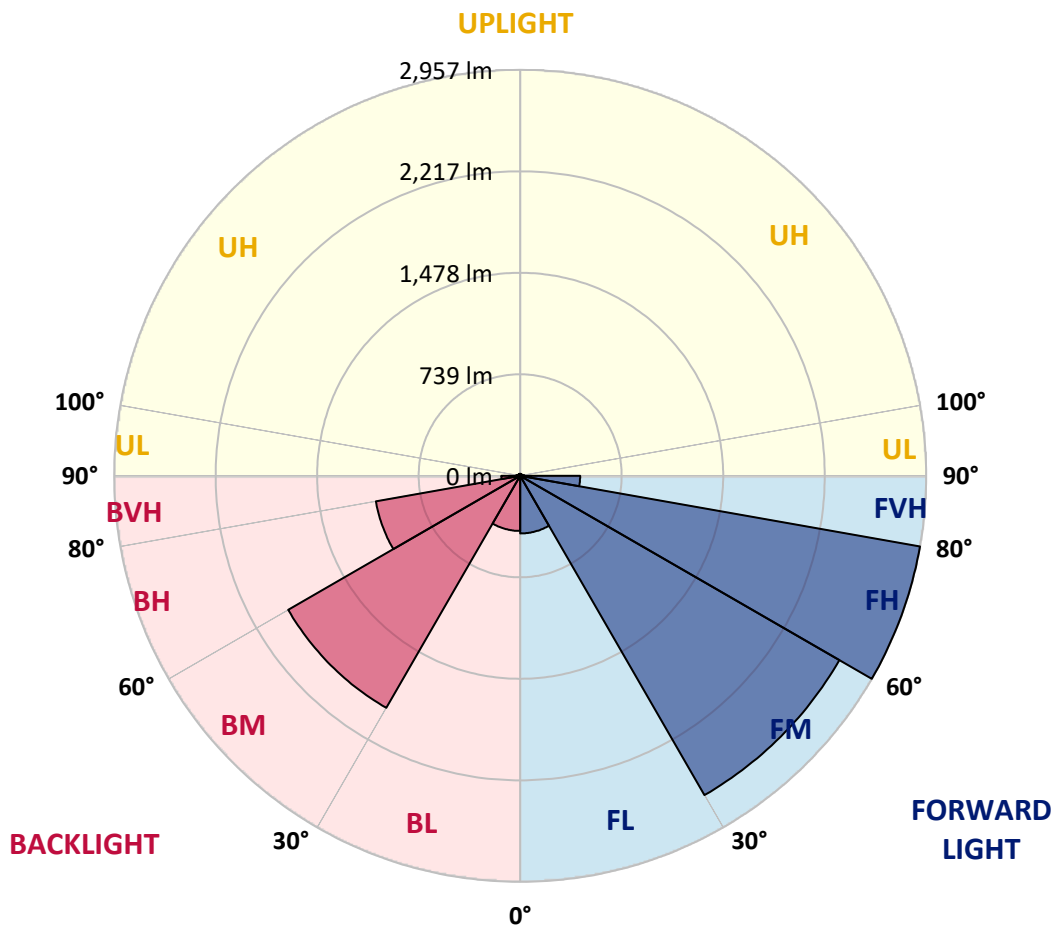



REPORT NUMBER: P436903

CATALOG NUMBER: TT-D6-740-U-5WQ-PM-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	44°	45°	55°	65°	75°	85°
0°	666.3	666.3	666.3	666.3	666.3	666.3	666.3	666.3	666.3	666.3	666.3
2.5°	686.0	684.0	684.0	682.0	682.0	682.0	682.0	682.0	680.1	678.1	676.1
5°	703.7	703.7	701.7	701.7	699.8	697.8	699.8	697.8	695.8	693.9	691.9
7.5°	727.4	725.4	725.4	721.5	721.5	719.5	719.5	719.5	717.5	713.6	711.6
10°	760.9	756.9	756.9	753.0	751.0	749.1	749.1	745.1	745.1	743.1	741.2
12.5°	798.3	794.4	798.3	796.4	792.4	788.5	788.5	784.5	782.6	780.6	772.7
15°	847.6	841.7	845.6	845.6	843.7	841.7	841.7	833.8	829.9	825.9	818.0
17.5°	906.8	902.8	904.8	906.8	912.7	912.7	914.6	904.8	896.9	883.1	877.2
20°	981.7	979.7	985.6	985.6	991.5	991.5	993.5	983.6	969.8	960.0	948.1
22.5°	1054.6	1054.6	1062.5	1062.5	1068.4	1064.4	1064.4	1060.5	1044.7	1032.9	1021.1
25°	1129.5	1127.5	1135.4	1141.3	1149.2	1139.4	1143.3	1137.4	1121.6	1105.8	1090.1
27.5°	1212.3	1208.3	1212.3	1220.2	1234.0	1226.1	1230.0	1220.2	1204.4	1182.7	1168.9
30°	1303.0	1297.0	1303.0	1314.8	1324.6	1328.6	1326.6	1312.8	1299.0	1267.5	1257.6
32.5°	1391.7	1391.7	1405.5	1427.1	1439.0	1437.0	1439.0	1427.1	1407.4	1368.0	1344.4
35°	1500.1	1508.0	1525.7	1557.2	1582.9	1573.0	1573.0	1569.1	1535.6	1488.3	1456.7
37.5°	1644.0	1651.9	1687.3	1724.8	1772.1	1768.2	1770.1	1758.3	1693.3	1644.0	1598.6
40°	1811.5	1819.4	1872.6	1925.9	1971.2	1985.0	1987.0	1961.3	1890.4	1819.4	1748.5
42.5°	1965.3	1975.1	2030.3	2105.2	2154.5	2176.2	2180.1	2138.8	2063.8	1983.0	1894.3
45°	2119.0	2130.9	2193.9	2272.8	2343.8	2353.6	2355.6	2320.1	2237.3	2144.7	2030.3
47.5°	2276.7	2286.6	2351.6	2446.3	2523.1	2542.8	2544.8	2511.3	2410.8	2298.4	2164.4
50°	2420.6	2440.3	2529.0	2629.6	2732.1	2747.9	2749.8	2712.4	2594.1	2467.9	2290.5
52.5°	2590.2	2600.0	2694.6	2862.2	2948.9	3010.0	3012.0	2939.1	2812.9	2643.4	2414.7
55°	2787.3	2805.0	2901.6	3069.2	3224.9	3266.3	3278.1	3191.4	3023.8	2840.5	2572.4
57.5°	2901.6	2935.1	3077.0	3236.7	3431.9	3459.5	3465.4	3374.7	3189.4	2988.3	2690.7
60°	2962.7	2982.4	3132.2	3380.6	3532.4	3558.0	3556.0	3487.1	3301.8	3057.3	2745.9
62.5°	3031.7	3065.2	3191.4	3443.7	3575.8	3638.8	3629.0	3558.0	3368.8	3100.7	2799.1
65°	3012.0	3039.6	3224.9	3429.9	3648.7	3717.7	3703.9	3609.3	3378.6	3108.6	2785.3
67.5°	2933.1	2954.8	3138.1	3392.4	3601.4	3650.7	3674.3	3581.7	3323.4	3023.8	2698.6
70°	2771.5	2805.0	2982.4	3242.6	3433.8	3469.3	3473.3	3416.1	3183.5	2868.1	2554.7
72.5°	2548.8	2576.4	2769.5	3033.7	3199.3	3240.7	3244.6	3157.9	2982.4	2655.2	2347.7
75°	2282.6	2308.3	2458.1	2734.1	2897.7	2939.1	2935.1	2854.3	2669.0	2359.5	2073.7
77.5°	1953.5	2000.8	2132.8	2359.5	2519.2	2540.9	2544.8	2456.1	2306.3	2038.2	1760.3
80°	1541.5	1586.8	1736.6	1906.1	2040.2	2057.9	2063.8	1988.9	1852.9	1616.4	1379.8
82.5°	1096.0	1135.4	1253.7	1391.7	1504.0	1504.0	1508.0	1446.9	1342.4	1139.4	954.1
85°	624.9	654.4	733.3	831.8	912.7	902.8	904.8	849.6	780.6	622.9	504.6
87.5°	205.0	218.8	236.5	274.0	311.4	287.8	299.6	248.4	224.7	167.6	130.1
90°	108.4	108.4	104.5	100.5	92.6	80.8	80.8	65.0	49.3	31.5	11.8
92.5°	98.6	98.6	94.6	90.7	82.8	72.9	72.9	59.1	43.4	27.6	9.9
95°	80.8	80.8	78.8	74.9	69.0	61.1	59.1	49.3	37.5	21.7	7.9
97.5°	63.1	63.1	61.1	59.1	53.2	47.3	47.3	37.5	27.6	17.7	5.9
100°	47.3	47.3	47.3	43.4	41.4	35.5	35.5	29.6	21.7	13.8	3.9
102.5°	33.5	35.5	33.5	31.5	29.6	25.6	25.6	21.7	15.8	9.9	3.9
105°	23.7	23.7	21.7	21.7	19.7	17.7	17.7	13.8	9.9	5.9	2.0
107.5°	13.8	13.8	13.8	13.8	11.8	11.8	11.8	9.9	5.9	3.9	2.0
110°	7.9	7.9	7.9	7.9	5.9	5.9	5.9	3.9	3.9	2.0	2.0



REPORT NUMBER: P436903
 CATALOG NUMBER: TT-D6-740-U-5WQ-PM-HSS

CANDELA DISTRIBUTION (continued):

	0°	5°	15°	25°	35°	44°	45°	55°	65°	75°	85°
112.5°	3.9	3.9	3.9	3.9	3.9	3.9	3.9	2.0	2.0	2.0	2.0
115°	2.0	2.0	2.0	3.9	2.0	2.0	2.0	2.0	2.0	2.0	2.0
117.5°	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
120°	0.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
122.5°	0.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
125°	0.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
127.5°	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
130°	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
132.5°	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
135°	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0
140°	2.0	2.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0
142.5°	2.0	2.0	2.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
145°	2.0	2.0	0.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0
147.5°	2.0	2.0	2.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
150°	2.0	2.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0
160°	2.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0
162.5°	2.0	2.0	0.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0
165°	2.0	0.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0
167.5°	2.0	2.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0
170°	2.0	0.0	0.0	0.0	0.0	2.0	0.0	2.0	2.0	2.0	2.0
172.5°	2.0	2.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0
175°	2.0	2.0	2.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0	2.0
177.5°	0.0	2.0	0.0	0.0	0.0	0.0	0.0	2.0	2.0	2.0	2.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P436903

CATALOG NUMBER: TT-D6-740-U-5WQ-PM-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	666.3	666.3	666.3	666.3	666.3	666.3	666.3	666.3	666.3	666.3	666.3
2.5°	676.1	676.1	674.2	672.2	672.2	672.2	670.2	670.2	670.2	668.2	668.2
5°	691.9	689.9	689.9	687.9	687.9	686.0	686.0	684.0	682.0	682.0	680.1
7.5°	713.6	711.6	707.7	709.6	705.7	703.7	701.7	701.7	701.7	699.8	699.8
10°	739.2	739.2	735.3	735.3	731.3	729.3	727.4	727.4	729.3	729.3	727.4
12.5°	772.7	770.7	770.7	768.8	766.8	764.8	766.8	766.8	764.8	762.9	760.9
15°	814.1	814.1	814.1	816.1	814.1	814.1	814.1	812.1	808.2	804.2	804.2
17.5°	877.2	875.2	871.3	873.2	877.2	883.1	877.2	871.3	865.4	865.4	863.4
20°	942.2	944.2	944.2	946.2	952.1	958.0	950.1	946.2	942.2	938.3	934.3
22.5°	1013.2	1015.2	1015.2	1013.2	1017.1	1015.2	1011.2	1007.3	1003.3	997.4	993.5
25°	1082.2	1084.2	1082.2	1080.2	1082.2	1076.3	1070.4	1064.4	1054.6	1044.7	1044.7
27.5°	1159.1	1157.1	1149.2	1151.2	1147.2	1143.3	1131.5	1117.7	1103.9	1094.0	1094.0
30°	1239.9	1239.9	1224.1	1232.0	1224.1	1222.1	1196.5	1178.8	1159.1	1145.3	1143.3
32.5°	1328.6	1324.6	1312.8	1320.7	1312.8	1304.9	1273.4	1249.7	1216.2	1196.5	1194.5
35°	1435.0	1425.2	1415.3	1423.2	1423.2	1401.5	1370.0	1326.6	1279.3	1255.7	1253.7
37.5°	1565.1	1559.2	1547.4	1557.2	1565.1	1543.4	1496.1	1433.1	1366.0	1330.6	1328.6
40°	1709.0	1701.1	1695.2	1709.0	1714.9	1693.3	1630.2	1541.5	1450.8	1399.6	1391.7
42.5°	1845.0	1827.3	1817.4	1837.2	1831.2	1807.6	1720.9	1618.4	1494.2	1435.0	1425.2
45°	1967.3	1947.5	1933.7	1951.5	1943.6	1896.3	1799.7	1661.7	1511.9	1439.0	1427.1
47.5°	2087.5	2057.9	2036.2	2059.9	2044.1	1971.2	1852.9	1683.4	1492.2	1405.5	1385.8
50°	2190.0	2154.5	2140.7	2168.3	2144.7	2042.2	1890.4	1673.5	1442.9	1316.8	1285.2
52.5°	2312.2	2259.0	2245.2	2298.4	2245.2	2109.2	1898.3	1649.9	1330.6	1178.8	1149.2
55°	2436.4	2377.3	2355.6	2404.9	2324.0	2123.0	1858.8	1513.9	1161.0	999.4	956.0
57.5°	2501.5	2446.3	2426.5	2462.0	2312.2	1988.9	1683.4	1261.6	906.8	725.4	678.1
60°	2560.6	2464.0	2438.4	2485.7	2190.0	1677.5	1303.0	904.8	548.0	412.0	376.5
62.5°	2602.0	2509.3	2456.1	2477.8	1965.3	1220.2	749.1	435.6	207.0	143.9	141.9
65°	2580.3	2501.5	2466.0	2450.2	1707.1	701.7	276.0	110.4	5.9	5.9	3.9
67.5°	2513.3	2426.5	2416.7	2430.5	1689.3	674.2	256.3	100.5	0.0	0.0	0.0
70°	2365.4	2304.3	2304.3	2351.6	1612.4	638.7	238.5	92.6	0.0	0.0	0.0
72.5°	2166.3	2119.0	2146.6	2217.6	1498.1	589.4	214.9	82.8	0.0	0.0	0.0
75°	1927.8	1878.6	1914.0	1992.9	1356.2	526.3	187.3	71.0	0.0	0.0	0.0
77.5°	1624.3	1590.8	1646.0	1718.9	1167.0	443.5	153.8	57.2	0.0	0.0	0.0
80°	1265.5	1247.8	1320.7	1385.8	942.2	348.9	116.3	41.4	0.0	0.0	0.0
82.5°	873.2	865.4	936.3	1003.3	674.2	244.4	78.8	27.6	0.0	0.0	0.0
85°	457.3	457.3	512.5	573.6	376.5	132.1	39.4	11.8	0.0	0.0	0.0
87.5°	100.5	96.6	104.5	134.0	74.9	25.6	5.9	2.0	0.0	0.0	0.0
90°	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	2.0	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0
105°	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P436903
 CATALOG NUMBER: TT-D6-740-U-5WQ-PM-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
112.5°	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	2.0	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0
117.5°	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	2.0	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0
122.5°	2.0	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0
125°	2.0	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	2.0	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	2.0	2.0	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)