

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P543123

Luminaire Tested: **TT-D6-750-U-T4-PM**

Issue Date: 6/22/2021

Test Information

Test Method: LM-79-08
Report Number: P543123
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2106-277-4)
Test Lab: INNOVATION CENTER
Issue Date: 6/22/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: TT-D6-750-U-T4-PM
Description: TOPTIER LED SITE LUMINAIRE
5000K, 70 CRI LEDS AND DRIVE LANE DISTRIBUTION
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10650 lumens
Efficiency: N/A
Efficacy: 109.3 lumens/watt
Luminous Opening: Circular (Dia: 1.12' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B2 - U0 - G3


Input Watts (W): 97.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P543123
 CATALOG NUMBER: TT-D6-750-U-T4-PM

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

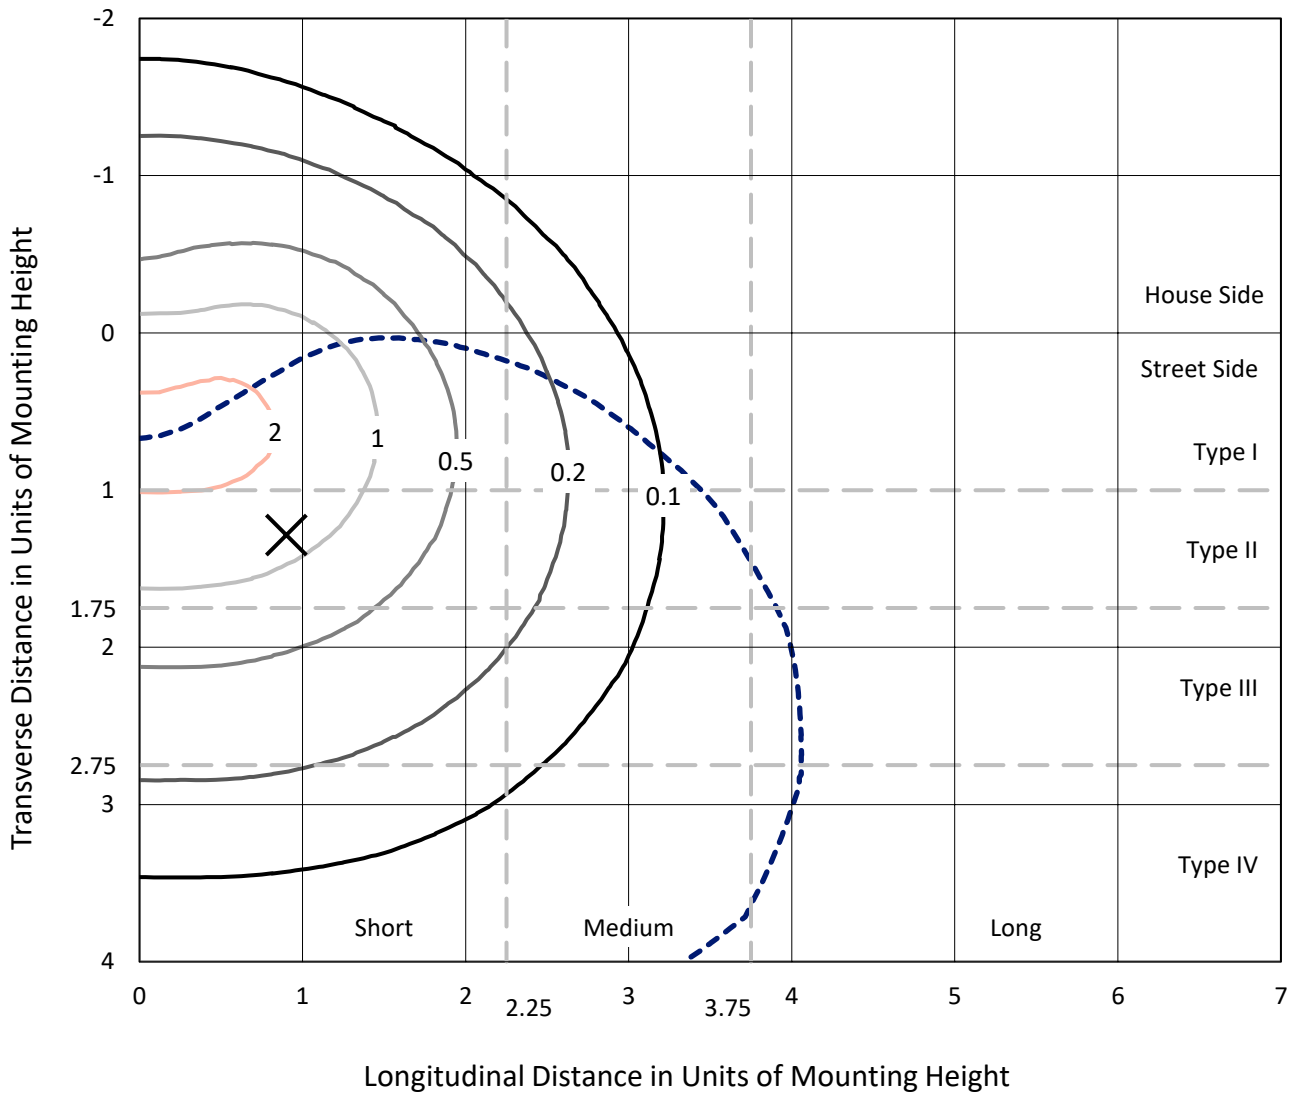

Based on 25 foot mounting height. Maximum calculated value = 2.3 fc
 Type IV - Short - N/A

REPORT NUMBER: P543123
CATALOG NUMBER: TT-D6-750-U-T4-PM

Luminous Intensity Polar Plot

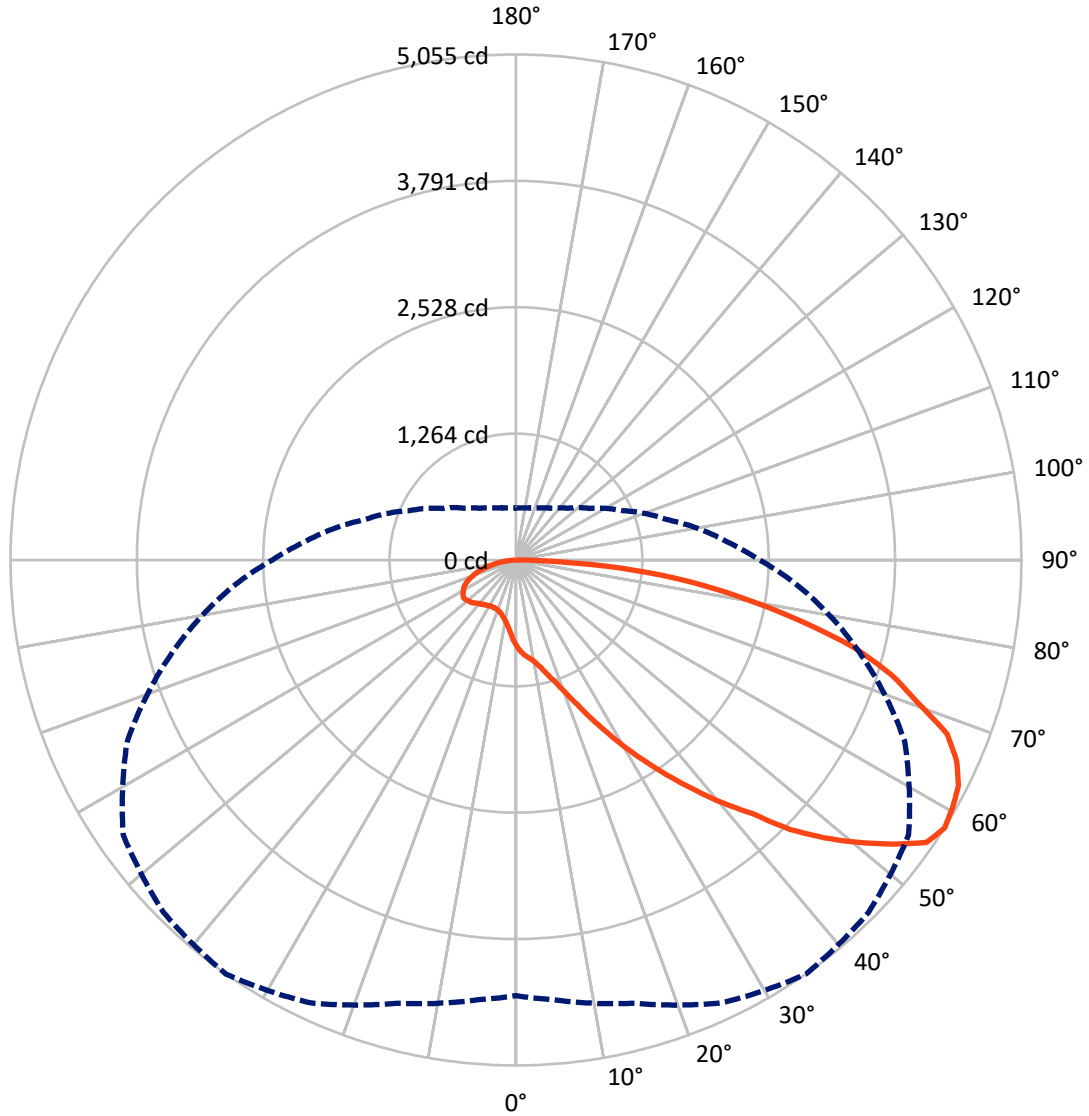

— Vertical Plane Through 35-Deg Lateral - - - Horizontal Cone Through 57.5-Deg Vertical

REPORT NUMBER: P543123
 CATALOG NUMBER: TT-D6-750-U-T4-PM


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	2085.5	0.0	2085.5
	% Fixture	19.6	0.0	19.6
Street Side	Lumens	8564.5	0.0	8564.5
	% Fixture	80.4	0.0	80.4
Total	Lumens	10650.0	0.0	10650.0
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.7	0.7
10°-20°	251.3	2.4
20°-30°	531.3	5.0
30°-40°	995.5	9.3
40°-50°	1656.9	15.6
50°-60°	2338.5	22.0
60°-70°	2460.3	23.1
70°-80°	1802.4	16.9
80°-90°	534.1	5.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	10650.0	100.0
0°-180°	10650.0	100.0

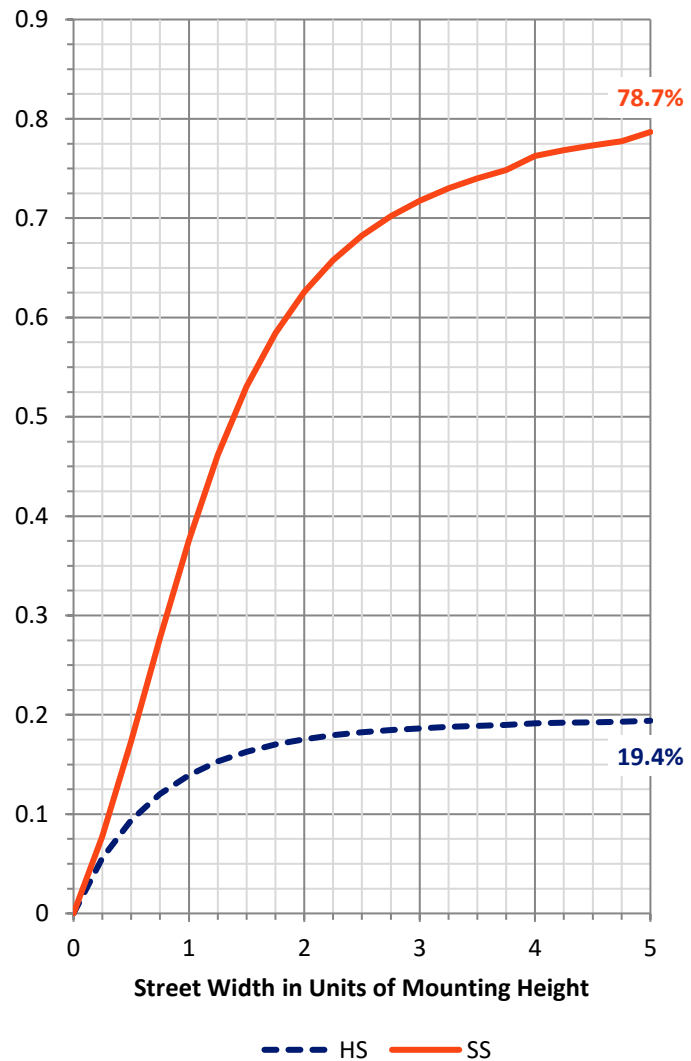


REPORT NUMBER: P543123
 CATALOG NUMBER: TT-D6-750-U-T4-PM

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	586.8	5.5			
FM (30°-60°)	3971.8	37.3			
FH (60°-80°)	3543.9	33.3			G2/5000
FVH (80°-90°)	462.0	4.3			G3/500
BL (0°-30°)	275.6	2.6	B1/500		
BM (30°-60°)	1019.1	9.6	B2/2500		
BH (60°-80°)	718.8	6.7	B2/1000		G2/1000
BVH (80°-90°)	72.0	0.7			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G3
 Type IV Short

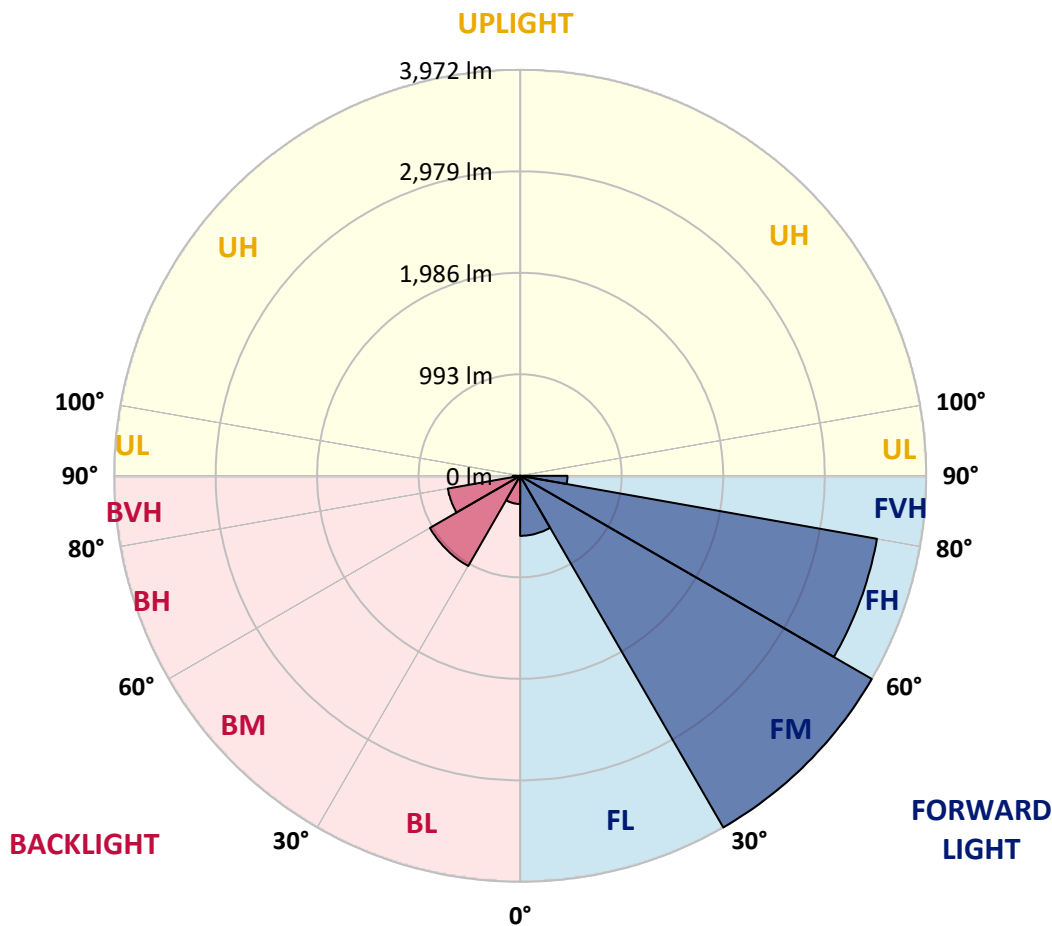



REPORT NUMBER: P543123

CATALOG NUMBER: TT-D6-750-U-T4-PM

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	859.5	859.5	859.5	859.5	859.5	859.5	859.5	859.5	859.5	859.5	859.5
2.5°	935.8	931.2	927.2	920.7	916.1	914.8	906.2	895.7	881.2	868.7	862.1
5°	985.1	984.5	982.5	974.6	960.1	939.7	920.7	899.0	875.3	851.6	840.4
7.5°	1031.8	1027.2	1024.6	1013.4	992.3	970.0	941.1	908.8	874.6	841.1	824.0
10°	1090.3	1083.8	1079.2	1057.5	1035.8	1004.2	966.0	924.6	883.8	841.8	821.4
12.5°	1165.3	1160.0	1141.0	1130.5	1102.8	1066.7	1018.7	968.7	916.1	862.1	835.8
15°	1245.5	1246.8	1239.6	1212.7	1190.3	1146.9	1095.6	1033.1	962.1	897.0	864.1
17.5°	1352.7	1350.8	1336.9	1319.2	1285.0	1240.9	1177.8	1111.4	1028.5	943.0	905.5
20°	1479.0	1472.4	1459.9	1435.6	1415.2	1363.2	1291.6	1208.7	1110.1	1008.8	958.2
22.5°	1639.4	1625.0	1617.1	1595.4	1570.4	1521.7	1445.5	1335.6	1219.9	1094.3	1029.2
25°	1796.6	1804.5	1800.6	1788.1	1756.5	1696.7	1615.8	1494.8	1336.3	1189.6	1116.0
27.5°	1993.9	1997.2	1998.5	1993.2	1962.3	1907.8	1825.6	1665.8	1488.9	1306.7	1209.4
30°	2199.1	2191.8	2201.1	2203.7	2188.6	2125.4	2024.8	1849.9	1638.1	1420.5	1311.3
32.5°	2402.9	2410.8	2429.9	2418.1	2420.7	2349.0	2239.2	2033.4	1797.3	1540.8	1425.7
35°	2622.6	2633.1	2646.3	2668.6	2667.3	2610.1	2451.6	2245.1	1969.6	1679.6	1530.3
37.5°	2847.5	2844.9	2864.6	2915.9	2925.8	2871.2	2705.5	2467.4	2150.4	1819.6	1653.3
40°	3060.6	3084.9	3123.0	3157.9	3200.0	3122.4	2961.3	2691.6	2347.0	1965.0	1769.0
42.5°	3309.1	3319.0	3375.6	3453.8	3465.0	3405.2	3229.6	2950.1	2542.4	2103.1	1895.3
45°	3572.9	3586.0	3639.3	3752.4	3843.8	3805.0	3566.9	3234.8	2784.4	2291.2	2034.7
47.5°	3800.4	3839.2	3924.7	4055.5	4152.9	4132.5	3904.3	3514.3	3015.8	2449.0	2169.5
50°	4002.9	4049.6	4166.0	4354.8	4441.6	4414.6	4192.3	3790.5	3184.9	2585.8	2267.5
52.5°	4208.1	4273.2	4379.8	4586.2	4721.7	4732.2	4484.3	4001.6	3380.8	2729.1	2374.7
55°	4319.3	4366.6	4544.8	4795.4	4986.7	4992.0	4711.9	4199.6	3516.3	2792.3	2425.3
57.5°	4358.1	4415.3	4588.9	4885.5	5055.1	4984.8	4794.1	4289.0	3554.4	2815.3	2435.8
60°	4304.1	4361.3	4559.3	4875.6	5019.0	5053.2	4757.9	4288.3	3535.4	2785.7	2403.6
62.5°	4227.2	4300.2	4492.2	4800.6	4966.4	4985.4	4711.2	4239.7	3507.1	2735.0	2356.3
65°	4031.9	4075.9	4356.7	4586.9	4842.7	4819.7	4604.0	4070.0	3407.1	2604.2	2240.5
67.5°	3837.2	3883.3	4089.7	4405.4	4653.3	4628.3	4415.9	3905.6	3215.1	2482.5	2119.5
70°	3509.1	3538.7	3823.4	4068.7	4254.1	4346.2	4072.0	3631.4	3013.9	2278.7	1935.4
72.5°	3161.8	3208.5	3412.4	3720.2	3929.9	3900.3	3762.9	3294.0	2685.7	2041.9	1744.7
75°	2717.9	2762.7	2988.2	3285.5	3489.3	3465.7	3309.1	2892.9	2387.2	1767.0	1510.6
77.5°	2298.4	2284.6	2483.8	2709.4	2894.8	2949.4	2773.2	2446.3	1968.9	1452.0	1229.8
80°	1765.7	1818.3	1943.3	2153.1	2293.1	2324.0	2187.9	1936.0	1573.0	1136.4	943.0
82.5°	1243.6	1271.2	1423.7	1555.9	1731.5	1720.3	1626.3	1406.0	1142.3	797.7	649.7
85°	678.7	684.6	822.7	915.4	1050.9	1067.3	1000.9	850.3	653.7	453.8	334.7
87.5°	119.0	117.1	169.7	248.6	315.7	339.3	282.1	221.0	89.4	53.3	27.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P543123
 CATALOG NUMBER: TT-D6-750-U-T4-PM

CANDELA DISTRIBUTION (continued):

	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	859.5	859.5	859.5	859.5	859.5	859.5	859.5	859.5	859.5	859.5
2.5°	854.9	841.8	829.3	817.4	806.2	797.0	793.1	789.8	789.1	783.2
5°	826.6	805.6	782.6	761.5	742.5	722.1	705.6	700.4	699.7	703.0
7.5°	808.2	776.0	744.4	719.4	691.2	664.2	639.9	624.7	620.8	619.5
10°	801.6	762.2	724.0	685.9	654.3	621.5	591.9	573.4	562.9	560.3
12.5°	810.2	760.2	712.9	668.1	625.4	589.2	555.7	532.7	520.8	516.9
15°	833.2	768.8	708.9	655.0	608.3	562.9	530.0	500.4	486.6	484.7
17.5°	863.5	787.8	711.5	648.4	593.2	545.2	507.0	476.1	459.0	456.4
20°	906.9	812.2	724.0	649.1	586.6	532.7	489.9	457.0	438.6	436.7
22.5°	968.0	851.0	744.4	657.6	586.6	525.4	479.4	445.2	426.1	424.2
25°	1037.7	895.7	772.0	669.5	588.6	524.1	473.5	437.3	418.2	416.3
27.5°	1118.0	950.3	801.6	684.6	595.8	525.4	471.5	435.3	416.9	414.3
30°	1208.0	1004.2	833.9	701.0	605.0	528.1	472.2	434.7	416.9	414.3
32.5°	1298.1	1063.4	870.0	722.7	615.5	535.3	476.1	439.3	420.9	418.9
35°	1392.8	1128.5	910.1	745.1	630.7	545.2	482.7	444.6	426.1	424.2
37.5°	1490.8	1194.2	951.6	772.7	646.4	555.0	491.9	453.8	436.0	434.0
40°	1592.8	1262.0	995.6	801.0	661.6	568.2	503.1	465.6	447.2	445.2
42.5°	1680.9	1323.1	1036.4	825.3	681.3	580.7	517.5	478.1	461.0	459.0
45°	1805.2	1392.8	1078.5	855.6	705.0	603.0	534.6	497.8	482.0	478.1
47.5°	1909.1	1463.9	1121.2	884.5	724.7	618.2	551.1	513.6	497.2	494.5
50°	1993.9	1508.6	1154.8	899.6	735.2	628.0	564.2	526.1	511.6	507.0
52.5°	2083.3	1559.2	1172.5	917.4	752.3	641.8	573.4	540.6	524.8	520.2
55°	2112.3	1561.8	1185.7	920.7	749.7	645.1	579.4	541.2	528.7	524.1
57.5°	2114.3	1561.2	1167.9	898.3	731.3	630.7	573.4	537.3	522.8	518.9
60°	2077.4	1522.4	1132.4	871.3	711.5	610.3	557.0	522.2	511.0	507.0
62.5°	2031.4	1486.9	1088.4	834.5	683.3	589.9	537.9	511.0	495.8	491.2
65°	1915.0	1393.5	1021.3	784.5	642.5	559.0	507.7	481.4	469.5	466.3
67.5°	1811.7	1293.5	954.2	732.6	596.5	520.8	474.1	451.1	441.9	439.9
70°	1644.1	1185.0	850.3	651.7	537.3	464.3	429.4	412.3	401.1	397.2
72.5°	1473.7	1040.4	749.7	574.1	465.6	417.6	382.7	364.3	358.4	355.1
75°	1251.5	874.6	632.0	486.6	399.8	349.2	324.9	311.1	303.8	303.2
77.5°	1023.9	700.4	509.0	385.4	316.3	281.5	264.4	251.2	249.9	252.5
80°	784.5	528.7	378.1	288.7	234.1	212.4	203.2	194.7	193.3	191.4
82.5°	521.5	350.5	239.4	182.8	157.2	144.7	142.0	136.1	134.8	133.5
85°	254.5	168.4	115.7	90.8	83.5	77.6	76.9	79.6	78.9	76.9
87.5°	26.3	21.7	21.0	16.4	15.1	13.8	13.8	12.5	15.1	11.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)