

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P821361

Luminaire Tested: **TT-D5-735-12VDC-5MQ-PM-HSS**

Issue Date: 12/2/2020

Test Information

Test Method: LM-79-08
Report Number: P821361
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2010-017-1)
Test Lab: INNOVATION CENTER
Issue Date: 12/2/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: TT-D5-735-12VDC-5MQ-PM-HSS
Description: TOPTIER LED SITE LUMINAIRE
3500K, 70 CRI LEDS AND MEDIUM DISTRIBUTION WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8013.9 lumens
Efficiency: N/A
Efficacy: 109.8 lumens/watt
Luminous Opening: Circular (Dia: 1.12' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B2 - U2 - G3


Input Watts (W): 73
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

REPORT NUMBER: P821361

CATALOG NUMBER: TT-D5-735-12VDC-5MQ-PM-HSS

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 --- 1/2 Max cd

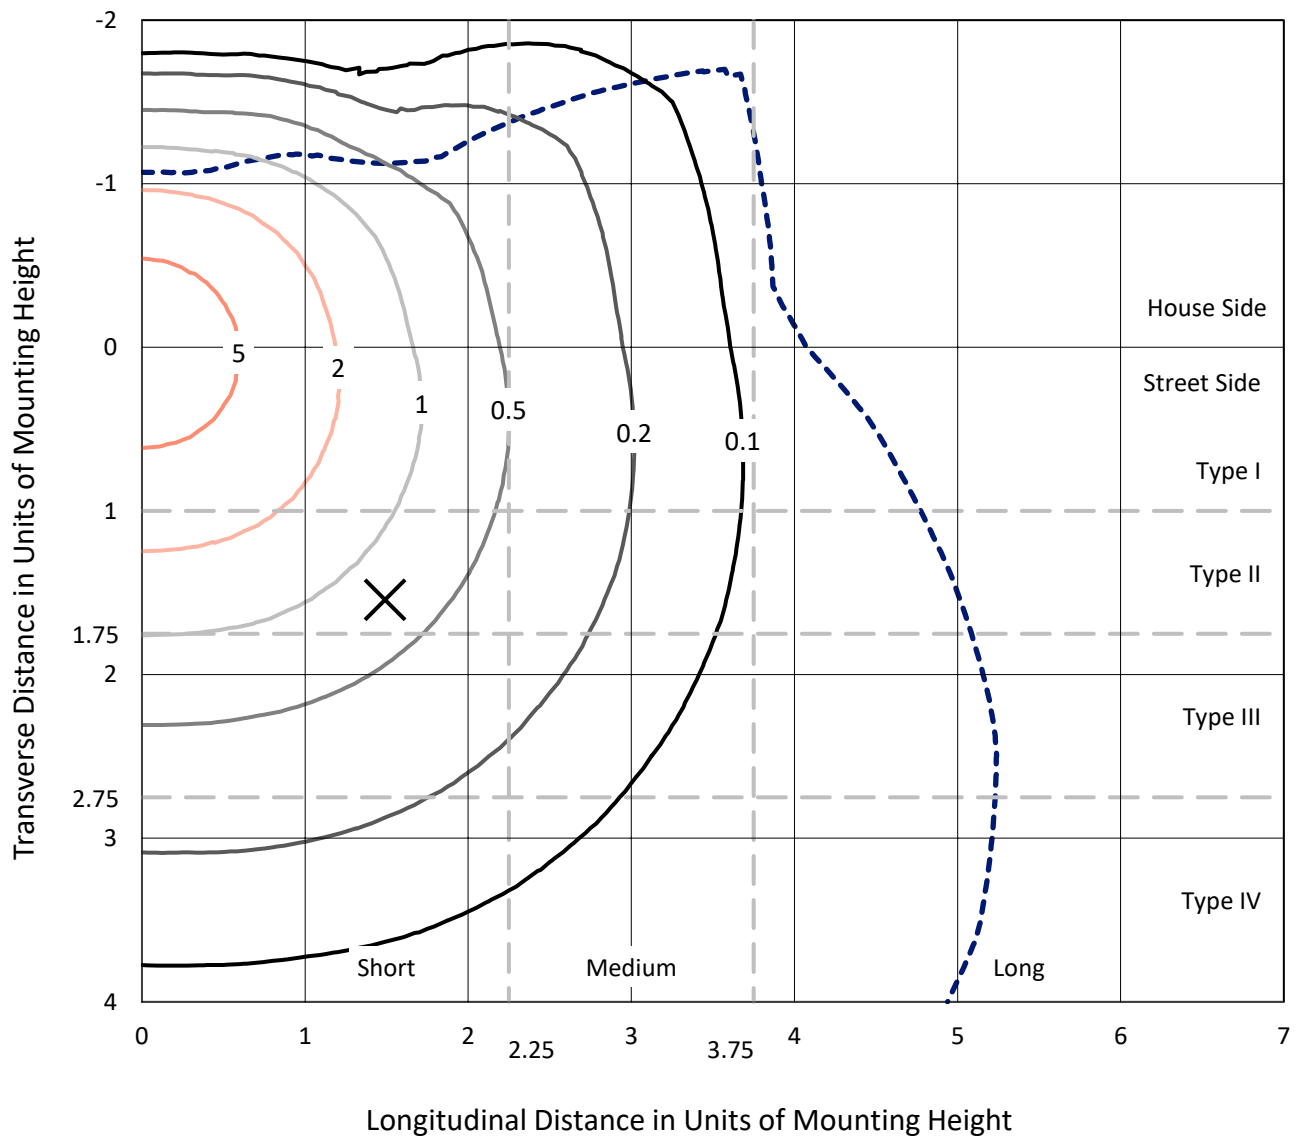

Based on 15 foot mounting height. Maximum calculated value = 8.2 fc
 Type IV - Short - N/A

REPORT NUMBER: P821361
CATALOG NUMBER: TT-D5-735-12VDC-5MQ-PM-HSS

Luminous Intensity Polar Plot

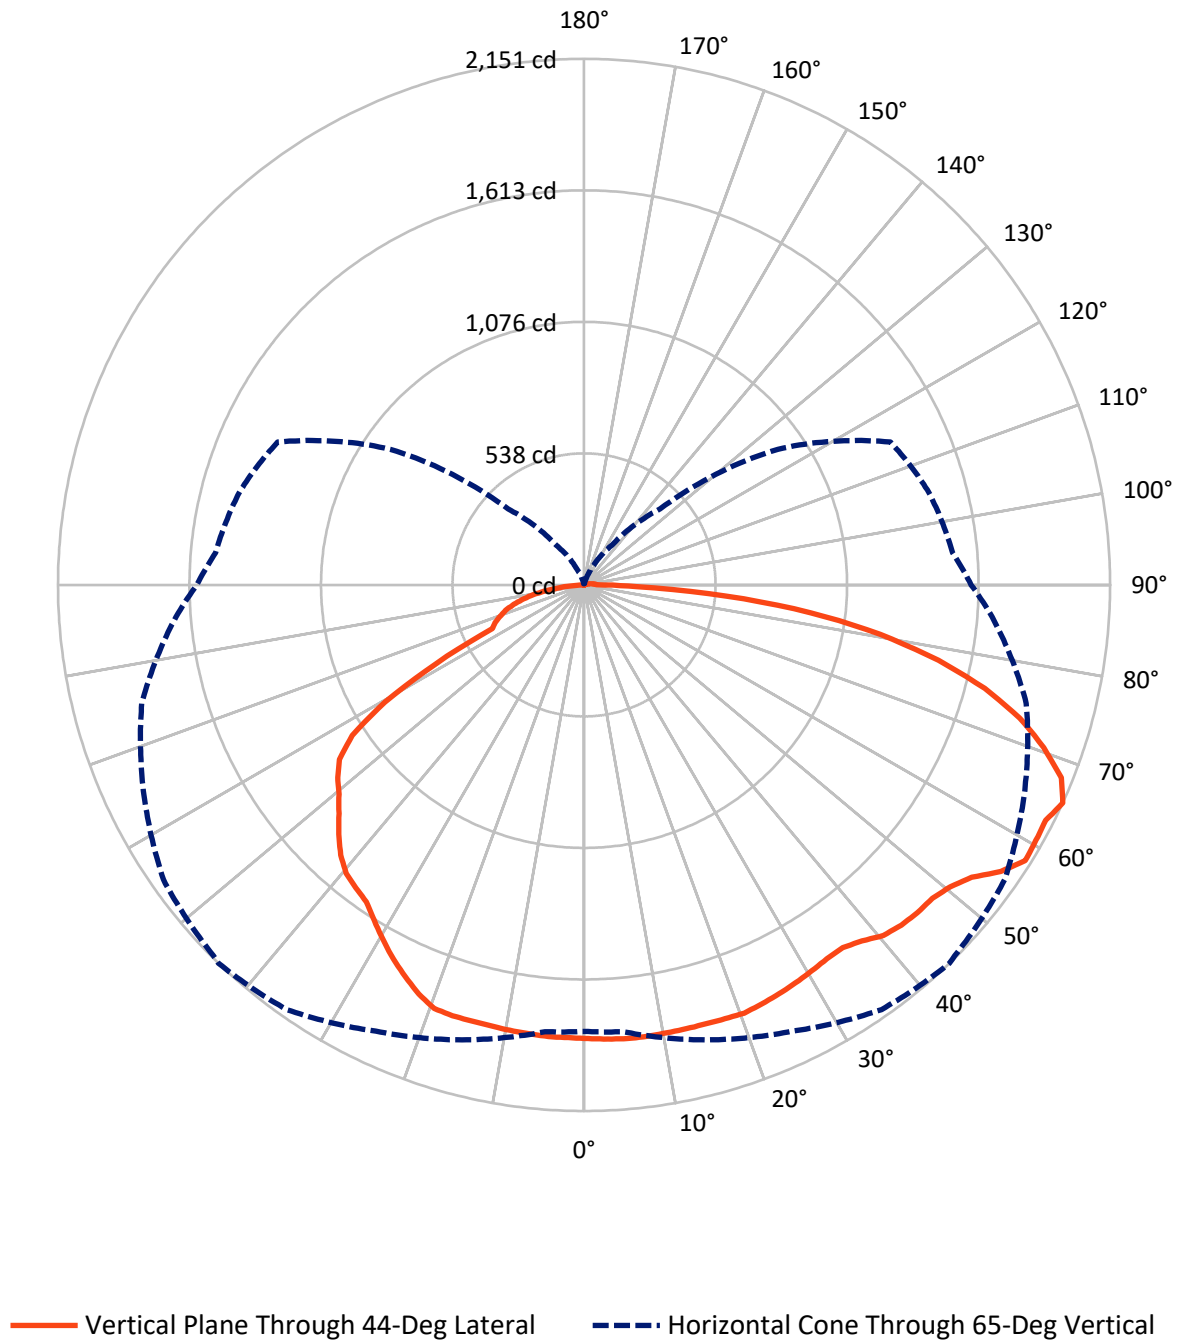

REPORT NUMBER: P821361

CATALOG NUMBER: TT-D5-735-12VDC-5MQ-PM-HSS


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	3034.4	2.1	3036.5
	% Fixture	37.9	0.0	37.9
Street Side	Lumens	4950.2	27.1	4977.4
	% Fixture	61.8	0.3	62.1
Total	Lumens	7984.7	29.2	8013.9
	% Fixture	99.6	0.4	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	177.1	2.2
10°-20°	524.4	6.5
20°-30°	834.6	10.4
30°-40°	1069.3	13.3
40°-50°	1266.7	15.8
50°-60°	1387.3	17.3
60°-70°	1318.7	16.5
70°-80°	1049.9	13.1
80°-90°	356.7	4.5
90°-100°	18.8	0.2
100°-110°	6.2	0.1
110°-120°	1.3	0.0
120°-130°	0.8	0.0
130°-140°	0.6	0.0
140°-150°	0.6	0.0
150°-160°	0.5	0.0
160°-170°	0.3	0.0
170°-180°	0.1	0.0
0°-90°	7984.7	99.6
0°-180°	8013.9	100.0

Coefficient of Utilization

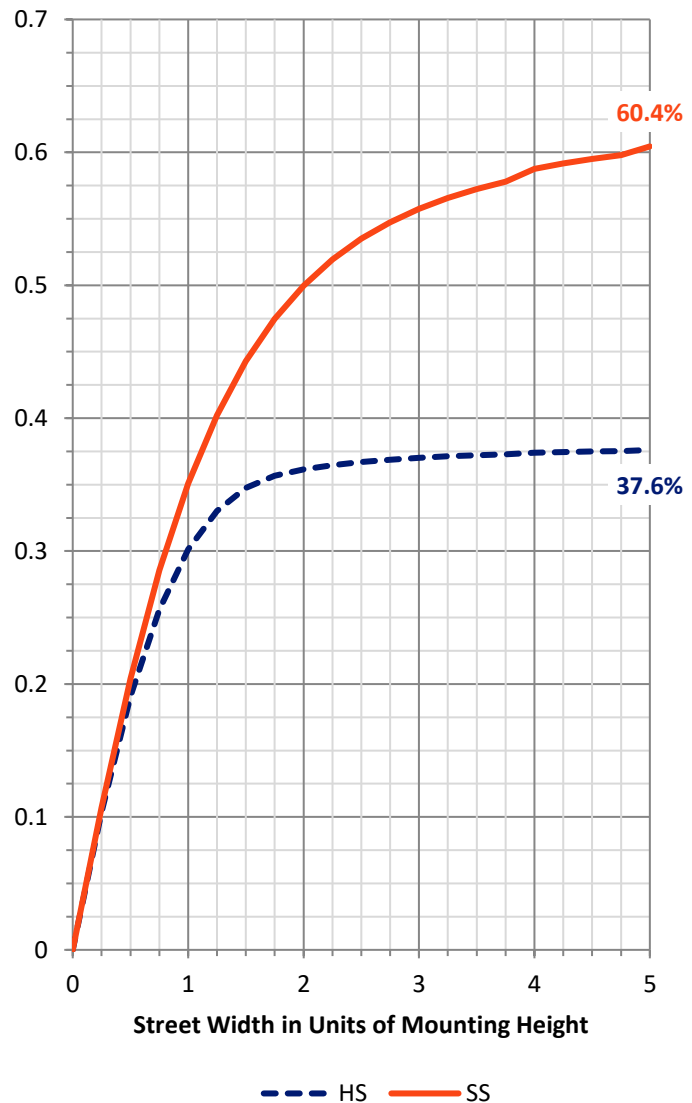

REPORT NUMBER: P821361


CATALOG NUMBER: TT-D5-735-12VDC-5MQ-PM-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	778.9	9.7			
FM	(30°-60°)	2158.1	26.9			
FH	(60°-80°)	1741.5	21.7			G1/1800
FVH	(80°-90°)	271.7	3.4			G3/500
BL	(0°-30°)	757.2	9.4	B2/1000		
BM	(30°-60°)	1565.2	19.5	B2/2500		
BH	(60°-80°)	627.1	7.8	B2/1000		G2/1000
BVH	(80°-90°)	85.0	1.1			G1/100
UL	(90°-100°)	18.8	0.2		U2/50	
UH	(100°-180°)	10.5	0.1		U2/50	

BUG Rating: B2-U2-G3

Type IV Short

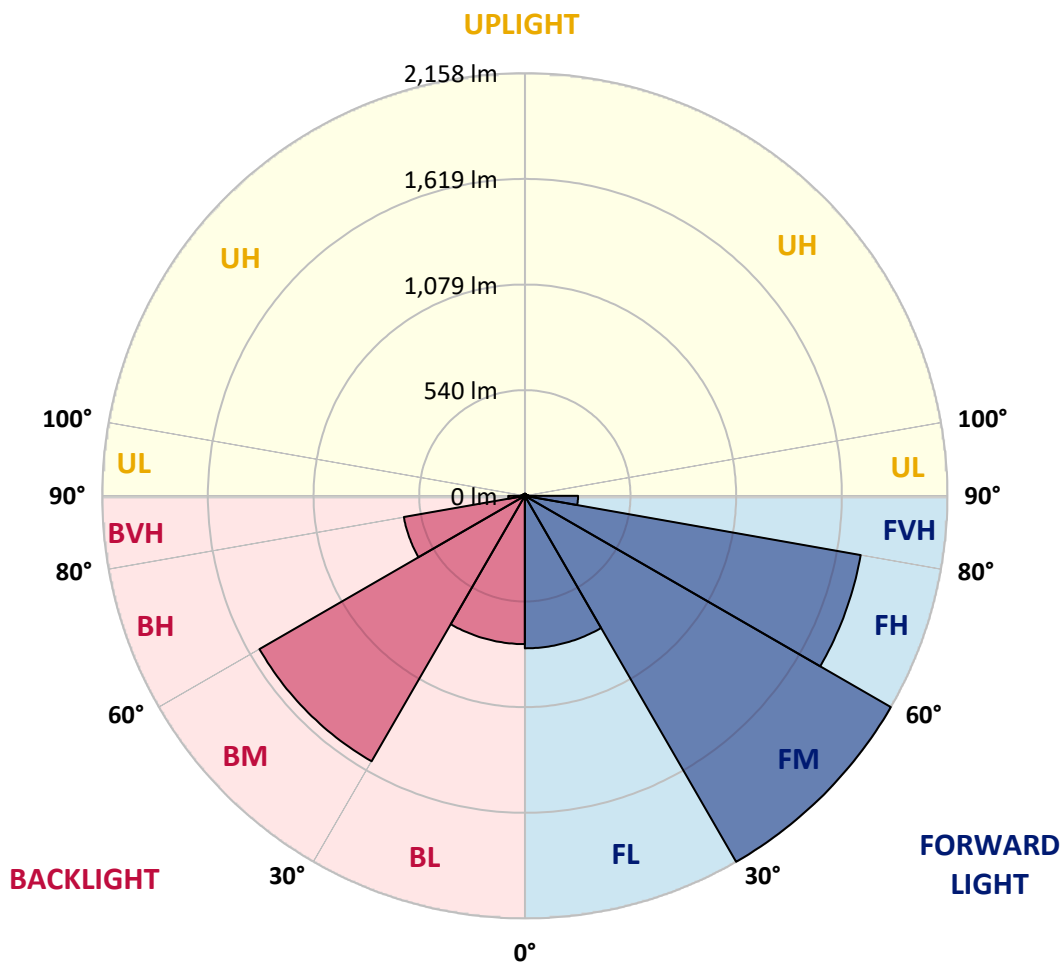



REPORT NUMBER: P821361

CATALOG NUMBER: TT-D5-735-12VDC-5MQ-PM-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	44°	45°	55°	65°	75°	85°
0°	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2
2.5°	1862.3	1860.9	1860.9	1860.9	1860.9	1859.4	1860.9	1858.0	1859.4	1855.2	1855.2
5°	1866.5	1863.7	1865.1	1865.1	1865.1	1863.7	1865.1	1860.9	1862.3	1856.6	1855.2
7.5°	1867.9	1866.5	1866.5	1866.5	1866.5	1863.7	1865.1	1862.3	1860.9	1856.6	1853.8
10°	1867.9	1866.5	1866.5	1866.5	1865.1	1862.3	1863.7	1859.4	1859.4	1853.8	1850.9
12.5°	1867.9	1866.5	1867.9	1865.1	1865.1	1862.3	1862.3	1858.0	1858.0	1850.9	1848.1
15°	1866.5	1865.1	1865.1	1866.5	1865.1	1862.3	1862.3	1858.0	1856.6	1848.1	1845.3
17.5°	1865.1	1863.7	1865.1	1866.5	1867.9	1865.1	1866.5	1859.4	1856.6	1848.1	1843.9
20°	1866.5	1865.1	1866.5	1869.3	1869.3	1869.3	1869.3	1862.3	1856.6	1848.1	1841.0
22.5°	1862.3	1862.3	1862.3	1862.3	1865.1	1860.9	1860.9	1856.6	1849.5	1842.4	1835.4
25°	1852.4	1852.4	1853.8	1855.2	1855.2	1852.4	1850.9	1846.7	1841.0	1832.5	1824.0
27.5°	1841.0	1841.0	1842.4	1842.4	1845.3	1842.4	1841.0	1835.4	1829.7	1819.8	1809.9
30°	1828.3	1828.3	1828.3	1831.1	1832.5	1832.5	1831.1	1824.0	1816.9	1805.6	1792.9
32.5°	1814.1	1814.1	1818.4	1821.2	1822.6	1822.6	1822.6	1814.1	1805.6	1791.5	1773.0
35°	1802.8	1802.8	1808.5	1818.4	1824.0	1821.2	1819.8	1814.1	1801.4	1785.8	1756.1
37.5°	1809.9	1809.9	1822.6	1836.8	1849.5	1846.7	1846.7	1836.8	1819.8	1794.3	1757.5
40°	1826.9	1828.3	1848.1	1866.5	1882.1	1884.9	1884.9	1873.6	1848.1	1815.5	1764.6
42.5°	1831.1	1833.9	1853.8	1880.7	1894.8	1901.9	1901.9	1886.3	1859.4	1821.2	1761.7
45°	1831.1	1832.5	1855.2	1883.5	1906.2	1911.8	1911.8	1894.8	1860.9	1824.0	1751.8
47.5°	1831.1	1829.7	1849.5	1889.2	1911.8	1916.1	1916.1	1897.7	1865.1	1818.4	1737.6
50°	1826.9	1833.9	1863.7	1894.8	1934.5	1940.2	1938.7	1918.9	1873.6	1825.4	1726.3
52.5°	1836.8	1835.4	1875.0	1937.3	1972.7	1985.5	1986.9	1961.4	1914.7	1845.3	1719.2
55°	1877.8	1879.3	1917.5	1989.7	2043.5	2067.6	2064.8	2032.2	1965.6	1884.9	1739.1
57.5°	1892.0	1906.2	1961.4	2023.7	2105.8	2127.1	2127.1	2087.4	2006.7	1916.1	1753.2
60°	1863.7	1869.3	1937.3	2043.5	2118.6	2122.8	2124.3	2095.9	2011.0	1899.1	1724.9
62.5°	1856.6	1867.9	1920.3	2039.3	2087.4	2118.6	2117.2	2078.9	2006.7	1886.3	1715.0
65°	1825.4	1833.9	1926.0	2013.8	2120.0	2151.2	2144.1	2100.2	1988.3	1872.2	1683.8
67.5°	1761.7	1770.2	1855.2	1978.4	2074.7	2104.4	2111.5	2060.5	1944.4	1805.6	1617.3
70°	1655.5	1668.3	1754.6	1875.0	1977.0	1994.0	1991.1	1960.0	1843.9	1695.2	1519.6
72.5°	1506.8	1526.6	1635.7	1750.4	1838.2	1863.7	1852.4	1816.9	1722.1	1562.0	1386.4
75°	1349.6	1368.0	1454.4	1583.3	1675.3	1692.3	1683.8	1641.3	1545.0	1387.8	1229.2
77.5°	1178.3	1193.8	1267.5	1399.2	1467.2	1481.3	1485.6	1428.9	1338.3	1196.7	1055.0
80°	947.4	954.5	1053.6	1140.0	1199.5	1227.8	1225.0	1182.5	1091.9	974.3	832.7
82.5°	699.6	705.3	781.7	855.4	909.2	934.7	920.5	878.0	805.8	705.3	597.6
85°	429.1	419.2	481.5	536.7	569.3	586.3	572.1	548.1	484.3	405.0	330.0
87.5°	154.4	145.9	174.2	182.7	219.5	213.8	226.6	182.7	147.3	104.8	73.6
90°	68.0	68.0	66.6	63.7	58.1	52.4	51.0	42.5	31.2	19.8	7.1
92.5°	62.3	62.3	60.9	58.1	52.4	46.7	46.7	38.2	28.3	18.4	7.1
95°	52.4	52.4	51.0	48.1	43.9	39.7	39.7	31.2	24.1	15.6	5.7
97.5°	41.1	41.1	39.7	38.2	34.0	31.2	31.2	25.5	18.4	11.3	4.2
100°	31.2	31.2	29.7	28.3	26.9	24.1	22.7	18.4	14.2	8.5	2.8
102.5°	22.7	22.7	22.7	21.2	18.4	17.0	17.0	14.2	9.9	7.1	2.8
105°	15.6	15.6	15.6	14.2	12.7	11.3	11.3	9.9	7.1	4.2	1.4
107.5°	9.9	9.9	9.9	9.9	8.5	7.1	7.1	5.7	4.2	2.8	1.4
110°	5.7	4.2	5.7	5.7	5.7	4.2	4.2	2.8	2.8	1.4	1.4



REPORT NUMBER: P821361

CATALOG NUMBER: TT-D5-735-12VDC-5MQ-PM-HSS

CANDELA DISTRIBUTION (continued):

	0°	5°	15°	25°	35°	44°	45°	55°	65°	75°	85°
112.5°	2.8	2.8	2.8	2.8	2.8	2.8	2.8	1.4	1.4	1.4	1.4
115°	1.4	1.4	1.4	2.8	2.8	1.4	1.4	1.4	1.4	1.4	1.4
117.5°	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
120°	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
122.5°	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
125°	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
127.5°	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
130°	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
132.5°	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
135°	0.0	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4
137.5°	0.0	0.0	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4
140°	0.0	1.4	1.4	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4
142.5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
145°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
147.5°	1.4	1.4	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4
150°	1.4	1.4	1.4	0.0	0.0	1.4	1.4	1.4	1.4	1.4	1.4
152.5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
155°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
157.5°	1.4	1.4	1.4	0.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4
160°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
162.5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
165°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
167.5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
170°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
172.5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
177.5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4

REPORT NUMBER: P821361

CATALOG NUMBER: TT-D5-735-12VDC-5MQ-PM-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2
2.5°	1855.2	1853.8	1852.4	1853.8	1852.4	1852.4	1850.9	1850.9	1849.5	1849.5	1848.1
5°	1855.2	1853.8	1852.4	1853.8	1850.9	1852.4	1852.4	1850.9	1849.5	1848.1	1846.7
7.5°	1853.8	1853.8	1850.9	1852.4	1849.5	1849.5	1848.1	1848.1	1846.7	1846.7	1845.3
10°	1850.9	1849.5	1849.5	1849.5	1846.7	1846.7	1845.3	1843.9	1843.9	1842.4	1841.0
12.5°	1848.1	1846.7	1845.3	1845.3	1843.9	1842.4	1841.0	1841.0	1839.6	1838.2	1836.8
15°	1843.9	1842.4	1842.4	1842.4	1841.0	1841.0	1839.6	1838.2	1835.4	1833.9	1832.5
17.5°	1842.4	1841.0	1842.4	1842.4	1841.0	1842.4	1839.6	1836.8	1833.9	1832.5	1831.1
20°	1841.0	1841.0	1841.0	1839.6	1838.2	1836.8	1835.4	1833.9	1832.5	1831.1	1829.7
22.5°	1833.9	1832.5	1829.7	1821.2	1811.3	1804.2	1802.8	1805.6	1805.6	1805.6	1801.4
25°	1821.2	1816.9	1805.6	1790.0	1773.0	1761.7	1754.6	1754.6	1753.2	1750.4	1749.0
27.5°	1805.6	1797.1	1777.3	1757.5	1733.4	1719.2	1702.2	1692.3	1688.1	1686.7	1683.8
30°	1784.4	1771.6	1746.1	1720.6	1690.9	1671.1	1644.2	1627.2	1617.3	1613.0	1610.2
32.5°	1758.9	1746.1	1716.4	1685.2	1649.8	1621.5	1587.5	1560.6	1542.2	1533.7	1529.5
35°	1741.9	1723.5	1689.5	1652.7	1617.3	1576.2	1535.1	1498.3	1470.0	1460.1	1454.4
37.5°	1734.8	1717.8	1681.0	1644.2	1604.5	1555.0	1506.8	1454.4	1416.2	1399.2	1393.5
40°	1739.1	1717.8	1676.7	1637.1	1590.4	1535.1	1471.4	1406.3	1356.7	1332.6	1327.0
42.5°	1729.1	1705.1	1656.9	1614.4	1556.4	1494.1	1416.2	1341.1	1274.6	1254.7	1246.2
45°	1712.2	1682.4	1630.0	1576.2	1515.3	1438.8	1358.1	1261.8	1182.5	1158.4	1151.3
47.5°	1695.2	1654.1	1591.8	1542.2	1468.6	1379.4	1284.5	1176.8	1077.7	1053.6	1049.4
50°	1669.7	1631.4	1564.9	1506.8	1431.8	1328.4	1220.7	1086.2	974.3	933.3	921.9
52.5°	1658.3	1608.8	1545.0	1499.7	1409.1	1291.5	1155.6	1011.1	849.7	798.7	787.4
55°	1669.7	1607.4	1539.4	1495.5	1390.7	1244.8	1077.7	893.6	706.7	652.9	637.3
57.5°	1649.8	1596.0	1528.0	1478.5	1342.5	1148.5	964.4	727.9	533.9	464.5	458.8
60°	1624.3	1547.9	1484.1	1438.8	1242.0	967.2	750.6	518.3	321.5	262.0	250.7
62.5°	1614.4	1535.1	1461.5	1406.3	1107.4	710.9	457.4	262.0	133.1	93.5	85.0
65°	1583.3	1512.5	1460.1	1382.2	967.2	439.0	196.8	77.9	5.7	4.2	4.2
67.5°	1523.8	1451.6	1416.2	1370.9	953.1	419.2	178.4	70.8	2.8	0.0	0.0
70°	1421.8	1365.2	1341.1	1317.0	912.0	388.0	162.9	63.7	1.4	0.0	0.0
72.5°	1287.3	1249.1	1244.8	1242.0	852.5	358.3	145.9	56.6	1.4	0.0	0.0
75°	1152.8	1106.0	1113.1	1130.1	778.9	317.2	126.0	49.6	1.4	0.0	0.0
77.5°	982.8	948.8	965.8	994.2	682.6	269.1	103.4	39.7	1.4	0.0	0.0
80°	773.2	750.6	788.8	814.3	558.0	213.8	77.9	28.3	0.0	0.0	0.0
82.5°	549.5	536.7	572.1	604.7	414.9	151.5	53.8	18.4	0.0	0.0	0.0
85°	296.0	288.9	322.9	358.3	249.2	86.4	26.9	8.5	0.0	0.0	0.0
87.5°	73.6	68.0	69.4	83.6	60.9	18.4	4.2	1.4	0.0	0.0	0.0
90°	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
100°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
102.5°	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
110°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P821361

CATALOG NUMBER: TT-D5-735-12VDC-5MQ-PM-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
112.5°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
115°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
117.5°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
120°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
122.5°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
125°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
127.5°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
130°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
135°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
140°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
145°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
147.5°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
150°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
155°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0	0.0
160°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
162.5°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
165°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
167.5°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
170°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
172.5°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
175°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
177.5°	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Streetworks

Report Number: SP1-2407-176-4

Test Date: 09/24/2024

Luminaire Tested: MEM2-HTN-VA-30-735-U-WQ

Data in this report applies to families of products including MEM2-HTN-VA-30-735-U-WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-176-4
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 09/27/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Streetworks
 Catalog Number: **MEM2-HTN-VA-30-735-U-WQ**
 Description: EPIC MODERN VISUAL COMFORT 30W WAVESTREAM WIDE

Spectral Parameters

CCT (K): 3348
 CIE u' : 0.2384
 CIE v' : 0.5184
 Duv: 0.0030
 CIE x: 0.4177
 CIE y: 0.4036
 CIE z: 0.1787
 Peak Wavelength (nm): 593
 Dominant Wavelength (nm): 580
 Purity: 46.5223
 R_f: 75.8
 R_g: 95.8

CRI (Ra): 73.4
 R1: 70.8
 R2: 79.9
 R3: 87.6
 R4: 72.6
 R5: 69.3
 R6: 71.3
 R7: 82.1
 R8: 53.3
 R9: -19.2
 R10: 52.5
 R11: 68.0
 R12: 42.6
 R13: 72.0
 R14: 92.6
 R15: 63.8



Test Conditions

Stabilization Time: 30M
 Operation Time: 1H 30M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-176-4


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-176-4

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

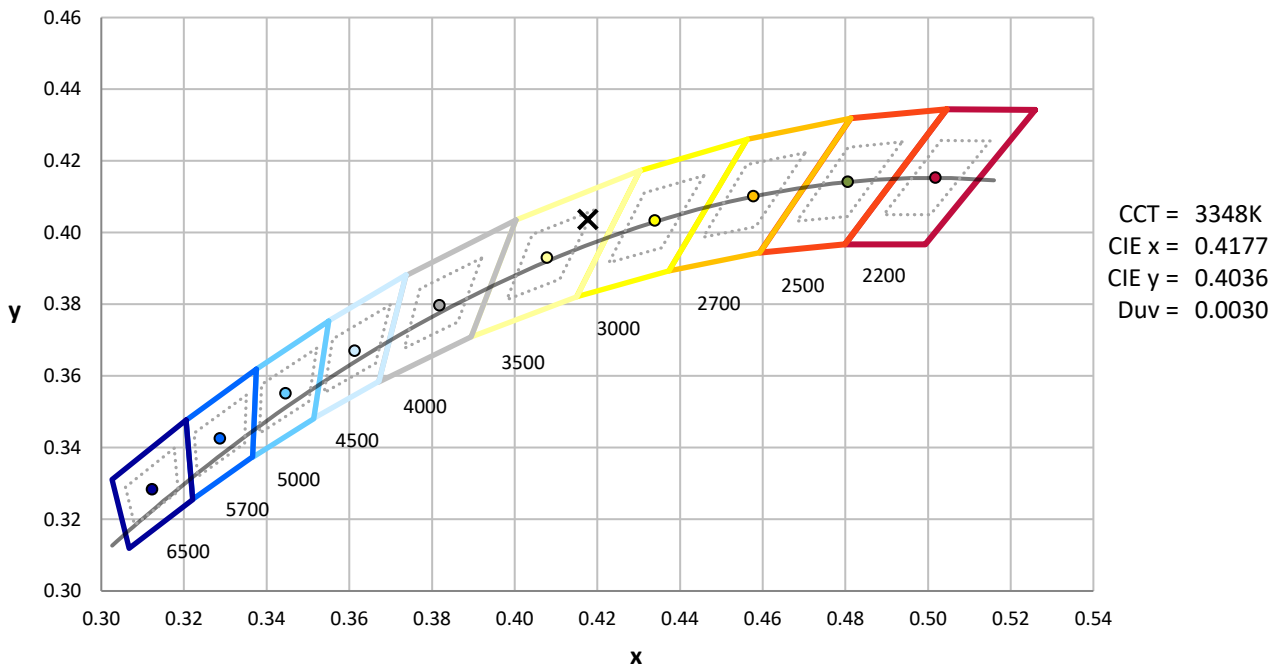

Point lies inside the ANSI 3500K 4-step quadrangle

REPORT NUMBER: SP1-2407-176-4

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	110	NR	620	844	NR	750	28	NR	880	0	NR
365	0	NR	495	150	NR	625	792	NR	755	25	NR	885	0	NR
370	0	NR	500	214	NR	630	737	NR	760	22	NR	890	0	NR
375	0	NR	505	293	NR	635	683	NR	765	19	NR	895	0	NR
380	0	NR	510	376	NR	640	625	NR	770	16	NR	900	0	NR
385	0	NR	515	458	NR	645	566	NR	775	14	NR	905	0	NR
390	0	NR	520	526	NR	650	509	NR	780	12	NR	910	0	NR
395	1	NR	525	584	NR	655	453	NR	785	10	NR	915	0	NR
400	3	NR	530	631	NR	660	401	NR	790	9	NR	920	0	NR
405	5	NR	535	671	NR	665	353	NR	795	8	NR	925	0	NR
410	10	NR	540	704	NR	670	308	NR	800	7	NR	930	0	NR
415	21	NR	545	737	NR	675	269	NR	805	6	NR	935	0	NR
420	44	NR	550	766	NR	680	235	NR	810	5	NR	940	0	NR
425	90	NR	555	797	NR	685	204	NR	815	4	NR	945	0	NR
430	171	NR	560	832	NR	690	177	NR	820	4	NR	950	0	NR
435	305	NR	565	866	NR	695	152	NR	825	3	NR	955	0	NR
440	455	NR	570	901	NR	700	131	NR	830	3	NR	960	0	NR
445	615	NR	575	933	NR	705	112	NR	835	3	NR	965	0	NR
450	771	NR	580	963	NR	710	96	NR	840	2	NR	970	0	NR
455	579	NR	585	984	NR	715	80	NR	845	2	NR	975	0	NR
460	313	NR	590	1000	NR	720	67	NR	850	2	NR	980	0	NR
465	221	NR	595	999	NR	725	55	NR	855	1	NR	985	0	NR
470	156	NR	600	990	NR	730	46	NR	860	1	NR	990	0	NR
475	103	NR	605	968	NR	735	40	NR	865	1	NR	995	0	NR
480	89	NR	610	937	NR	740	35	NR	870	1	NR	1000	0	NR
485	93	NR	615	893	NR	745	31	NR	875	1	NR			

REPORT NUMBER: SP1-2407-176-4

Scotopic Flux vs. Wavelength




Scotopic Lumens: NR

S/P: 1.31

λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)
360	0	NR	490	110	NR	620	844	NR	750	28	NR	880	0	NR
365	0	NR	495	150	NR	625	792	NR	755	25	NR	885	0	NR
370	0	NR	500	214	NR	630	737	NR	760	22	NR	890	0	NR
375	0	NR	505	293	NR	635	683	NR	765	19	NR	895	0	NR
380	0	NR	510	376	NR	640	625	NR	770	16	NR	900	0	NR
385	0	NR	515	458	NR	645	566	NR	775	14	NR	905	0	NR
390	0	NR	520	526	NR	650	509	NR	780	12	NR	910	0	NR
395	1	NR	525	584	NR	655	453	NR	785	10	NR	915	0	NR
400	3	NR	530	631	NR	660	401	NR	790	9	NR	920	0	NR
405	5	NR	535	671	NR	665	353	NR	795	8	NR	925	0	NR
410	10	NR	540	704	NR	670	308	NR	800	7	NR	930	0	NR
415	21	NR	545	737	NR	675	269	NR	805	6	NR	935	0	NR
420	44	NR	550	766	NR	680	235	NR	810	5	NR	940	0	NR
425	90	NR	555	797	NR	685	204	NR	815	4	NR	945	0	NR
430	171	NR	560	832	NR	690	177	NR	820	4	NR	950	0	NR
435	305	NR	565	866	NR	695	152	NR	825	3	NR	955	0	NR
440	455	NR	570	901	NR	700	131	NR	830	3	NR	960	0	NR
445	615	NR	575	933	NR	705	112	NR	835	3	NR	965	0	NR
450	771	NR	580	963	NR	710	96	NR	840	2	NR	970	0	NR
455	579	NR	585	984	NR	715	80	NR	845	2	NR	975	0	NR
460	313	NR	590	1000	NR	720	67	NR	850	2	NR	980	0	NR
465	221	NR	595	999	NR	725	55	NR	855	1	NR	985	0	NR
470	156	NR	600	990	NR	730	46	NR	860	1	NR	990	0	NR
475	103	NR	605	968	NR	735	40	NR	865	1	NR	995	0	NR
480	89	NR	610	937	NR	740	35	NR	870	1	NR	1000	0	NR
485	93	NR	615	893	NR	745	31	NR	875	1	NR			

REPORT NUMBER: SP1-2407-176-4

Melanopic Flux vs. Wavelength

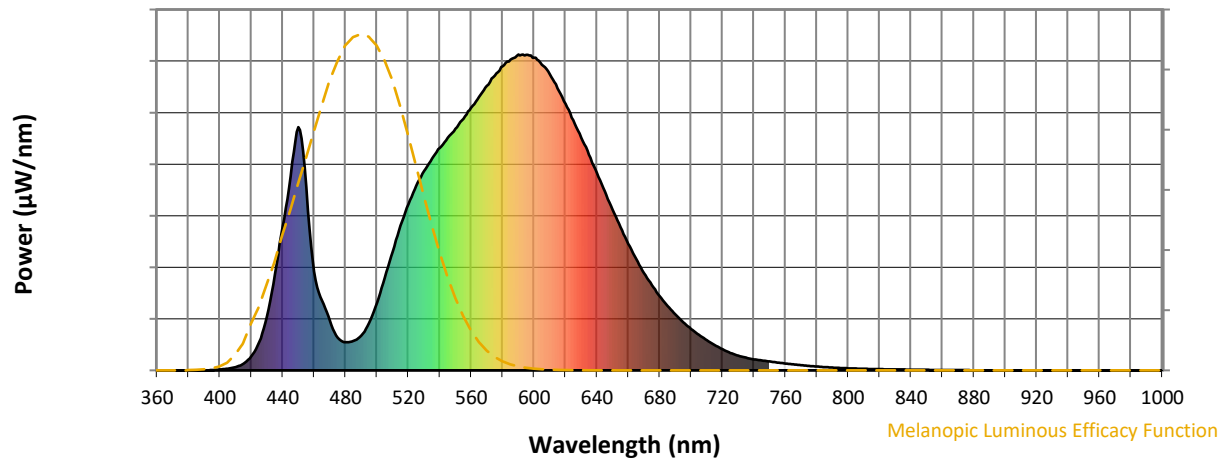

Melanopic Lumens: NR

M/P: 2.4


λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	110	NR	620	844	NR	750	28	NR	880	0	NR
365	0	NR	495	150	NR	625	792	NR	755	25	NR	885	0	NR
370	0	NR	500	214	NR	630	737	NR	760	22	NR	890	0	NR
375	0	NR	505	293	NR	635	683	NR	765	19	NR	895	0	NR
380	0	NR	510	376	NR	640	625	NR	770	16	NR	900	0	NR
385	0	NR	515	458	NR	645	566	NR	775	14	NR	905	0	NR
390	0	NR	520	526	NR	650	509	NR	780	12	NR	910	0	NR
395	1	NR	525	584	NR	655	453	NR	785	10	NR	915	0	NR
400	3	NR	530	631	NR	660	401	NR	790	9	NR	920	0	NR
405	5	NR	535	671	NR	665	353	NR	795	8	NR	925	0	NR
410	10	NR	540	704	NR	670	308	NR	800	7	NR	930	0	NR
415	21	NR	545	737	NR	675	269	NR	805	6	NR	935	0	NR
420	44	NR	550	766	NR	680	235	NR	810	5	NR	940	0	NR
425	90	NR	555	797	NR	685	204	NR	815	4	NR	945	0	NR
430	171	NR	560	832	NR	690	177	NR	820	4	NR	950	0	NR
435	305	NR	565	866	NR	695	152	NR	825	3	NR	955	0	NR
440	455	NR	570	901	NR	700	131	NR	830	3	NR	960	0	NR
445	615	NR	575	933	NR	705	112	NR	835	3	NR	965	0	NR
450	771	NR	580	963	NR	710	96	NR	840	2	NR	970	0	NR
455	579	NR	585	984	NR	715	80	NR	845	2	NR	975	0	NR
460	313	NR	590	1000	NR	720	67	NR	850	2	NR	980	0	NR
465	221	NR	595	999	NR	725	55	NR	855	1	NR	985	0	NR
470	156	NR	600	990	NR	730	46	NR	860	1	NR	990	0	NR
475	103	NR	605	968	NR	735	40	NR	865	1	NR	995	0	NR
480	89	NR	610	937	NR	740	35	NR	870	1	NR	1000	0	NR
485	93	NR	615	893	NR	745	31	NR	875	1	NR			

REPORT NUMBER: SP1-2407-176-4



TM-30-18

Summary

$R_f = 75.8$
 $R_g = 95.8$
 $CIE R_a = 73.4$
 $R_g = -19.2$

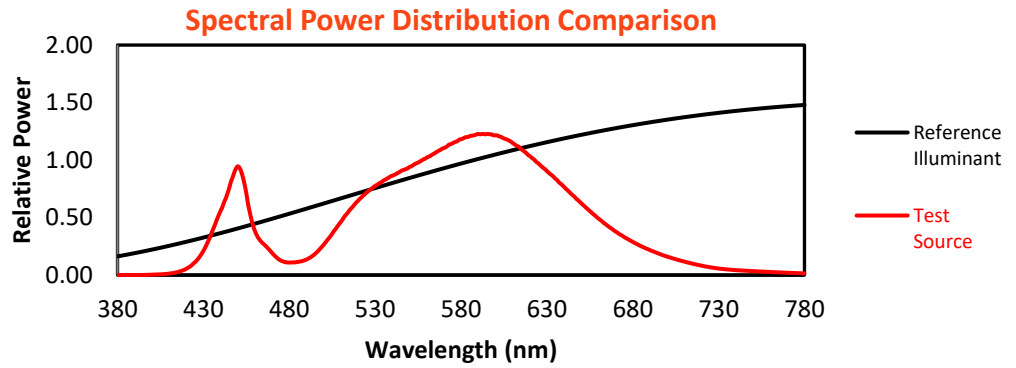


Color Vector Graphics


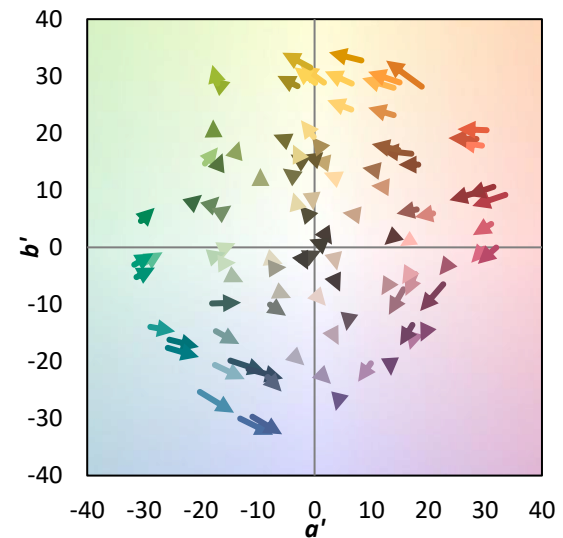
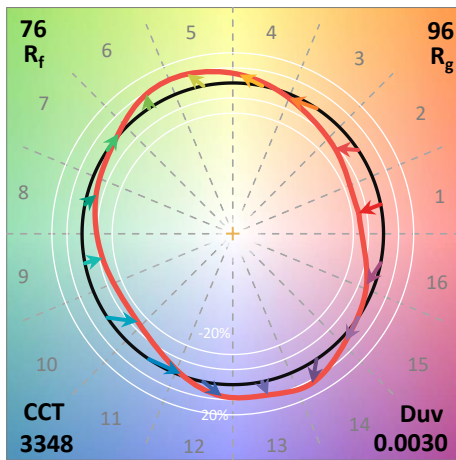


Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 86	CES26 = 65	CES51 = 88	CES76 = 55
CES02 = 62	CES27 = 88	CES52 = 87	CES77 = 74
CES03 = 31	CES28 = 83	CES53 = 77	CES78 = 58
CES04 = 70	CES29 = 66	CES54 = 86	CES79 = 84
CES05 = 48	CES30 = 79	CES55 = 84	CES80 = 81
CES06 = 51	CES31 = 69	CES56 = 74	CES81 = 78
CES07 = 41	CES32 = 62	CES57 = 73	CES82 = 92
CES08 = 40	CES33 = 75	CES58 = 75	CES83 = 89
CES09 = 29	CES34 = 73	CES59 = 87	CES84 = 88
CES10 = 75	CES35 = 85	CES60 = 91	CES85 = 79
CES11 = 58	CES36 = 95	CES61 = 84	CES86 = 71
CES12 = 64	CES37 = 80	CES62 = 88	CES87 = 79
CES13 = 43	CES38 = 88	CES63 = 73	CES88 = 81
CES14 = 74	CES39 = 96	CES64 = 69	CES89 = 71
CES15 = 71	CES40 = 91	CES65 = 66	CES90 = 80
CES16 = 47	CES41 = 91	CES66 = 62	CES91 = 81
CES17 = 50	CES42 = 81	CES67 = 60	CES92 = 63
CES18 = 56	CES43 = 77	CES68 = 68	CES93 = 78
CES19 = 72	CES44 = 99	CES69 = 76	CES94 = 56
CES20 = 65	CES45 = 85	CES70 = 60	CES95 = 70
CES21 = 87	CES46 = 82	CES71 = 55	CES96 = 79
CES22 = 79	CES47 = 83	CES72 = 85	CES97 = 84
CES23 = 92	CES48 = 75	CES73 = 52	CES98 = 77
CES24 = 91	CES49 = 79	CES74 = 96	CES99 = 68
CES25 = 72	CES50 = 87	CES75 = 57	

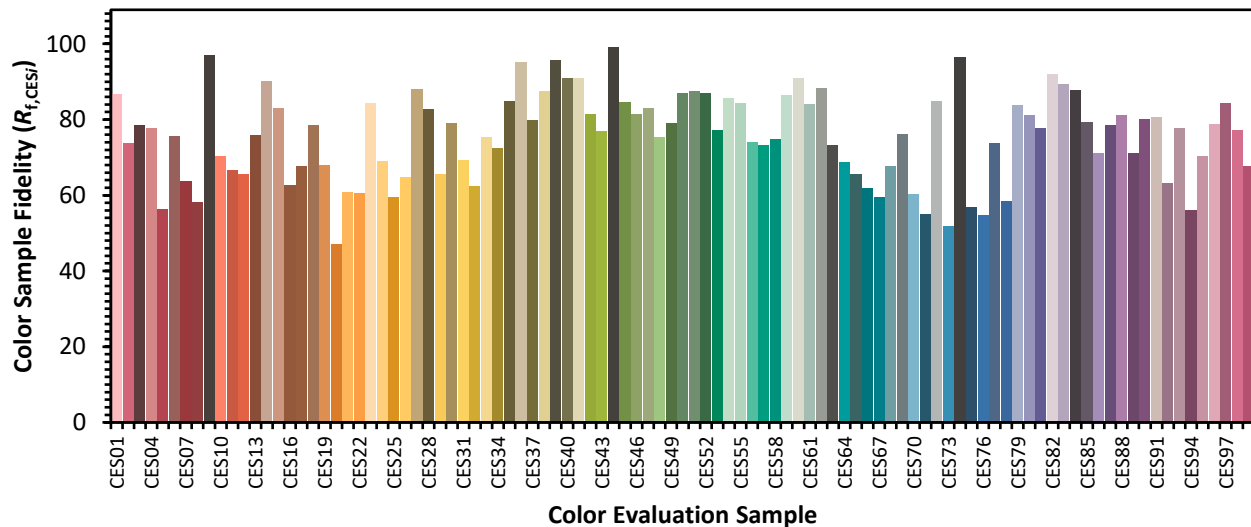

Color Rendition by Hue-Angle Bin

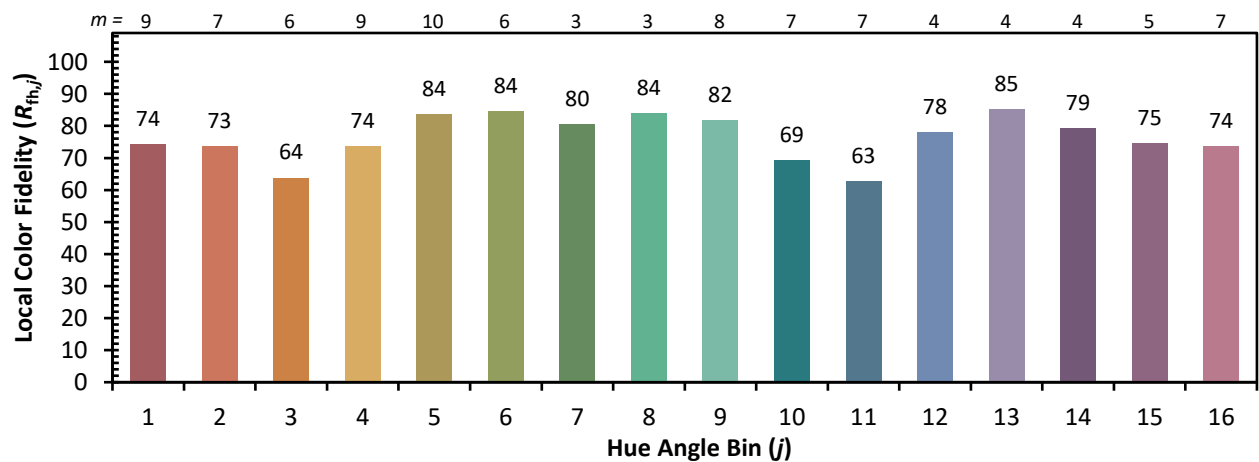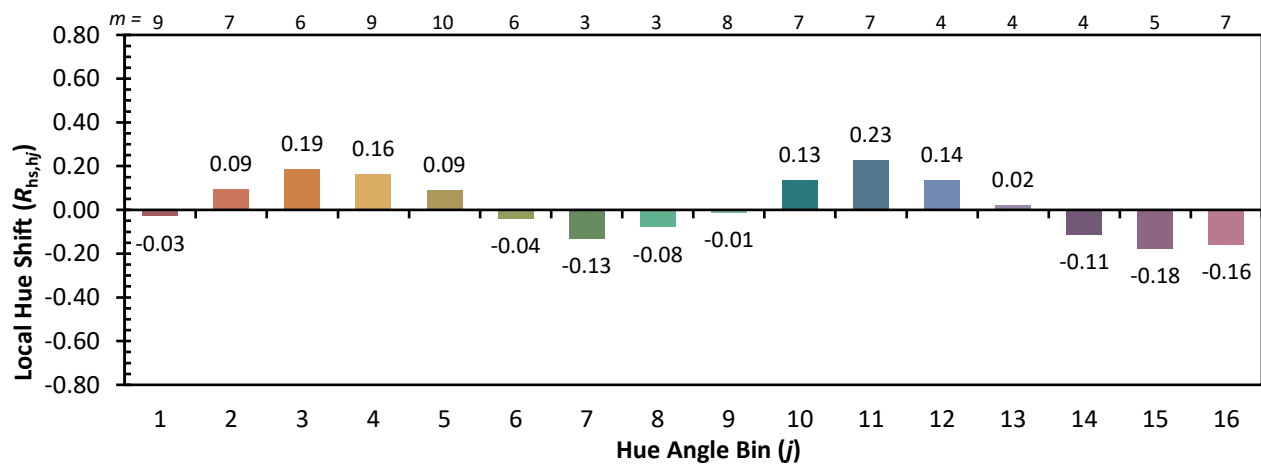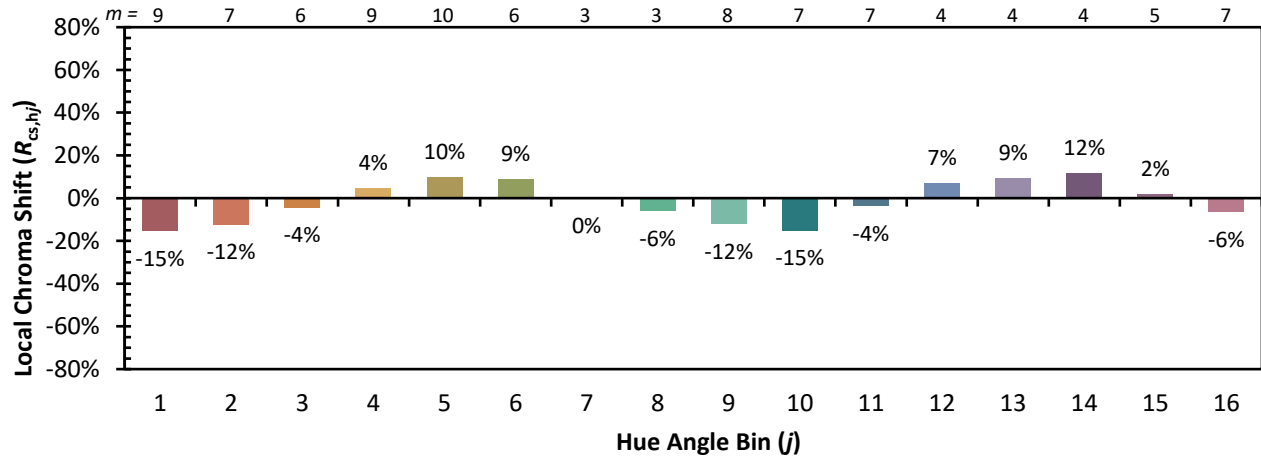

Measure Comparisons



(END OF REPORT)