Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P821269

Luminaire Tested: **TT-D1-740-24VDC-MQ-UPL**

Issue Date: 7/23/2020

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Test Information

Test Method:	LM-79-08
Report Number:	P821269
	REPORT IS FROM IESNA LM-79-08 TEST DATA - UPLIGHT (G2-2002-677-1) AND
Test Lab:	INNOVATION CENTER
Issue Date:	7/23/2020
Manufacturer:	COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line:	McGRAW-EDISON
Catalog Number:	TT-D1-740-24VDC-MQ-UPL
Description:	TOPTIER LED PARKING GARAGE LUMINAIRE WITH UPLIGHT
	4000K, 70 CRI LEDS AND MEDIUM DISTRIBUTION
Light Source:	-
Ballast/Driver:	ELECTRONIC DRIVER

Summary

Lumens per Lamp:	N/A
Luminaire Lumens:	4985.7 lumens
Efficiency:	N/A
Efficacy:	178.1 lumens/watt
Luminous Opening:	Vertical Cylinder (Dia: 1.12' x H: 0.1')
IES Classification:	Type V - Short
BUG Rating:	B2 - U4 - G2


Input Watts (W):	28
Input Voltage (V):	NR
Input Current (Ain):	NR
Voltage Rise (V):	NR
Power Factor:	NR
Total Harmonic Distortion (THDi):	NR
Frequency (hertz):	60
Stabilization Time:	NR
Operation Time:	NR
Ambient Temperature (°C):	NR
Test Distance:	25 FT

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P821269
CATALOG NUMBER: TT-D1-740-24VDC-MQ-UPL

Iso-Footcandle Lines of Horizontal Illumination

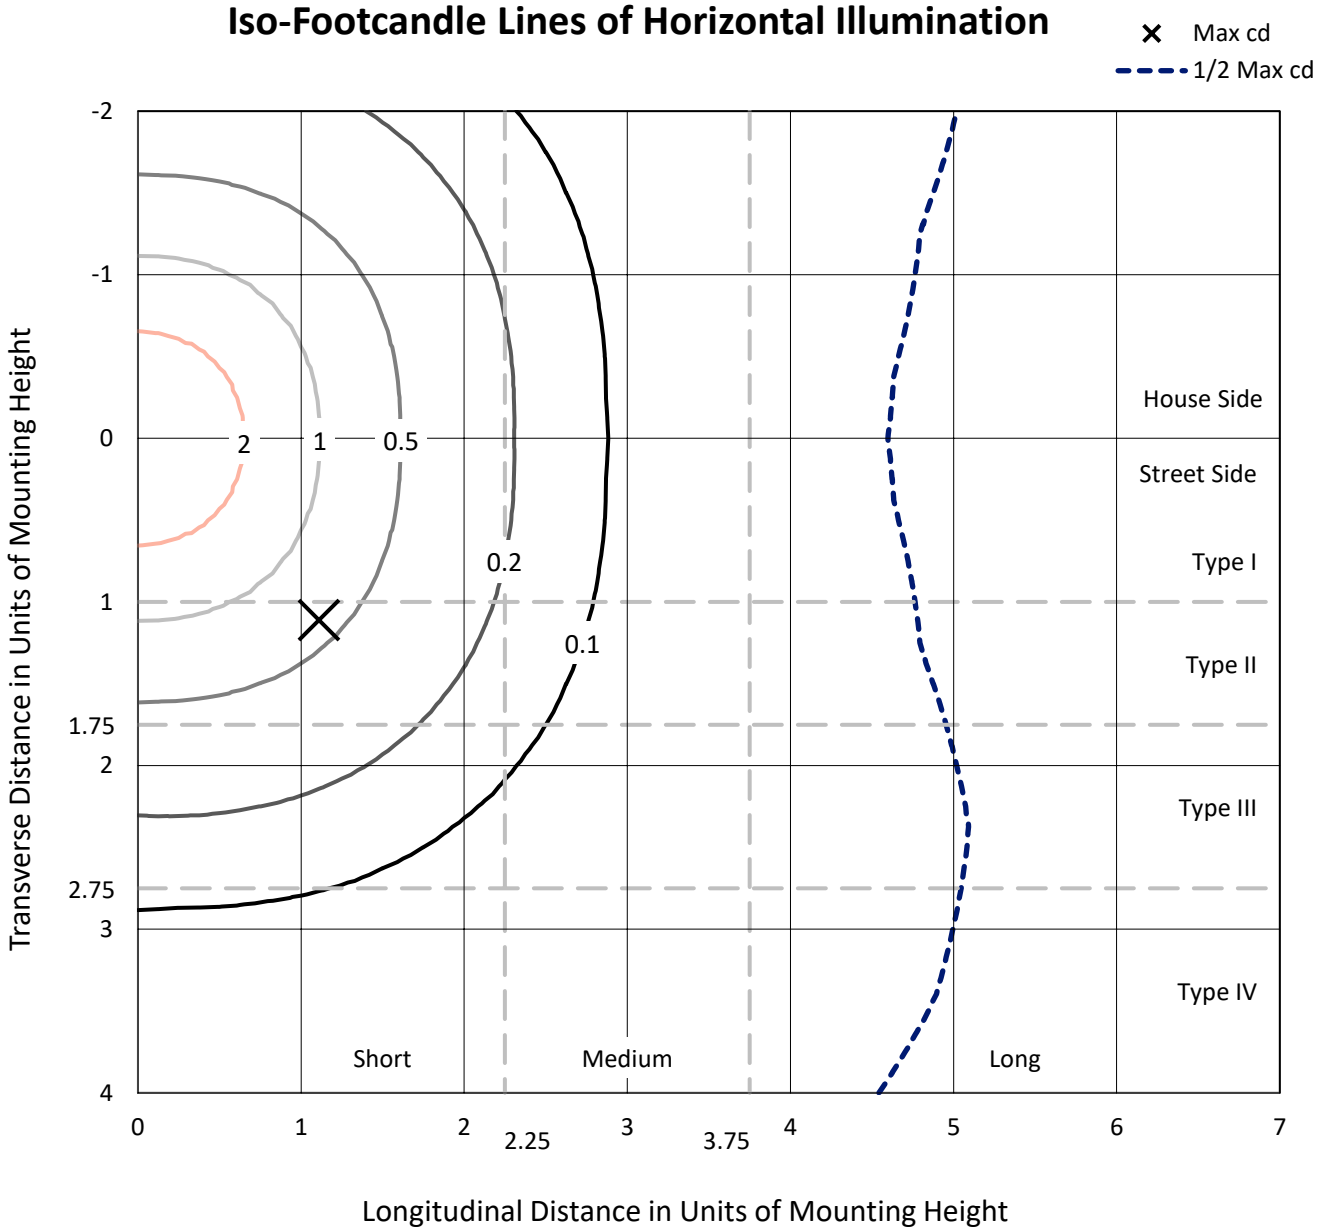


Based on 15 foot mounting height. Maximum calculated value = 3.6 fc
Type V - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P821269
CATALOG NUMBER: TT-D1-740-24VDC-MQ-UPL

Luminous Intensity Polar Plot

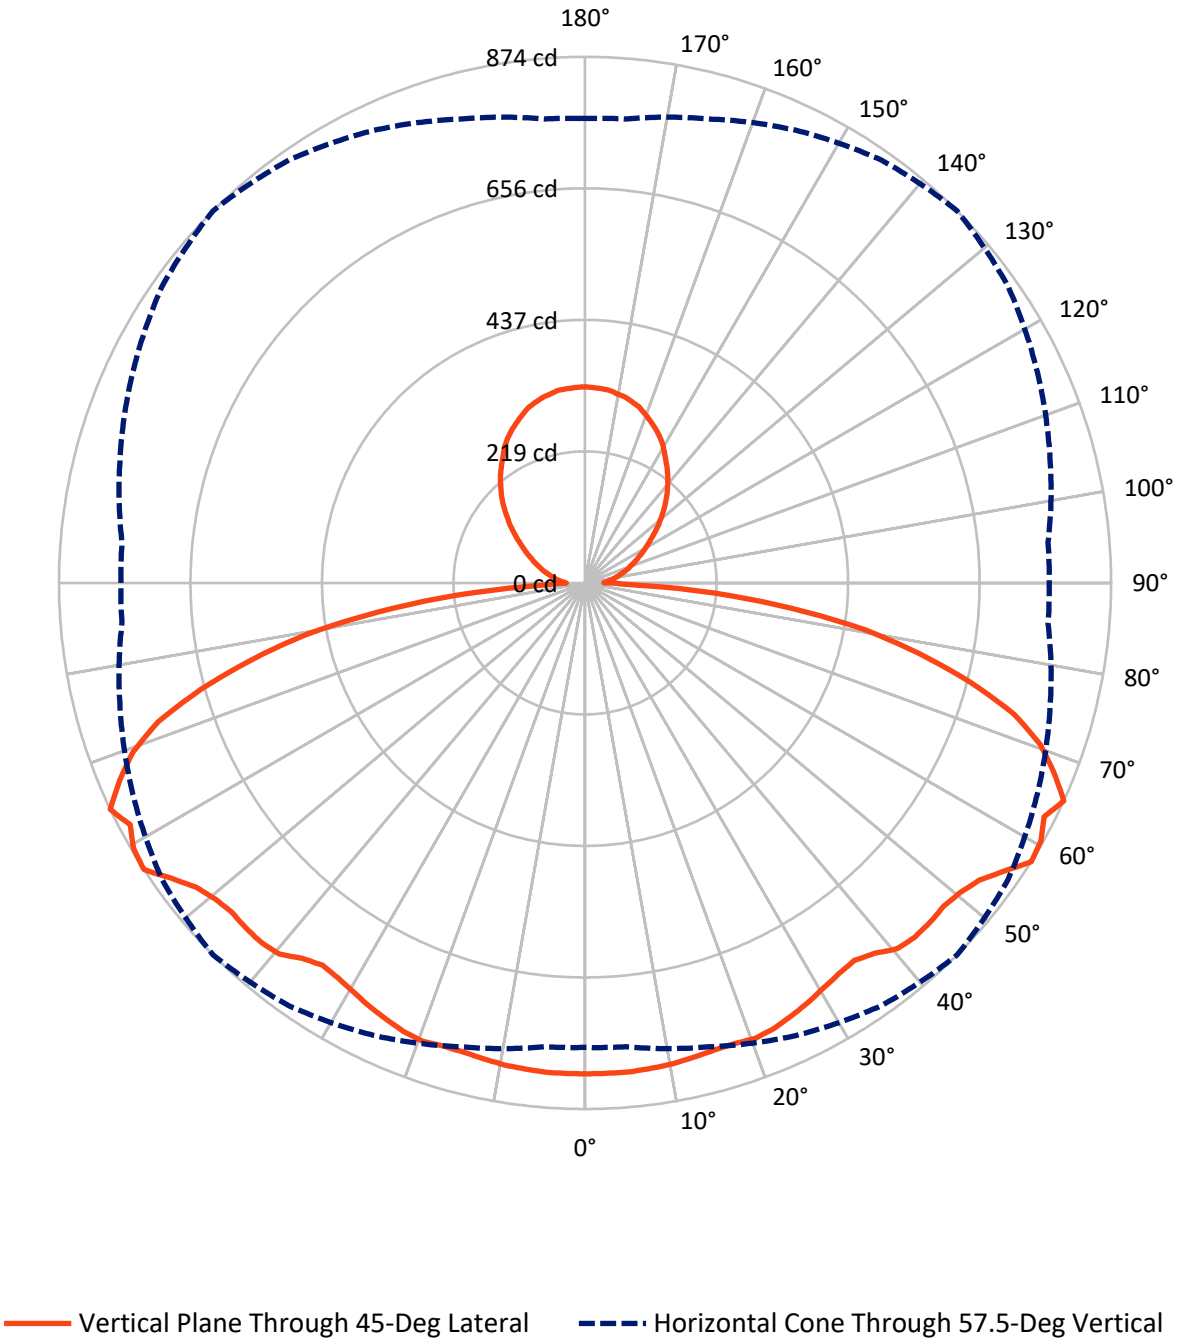

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P821269
CATALOG NUMBER: TT-D1-740-24VDC-MQ-UPL

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	2050.1	442.7	2492.9
	% Fixture	41.1	8.9	50.0
Street Side	Lumens	2050.1	442.7	2492.9
	% Fixture	41.1	8.9	50.0
Total	Lumens	4100.3	885.5	4985.7
	% Fixture	82.2	17.8	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.7	1.6
10°-20°	228.6	4.6
20°-30°	367.4	7.4
30°-40°	485.0	9.7
40°-50°	606.8	12.2
50°-60°	721.8	14.5
60°-70°	782.9	15.7
70°-80°	623.1	12.5
80°-90°	206.8	4.1
90°-100°	45.4	0.9
100°-110°	70.3	1.4
110°-120°	97.7	2.0
120°-130°	126.6	2.5
130°-140°	147.6	3.0
140°-150°	149.5	3.0
150°-160°	129.8	2.6
160°-170°	87.7	1.8
170°-180°	30.8	0.6
0°-90°	4100.3	82.2
0°-180°	4985.7	100.0

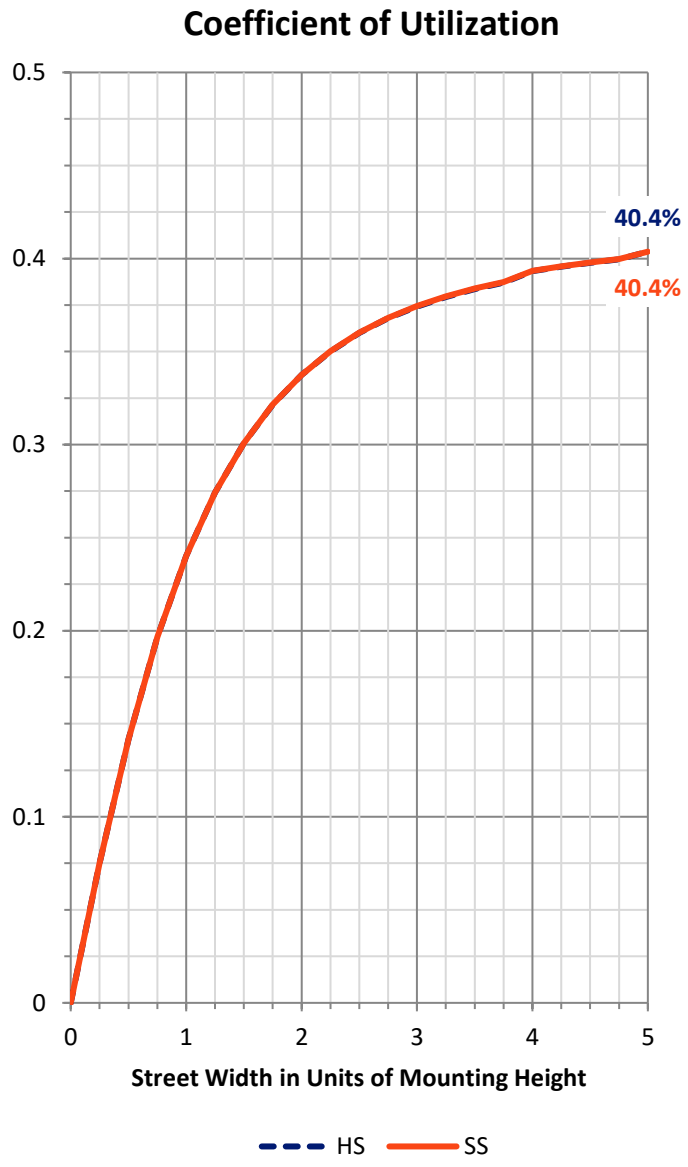

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P821269
CATALOG NUMBER: TT-D1-740-24VDC-MQ-UPL

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit B	U	G
FL	(0°-30°)	336.9	6.8			
FM	(30°-60°)	906.8	18.2			
FH	(60°-80°)	703.0	14.1			G1/1800
FVH	(80°-90°)	103.4	2.1			G2/225
BL	(0°-30°)	336.9	6.8	B1/500		
BM	(30°-60°)	906.8	18.2	B1/1000		
BH	(60°-80°)	703.0	14.1	B2/1000		G1/1800
BVH	(80°-90°)	103.4	2.1			G2/225
UL	(90°-100°)	45.4	0.9		U2/50	
UH	(100°-180°)	840.1	16.8		U4/1000	

BUG Rating: B2-U4-G2
Type V Short

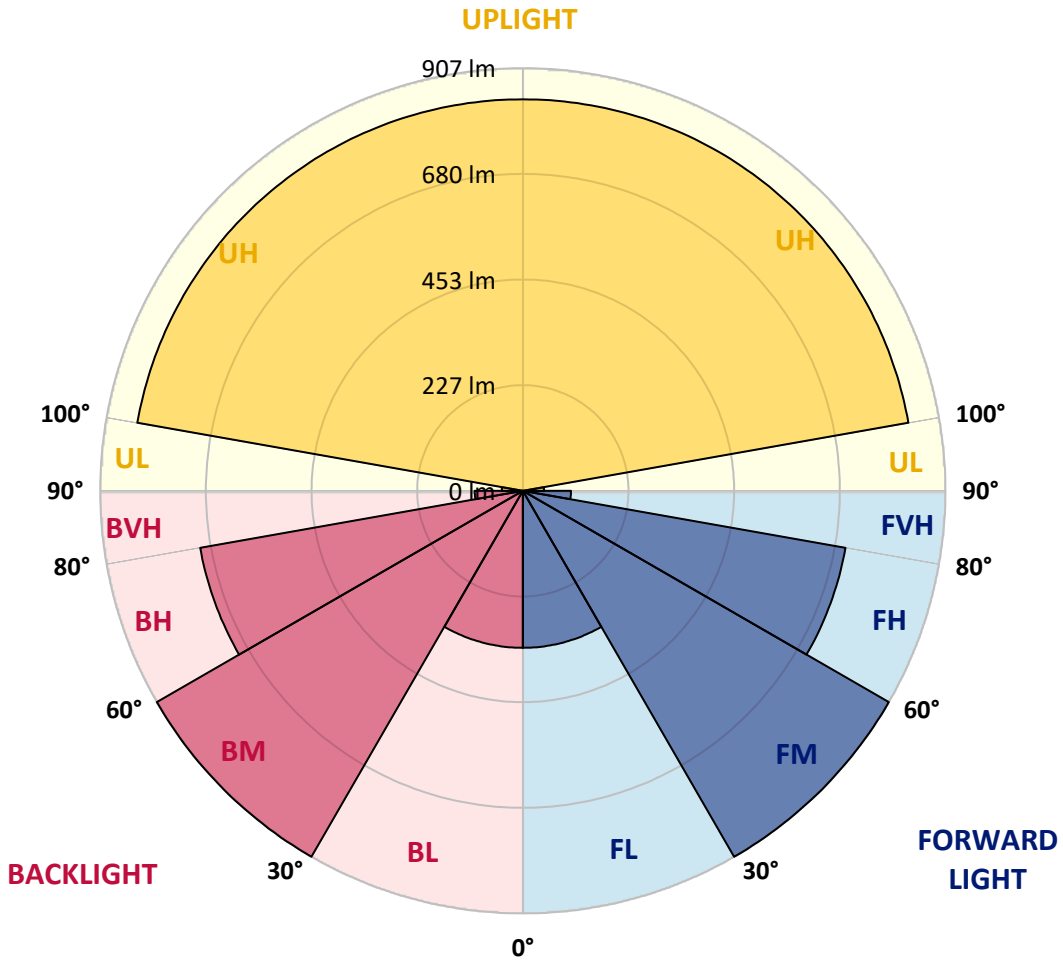

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P821269
CATALOG NUMBER: TT-D1-740-24VDC-MQ-UPL

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	815.8	815.8	815.8	815.8	815.8	815.8	815.8	815.8	815.8	815.8	815.8
2.5°	817.0	816.4	817.0	816.4	816.4	815.8	816.4	816.4	816.4	816.4	816.4
5°	816.4	815.8	815.8	816.4	815.8	815.8	815.8	815.8	815.8	815.8	815.8
7.5°	814.0	814.0	814.6	814.0	814.0	814.0	814.0	814.0	814.0	814.6	814.6
10°	812.1	811.5	812.1	812.1	811.5	812.1	811.5	812.1	812.1	812.1	812.1
12.5°	809.7	809.1	809.7	809.7	809.1	808.5	809.1	809.1	809.7	809.7	809.7
15°	805.4	805.4	806.7	806.0	806.0	805.4	806.7	806.0	805.4	806.0	806.0
17.5°	802.4	802.4	803.6	804.8	804.8	804.8	804.8	804.2	803.0	803.6	802.4
20°	803.0	803.6	804.2	806.0	807.3	807.9	807.9	806.0	804.2	804.8	804.2
22.5°	801.2	800.6	801.2	802.4	804.2	804.2	804.2	801.8	801.2	800.6	800.6
25°	793.9	793.9	795.1	796.3	797.5	796.9	797.5	796.3	795.1	793.9	793.9
27.5°	785.3	785.3	787.2	788.4	789.6	789.6	789.0	787.8	787.2	785.9	785.3
30°	776.8	776.8	778.6	779.9	781.7	781.1	781.1	779.2	777.4	776.2	776.2
32.5°	767.7	767.1	768.9	771.9	774.4	774.4	774.4	770.7	768.3	767.1	766.4
35°	759.7	759.7	762.2	767.7	770.7	770.7	769.5	767.1	761.6	759.7	759.7
37.5°	757.3	759.1	765.8	773.8	779.9	781.1	779.2	772.5	765.2	759.7	757.9
40°	765.2	767.1	775.6	788.4	797.5	799.3	797.5	787.8	775.0	766.4	765.8
42.5°	766.4	767.7	778.0	792.6	801.2	804.2	801.2	791.4	777.4	767.1	766.4
45°	762.2	762.8	775.0	790.2	800.6	804.2	800.6	789.0	774.4	762.8	762.2
47.5°	756.7	757.9	771.3	787.2	800.0	802.4	799.3	786.6	770.1	758.5	756.7
50°	752.4	756.1	768.3	785.9	801.2	808.5	801.2	784.1	767.7	754.9	752.4
52.5°	754.9	756.1	771.9	796.9	817.6	820.7	817.0	796.9	770.7	756.1	754.3
55°	762.2	767.7	784.7	820.7	839.6	845.0	837.1	819.5	785.3	767.7	762.2
57.5°	771.9	773.8	798.1	829.8	857.8	874.3	858.4	829.2	800.0	772.5	771.3
60°	764.0	758.5	789.0	826.2	863.9	870.6	861.5	826.8	787.8	757.9	763.4
62.5°	742.7	746.3	771.3	822.5	848.7	856.0	846.3	822.5	770.1	749.4	740.9
65°	725.6	747.6	775.0	811.5	853.6	874.3	854.2	810.3	776.2	743.9	723.8
67.5°	701.9	706.1	747.0	792.0	829.8	840.2	829.2	792.6	743.3	703.1	706.1
70°	661.7	655.6	697.0	749.4	785.3	801.8	786.6	747.0	695.2	654.3	659.8
72.5°	595.2	598.9	637.3	692.7	729.9	745.7	730.5	688.5	636.1	602.6	598.9
75°	525.8	530.1	567.2	617.8	655.6	662.3	658.0	614.7	568.4	529.4	525.8
77.5°	446.6	450.9	481.3	536.8	559.3	569.7	560.5	539.8	480.1	450.2	445.4
80°	358.9	357.6	384.4	432.0	460.0	471.6	460.0	433.2	383.2	360.1	352.2
82.5°	256.5	257.7	282.7	315.6	342.4	346.1	340.6	318.6	280.3	260.8	249.8
85°	142.6	148.0	166.3	190.7	208.4	214.5	205.3	184.6	165.7	150.5	145.6
87.5°	34.1	37.2	43.3	54.8	61.5	67.6	61.5	57.3	40.8	37.2	34.1
90°	32.0	31.0	31.0	31.0	31.0	31.0	31.0	31.0	31.0	31.0	31.0
92.5°	37.0	37.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0
95°	42.0	42.0	42.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0
97.5°	48.0	48.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0
100°	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0
102.5°	60.0	59.0	60.0	60.0	59.0	59.0	59.0	60.0	60.0	60.0	59.0
105°	66.0	66.0	66.0	66.0	66.0	66.0	66.0	67.0	66.0	66.0	66.0
107.5°	73.0	73.0	73.0	74.0	74.0	74.0	74.0	74.0	73.0	74.0	73.0
110°	80.0	80.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P821269
CATALOG NUMBER: TT-D1-740-24VDC-MQ-UPL

CANDELA DISTRIBUTION (continued):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
112.5°	89.0	89.0	89.0	89.0	89.0	*90.0*	90.0	90.0	90.0	90.0	89.0
115°	97.0	97.0	98.0	98.0	98.0	*98.0*	99.0	99.0	98.0	98.0	98.0
117.5°	107.0	107.0	107.0	107.0	107.0	*108.0*	108.0	108.0	108.0	108.0	107.0
120°	117.0	117.0	117.0	118.0	118.0	*118.0*	119.0	119.0	118.0	118.0	118.0
122.5°	129.0	128.0	129.0	129.0	129.0	*129.0*	130.0	130.0	130.0	130.0	129.0
125°	140.0	140.0	141.0	141.0	141.0	*141.0*	142.0	142.0	142.0	142.0	141.0
127.5°	153.0	153.0	153.0	153.0	153.0	*154.0*	154.0	154.0	154.0	154.0	154.0
130°	165.0	165.0	166.0	166.0	166.0	*166.0*	167.0	167.0	167.0	167.0	166.0
132.5°	179.0	178.0	179.0	178.0	178.0	*179.0*	179.0	180.0	179.0	180.0	179.0
135°	191.0	191.0	191.0	191.0	191.0	*192.0*	192.0	192.0	192.0	192.0	192.0
137.5°	204.0	203.0	204.0	203.0	203.0	*204.0*	204.0	204.0	204.0	204.0	204.0
140°	216.0	215.0	216.0	215.0	216.0	*216.0*	216.0	216.0	216.0	216.0	216.0
142.5°	228.0	227.0	228.0	227.0	227.0	*228.0*	228.0	228.0	228.0	228.0	228.0
145°	239.0	239.0	239.0	238.0	239.0	*239.0*	239.0	239.0	239.0	239.0	239.0
147.5°	250.0	249.0	250.0	249.0	249.0	*250.0*	250.0	250.0	250.0	250.0	250.0
150°	263.0	262.0	263.0	262.0	263.0	*263.0*	263.0	263.0	263.0	263.0	263.0
152.5°	273.0	273.0	273.0	273.0	273.0	*273.0*	273.0	273.0	273.0	273.0	273.0
155°	282.0	282.0	283.0	282.0	282.0	*282.0*	283.0	282.0	282.0	282.0	282.0
157.5°	290.0	290.0	290.0	290.0	290.0	*290.0*	291.0	291.0	290.0	291.0	290.0
160°	298.0	298.0	299.0	298.0	298.0	*298.0*	299.0	298.0	298.0	298.0	298.0
162.5°	306.0	305.0	306.0	305.0	306.0	*306.0*	306.0	306.0	306.0	306.0	306.0
165°	311.0	311.0	312.0	311.0	311.0	*311.0*	312.0	311.0	311.0	311.0	311.0
167.5°	316.0	315.0	316.0	316.0	316.0	*316.0*	316.0	316.0	316.0	316.0	316.0
170°	319.0	319.0	320.0	319.0	319.0	*319.0*	320.0	319.0	319.0	319.0	319.0
172.5°	323.0	323.0	323.0	323.0	323.0	*323.0*	323.0	323.0	323.0	323.0	323.0
175°	324.0	324.0	325.0	324.0	325.0	*324.0*	325.0	324.0	324.0	324.0	324.0
177.5°	325.0	325.0	326.0	325.0	325.0	*325.0*	325.0	325.0	325.0	325.0	325.0
180°	326.0	326.0	326.0	326.0	326.0	*326.0*	326.0	326.0	326.0	326.0	326.0

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Streetworks

Report Number: SP1-2407-176-5

Test Date: 09/24/2024

Luminaire Tested: MEM2-HTN-VA-30-740-U-WQ

Data in this report applies to families of products including MEM2-HTN-VA-30-740-U-WQ

Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04


Test Information

Test Method:	LM-79-2019
Report Number:	SP1-2407-176-5
Test Lab:	COOPER LIGHTING SOLUTIONS
Photometer:	SP1 - 76IN SPHERE
Measurement Geometry:	4π
Issue Date:	09/27/2024
Manufacturer:	COOPER LIGHTING SOLUTIONS
Product Line:	Streetworks
Catalog Number:	**MEM2-HTN-VA-30-740-U-WQ**
Description:	EPIC MODERN VISUAL COMFORT 30W WAVESTREAM WIDE

Spectral Parameters

CCT (K):	3819	CRI (Ra):	72.9		
CIE u':	0.2261	R1:	70.1	R9:	-21.5
CIE v':	0.5108	R2:	78.4	R10:	48.5
Duv:	0.0046	R3:	85.0	R11:	68.4
CIE x:	0.3926	R4:	72.9	R12:	39.0
CIE y:	0.3942	R5:	69.1	R13:	71.1
CIE z:	0.2132	R6:	69.2	R14:	91.3
Peak Wavelength (nm):	450	R7:	82.8	R15:	63.2
Dominant Wavelength (nm):	577	R8:	55.4		
Purity:	36.15483				

Rf:	75.6
Rg:	94.8

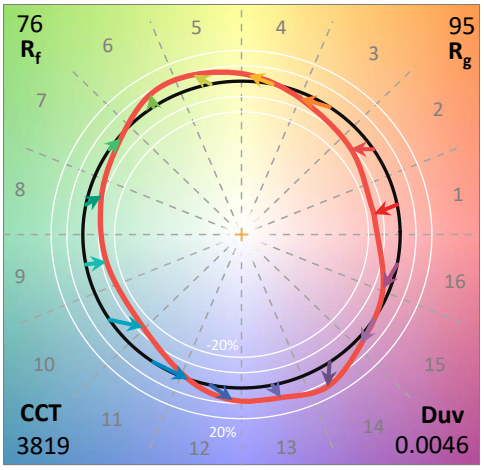

Test Conditions


Stabilization Time:	30M
Operation Time:	1H 30M
Sphere Temperature (°C):	25.2

REPORT NUMBER: SP1-2407-176-5


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-176-5

CIE 1931 Chromaticity Diagram

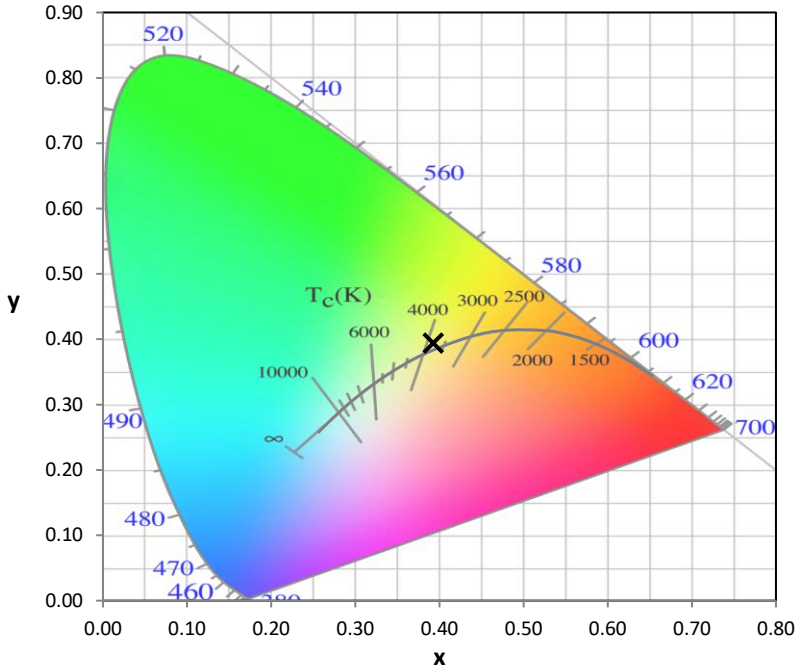

CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

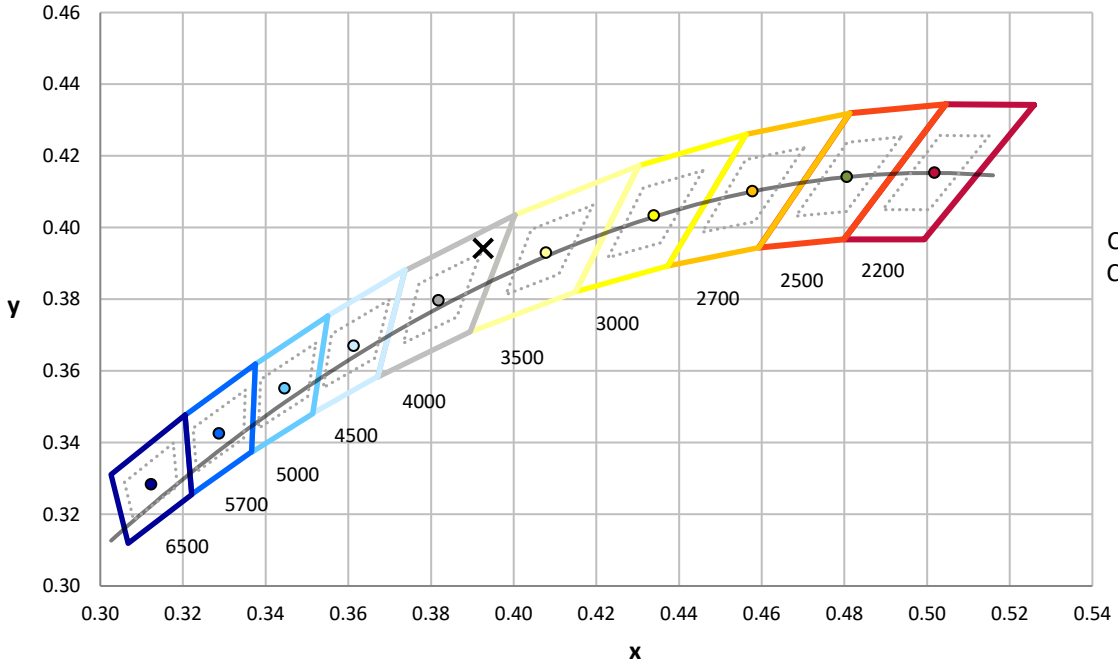


CCT = 3819K
CIE x = 0.3926
CIE y = 0.3942
Duv = 0.0046

Point lies inside the ANSI 4000K 7-step quadrangle

REPORT NUMBER: SP1-2407-176-5

Photopic Flux vs. Wavelength

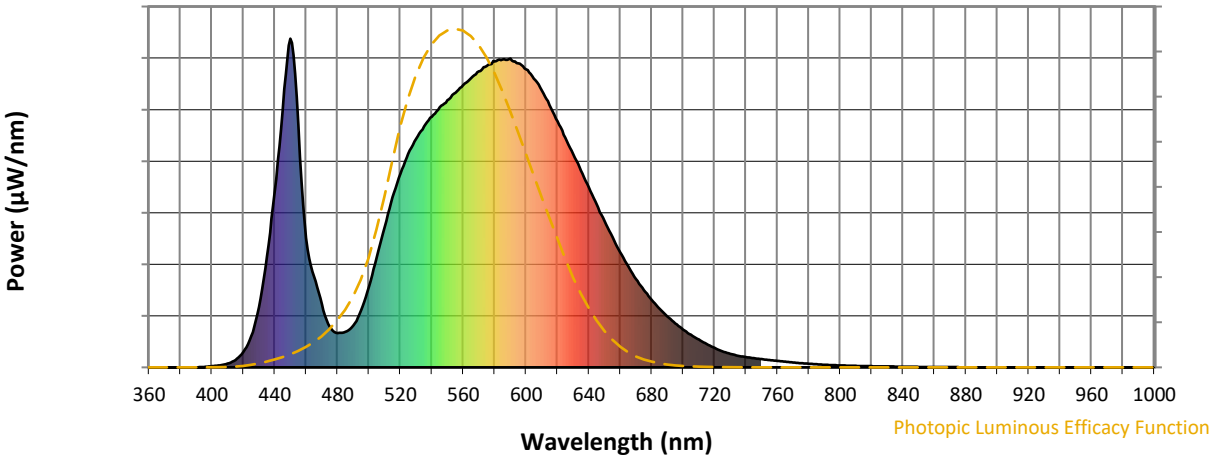


Photopic Lumens: NR

λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)
360	0	NR	490	127	NR	620	748	NR	750	25	NR	880	0	NR
365	0	NR	495	173	NR	625	699	NR	755	22	NR	885	0	NR
370	0	NR	500	246	NR	630	648	NR	760	20	NR	890	0	NR
375	0	NR	505	335	NR	635	599	NR	765	17	NR	895	0	NR
380	0	NR	510	427	NR	640	547	NR	770	15	NR	900	0	NR
385	0	NR	515	517	NR	645	495	NR	775	13	NR	905	0	NR
390	0	NR	520	589	NR	650	445	NR	780	11	NR	910	0	NR
395	1	NR	525	649	NR	655	396	NR	785	9	NR	915	0	NR
400	4	NR	530	695	NR	660	349	NR	790	8	NR	920	0	NR
405	6	NR	535	733	NR	665	308	NR	795	7	NR	925	0	NR
410	11	NR	540	763	NR	670	269	NR	800	6	NR	930	0	NR
415	23	NR	545	792	NR	675	235	NR	805	5	NR	935	0	NR
420	46	NR	550	813	NR	680	205	NR	810	5	NR	940	0	NR
425	95	NR	555	835	NR	685	178	NR	815	4	NR	945	0	NR
430	183	NR	560	859	NR	690	155	NR	820	3	NR	950	0	NR
435	338	NR	565	880	NR	695	134	NR	825	3	NR	955	0	NR
440	534	NR	570	900	NR	700	115	NR	830	3	NR	960	0	NR
445	782	NR	575	918	NR	705	99	NR	835	2	NR	965	0	NR
450	1000	NR	580	931	NR	710	84	NR	840	2	NR	970	0	NR
455	739	NR	585	937	NR	715	71	NR	845	2	NR	975	0	NR
460	393	NR	590	939	NR	720	59	NR	850	1	NR	980	0	NR
465	276	NR	595	925	NR	725	49	NR	855	1	NR	985	0	NR
470	190	NR	600	907	NR	730	41	NR	860	1	NR	990	0	NR
475	123	NR	605	878	NR	735	35	NR	865	1	NR	995	0	NR
480	105	NR	610	842	NR	740	31	NR	870	1	NR	1000	0	NR
485	108	NR	615	797	NR	745	28	NR	875	1	NR			

REPORT NUMBER: SP1-2407-176-5

Scotopic Flux vs. Wavelength

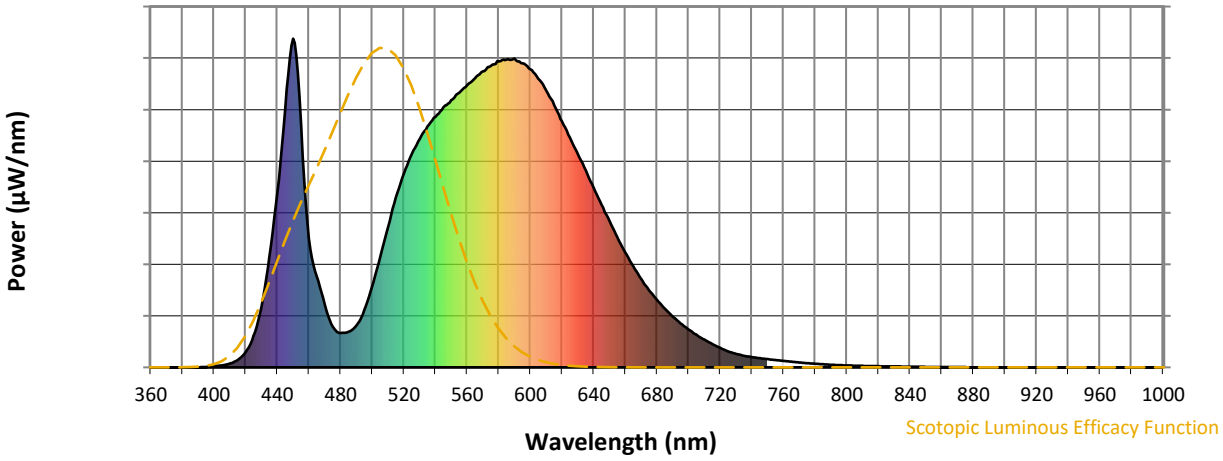


Scotopic Lumens: NR **S/P: 1.45**

λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)
360	0	NR	490	127	NR	620	748	NR	750	25	NR	880	0	NR
365	0	NR	495	173	NR	625	699	NR	755	22	NR	885	0	NR
370	0	NR	500	246	NR	630	648	NR	760	20	NR	890	0	NR
375	0	NR	505	335	NR	635	599	NR	765	17	NR	895	0	NR
380	0	NR	510	427	NR	640	547	NR	770	15	NR	900	0	NR
385	0	NR	515	517	NR	645	495	NR	775	13	NR	905	0	NR
390	0	NR	520	589	NR	650	445	NR	780	11	NR	910	0	NR
395	1	NR	525	649	NR	655	396	NR	785	9	NR	915	0	NR
400	4	NR	530	695	NR	660	349	NR	790	8	NR	920	0	NR
405	6	NR	535	733	NR	665	308	NR	795	7	NR	925	0	NR
410	11	NR	540	763	NR	670	269	NR	800	6	NR	930	0	NR
415	23	NR	545	792	NR	675	235	NR	805	5	NR	935	0	NR
420	46	NR	550	813	NR	680	205	NR	810	5	NR	940	0	NR
425	95	NR	555	835	NR	685	178	NR	815	4	NR	945	0	NR
430	183	NR	560	859	NR	690	155	NR	820	3	NR	950	0	NR
435	338	NR	565	880	NR	695	134	NR	825	3	NR	955	0	NR
440	534	NR	570	900	NR	700	115	NR	830	3	NR	960	0	NR
445	782	NR	575	918	NR	705	99	NR	835	2	NR	965	0	NR
450	1000	NR	580	931	NR	710	84	NR	840	2	NR	970	0	NR
455	739	NR	585	937	NR	715	71	NR	845	2	NR	975	0	NR
460	393	NR	590	939	NR	720	59	NR	850	1	NR	980	0	NR
465	276	NR	595	925	NR	725	49	NR	855	1	NR	985	0	NR
470	190	NR	600	907	NR	730	41	NR	860	1	NR	990	0	NR
475	123	NR	605	878	NR	735	35	NR	865	1	NR	995	0	NR
480	105	NR	610	842	NR	740	31	NR	870	1	NR	1000	0	NR
485	108	NR	615	797	NR	745	28	NR	875	1	NR			

REPORT NUMBER: SP1-2407-176-5

Melanopic Flux vs. Wavelength

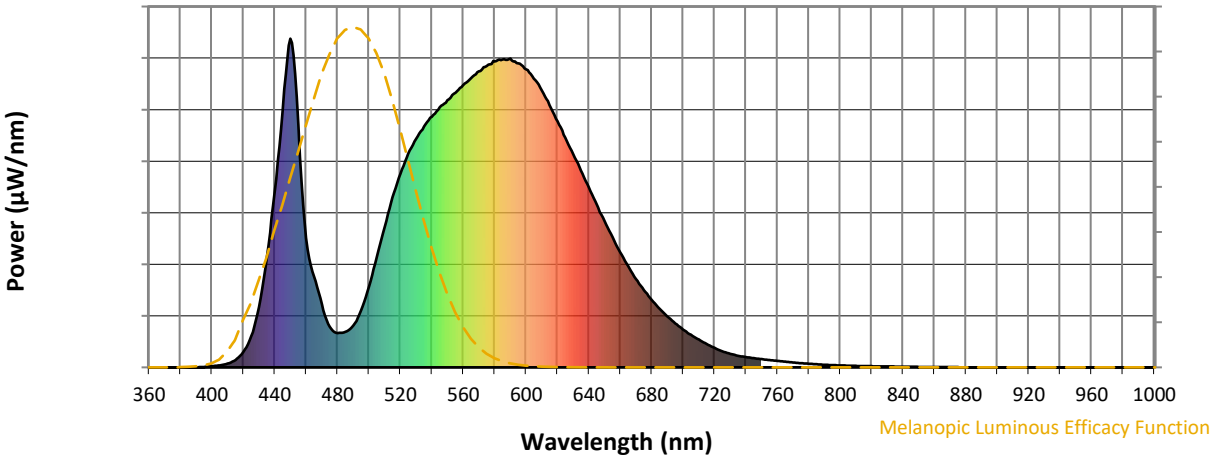

Melanopic Lumens: NR **M/P: 2.76**

λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)	λ (nm)	Power W^/nm	Lumens (ϕ/nm)
360	0	NR	490	127	NR	620	748	NR	750	25	NR	880	0	NR
365	0	NR	495	173	NR	625	699	NR	755	22	NR	885	0	NR
370	0	NR	500	246	NR	630	648	NR	760	20	NR	890	0	NR
375	0	NR	505	335	NR	635	599	NR	765	17	NR	895	0	NR
380	0	NR	510	427	NR	640	547	NR	770	15	NR	900	0	NR
385	0	NR	515	517	NR	645	495	NR	775	13	NR	905	0	NR
390	0	NR	520	589	NR	650	445	NR	780	11	NR	910	0	NR
395	1	NR	525	649	NR	655	396	NR	785	9	NR	915	0	NR
400	4	NR	530	695	NR	660	349	NR	790	8	NR	920	0	NR
405	6	NR	535	733	NR	665	308	NR	795	7	NR	925	0	NR
410	11	NR	540	763	NR	670	269	NR	800	6	NR	930	0	NR
415	23	NR	545	792	NR	675	235	NR	805	5	NR	935	0	NR
420	46	NR	550	813	NR	680	205	NR	810	5	NR	940	0	NR
425	95	NR	555	835	NR	685	178	NR	815	4	NR	945	0	NR
430	183	NR	560	859	NR	690	155	NR	820	3	NR	950	0	NR
435	338	NR	565	880	NR	695	134	NR	825	3	NR	955	0	NR
440	534	NR	570	900	NR	700	115	NR	830	3	NR	960	0	NR
445	782	NR	575	918	NR	705	99	NR	835	2	NR	965	0	NR
450	1000	NR	580	931	NR	710	84	NR	840	2	NR	970	0	NR
455	739	NR	585	937	NR	715	71	NR	845	2	NR	975	0	NR
460	393	NR	590	939	NR	720	59	NR	850	1	NR	980	0	NR
465	276	NR	595	925	NR	725	49	NR	855	1	NR	985	0	NR
470	190	NR	600	907	NR	730	41	NR	860	1	NR	990	0	NR
475	123	NR	605	878	NR	735	35	NR	865	1	NR	995	0	NR
480	105	NR	610	842	NR	740	31	NR	870	1	NR	1000	0	NR
485	108	NR	615	797	NR	745	28	NR	875	1	NR			


REPORT NUMBER: SP1-2407-176-5

TM-30-18


Summary


R_f = 75.6
R_g = 94.8
CIE R_a = 72.9
R_9 = -21.5


Spectral Power Distribution Comparison

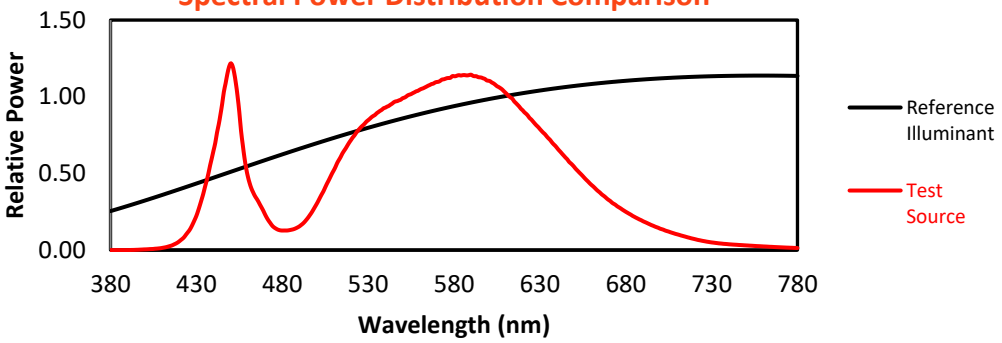


Color Vector Graphics

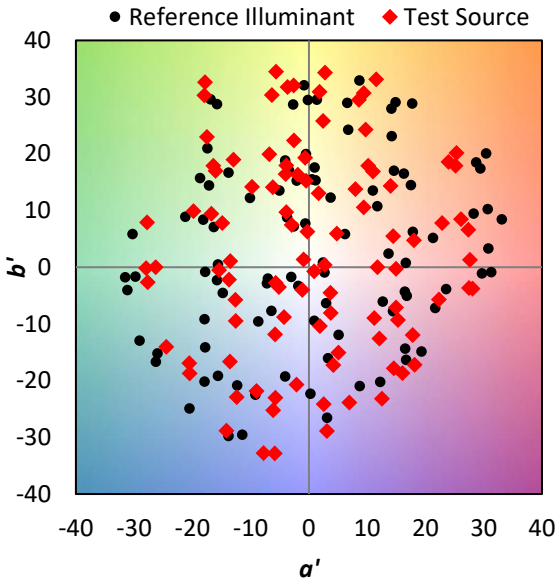

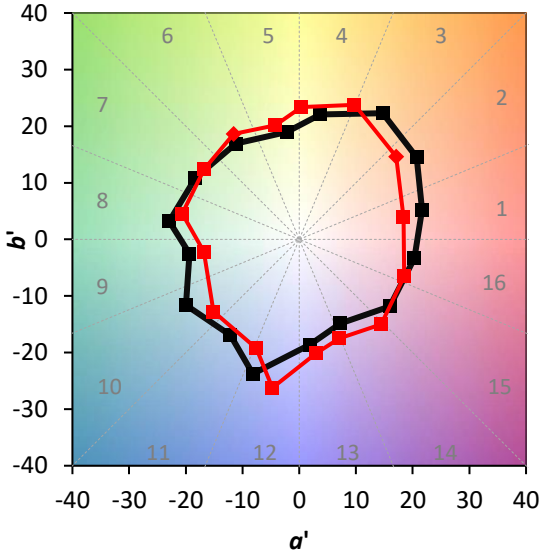

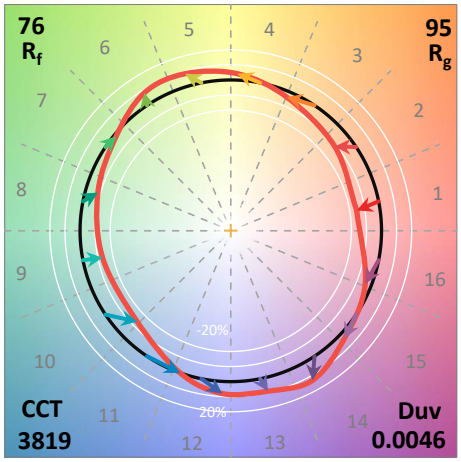

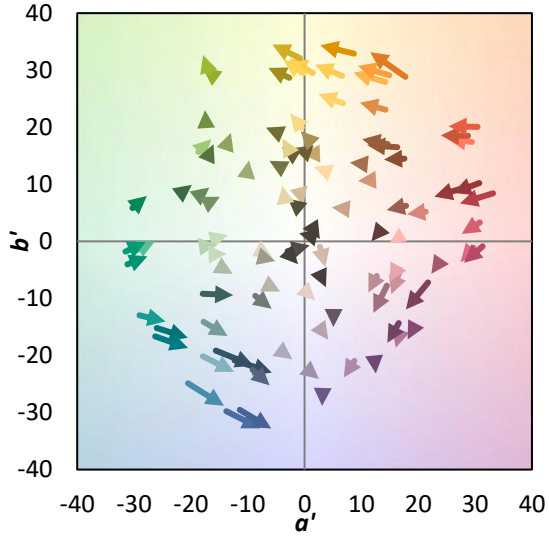


REPORT NUMBER: SP1-2407-176-5

TM-30-18

Individual Sample Fidelity Index ($R_{f,i}$)


CES01 = 85	CES26 = 65	CES51 = 89	CES76 = 53
CES02 = 61	CES27 = 89	CES52 = 88	CES77 = 71
CES03 = 30	CES28 = 82	CES53 = 78	CES78 = 56
CES04 = 70	CES29 = 68	CES54 = 85	CES79 = 83
CES05 = 48	CES30 = 84	CES55 = 84	CES80 = 79
CES06 = 50	CES31 = 71	CES56 = 74	CES81 = 79
CES07 = 40	CES32 = 63	CES57 = 73	CES82 = 91
CES08 = 39	CES33 = 79	CES58 = 74	CES83 = 90
CES09 = 29	CES34 = 72	CES59 = 86	CES84 = 87
CES10 = 74	CES35 = 84	CES60 = 90	CES85 = 78
CES11 = 57	CES36 = 91	CES61 = 84	CES86 = 74
CES12 = 63	CES37 = 79	CES62 = 85	CES87 = 78
CES13 = 42	CES38 = 93	CES63 = 73	CES88 = 82
CES14 = 74	CES39 = 96	CES64 = 67	CES89 = 72
CES15 = 71	CES40 = 91	CES65 = 64	CES90 = 81
CES16 = 47	CES41 = 93	CES66 = 60	CES91 = 75
CES17 = 49	CES42 = 80	CES67 = 57	CES92 = 62
CES18 = 56	CES43 = 78	CES68 = 66	CES93 = 77
CES19 = 72	CES44 = 99	CES69 = 75	CES94 = 57
CES20 = 65	CES45 = 86	CES70 = 58	CES95 = 68
CES21 = 86	CES46 = 83	CES71 = 51	CES96 = 78
CES22 = 78	CES47 = 86	CES72 = 84	CES97 = 85
CES23 = 92	CES48 = 78	CES73 = 49	CES98 = 77
CES24 = 91	CES49 = 81	CES74 = 93	CES99 = 67
CES25 = 72	CES50 = 88	CES75 = 53	

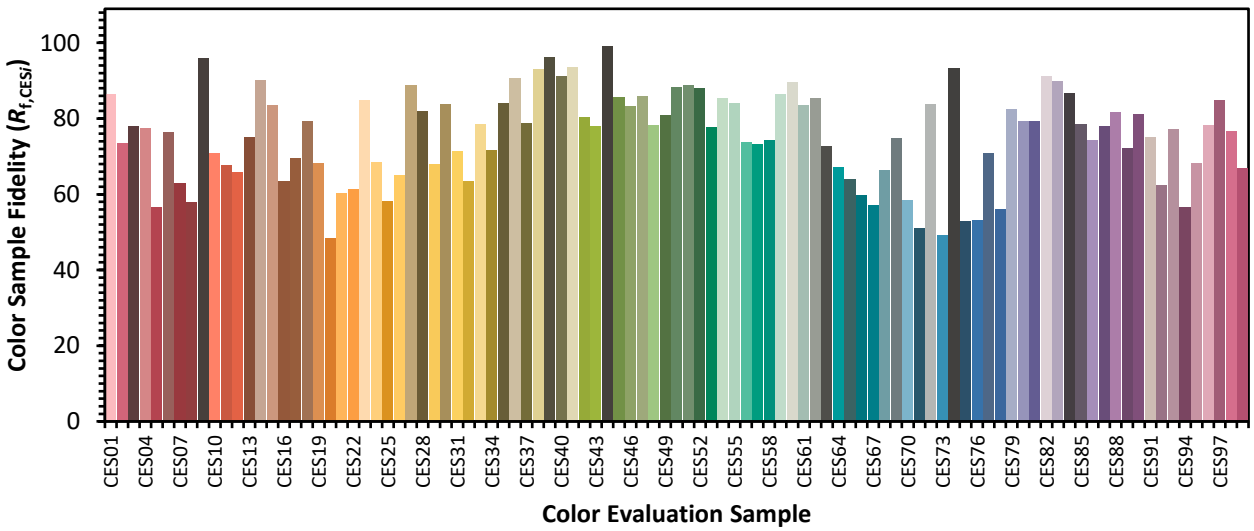



REPORT NUMBER: SP1-2407-176-5

TM-30-18

Color Rendition by Hue-Angle Bin

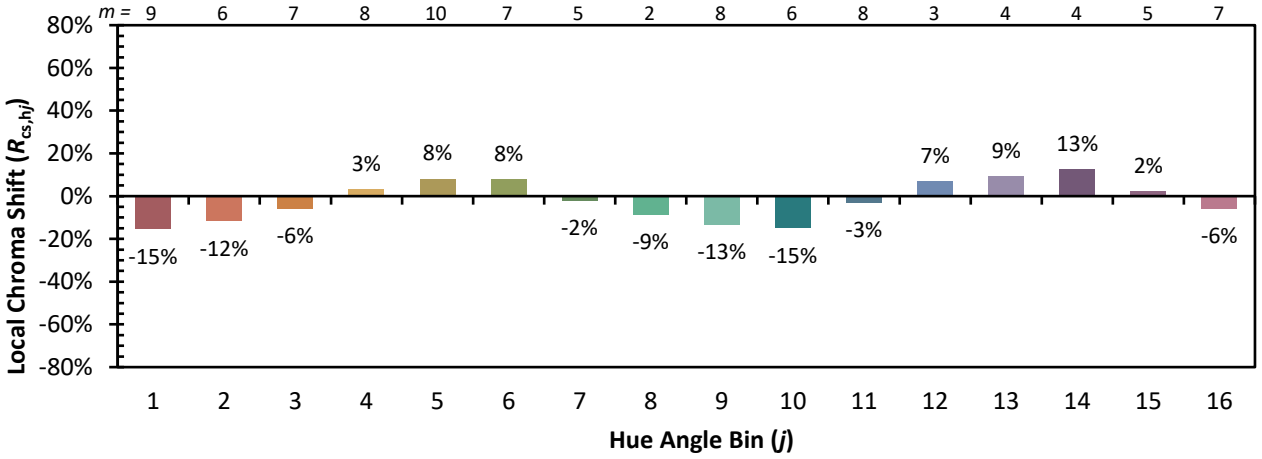

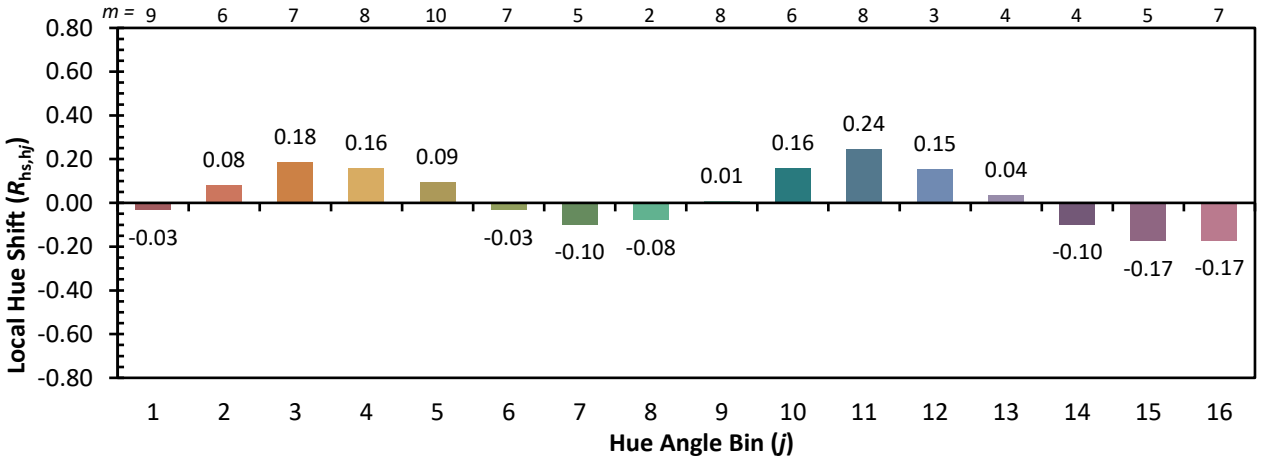


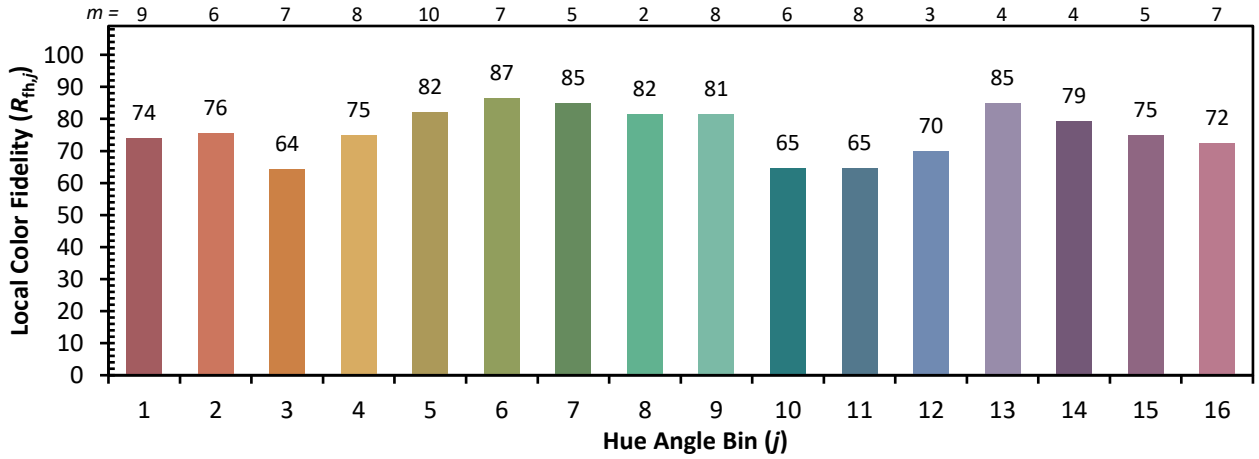


REPORT NUMBER: SP1-2407-176-5

TM-30-18

Measure Comparisons

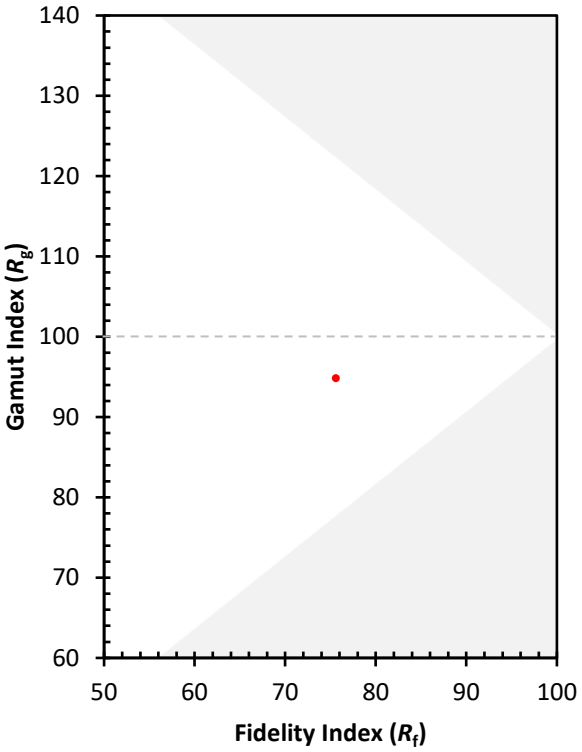

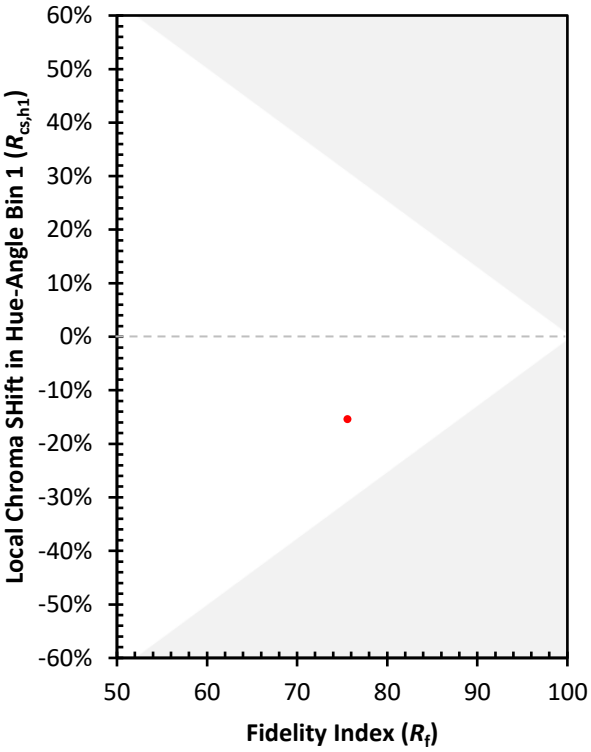

(END OF REPORT)