Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P821276

Luminaire Tested: **TT-D1-740-24VDC-WQ**

Issue Date: 2/12/2020

Report Generated By 670245763

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

**Test Information**

| | |
|---|---|
| Test Method: | LM-79-08 |
| Report Number: | P821276 |
| | TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1908-473-14) |
| Test Lab: | INNOVATIONS CENTER |
| Issue Date: | 2/12/2020 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS (FORMERLY EATON) |
| Product Line: | McGRAW-EDISON |
| Catalog Number: | TT-D1-740-24VDC-WQ |
| Description: | TOPTIER LED PARKING GARAGE LUMINAIRE |
| | 4000K, 70 CRI LEDS AND WIDE DISTRIBUTION |
| Light Source: | - |
| Ballast/Driver: | ELECTRONIC DRIVER |

**Summary**

| | |
|---|---|
| Lumens per Lamp: | N/A |
| Luminaire Lumens: | 3874 lumens |
| Efficiency: | N/A |
| Efficacy: | 138.4 lumens/watt |
| Luminous Opening: | Circular (Dia: 1.12' x H: 0') |
| IES Classification: | Type V - Short |
| BUG Rating: | B2 - U0 - G1 |


| | |
|---|---|
| Input Watts (W): | 28 |
| Input Voltage (V): | NR |
| Input Current (Ain): | NR |
| Voltage Rise (V): | NR |
| Power Factor: | NR |
| Total Harmonic Distortion (THDi): | NR |
| Frequency (hertz): | 60 |
| Stabilization Time: | NR |
| Operation Time: | NR |
| Ambient Temperature (°C): | NR |
| Test Distance: | 25 FT |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P821276
CATALOG NUMBER: TT-D1-740-24VDC-WQ

## Iso-Footcandle Lines of Horizontal Illumination

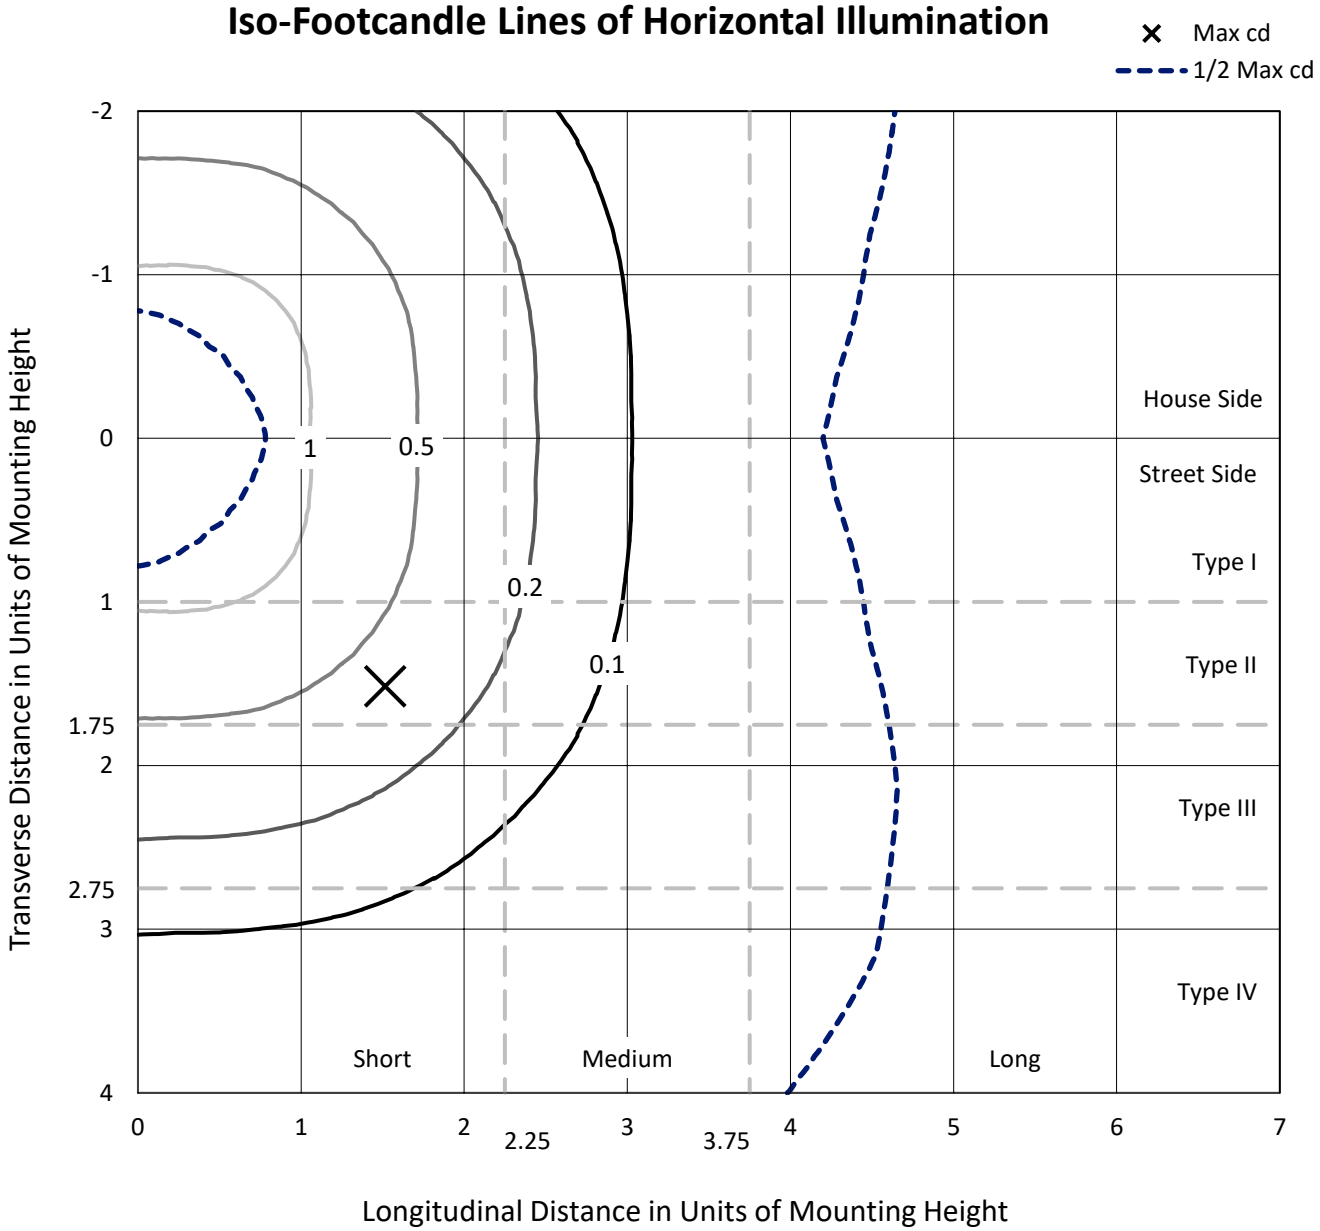



Based on 15 foot mounting height. Maximum calculated value = 1.3 fc
Type V - Short - N/A

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P821276
CATALOG NUMBER: TT-D1-740-24VDC-WQ

## Luminous Intensity Polar Plot

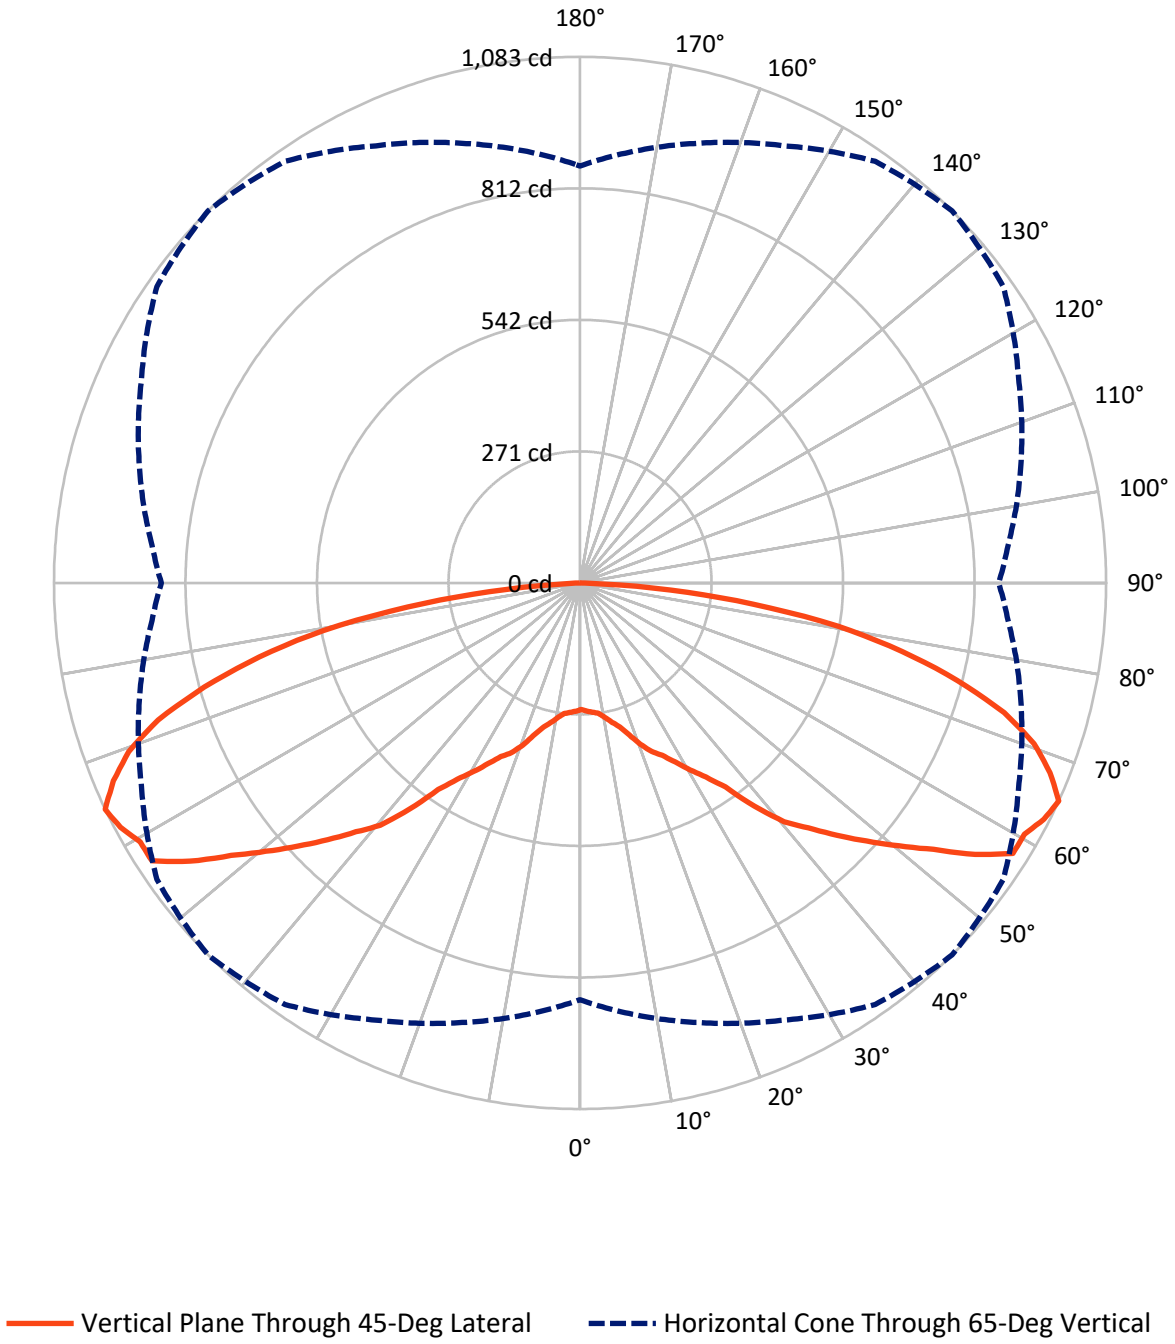

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report


REPORT NUMBER: P821276
CATALOG NUMBER: TT-D1-740-24VDC-WQ

**FLUX DISTRIBUTION:**

| | | Downward | Upward | Total |
|---|---|---|---|---|
| **House Side** | Lumens | 1937.0 | 0.0 | 1937.0 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| **Street Side** | Lumens | 1937.0 | 0.0 | 1937.0 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| **Total** | Lumens | 3874.0 | 0.0 | 3874.0 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

**ZONAL LUMENS:**

| Zone | Lumens | % Fixture |
|---|---|---|
| 0°-10° | 26.0 | 0.7 |
| 10°-20° | 89.4 | 2.3 |
| 20°-30° | 183.6 | 4.7 |
| 30°-40° | 326.2 | 8.4 |
| 40°-50° | 549.9 | 14.2 |
| 50°-60° | 811.2 | 20.9 |
| 60°-70° | 952.0 | 24.6 |
| 70°-80° | 741.7 | 19.1 |
| 80°-90° | 193.9 | 5.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 3874.0 | 100.0 |
| 0°-180° | 3874.0 | 100.0 |

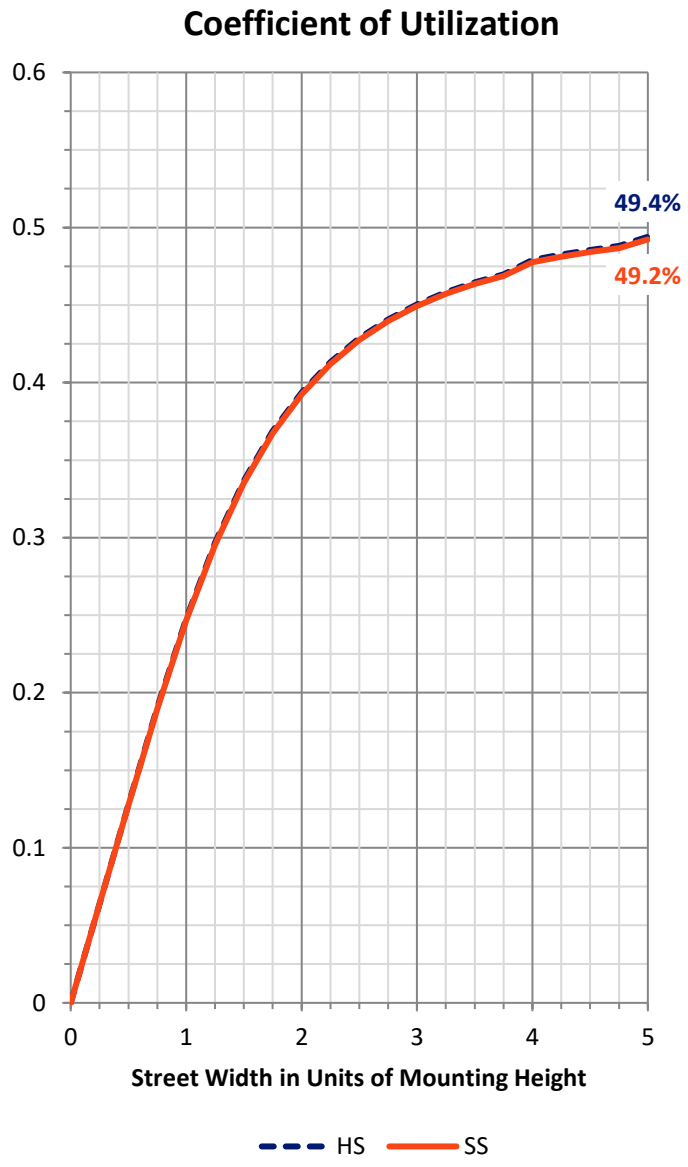

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


Scaled Data Report

REPORT NUMBER: P821276
CATALOG NUMBER: TT-D1-740-24VDC-WQ

## LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | | Lumens | % Fixture | Zone Rating/Lumen Limit B | U | G |
|---|---|---|---|---|---|---|
| FL | (0°-30°) | 149.5 | 3.9 | | | |
| FM | (30°-60°) | 843.7 | 21.8 | | | |
| FH | (60°-80°) | 846.9 | 21.9 | | | G1/1800 |
| FVH | (80°-90°) | 96.9 | 2.5 | | | G1/100 |
| BL | (0°-30°) | 149.5 | 3.9 | B1/500 | | |
| BM | (30°-60°) | 843.7 | 21.8 | B1/1000 | | |
| BH | (60°-80°) | 846.9 | 21.9 | B2/1000 | | G1/1800 |
| BVH | (80°-90°) | 96.9 | 2.5 | | | G1/100 |
| UL | (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH | (100°-180°) | 0.0 | 0.0 | | U0/0 | |

**BUG Rating: B2-U0-G1**
Type V Short

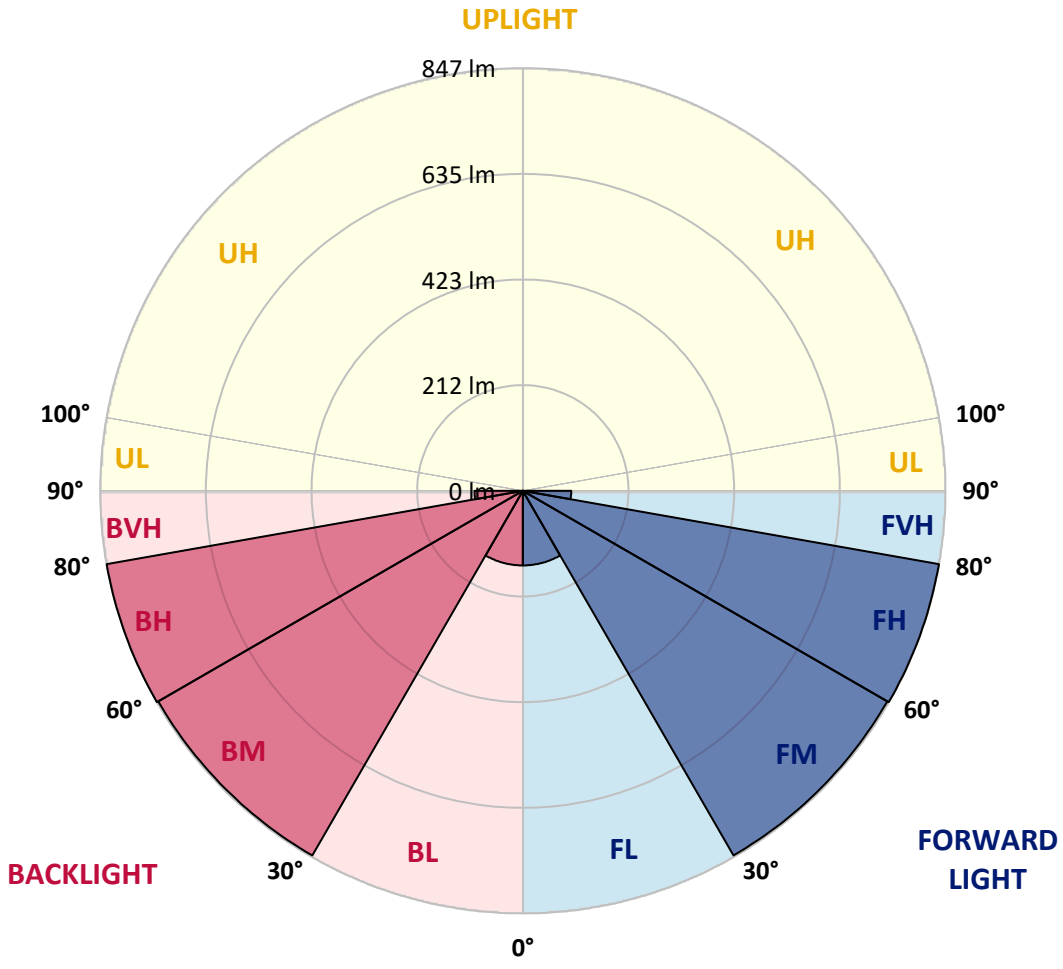

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

REPORT NUMBER: P821276
CATALOG NUMBER: TT-D1-740-24VDC-WQ

**CANDELA DISTRIBUTION (FULL):**

| | 0° | 5° | 15° | 25° | 35° | 45° | 55° | 65° | 75° | 85° | 90° |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0° | 260.7 | 260.7 | 260.7 | 260.7 | 260.7 | *260.7* | 260.7 | 260.7 | 260.7 | 260.7 | 260.7 |
| 2.5° | 265.0 | 265.0 | 265.0 | 264.4 | 264.4 | *264.4* | 264.4 | 265.0 | 265.0 | 265.0 | 265.0 |
| 5° | 271.1 | 271.1 | 269.9 | 268.7 | 267.4 | *267.4* | 268.0 | 268.7 | 269.3 | 270.5 | 270.5 |
| 7.5° | 274.7 | 274.7 | 274.1 | 272.9 | 271.1 | *271.1* | 271.7 | 272.9 | 273.5 | 273.5 | 272.9 |
| 10° | 279.6 | 280.2 | 282.1 | 282.7 | 281.4 | *281.4* | 282.1 | 282.7 | 281.4 | 279.6 | 279.6 |
| 12.5° | 291.2 | 291.8 | 294.2 | 296.1 | 296.1 | *294.8* | 295.5 | 296.7 | 293.6 | 290.6 | 291.2 |
| 15° | 307.6 | 307.6 | 308.2 | 310.1 | 308.9 | *307.6* | 308.9 | 309.5 | 307.6 | 307.0 | 308.2 |
| 17.5° | 329.6 | 329.6 | 325.9 | 329.0 | 329.6 | *329.0* | 330.2 | 327.1 | 325.3 | 327.7 | 329.0 |
| 20° | 353.3 | 350.9 | 349.1 | 351.5 | 356.4 | *354.5* | 357.0 | 350.3 | 348.5 | 349.7 | 350.3 |
| 22.5° | 368.6 | 370.4 | 371.6 | 372.8 | 379.5 | *377.1* | 379.5 | 372.2 | 371.0 | 368.6 | 366.7 |
| 25° | 386.8 | 388.7 | 396.0 | 392.3 | 396.6 | *392.9* | 396.0 | 391.7 | 394.1 | 386.8 | 386.8 |
| 27.5° | 407.5 | 411.2 | 415.5 | 413.6 | 419.1 | *417.3* | 419.1 | 413.0 | 413.6 | 410.6 | 409.4 |
| 30° | 435.6 | 435.6 | 434.4 | 438.0 | 447.8 | *446.5* | 447.1 | 439.2 | 433.7 | 434.4 | 436.8 |
| 32.5° | 463.6 | 459.9 | 461.8 | 472.7 | 478.8 | *476.4* | 477.6 | 473.9 | 461.8 | 459.3 | 461.2 |
| 35° | 489.8 | 495.3 | 499.5 | 508.7 | 517.2 | *516.0* | 515.4 | 509.3 | 501.4 | 491.6 | 488.6 |
| 37.5° | 530.6 | 536.7 | 548.3 | 564.7 | 579.9 | *583.0* | 575.1 | 567.2 | 548.9 | 534.9 | 527.6 |
| 40° | 584.2 | 584.8 | 598.2 | 629.9 | 643.9 | *646.3* | 642.1 | 628.7 | 600.7 | 584.8 | 584.2 |
| 42.5° | 631.1 | 626.9 | 648.8 | 675.6 | 688.4 | *689.6* | 686.6 | 675.6 | 648.8 | 626.2 | 630.5 |
| 45° | 667.7 | 667.7 | 693.9 | 715.2 | 735.9 | *740.8* | 735.3 | 712.1 | 694.5 | 668.3 | 666.5 |
| 47.5° | 701.2 | 710.3 | 732.2 | 758.4 | 787.7 | *794.4* | 787.7 | 760.3 | 730.4 | 710.9 | 700.6 |
| 50° | 741.4 | 752.3 | 768.2 | 809.0 | 841.9 | *851.0* | 841.3 | 811.4 | 768.2 | 751.7 | 745.6 |
| 52.5° | 788.3 | 797.4 | 822.4 | 873.6 | 897.9 | *911.3* | 903.4 | 874.8 | 823.6 | 798.6 | 793.8 |
| 55° | 844.3 | 835.8 | 874.8 | 924.1 | 969.2 | *986.9* | 971.0 | 925.4 | 880.9 | 835.8 | 844.3 |
| 57.5° | 873.0 | 863.2 | 918.0 | 965.0 | 1027.7 | *1050.8* | 1031.4 | 968.6 | 918.0 | 866.3 | 872.4 |
| 60° | 875.4 | 879.7 | 921.1 | 997.8 | 1041.1 | *1050.8* | 1044.8 | 1003.3 | 922.9 | 883.3 | 871.7 |
| 62.5° | 868.1 | 894.3 | 929.6 | 1008.8 | 1047.8 | *1071.6* | 1050.8 | 1010.0 | 933.3 | 898.6 | 868.7 |
| 65° | *858.3* | *884.5* | *936.9* | *993.0* | *1059.4* | *1083.1* | *1063.6* | *996.0* | *939.4* | *884.5* | *862.0* |
| 67.5° | 841.3 | 832.2 | 896.7 | 971.7 | 1029.5 | *1043.5* | 1031.4 | 972.9 | 896.1 | 830.9 | 843.1 |
| 70° | 787.1 | 779.2 | 834.6 | 916.8 | 972.3 | *991.8* | 977.1 | 918.0 | 835.8 | 781.0 | 788.3 |
| 72.5° | 706.7 | 709.1 | 762.7 | 841.3 | 901.0 | *913.2* | 905.3 | 840.7 | 765.7 | 712.1 | 702.4 |
| 75° | 612.8 | 618.9 | 670.1 | 741.4 | 795.6 | *802.9* | 795.0 | 744.4 | 669.5 | 622.6 | 609.8 |
| 77.5° | 503.8 | 512.9 | 554.4 | 625.6 | 661.6 | *678.0* | 665.2 | 627.5 | 557.4 | 515.4 | 502.6 |
| 80° | 390.5 | 393.5 | 422.8 | 480.0 | 527.6 | *538.5* | 526.3 | 481.9 | 426.4 | 394.8 | 385.6 |
| 82.5° | 255.9 | 260.7 | 286.9 | 330.8 | 361.9 | *358.8* | 361.9 | 327.1 | 290.0 | 259.5 | 244.3 |
| 85° | 113.9 | 123.7 | 141.3 | 162.0 | 182.1 | *187.6* | 182.1 | 164.5 | 141.3 | 121.2 | 118.8 |
| 87.5° | 7.9 | 9.1 | 11.0 | 11.6 | 12.8 | *9.7* | 9.7 | 9.7 | 8.5 | 9.7 | 7.9 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | *0.0* | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

# LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Streetworks

Report Number: SP1-2407-176-5

Test Date: 09/24/2024

Luminaire Tested: MEM2-HTN-VA-30-740-U-WQ

Data in this report applies to families of products including MEM2-HTN-VA-30-740-U-WQ


Report Generated By FNC07603 / LDUCLS01DT446
Version: v7.04

## Test Information

| | |
|---|---|
| Test Method: | LM-79-2019 |
| Report Number: | SP1-2407-176-5 |
| Test Lab: | COOPER LIGHTING SOLUTIONS |
| Photometer: | SP1 - 76IN SPHERE |
| Measurement Geometry: | 4π |
| Issue Date: | 09/27/2024 |
| Manufacturer: | COOPER LIGHTING SOLUTIONS |
| Product Line: | Streetworks |
| Catalog Number: | **MEM2-HTN-VA-30-740-U-WQ** |
| Description: | EPIC MODERN VISUAL COMFORT 30W WAVESTREAM WIDE |

## Spectral Parameters

| | | | | | |
|---|---|---|---|---|---|
| CCT (K): | 3819 | CRI (Ra): | 72.9 | | |
| CIE u': | 0.2261 | R1: | 70.1 | R9: | -21.5 |
| CIE v': | 0.5108 | R2: | 78.4 | R10: | 48.5 |
| Duv: | 0.0046 | R3: | 85.0 | R11: | 68.4 |
| CIE x: | 0.3926 | R4: | 72.9 | R12: | 39.0 |
| CIE y: | 0.3942 | R5: | 69.1 | R13: | 71.1 |
| CIE z: | 0.2132 | R6: | 69.2 | R14: | 91.3 |
| Peak Wavelength (nm): | 450 | R7: | 82.8 | R15: | 63.2 |
| Dominant Wavelength (nm): | 577 | R8: | 55.4 | | |
| Purity: | 36.15483 | | | | |
| Rf: | 75.6 | | | | |
| Rg: | 94.8 | | | | |

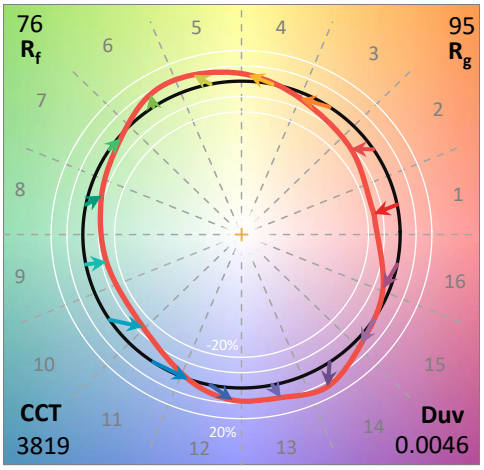


## Test Conditions


| | |
|---|---|
| Stabilization Time: | 30M |
| Operation Time: | 1H 30M |
| Sphere Temperature (°C): | 25.2 |

REPORT NUMBER: SP1-2407-176-5


| Measurement and Test Equipment | | | |
|---|---|---|---|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-176-5

## CIE 1931 Chromaticity Diagram

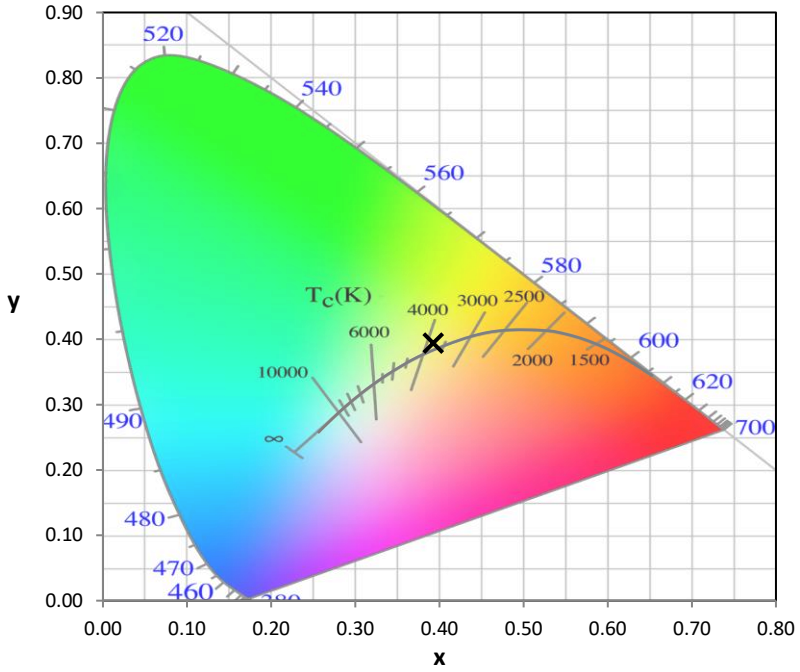


## CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

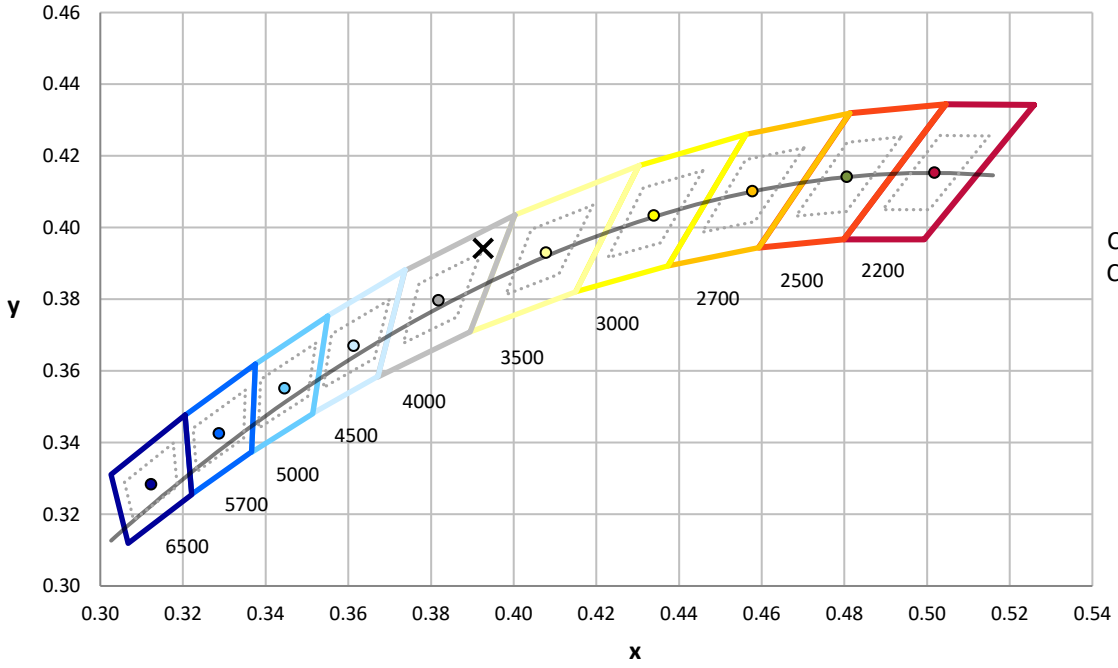



CCT = 3819K
CIE x = 0.3926
CIE y = 0.3942
Duv = 0.0046

Point lies inside the ANSI 4000K 7-step quadrangle

REPORT NUMBER: SP1-2407-176-5

## Photopic Flux vs. Wavelength

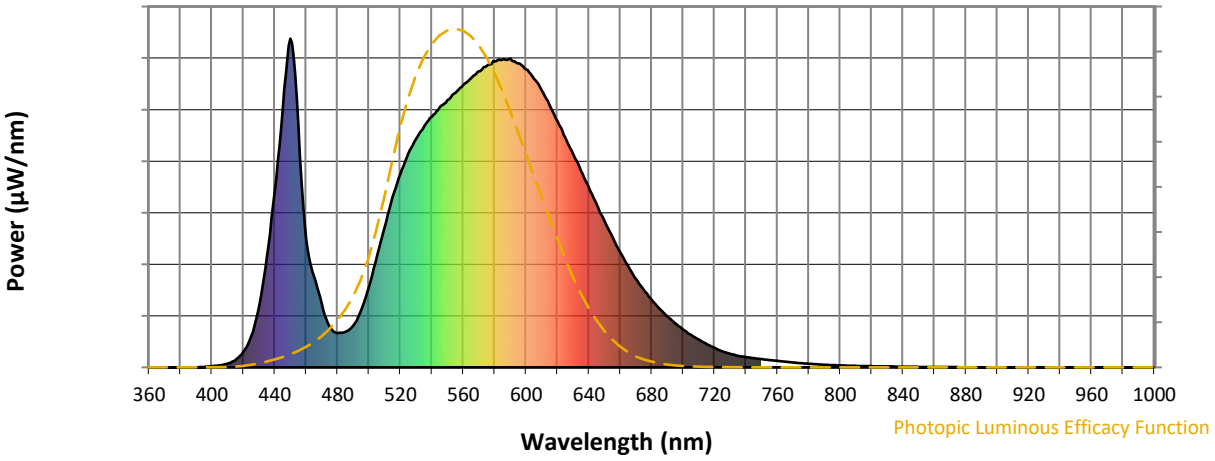



## Photopic Lumens: NR

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 127 | NR | 620 | 748 | NR | 750 | 25 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 173 | NR | 625 | 699 | NR | 755 | 22 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 246 | NR | 630 | 648 | NR | 760 | 20 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 335 | NR | 635 | 599 | NR | 765 | 17 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 427 | NR | 640 | 547 | NR | 770 | 15 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 517 | NR | 645 | 495 | NR | 775 | 13 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 589 | NR | 650 | 445 | NR | 780 | 11 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 649 | NR | 655 | 396 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 695 | NR | 660 | 349 | NR | 790 | 8 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 733 | NR | 665 | 308 | NR | 795 | 7 | NR | 925 | 0 | NR |
| 410 | 11 | NR | 540 | 763 | NR | 670 | 269 | NR | 800 | 6 | NR | 930 | 0 | NR |
| 415 | 23 | NR | 545 | 792 | NR | 675 | 235 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 46 | NR | 550 | 813 | NR | 680 | 205 | NR | 810 | 5 | NR | 940 | 0 | NR |
| 425 | 95 | NR | 555 | 835 | NR | 685 | 178 | NR | 815 | 4 | NR | 945 | 0 | NR |
| 430 | 183 | NR | 560 | 859 | NR | 690 | 155 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 338 | NR | 565 | 880 | NR | 695 | 134 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 534 | NR | 570 | 900 | NR | 700 | 115 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 782 | NR | 575 | 918 | NR | 705 | 99 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 1000 | NR | 580 | 931 | NR | 710 | 84 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 739 | NR | 585 | 937 | NR | 715 | 71 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 393 | NR | 590 | 939 | NR | 720 | 59 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 276 | NR | 595 | 925 | NR | 725 | 49 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 190 | NR | 600 | 907 | NR | 730 | 41 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 123 | NR | 605 | 878 | NR | 735 | 35 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 105 | NR | 610 | 842 | NR | 740 | 31 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 108 | NR | 615 | 797 | NR | 745 | 28 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-176-5

## Scotopic Flux vs. Wavelength

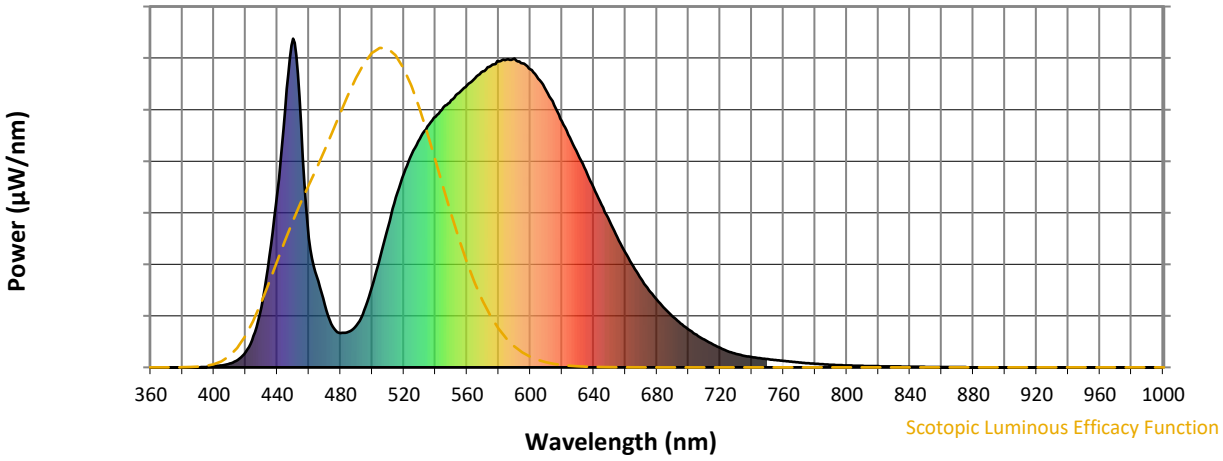



**Scotopic Lumens: NR** **S/P: 1.45**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 127 | NR | 620 | 748 | NR | 750 | 25 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 173 | NR | 625 | 699 | NR | 755 | 22 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 246 | NR | 630 | 648 | NR | 760 | 20 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 335 | NR | 635 | 599 | NR | 765 | 17 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 427 | NR | 640 | 547 | NR | 770 | 15 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 517 | NR | 645 | 495 | NR | 775 | 13 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 589 | NR | 650 | 445 | NR | 780 | 11 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 649 | NR | 655 | 396 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 695 | NR | 660 | 349 | NR | 790 | 8 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 733 | NR | 665 | 308 | NR | 795 | 7 | NR | 925 | 0 | NR |
| 410 | 11 | NR | 540 | 763 | NR | 670 | 269 | NR | 800 | 6 | NR | 930 | 0 | NR |
| 415 | 23 | NR | 545 | 792 | NR | 675 | 235 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 46 | NR | 550 | 813 | NR | 680 | 205 | NR | 810 | 5 | NR | 940 | 0 | NR |
| 425 | 95 | NR | 555 | 835 | NR | 685 | 178 | NR | 815 | 4 | NR | 945 | 0 | NR |
| 430 | 183 | NR | 560 | 859 | NR | 690 | 155 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 338 | NR | 565 | 880 | NR | 695 | 134 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 534 | NR | 570 | 900 | NR | 700 | 115 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 782 | NR | 575 | 918 | NR | 705 | 99 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 1000 | NR | 580 | 931 | NR | 710 | 84 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 739 | NR | 585 | 937 | NR | 715 | 71 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 393 | NR | 590 | 939 | NR | 720 | 59 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 276 | NR | 595 | 925 | NR | 725 | 49 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 190 | NR | 600 | 907 | NR | 730 | 41 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 123 | NR | 605 | 878 | NR | 735 | 35 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 105 | NR | 610 | 842 | NR | 740 | 31 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 108 | NR | 615 | 797 | NR | 745 | 28 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-176-5

## Melanopic Flux vs. Wavelength

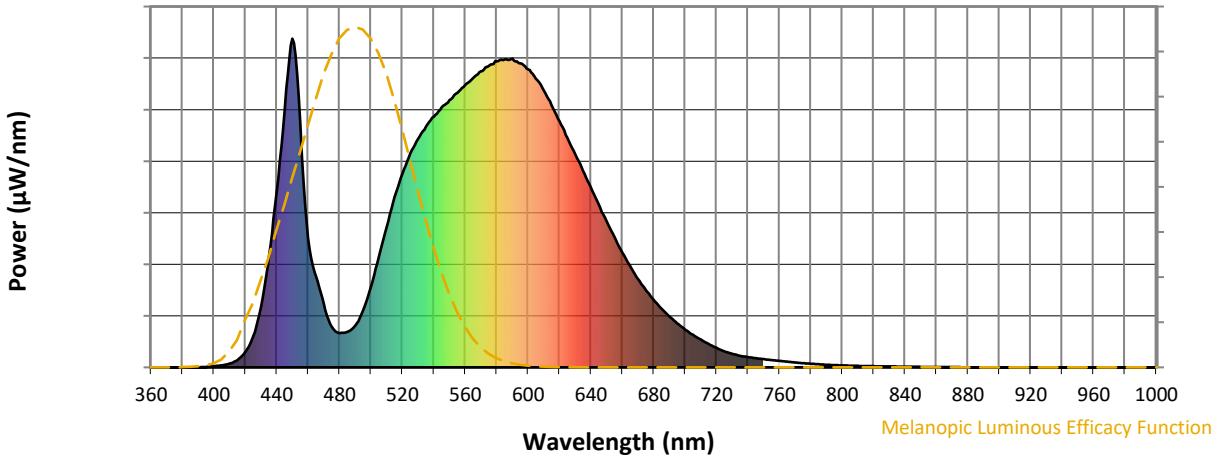


**Melanopic Lumens: NR** **M/P: 2.76**

| λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) | λ (nm) | Power W^/nm | Lumens (ϕ/nm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 360 | 0 | NR | 490 | 127 | NR | 620 | 748 | NR | 750 | 25 | NR | 880 | 0 | NR |
| 365 | 0 | NR | 495 | 173 | NR | 625 | 699 | NR | 755 | 22 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 246 | NR | 630 | 648 | NR | 760 | 20 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 335 | NR | 635 | 599 | NR | 765 | 17 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 427 | NR | 640 | 547 | NR | 770 | 15 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 517 | NR | 645 | 495 | NR | 775 | 13 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 589 | NR | 650 | 445 | NR | 780 | 11 | NR | 910 | 0 | NR |
| 395 | 1 | NR | 525 | 649 | NR | 655 | 396 | NR | 785 | 9 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 695 | NR | 660 | 349 | NR | 790 | 8 | NR | 920 | 0 | NR |
| 405 | 6 | NR | 535 | 733 | NR | 665 | 308 | NR | 795 | 7 | NR | 925 | 0 | NR |
| 410 | 11 | NR | 540 | 763 | NR | 670 | 269 | NR | 800 | 6 | NR | 930 | 0 | NR |
| 415 | 23 | NR | 545 | 792 | NR | 675 | 235 | NR | 805 | 5 | NR | 935 | 0 | NR |
| 420 | 46 | NR | 550 | 813 | NR | 680 | 205 | NR | 810 | 5 | NR | 940 | 0 | NR |
| 425 | 95 | NR | 555 | 835 | NR | 685 | 178 | NR | 815 | 4 | NR | 945 | 0 | NR |
| 430 | 183 | NR | 560 | 859 | NR | 690 | 155 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 338 | NR | 565 | 880 | NR | 695 | 134 | NR | 825 | 3 | NR | 955 | 0 | NR |
| 440 | 534 | NR | 570 | 900 | NR | 700 | 115 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 782 | NR | 575 | 918 | NR | 705 | 99 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 1000 | NR | 580 | 931 | NR | 710 | 84 | NR | 840 | 2 | NR | 970 | 0 | NR |
| 455 | 739 | NR | 585 | 937 | NR | 715 | 71 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 393 | NR | 590 | 939 | NR | 720 | 59 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 276 | NR | 595 | 925 | NR | 725 | 49 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 190 | NR | 600 | 907 | NR | 730 | 41 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 123 | NR | 605 | 878 | NR | 735 | 35 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 105 | NR | 610 | 842 | NR | 740 | 31 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 108 | NR | 615 | 797 | NR | 745 | 28 | NR | 875 | 1 | NR | | | |


REPORT NUMBER: SP1-2407-176-5

# TM-30-18


## Summary


$R_f$ = 75.6
$R_g$ = 94.8
CIE $R_a$ = 72.9
$R_9$ = -21.5


## Spectral Power Distribution Comparison

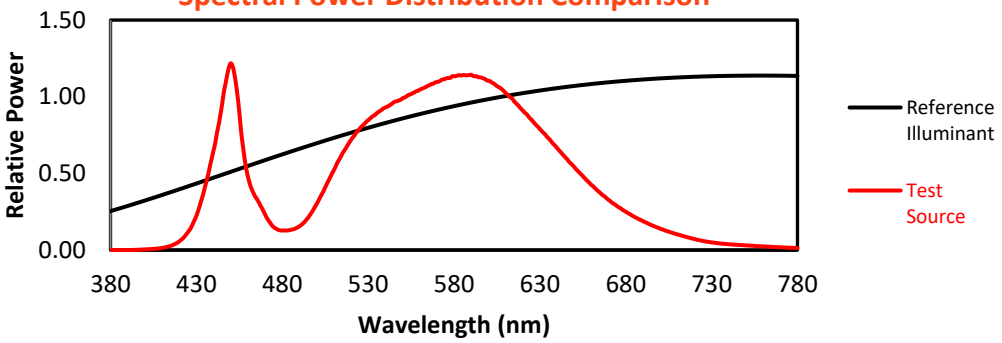



## Color Vector Graphics

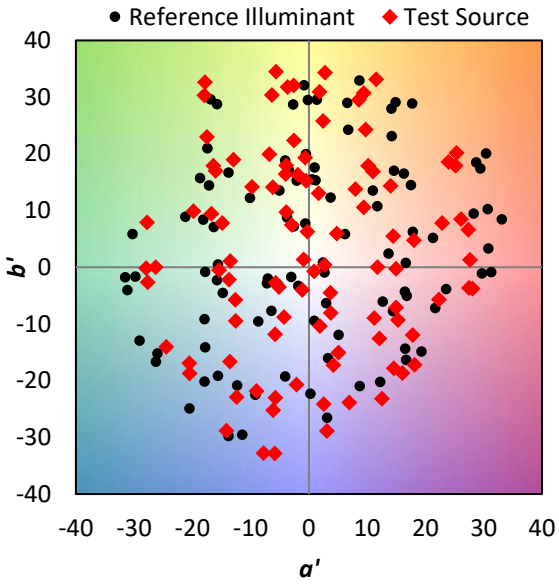

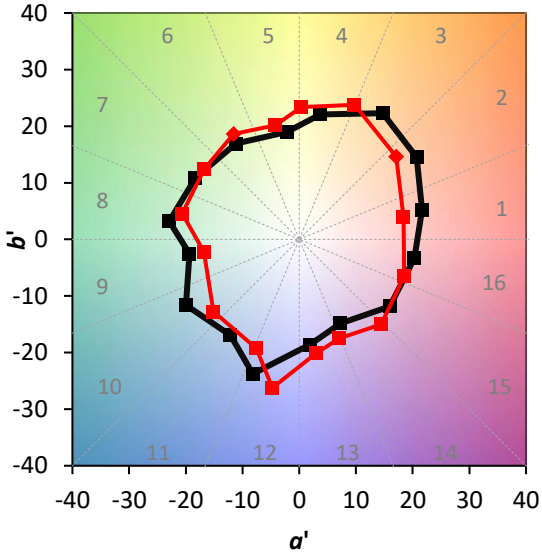


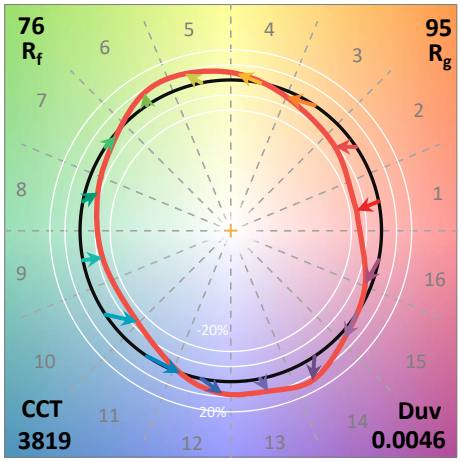
REPORT NUMBER: SP1-2407-176-5
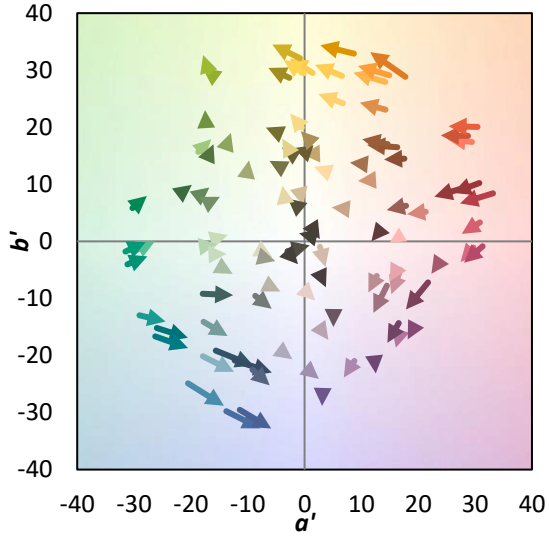
# TM-30-18

**Individual Sample Fidelity Index ($R_{f,i}$)**


| | | | |
|---|---|---|---|
| CES01 = 85 | CES26 = 65 | CES51 = 89 | CES76 = 53 |
| CES02 = 61 | CES27 = 89 | CES52 = 88 | CES77 = 71 |
| CES03 = 30 | CES28 = 82 | CES53 = 78 | CES78 = 56 |
| CES04 = 70 | CES29 = 68 | CES54 = 85 | CES79 = 83 |
| CES05 = 48 | CES30 = 84 | CES55 = 84 | CES80 = 79 |
| CES06 = 50 | CES31 = 71 | CES56 = 74 | CES81 = 79 |
| CES07 = 40 | CES32 = 63 | CES57 = 73 | CES82 = 91 |
| CES08 = 39 | CES33 = 79 | CES58 = 74 | CES83 = 90 |
| CES09 = 29 | CES34 = 72 | CES59 = 86 | CES84 = 87 |
| CES10 = 74 | CES35 = 84 | CES60 = 90 | CES85 = 78 |
| CES11 = 57 | CES36 = 91 | CES61 = 84 | CES86 = 74 |
| CES12 = 63 | CES37 = 79 | CES62 = 85 | CES87 = 78 |
| CES13 = 42 | CES38 = 93 | CES63 = 73 | CES88 = 82 |
| CES14 = 74 | CES39 = 96 | CES64 = 67 | CES89 = 72 |
| CES15 = 71 | CES40 = 91 | CES65 = 64 | CES90 = 81 |
| CES16 = 47 | CES41 = 93 | CES66 = 60 | CES91 = 75 |
| CES17 = 49 | CES42 = 80 | CES67 = 57 | CES92 = 62 |
| CES18 = 56 | CES43 = 78 | CES68 = 66 | CES93 = 77 |
| CES19 = 72 | CES44 = 99 | CES69 = 75 | CES94 = 57 |
| CES20 = 65 | CES45 = 86 | CES70 = 58 | CES95 = 68 |
| CES21 = 86 | CES46 = 83 | CES71 = 51 | CES96 = 78 |
| CES22 = 78 | CES47 = 86 | CES72 = 84 | CES97 = 85 |
| CES23 = 92 | CES48 = 78 | CES73 = 49 | CES98 = 77 |
| CES24 = 91 | CES49 = 81 | CES74 = 93 | CES99 = 67 |
| CES25 = 72 | CES50 = 88 | CES75 = 53 | |

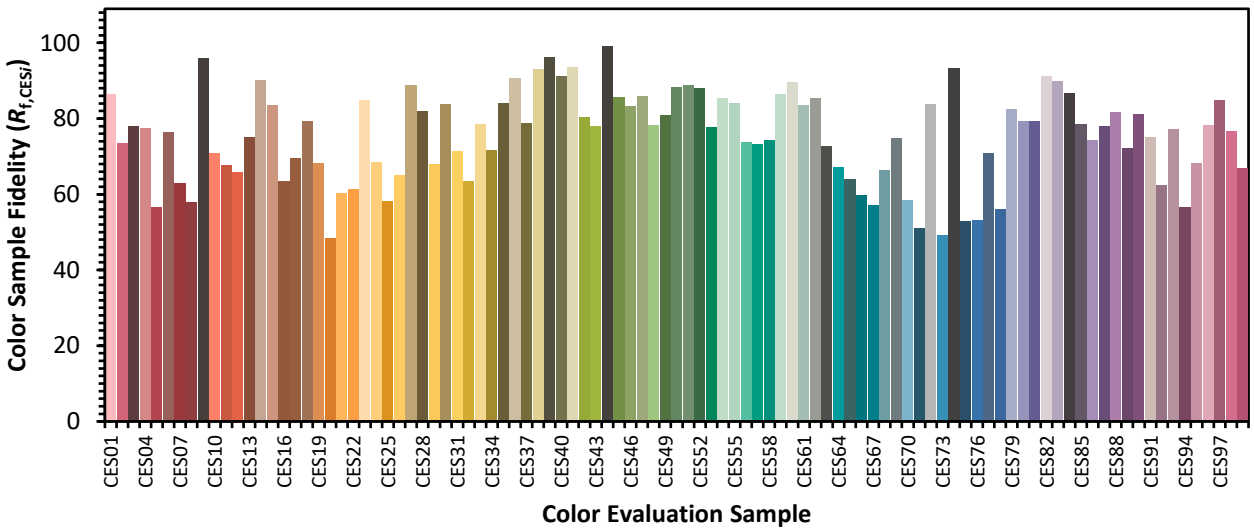



REPORT NUMBER: SP1-2407-176-5

**TM-30-18**

## Color Rendition by Hue-Angle Bin

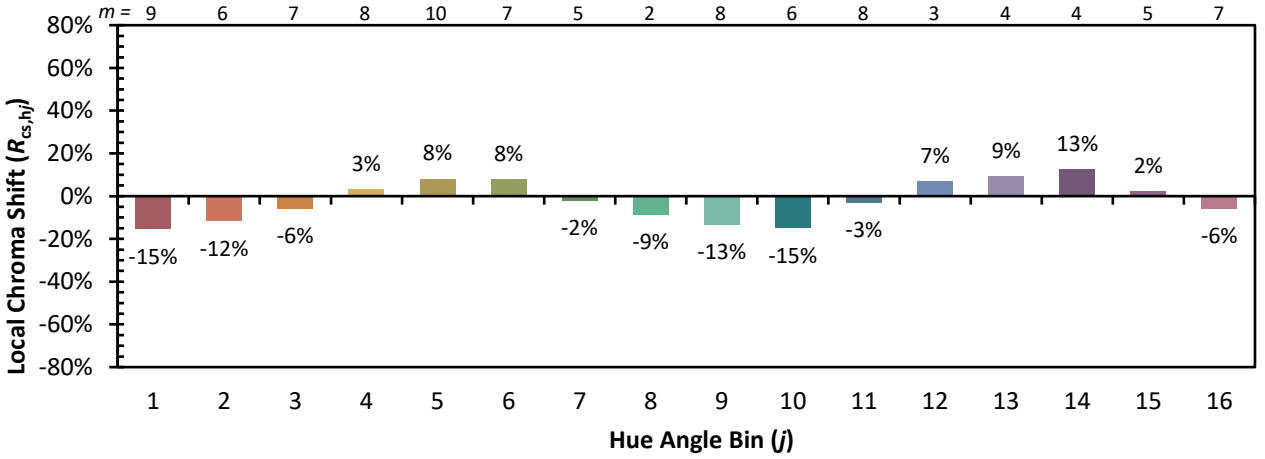

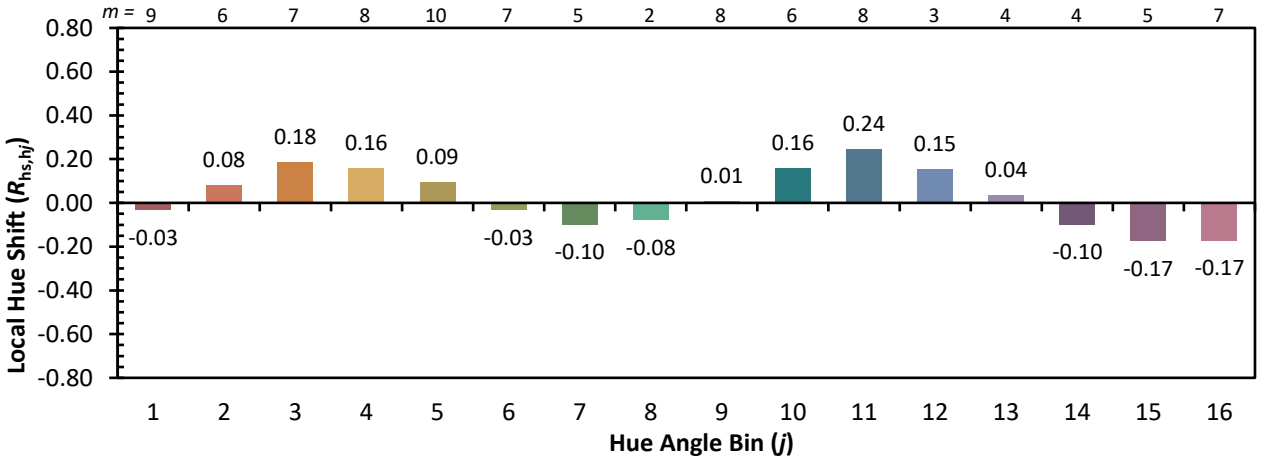


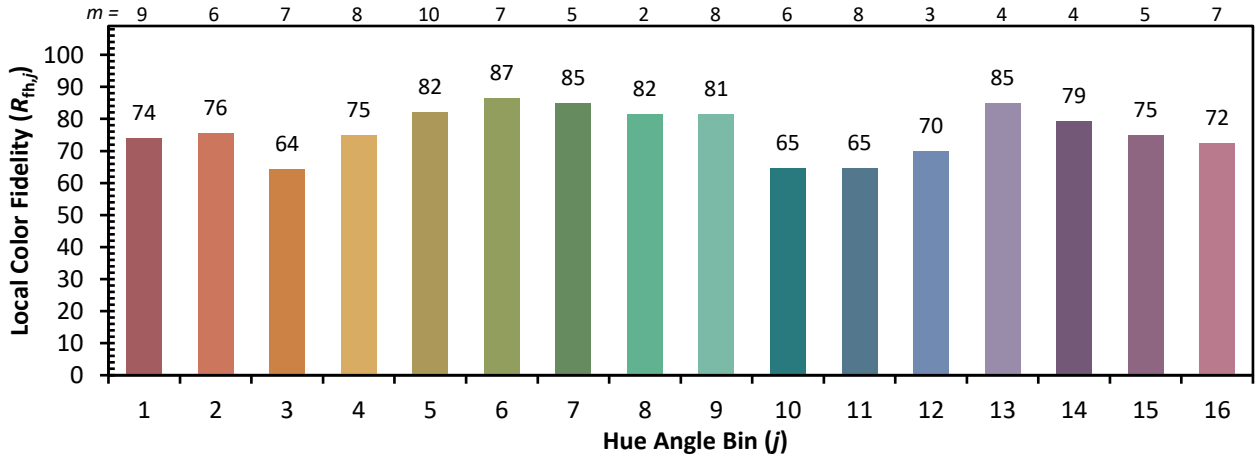
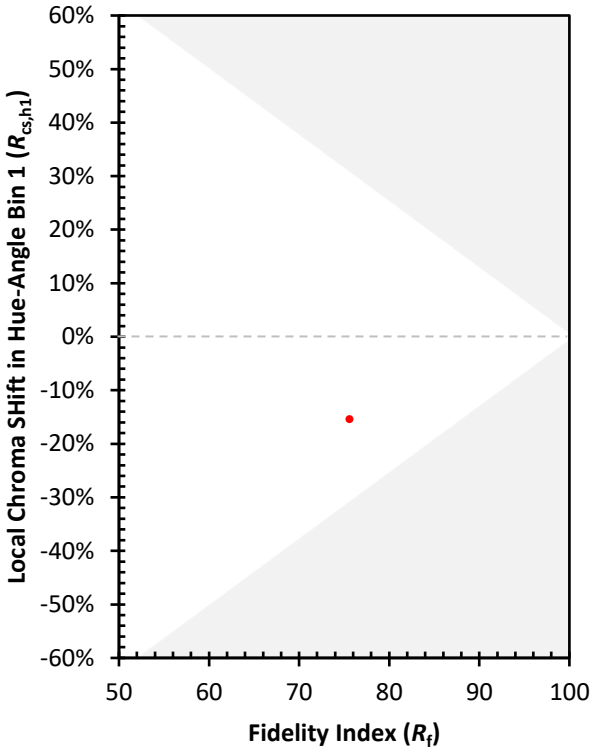



REPORT NUMBER: SP1-2407-176-5

# TM-30-18

## Measure Comparisons

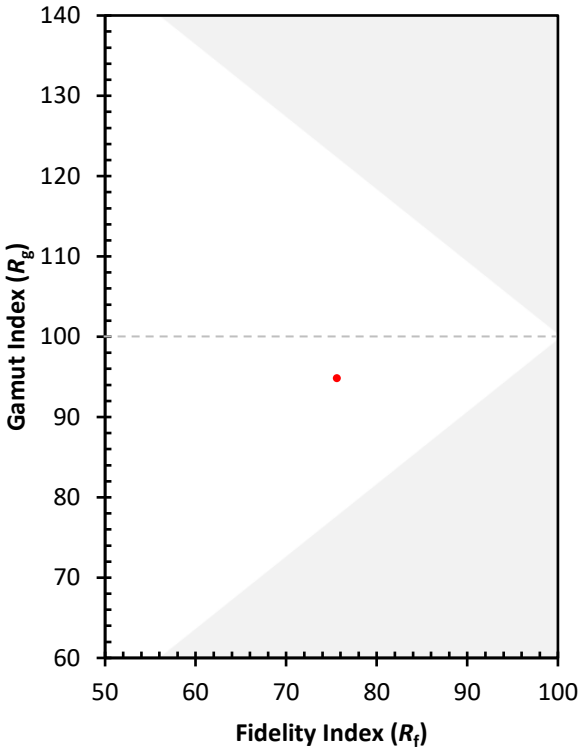


(END OF REPORT)