

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P972437

Luminaire Tested: **GKO-PB2E-750-U-T1**

Issue Date: 02/27/2025

Test Information

Test Method: LM-79-08
Report Number: P972437
Test Lab: INNOVATION CENTER(G1)
Issue Date: 02/27/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: GKO-PB2E-750-U-T1
Description: GEKKO WALL PACK 12000LM PACKAGE 70CRI 5000K FIXTURE w/ TYPE I DISTRIBUTION OPTIC
Light Source: (20) 5000K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 13468.3 lumens
Efficiency: N/A
Efficacy: 128.6 lumens/watt
Luminous Opening: Rectangular (W 0.67' x L: 0.33' x H: 0')
IES Classification: Type I - Short
BUG Rating: B3 - U0 - G3


Input Watts (W): 104.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): 6%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

REPORT NUMBER: P972437

CATALOG NUMBER: GKO-PB2E-750-U-T1

Iso-Footcandle Lines of Horizontal Illumination

✕ Max cd
 - - - 1/2 Max cd

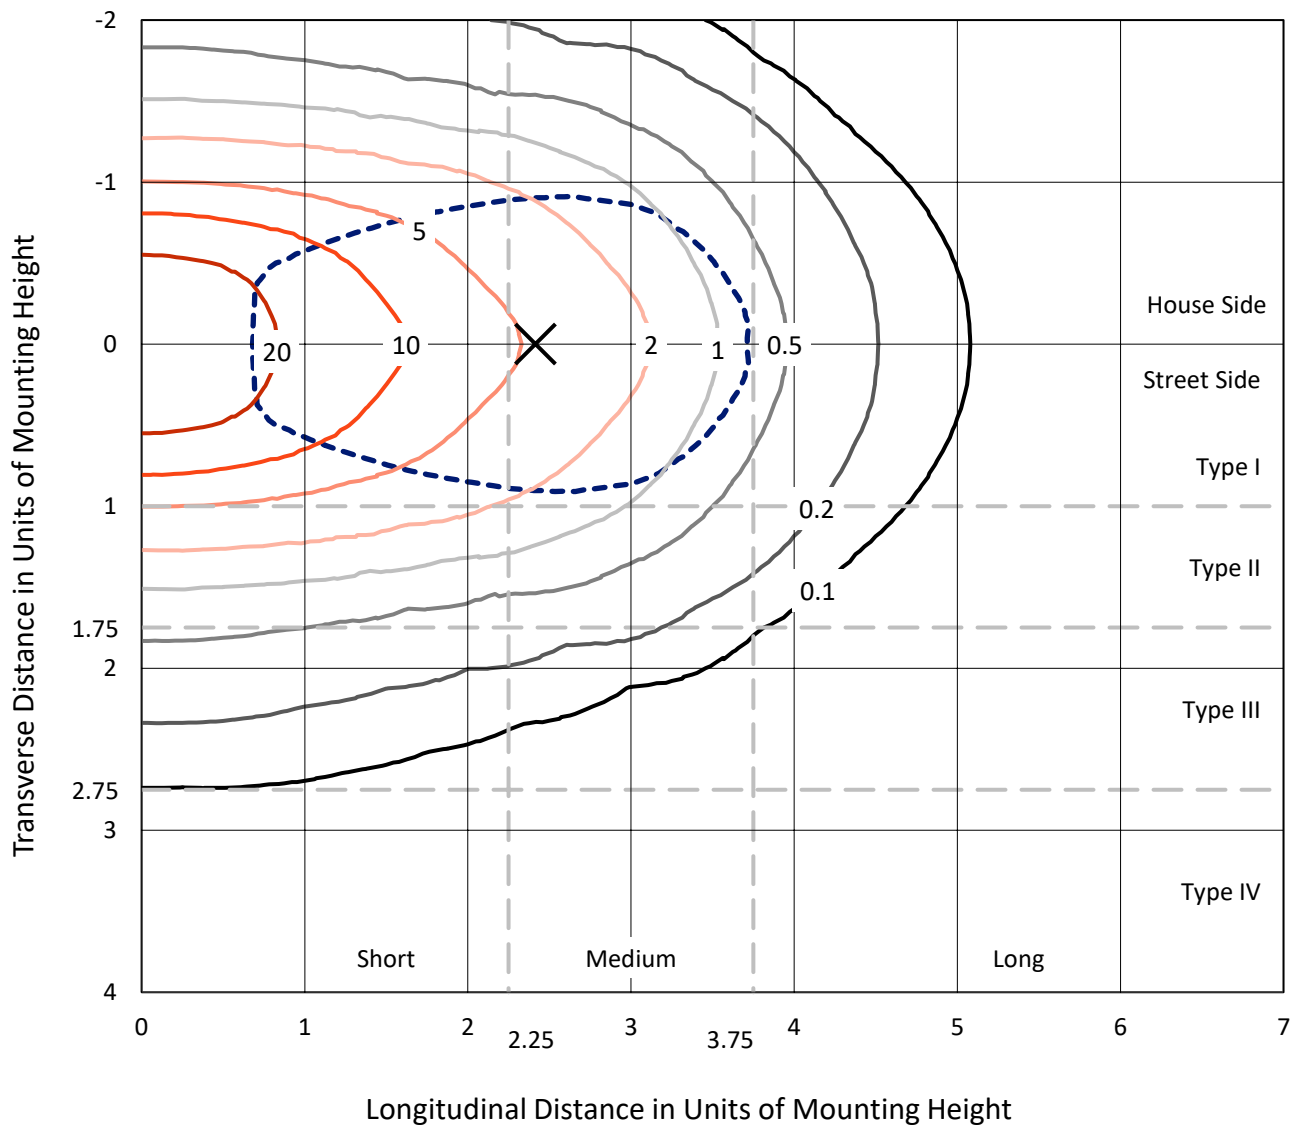


Based on 10 foot mounting height. Maximum calculated value = 33.4 fc
 Type I - Short - N/A

REPORT NUMBER: P972437

CATALOG NUMBER: GKO-PB2E-750-U-T1

Luminous Intensity Polar Plot

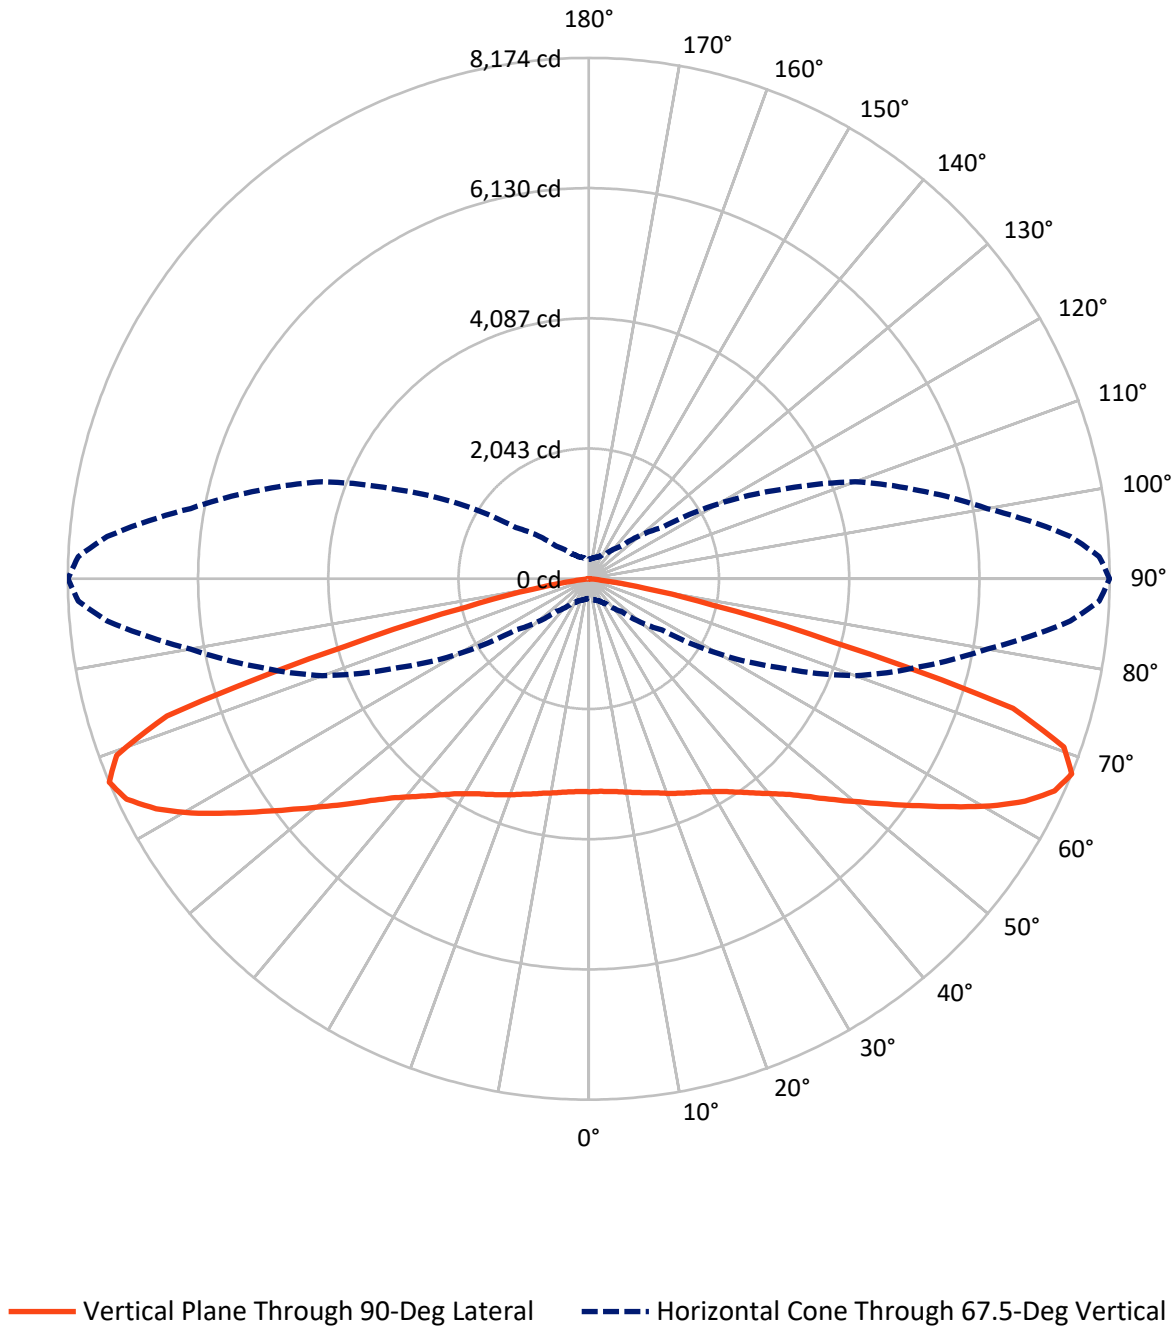

REPORT NUMBER: P972437

CATALOG NUMBER: GKO-PB2E-750-U-T1

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	6734.2	0.0	6734.2
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	6734.2	0.0	6734.2
	% Fixture	50.0	0.0	50.0
Total	Lumens	13468.3	0.0	13468.3
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	320.5	2.4
10°-20°	965.9	7.2
20°-30°	1606.1	11.9
30°-40°	2133.6	15.8
40°-50°	2405.4	17.9
50°-60°	2473.4	18.4
60°-70°	2337.4	17.4
70°-80°	1144.2	8.5
80°-90°	81.8	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	13468.3	100.0
0°-180°	13468.3	100.0

Coefficient of Utilization



REPORT NUMBER: P972437


CATALOG NUMBER: GKO-PB2E-750-U-T1

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1446.2	10.7			
FM	(30°-60°)	3506.2	26.0			
FH	(60°-80°)	1740.8	12.9			G1/1800
FVH	(80°-90°)	40.9	0.3			G1/100
BL	(0°-30°)	1446.2	10.7	B3/2500		
BM	(30°-60°)	3506.2	26.0	B3/5000		
BH	(60°-80°)	1740.8	12.9	B3/2500		G3/2500
BVH	(80°-90°)	40.9	0.3			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G3

Type I Short

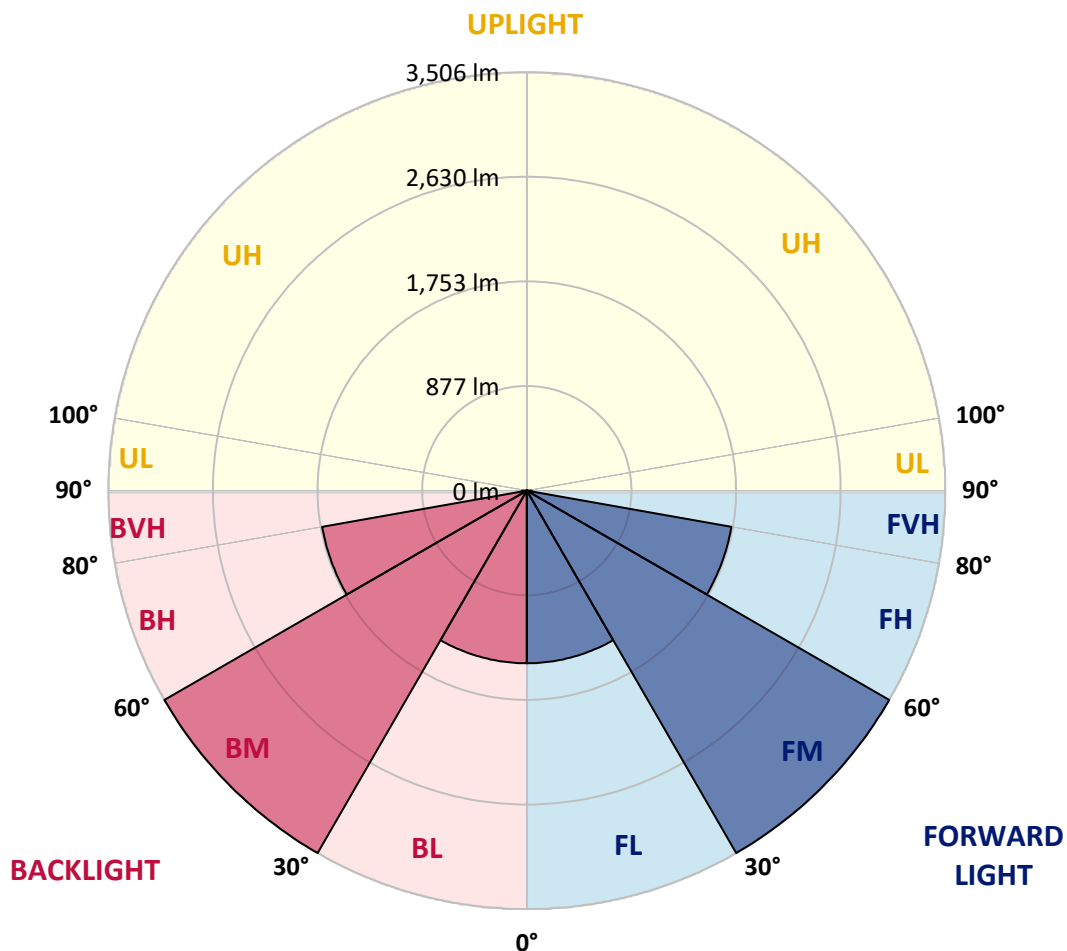

REPORT NUMBER: P972437

CATALOG NUMBER: GKO-PB2E-750-U-T1

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	70°	75°	80°
0°	3342.0	3342.0	3342.0	3342.0	3342.0	3342.0	3342.0	3342.0	3342.0	3342.0	3342.0
2.5°	3344.5	3349.5	3339.6	3339.6	3344.5	3347.0	3347.0	3349.5	3344.5	3344.5	3342.0
5°	3344.5	3347.0	3342.0	3342.0	3347.0	3354.5	3352.0	3356.9	3356.9	3354.5	3354.5
7.5°	3342.0	3347.0	3342.0	3344.5	3352.0	3366.9	3366.9	3366.9	3371.8	3376.8	3376.8
10°	3339.6	3344.5	3347.0	3349.5	3359.4	3381.8	3386.7	3389.2	3396.7	3404.1	3404.1
12.5°	3327.1	3332.1	3339.6	3349.5	3366.9	3396.7	3406.6	3414.0	3426.5	3433.9	3438.9
15°	3309.8	3312.2	3329.6	3349.5	3376.8	3414.0	3433.9	3446.3	3463.7	3473.6	3481.1
17.5°	3284.9	3287.4	3314.7	3344.5	3384.3	3436.4	3468.7	3488.5	3505.9	3520.8	3530.7
20°	3252.7	3260.1	3292.4	3339.6	3396.7	3458.7	3505.9	3540.7	3558.1	3573.0	3587.9
22.5°	3212.9	3220.4	3260.1	3327.1	3409.1	3488.5	3550.6	3595.3	3617.6	3637.5	3654.9
25°	3153.3	3163.3	3210.4	3297.3	3414.0	3520.8	3600.3	3657.4	3677.2	3702.1	3717.0
27.5°	3061.5	3068.9	3126.0	3237.8	3399.1	3555.6	3657.4	3724.4	3746.8	3774.1	3789.0
30°	2917.5	2932.4	3001.9	3140.9	3361.9	3582.9	3724.4	3791.5	3818.8	3846.1	3865.9
32.5°	2731.2	2753.6	2830.6	3009.3	3289.9	3592.8	3796.4	3873.4	3908.2	3937.9	3962.8
35°	2500.3	2522.7	2614.5	2840.5	3175.7	3573.0	3868.4	3967.7	4010.0	4049.7	4079.5
37.5°	2237.1	2257.0	2368.7	2627.0	3011.8	3510.9	3925.5	4072.0	4129.1	4181.3	4221.0
40°	1971.5	1993.8	2115.5	2391.1	2813.2	3391.7	3950.4	4186.2	4258.2	4325.3	4374.9
42.5°	1683.4	1710.7	1847.3	2140.3	2582.3	3227.8	3930.5	4298.0	4387.4	4479.2	4553.7
45°	1427.7	1432.7	1581.6	1864.7	2329.0	3016.8	3861.0	4404.7	4526.4	4655.5	4762.3
47.5°	1181.9	1191.8	1320.9	1601.5	2065.8	2778.4	3734.3	4489.2	4682.8	4849.2	5005.6
50°	963.4	975.8	1092.5	1343.3	1802.6	2517.7	3563.0	4538.8	4816.9	5042.9	5261.4
52.5°	784.6	799.5	896.3	1117.3	1536.9	2244.6	3352.0	4546.3	4938.6	5236.5	5527.0
55°	653.0	662.9	737.4	913.7	1281.2	1961.5	3111.1	4509.0	5018.0	5410.3	5797.7
57.5°	551.2	561.1	613.3	752.3	1050.3	1671.0	2818.1	4422.1	5060.2	5561.8	6070.8
60°	479.2	486.7	523.9	623.2	864.1	1397.9	2502.8	4268.2	5047.8	5656.1	6296.7
62.5°	427.1	429.5	461.8	531.3	712.6	1139.7	2147.7	4037.3	4946.0	5668.6	6450.7
65°	379.9	382.4	402.2	451.9	586.0	916.2	1777.8	3719.4	4752.4	5581.7	6473.0
67.5°	307.9	312.9	342.6	379.9	481.7	725.0	1400.4	3302.3	4449.4	5355.7	6346.4
70°	245.8	248.3	278.1	320.3	392.3	571.1	1075.1	2741.2	3975.2	4988.2	6018.7
72.5°	183.7	188.7	216.0	258.2	320.3	442.0	777.2	2073.3	3178.2	4206.1	5241.5
75°	146.5	149.0	158.9	198.6	248.3	335.2	523.9	1256.4	1914.3	2602.1	3212.9
77.5°	124.1	126.6	126.6	153.9	183.7	225.9	278.1	499.1	809.4	1152.1	1527.0
80°	101.8	106.8	96.8	114.2	131.6	131.6	129.1	238.4	382.4	541.3	710.1
82.5°	74.5	79.5	74.5	79.5	79.5	72.0	67.0	89.4	121.7	166.4	181.3
85°	52.1	54.6	59.6	54.6	52.1	42.2	32.3	24.8	14.9	17.4	24.8
87.5°	34.8	42.2	49.7	47.2	39.7	32.3	22.3	14.9	7.4	9.9	9.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P972437

CATALOG NUMBER: GKO-PB2E-750-U-T1

CANDELA DISTRIBUTION (continued):

	85°	87.5°	90°
0°	3342.0	3342.0	3342.0
2.5°	3344.5	3342.0	3339.6
5°	3356.9	3354.5	3352.0
7.5°	3374.3	3374.3	3374.3
10°	3401.6	3406.6	3406.6
12.5°	3436.4	3441.4	3441.4
15°	3478.6	3481.1	3486.1
17.5°	3530.7	3533.2	3533.2
20°	3592.8	3590.3	3595.3
22.5°	3654.9	3654.9	3654.9
25°	3719.4	3719.4	3719.4
27.5°	3793.9	3793.9	3789.0
30°	3875.9	3875.9	3875.9
32.5°	3975.2	3977.7	3980.2
35°	4101.8	4106.8	4114.2
37.5°	4245.8	4258.2	4265.7
40°	4417.2	4422.1	4434.5
42.5°	4608.3	4623.2	4625.7
45°	4846.7	4871.5	4881.5
47.5°	5127.3	5162.0	5179.4
50°	5440.1	5479.9	5504.7
52.5°	5780.3	5844.8	5874.6
55°	6142.8	6254.5	6286.8
57.5°	6552.5	6703.9	6748.6
60°	6954.7	7168.3	7240.3
62.5°	7297.4	7597.8	7687.2
65°	7538.2	7900.7	8032.3
67.5°	7587.9	8017.4	8173.9
70°	7289.9	7729.4	7910.7
72.5°	6339.0	6736.2	6962.2
75°	3744.3	4029.8	3960.3
77.5°	1879.6	1961.5	1973.9
80°	824.3	874.0	893.9
82.5°	203.6	208.6	235.9
85°	27.3	32.3	29.8
87.5°	9.9	9.9	12.4
90°	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP2-2501-321-5

Test Date: 04/10/2025

Luminaire Tested: GKO-PB1E-750-U-T4W


Data in this report applies to families of products including GKO-PB1E-750-U-T4W

Test Information

Test Method: LM-79-2019
 Report Number: SP2-2501-321-5
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP2 - 165CM SPHERE
 Measurement Geometry: 4π
 Issue Date: 04/10/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GKO-PB1E-750-U-T4W**
 Description: Gekko Wedge Wall Pack Fixture 1 SQ w/ T4W distribution

Spectral Parameters

CCT (K):	5105	CRI (Ra):	72.2		
CIE u':	0.2079	R1:	68.8	R9:	-38.2
CIE v':	0.4868	R2:	78.3	R10:	48.2
Duv:	0.0035	R3:	84.9	R11:	68.1
CIE x:	0.3428	R4:	71.7	R12:	42.9
CIE y:	0.3567	R5:	69.8	R13:	70.6
CIE z:	0.3005	R6:	69.8	R14:	91.6
Peak Wavelength (nm):	451	R7:	81.2	R15:	61.7
Dominant Wavelength (nm):	567	R8:	53.5		
Purity:	9.884628				
Rf:	74.2				
Rg:	92.7				

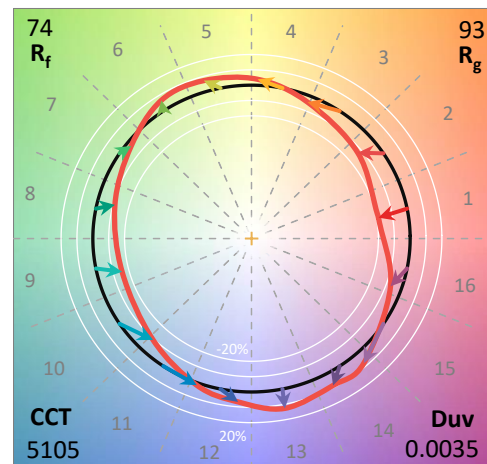

Test Conditions

Stabilization Time: 30M
 Operation Time: 1H 30M
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP2-2501-321-5

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN2187	1/6/2025	7/6/2025
Power Meter	INXT2011002	1/21/2025	1/21/2026
AC Power Source	IN0458	10/22/2024	10/22/2025
DC Power Source	IN0212	10/22/2024	10/22/2025
Sphere Thermometer	IN4036B	10/22/2024	10/22/2025
Room Thermometer	IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP2-2501-321-5

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP2-2501-321-5

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	134	NR	620	390	NR	750	10	NR	880	0	NR
365	0	NR	495	165	NR	625	354	NR	755	9	NR	885	0	NR
370	0	NR	500	218	NR	630	319	NR	760	8	NR	890	0	NR
375	0	NR	505	281	NR	635	285	NR	765	7	NR	895	0	NR
380	0	NR	510	343	NR	640	254	NR	770	6	NR	900	0	NR
385	1	NR	515	400	NR	645	224	NR	775	5	NR	905	0	NR
390	2	NR	520	444	NR	650	197	NR	780	4	NR	910	0	NR
395	4	NR	525	477	NR	655	173	NR	785	4	NR	915	0	NR
400	6	NR	530	501	NR	660	150	NR	790	3	NR	920	0	NR
405	9	NR	535	520	NR	665	131	NR	795	3	NR	925	0	NR
410	14	NR	540	534	NR	670	113	NR	800	2	NR	930	0	NR
415	26	NR	545	547	NR	675	98	NR	805	2	NR	935	0	NR
420	50	NR	550	561	NR	680	85	NR	810	2	NR	940	0	NR
425	95	NR	555	574	NR	685	73	NR	815	2	NR	945	0	NR
430	168	NR	560	586	NR	690	63	NR	820	1	NR	950	0	NR
435	284	NR	565	596	NR	695	54	NR	825	1	NR	955	0	NR
440	452	NR	570	604	NR	700	46	NR	830	1	NR	960	0	NR
445	705	NR	575	606	NR	705	40	NR	835	1	NR	965	0	NR
450	980	NR	580	603	NR	710	34	NR	840	1	NR	970	0	NR
455	869	NR	585	592	NR	715	29	NR	845	1	NR	975	0	NR
460	531	NR	590	577	NR	720	25	NR	850	1	NR	980	0	NR
465	372	NR	595	554	NR	725	22	NR	855	1	NR	985	0	NR
470	268	NR	600	527	NR	730	19	NR	860	1	NR	990	0	NR
475	174	NR	605	497	NR	735	16	NR	865	0	NR	995	0	NR
480	135	NR	610	462	NR	740	14	NR	870	0	NR	1000	0	NR
485	126	NR	615	428	NR	745	12	NR	875	0	NR			

REPORT NUMBER: SP2-2501-321-5

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.82

λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	134	NR	620	390	NR	750	10	NR	880	0	NR
365	0	NR	495	165	NR	625	354	NR	755	9	NR	885	0	NR
370	0	NR	500	218	NR	630	319	NR	760	8	NR	890	0	NR
375	0	NR	505	281	NR	635	285	NR	765	7	NR	895	0	NR
380	0	NR	510	343	NR	640	254	NR	770	6	NR	900	0	NR
385	1	NR	515	400	NR	645	224	NR	775	5	NR	905	0	NR
390	2	NR	520	444	NR	650	197	NR	780	4	NR	910	0	NR
395	4	NR	525	477	NR	655	173	NR	785	4	NR	915	0	NR
400	6	NR	530	501	NR	660	150	NR	790	3	NR	920	0	NR
405	9	NR	535	520	NR	665	131	NR	795	3	NR	925	0	NR
410	14	NR	540	534	NR	670	113	NR	800	2	NR	930	0	NR
415	26	NR	545	547	NR	675	98	NR	805	2	NR	935	0	NR
420	50	NR	550	561	NR	680	85	NR	810	2	NR	940	0	NR
425	95	NR	555	574	NR	685	73	NR	815	2	NR	945	0	NR
430	168	NR	560	586	NR	690	63	NR	820	1	NR	950	0	NR
435	284	NR	565	596	NR	695	54	NR	825	1	NR	955	0	NR
440	452	NR	570	604	NR	700	46	NR	830	1	NR	960	0	NR
445	705	NR	575	606	NR	705	40	NR	835	1	NR	965	0	NR
450	980	NR	580	603	NR	710	34	NR	840	1	NR	970	0	NR
455	869	NR	585	592	NR	715	29	NR	845	1	NR	975	0	NR
460	531	NR	590	577	NR	720	25	NR	850	1	NR	980	0	NR
465	372	NR	595	554	NR	725	22	NR	855	1	NR	985	0	NR
470	268	NR	600	527	NR	730	19	NR	860	1	NR	990	0	NR
475	174	NR	605	497	NR	735	16	NR	865	0	NR	995	0	NR
480	135	NR	610	462	NR	740	14	NR	870	0	NR	1000	0	NR
485	126	NR	615	428	NR	745	12	NR	875	0	NR			

REPORT NUMBER: SP2-2501-321-5

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 3.75


λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	134	NR	620	390	NR	750	10	NR	880	0	NR
365	0	NR	495	165	NR	625	354	NR	755	9	NR	885	0	NR
370	0	NR	500	218	NR	630	319	NR	760	8	NR	890	0	NR
375	0	NR	505	281	NR	635	285	NR	765	7	NR	895	0	NR
380	0	NR	510	343	NR	640	254	NR	770	6	NR	900	0	NR
385	1	NR	515	400	NR	645	224	NR	775	5	NR	905	0	NR
390	2	NR	520	444	NR	650	197	NR	780	4	NR	910	0	NR
395	4	NR	525	477	NR	655	173	NR	785	4	NR	915	0	NR
400	6	NR	530	501	NR	660	150	NR	790	3	NR	920	0	NR
405	9	NR	535	520	NR	665	131	NR	795	3	NR	925	0	NR
410	14	NR	540	534	NR	670	113	NR	800	2	NR	930	0	NR
415	26	NR	545	547	NR	675	98	NR	805	2	NR	935	0	NR
420	50	NR	550	561	NR	680	85	NR	810	2	NR	940	0	NR
425	95	NR	555	574	NR	685	73	NR	815	2	NR	945	0	NR
430	168	NR	560	586	NR	690	63	NR	820	1	NR	950	0	NR
435	284	NR	565	596	NR	695	54	NR	825	1	NR	955	0	NR
440	452	NR	570	604	NR	700	46	NR	830	1	NR	960	0	NR
445	705	NR	575	606	NR	705	40	NR	835	1	NR	965	0	NR
450	980	NR	580	603	NR	710	34	NR	840	1	NR	970	0	NR
455	869	NR	585	592	NR	715	29	NR	845	1	NR	975	0	NR
460	531	NR	590	577	NR	720	25	NR	850	1	NR	980	0	NR
465	372	NR	595	554	NR	725	22	NR	855	1	NR	985	0	NR
470	268	NR	600	527	NR	730	19	NR	860	1	NR	990	0	NR
475	174	NR	605	497	NR	735	16	NR	865	0	NR	995	0	NR
480	135	NR	610	462	NR	740	14	NR	870	0	NR	1000	0	NR
485	126	NR	615	428	NR	745	12	NR	875	0	NR			

REPORT NUMBER: SP2-2501-321-5



TM-30-18

Summary

$R_f = 74.2$
 $R_g = 92.7$
 $CIE\ R_a = 72.2$
 $R_g = -38.2$

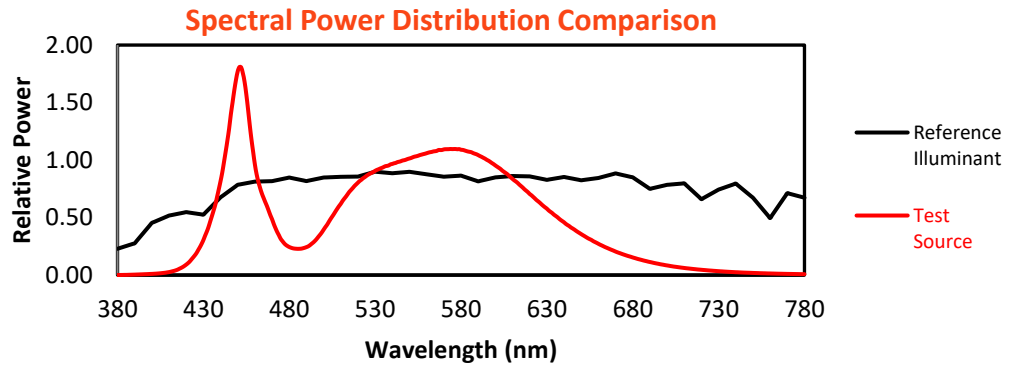


Color Vector Graphics

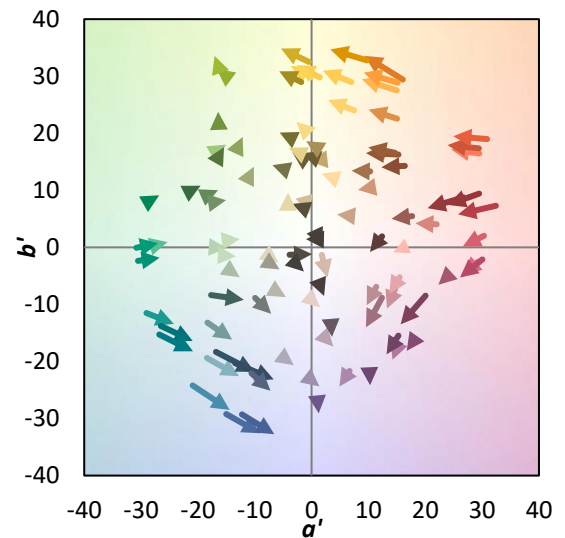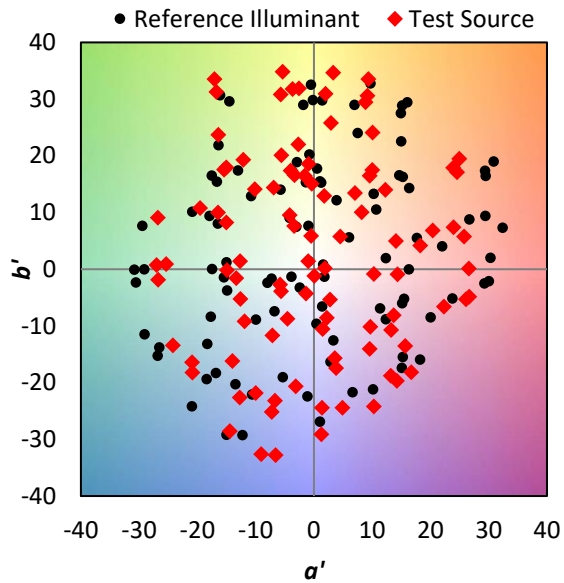

Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 85	CES26 = 63	CES51 = 89	CES76 = 51
CES02 = 59	CES27 = 89	CES52 = 89	CES77 = 68
CES03 = 30	CES28 = 81	CES53 = 79	CES78 = 54
CES04 = 69	CES29 = 69	CES54 = 84	CES79 = 80
CES05 = 46	CES30 = 88	CES55 = 83	CES80 = 77
CES06 = 50	CES31 = 72	CES56 = 74	CES81 = 79
CES07 = 38	CES32 = 63	CES57 = 73	CES82 = 91
CES08 = 38	CES33 = 82	CES58 = 74	CES83 = 90
CES09 = 29	CES34 = 70	CES59 = 86	CES84 = 85
CES10 = 72	CES35 = 83	CES60 = 88	CES85 = 78
CES11 = 56	CES36 = 88	CES61 = 82	CES86 = 75
CES12 = 61	CES37 = 78	CES62 = 81	CES87 = 77
CES13 = 41	CES38 = 98	CES63 = 73	CES88 = 81
CES14 = 74	CES39 = 97	CES64 = 64	CES89 = 73
CES15 = 70	CES40 = 91	CES65 = 61	CES90 = 80
CES16 = 46	CES41 = 96	CES66 = 56	CES91 = 72
CES17 = 49	CES42 = 80	CES67 = 54	CES92 = 58
CES18 = 55	CES43 = 79	CES68 = 64	CES93 = 75
CES19 = 71	CES44 = 99	CES69 = 73	CES94 = 53
CES20 = 63	CES45 = 87	CES70 = 56	CES95 = 64
CES21 = 85	CES46 = 85	CES71 = 47	CES96 = 76
CES22 = 77	CES47 = 90	CES72 = 82	CES97 = 86
CES23 = 91	CES48 = 80	CES73 = 47	CES98 = 76
CES24 = 90	CES49 = 83	CES74 = 90	CES99 = 62
CES25 = 71	CES50 = 89	CES75 = 50	

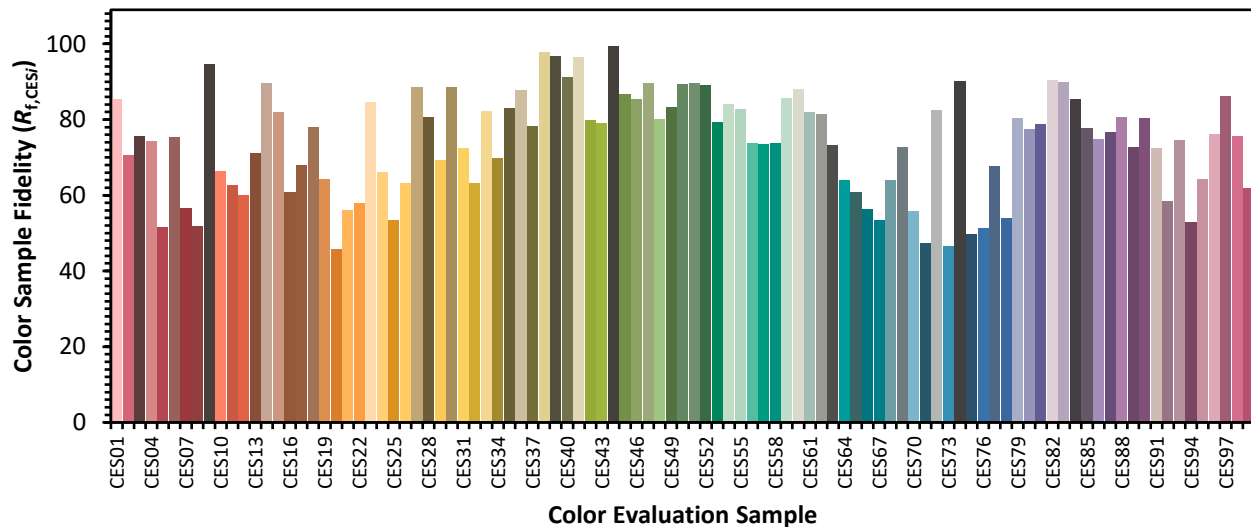

Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)