

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1212016

Luminaire Tested: **GKO-PB1A-827-U-T1**

Issue Date: 11/5/2025



Test Information

Test Method: LM-79-08
Report Number: P1212016
Test Lab: INNOVATION CENTER(G1)
Issue Date: 11/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: GKO-PB1A-827-U-T1
Description: GEKKO WALL PACK 750LM PACKAGE 80CRI 2700K FIXTURE w/ TYPE I DISTRIBUTION OPTIC
Light Source: (10) 2700K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 686 lumens
Efficiency: N/A
Efficacy: 142.9 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
IES Classification: Type I - Short
BUG Rating: B0 - U0 - G0

Input Watts (W): 4.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): 16%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

REPORT NUMBER: P1212016
 CATALOG NUMBER: GKO-PB1A-827-U-T1

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

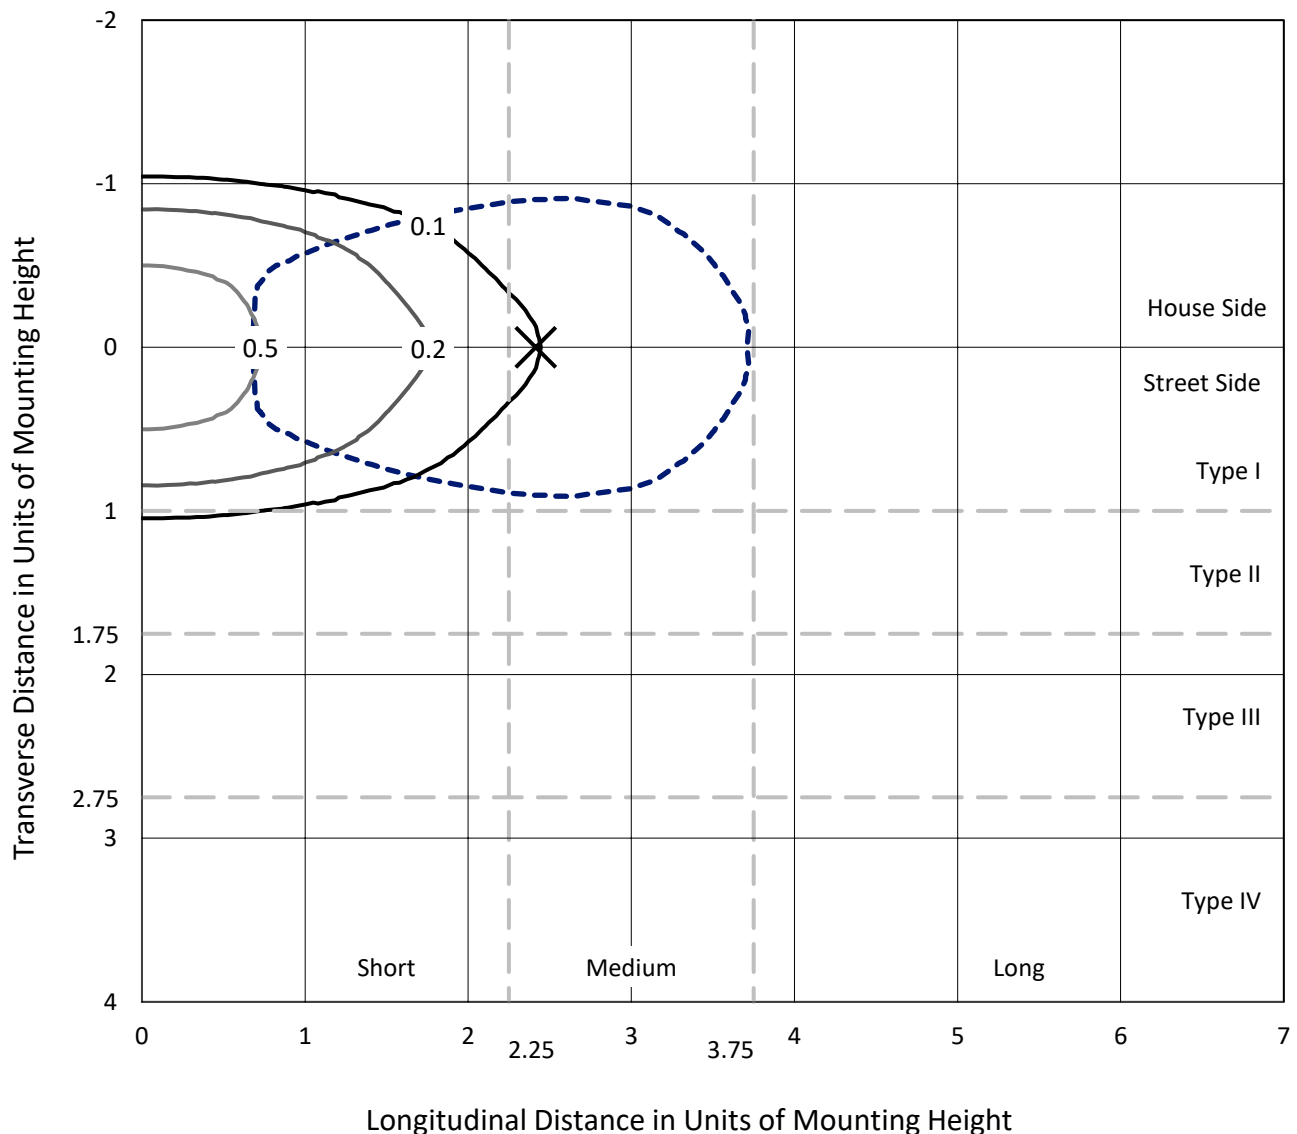

Based on 15 foot mounting height. Maximum calculated value = 0.8 fc
 Type I - Short - N/A

REPORT NUMBER: P1212016
CATALOG NUMBER: GKO-PB1A-827-U-T1

Luminous Intensity Polar Plot

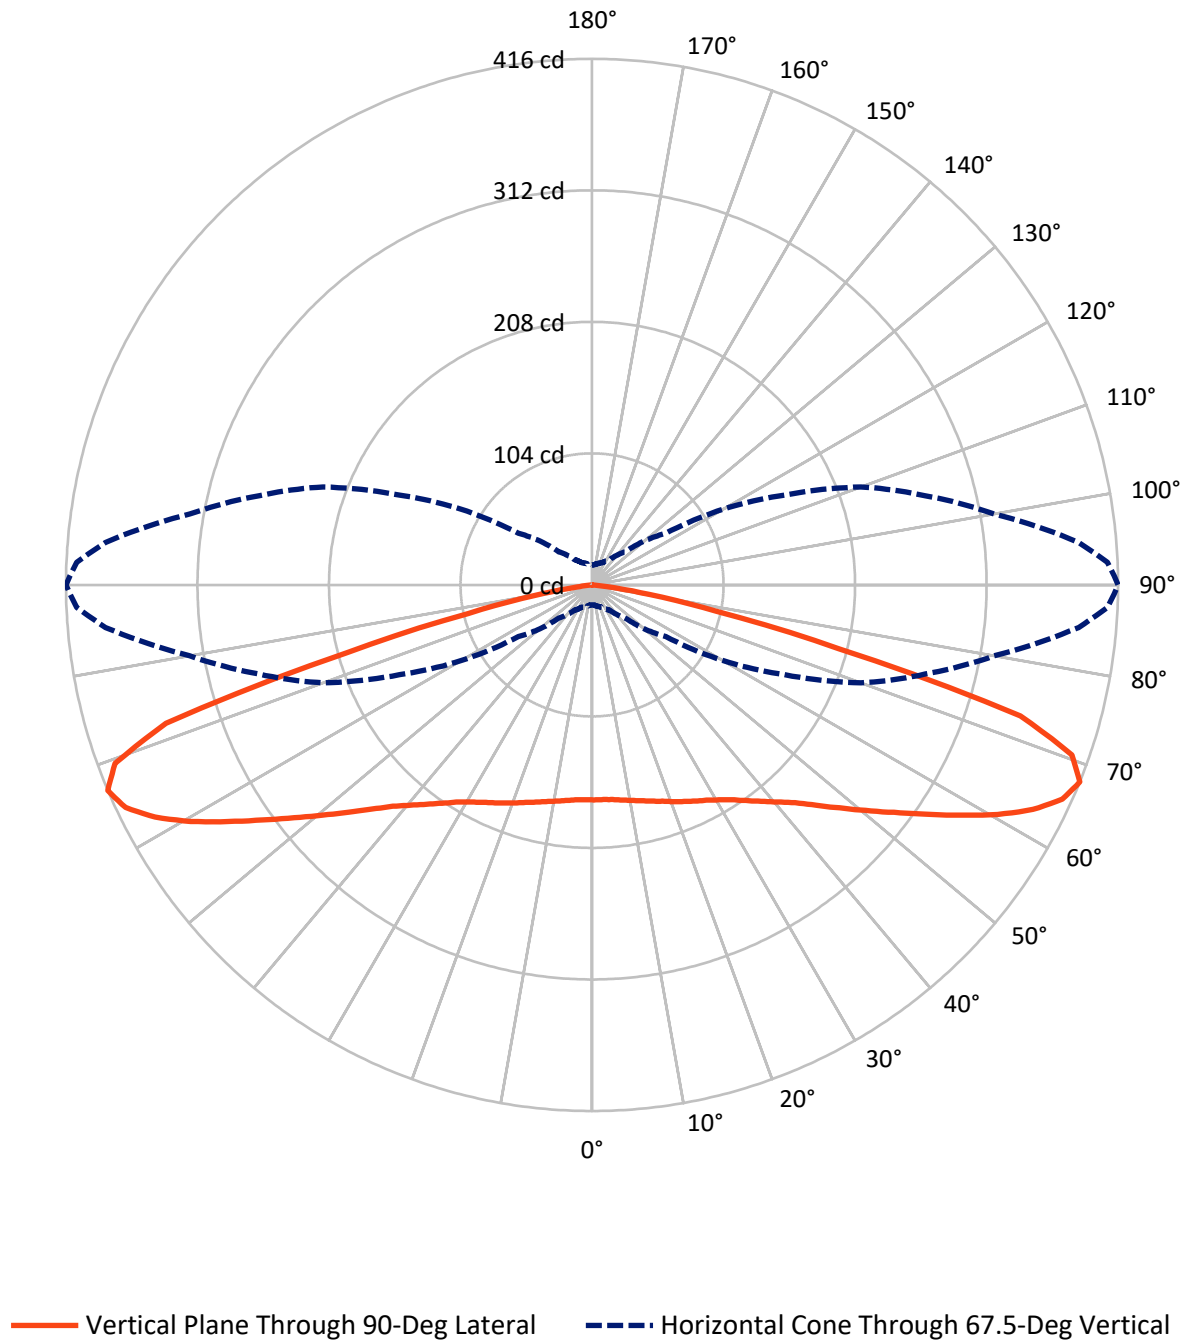

REPORT NUMBER: P1212016

CATALOG NUMBER: GKO-PB1A-827-U-T1


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	343.0	0.0	343.0
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	343.0	0.0	343.0
	% Fixture	50.0	0.0	50.0
Total	Lumens	686.0	0.0	686.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	16.3	2.4
10°-20°	49.2	7.2
20°-30°	81.8	11.9
30°-40°	108.7	15.8
40°-50°	122.5	17.9
50°-60°	126.0	18.4
60°-70°	119.1	17.4
70°-80°	58.3	8.5
80°-90°	4.2	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	686.0	100.0
0°-180°	686.0	100.0

Coefficient of Utilization

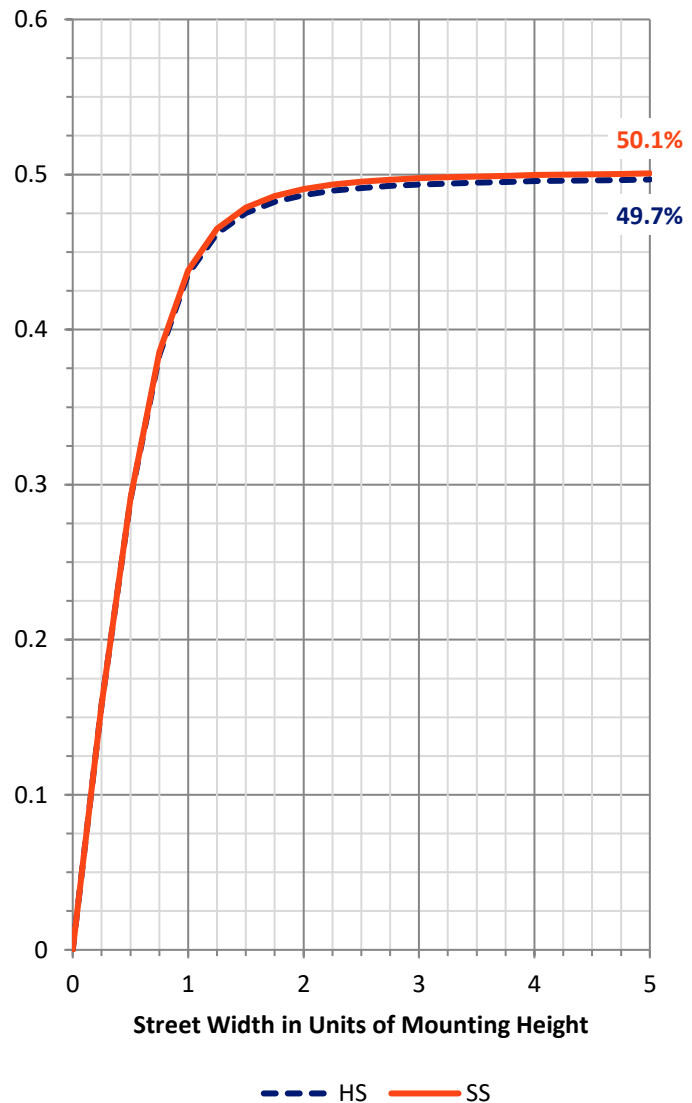

REPORT NUMBER: P1212016


CATALOG NUMBER: GKO-PB1A-827-U-T1

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	73.7	10.7			
FM	(30°-60°)	178.6	26.0			
FH	(60°-80°)	88.7	12.9			G0/660
FVH	(80°-90°)	2.1	0.3			G0/10
BL	(0°-30°)	73.7	10.7	B0/110		
BM	(30°-60°)	178.6	26.0	B0/220		
BH	(60°-80°)	88.7	12.9	B0/110		G0/110
BVH	(80°-90°)	2.1	0.3			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G0

Type I Short

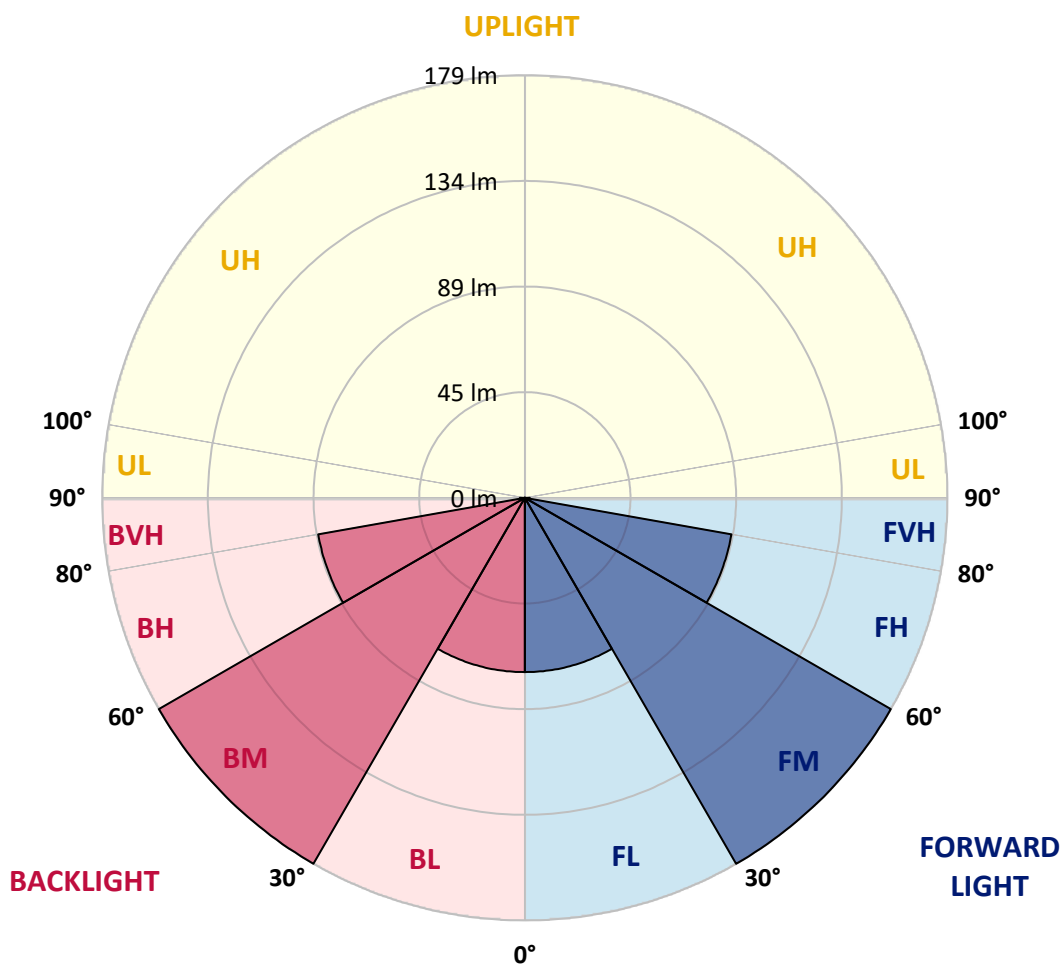



REPORT NUMBER: P1212016

CATALOG NUMBER: GKO-PB1A-827-U-T1

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	70°	75°	80°
0°	170.2	170.2	170.2	170.2	170.2	170.2	170.2	170.2	170.2	170.2	170.2
2.5°	170.4	170.6	170.1	170.1	170.4	170.5	170.5	170.6	170.4	170.4	170.2
5°	170.4	170.5	170.2	170.2	170.5	170.9	170.7	171.0	171.0	170.9	170.9
7.5°	170.2	170.5	170.2	170.4	170.7	171.5	171.5	171.5	171.8	172.0	172.0
10°	170.1	170.4	170.5	170.6	171.1	172.3	172.5	172.6	173.0	173.4	173.4
12.5°	169.5	169.7	170.1	170.6	171.5	173.0	173.5	173.9	174.5	174.9	175.2
15°	168.6	168.7	169.6	170.6	172.0	173.9	174.9	175.5	176.4	176.9	177.3
17.5°	167.3	167.5	168.8	170.4	172.4	175.0	176.7	177.7	178.6	179.3	179.8
20°	165.7	166.1	167.7	170.1	173.0	176.2	178.6	180.4	181.2	182.0	182.8
22.5°	163.7	164.0	166.1	169.5	173.6	177.7	180.9	183.1	184.3	185.3	186.2
25°	160.6	161.1	163.5	168.0	173.9	179.3	183.4	186.3	187.3	188.6	189.3
27.5°	155.9	156.3	159.2	164.9	173.1	181.1	186.3	189.7	190.9	192.2	193.0
30°	148.6	149.4	152.9	160.0	171.2	182.5	189.7	193.1	194.5	195.9	196.9
32.5°	139.1	140.3	144.2	153.3	167.6	183.0	193.4	197.3	199.1	200.6	201.9
35°	127.4	128.5	133.2	144.7	161.8	182.0	197.0	202.1	204.3	206.3	207.8
37.5°	114.0	115.0	120.7	133.8	153.4	178.8	200.0	207.4	210.3	213.0	215.0
40°	100.4	101.6	107.8	121.8	143.3	172.8	201.2	213.2	216.9	220.3	222.8
42.5°	85.7	87.1	94.1	109.0	131.5	164.4	200.2	218.9	223.5	228.2	232.0
45°	72.7	73.0	80.6	95.0	118.6	153.7	196.7	224.4	230.6	237.1	242.6
47.5°	60.2	60.7	67.3	81.6	105.2	141.5	190.2	228.7	238.5	247.0	255.0
50°	49.1	49.7	55.6	68.4	91.8	128.2	181.5	231.2	245.4	256.9	268.0
52.5°	40.0	40.7	45.7	56.9	78.3	114.3	170.7	231.6	251.6	266.7	281.5
55°	33.3	33.8	37.6	46.5	65.3	99.9	158.5	229.7	255.6	275.6	295.3
57.5°	28.1	28.6	31.2	38.3	53.5	85.1	143.5	225.3	257.8	283.3	309.2
60°	24.4	24.8	26.7	31.7	44.0	71.2	127.5	217.4	257.1	288.1	320.7
62.5°	21.8	21.9	23.5	27.1	36.3	58.1	109.4	205.6	251.9	288.7	328.6
65°	19.4	19.5	20.5	23.0	29.8	46.7	90.6	189.5	242.1	284.3	329.7
67.5°	15.7	15.9	17.5	19.4	24.5	36.9	71.3	168.2	226.6	272.8	323.3
70°	12.5	12.6	14.2	16.3	20.0	29.1	54.8	139.6	202.5	254.1	306.6
72.5°	9.4	9.6	11.0	13.2	16.3	22.5	39.6	105.6	161.9	214.2	267.0
75°	7.5	7.6	8.1	10.1	12.6	17.1	26.7	64.0	97.5	132.5	163.7
77.5°	6.3	6.5	6.5	7.8	9.4	11.5	14.2	25.4	41.2	58.7	77.8
80°	5.2	5.4	4.9	5.8	6.7	6.7	6.6	12.1	19.5	27.6	36.2
82.5°	3.8	4.0	3.8	4.0	4.0	3.7	3.4	4.6	6.2	8.5	9.2
85°	2.7	2.8	3.0	2.8	2.7	2.2	1.6	1.3	0.8	0.9	1.3
87.5°	1.8	2.2	2.5	2.4	2.0	1.6	1.1	0.8	0.4	0.5	0.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1212016
 CATALOG NUMBER: GKO-PB1A-827-U-T1

CANDELA DISTRIBUTION (continued):

	85°	87.5°	90°
0°	170.2	170.2	170.2
2.5°	170.4	170.2	170.1
5°	171.0	170.9	170.7
7.5°	171.9	171.9	171.9
10°	173.3	173.5	173.5
12.5°	175.0	175.3	175.3
15°	177.2	177.3	177.6
17.5°	179.8	180.0	180.0
20°	183.0	182.9	183.1
22.5°	186.2	186.2	186.2
25°	189.5	189.5	189.5
27.5°	193.3	193.3	193.0
30°	197.4	197.4	197.4
32.5°	202.5	202.6	202.7
35°	208.9	209.2	209.6
37.5°	216.3	216.9	217.3
40°	225.0	225.3	225.9
42.5°	234.7	235.5	235.6
45°	246.9	248.1	248.6
47.5°	261.2	262.9	263.8
50°	277.1	279.1	280.4
52.5°	294.4	297.7	299.2
55°	312.9	318.6	320.2
57.5°	333.8	341.5	343.8
60°	354.3	365.1	368.8
62.5°	371.7	387.0	391.6
65°	384.0	402.4	409.1
67.5°	386.5	408.4	416.4
70°	371.3	393.7	402.9
72.5°	322.9	343.1	354.6
75°	190.7	205.3	201.7
77.5°	95.7	99.9	100.5
80°	42.0	44.5	45.5
82.5°	10.4	10.6	12.0
85°	1.4	1.6	1.5
87.5°	0.5	0.5	0.6
90°	0.0	0.0	0.0

(END OF REPORT)