

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1211904

Luminaire Tested: **GKO-PB1C-830-U-T2R**

Issue Date: 11/5/2025



Test Information

Test Method: LM-79-08
Report Number: P1211904
Test Lab: INNOVATION CENTER(G1)
Issue Date: 11/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: GKO-PB1C-830-U-T2R
Description: GEKKO WALL PACK 2500LM PACKAGE 80CRI 3000K FIXTURE w/ TYPE II
ROADWAY DISTRIBUTION OPTIC
Light Source: (10) 3000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2293.8 lumens
Efficiency: N/A
Efficacy: 134.9 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
IES Classification: Type II - Medium
BUG Rating: B1 - U0 - G1


Input Watts (W): 17
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): 13%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

REPORT NUMBER: P1211904
 CATALOG NUMBER: GKO-PB1C-830-U-T2R

Iso-Footcandle Lines of Horizontal Illumination

× Max cd


--- 1/2 Max cd

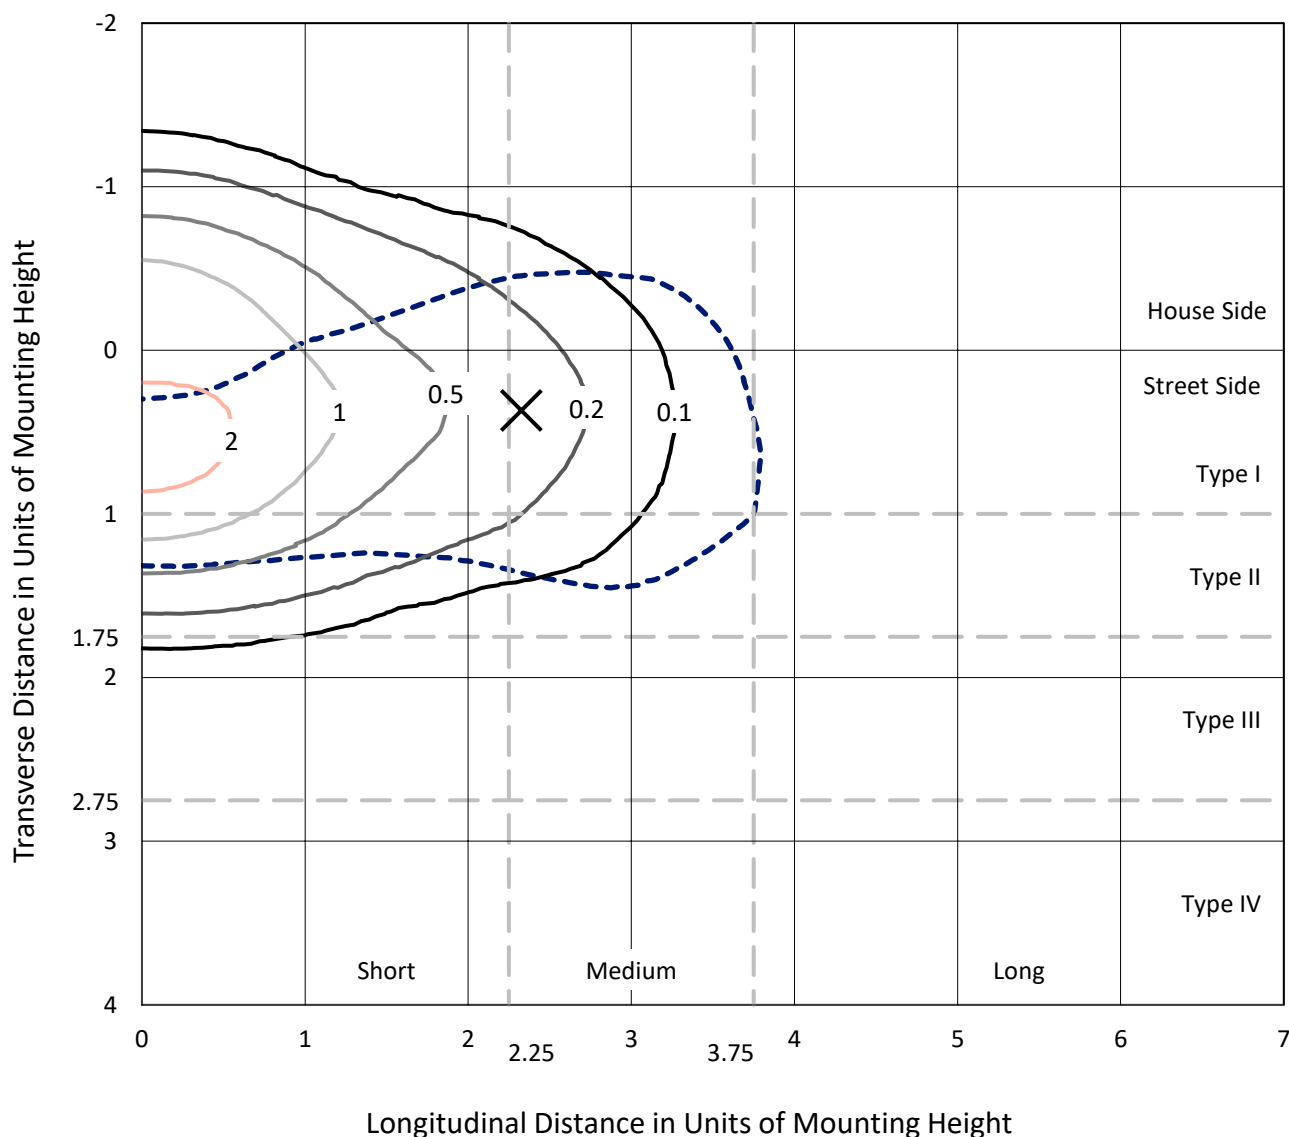

Based on 15 foot mounting height. Maximum calculated value = 2.7 fc
 Type II - Medium - N/A

REPORT NUMBER: P1211904
CATALOG NUMBER: GKO-PB1C-830-U-T2R

Luminous Intensity Polar Plot

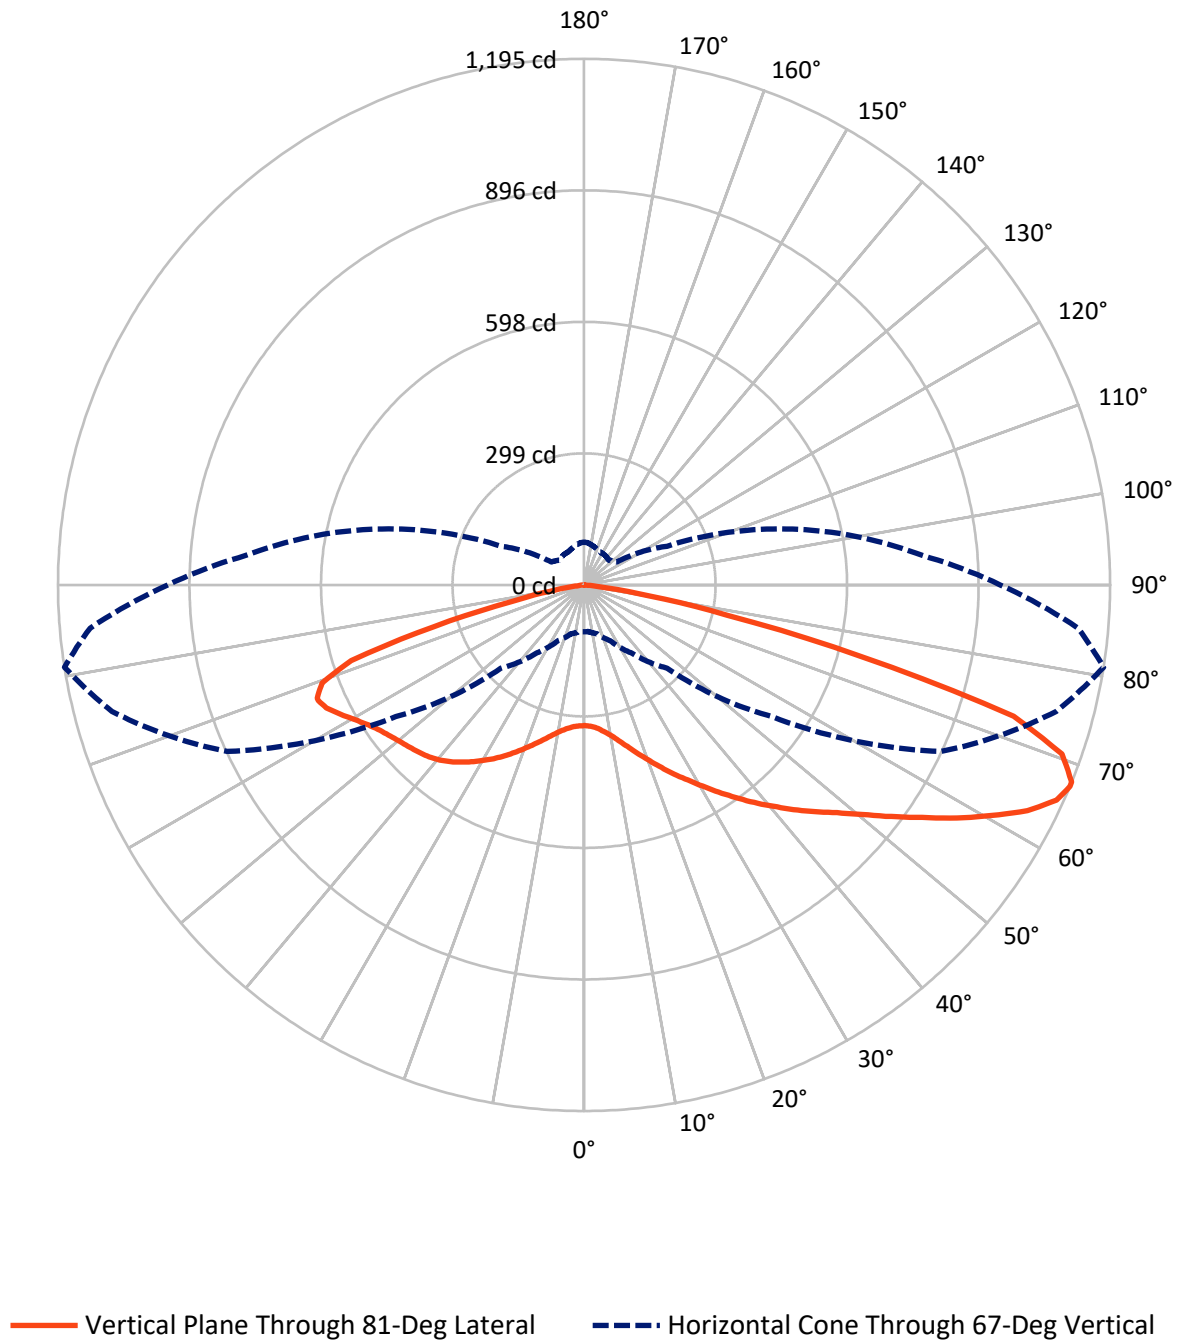

REPORT NUMBER: P1211904

CATALOG NUMBER: GKO-PB1C-830-U-T2R


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	708.3	0.0	708.3
	% Fixture	30.9	0.0	30.9
Street Side	Lumens	1585.5	0.0	1585.5
	% Fixture	69.1	0.0	69.1
Total	Lumens	2293.8	0.0	2293.8
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.1	1.4
10°-20°	119.8	5.2
20°-30°	242.7	10.6
30°-40°	382.7	16.7
40°-50°	470.0	20.5
50°-60°	449.0	19.6
60°-70°	376.5	16.4
70°-80°	199.5	8.7
80°-90°	20.6	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	2293.8	100.0
0°-180°	2293.8	100.0

Coefficient of Utilization

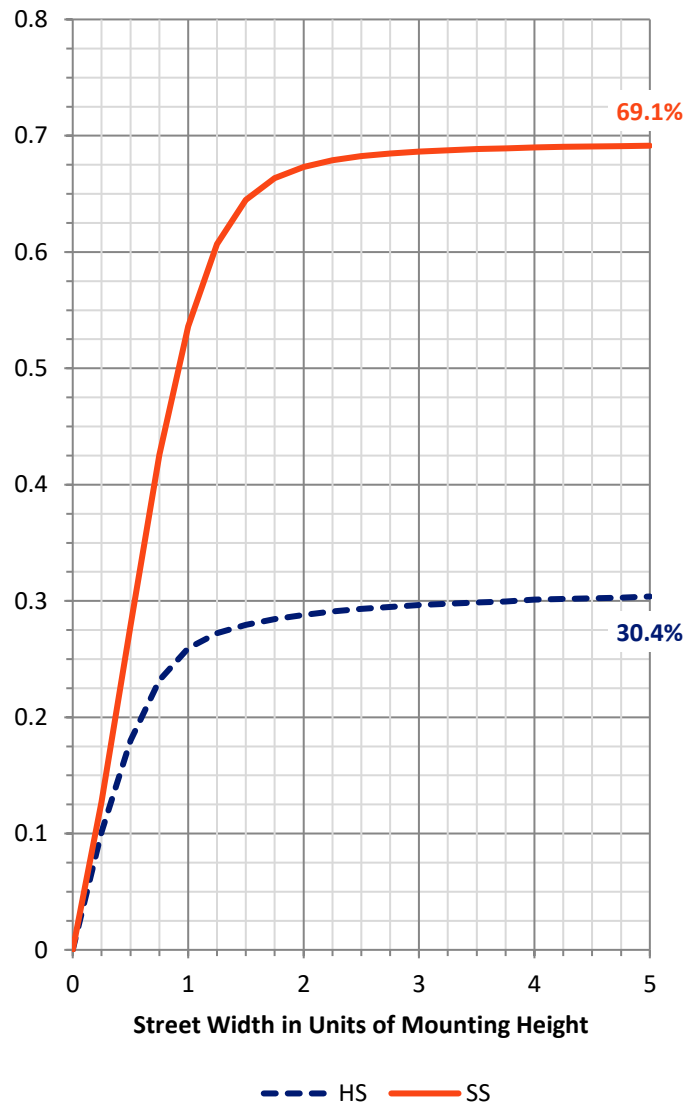

REPORT NUMBER: P1211904


CATALOG NUMBER: GKO-PB1C-830-U-T2R

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	240.6	10.5			
FM	(30°-60°)	944.7	41.2			
FH	(60°-80°)	393.8	17.2			G0/660
FVH	(80°-90°)	6.4	0.3			G0/10
BL	(0°-30°)	155.0	6.8	B1/500		
BM	(30°-60°)	356.9	15.6	B1/1000		
BH	(60°-80°)	182.2	7.9	B1/500		G1/500
BVH	(80°-90°)	14.2	0.6			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G1

Type II Medium

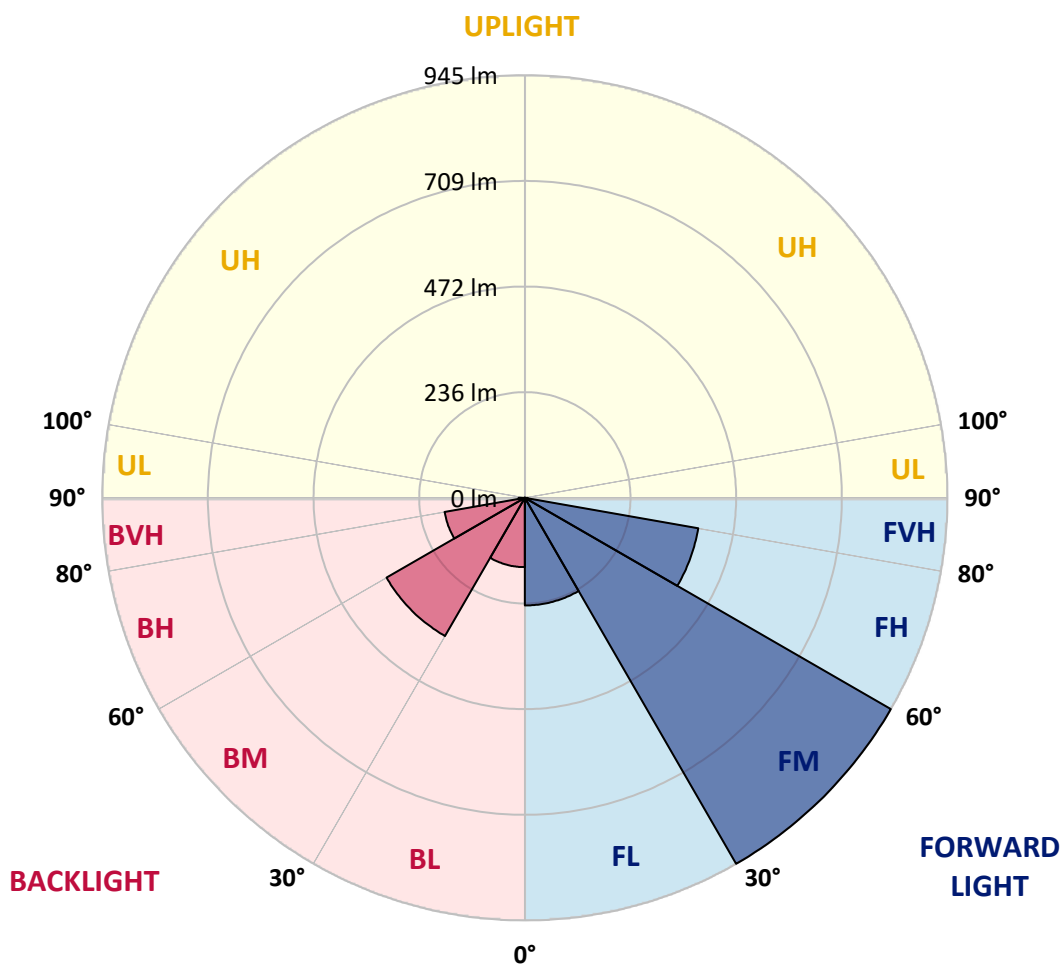

REPORT NUMBER: P1211904

CATALOG NUMBER: GKO-PB1C-830-U-T2R

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	81°	85°
0°	319.5	319.5	319.5	319.5	319.5	319.5	319.5	319.5	319.5	319.5	319.5
2.5°	338.0	338.8	337.1	336.6	334.9	332.2	329.2	327.0	323.5	321.7	320.8
5°	370.0	368.2	366.9	364.7	358.6	353.3	344.5	338.4	331.8	327.4	326.1
7.5°	409.1	409.9	405.5	399.8	391.1	380.5	366.5	355.1	342.8	337.1	334.4
10°	451.6	455.1	450.7	443.7	427.0	411.2	394.1	374.4	357.7	348.9	345.4
12.5°	503.4	505.6	499.9	490.7	470.5	446.8	422.7	398.1	376.1	365.2	359.0
15°	561.3	559.6	553.9	540.3	514.4	488.1	455.1	423.1	397.2	383.6	374.8
17.5°	621.0	618.8	611.4	593.8	564.4	531.5	492.4	452.1	419.6	404.7	392.8
20°	678.1	675.9	670.6	650.9	615.3	575.0	529.3	485.4	445.0	426.6	413.4
22.5°	741.3	739.5	731.2	707.1	668.9	624.6	571.4	519.2	472.7	450.7	434.9
25°	809.8	810.2	801.0	767.2	724.2	672.4	616.7	557.4	503.9	476.2	458.2
27.5°	889.6	889.2	873.4	837.0	783.0	723.3	661.4	597.3	534.6	502.1	481.5
30°	962.1	960.3	942.8	906.3	844.0	776.8	708.8	636.0	569.3	530.6	505.6
32.5°	1015.6	1016.0	1001.6	961.6	900.6	829.1	753.1	679.4	602.6	561.3	533.7
35°	1054.2	1054.7	1040.6	1006.4	949.3	877.8	800.1	720.2	639.9	593.0	563.1
37.5°	1066.5	1066.5	1057.3	1030.5	984.0	921.7	846.2	766.8	677.2	627.2	593.0
40°	1049.8	1051.2	1050.7	1033.2	1001.1	952.0	888.8	811.5	718.9	661.0	623.2
42.5°	1012.1	1013.0	1014.3	1007.7	997.6	968.2	923.0	857.2	760.6	697.8	653.1
45°	949.8	953.3	959.9	962.5	966.5	964.3	944.1	899.7	807.1	734.7	682.5
47.5°	870.8	876.5	885.3	901.1	923.0	940.6	949.3	932.7	852.3	772.9	715.4
50°	761.0	767.2	790.9	823.8	867.3	901.5	934.9	957.2	902.8	819.4	752.3
52.5°	609.2	622.4	662.3	725.5	800.1	851.0	904.1	969.1	954.2	874.3	796.2
55°	463.5	468.3	519.7	595.6	710.6	796.6	862.0	962.9	1002.4	931.8	846.2
57.5°	323.9	329.2	373.9	456.9	584.2	725.5	819.9	942.3	1046.3	999.4	903.7
60°	230.0	235.7	269.0	330.5	453.8	621.9	780.8	916.0	1084.5	1063.4	970.0
62.5°	167.2	170.3	187.8	239.6	327.9	486.3	725.1	898.9	1111.3	1130.2	1038.0
65°	128.2	131.2	141.3	173.8	242.3	355.5	625.0	898.4	1118.3	1179.3	1096.8
67°	106.7	106.2	115.0	139.6	189.2	267.3	521.8	894.9	1110.4	1195.1	1126.6
67.5°	100.9	102.7	109.7	130.4	178.6	246.2	499.5	889.2	1107.8	1194.7	1128.8
70°	80.3	80.8	86.9	103.1	134.3	178.6	359.5	833.0	1067.8	1151.7	1104.3
72.5°	58.8	58.4	67.6	78.1	102.7	129.9	241.0	699.6	981.4	1020.4	981.8
75°	43.5	43.0	47.8	59.7	73.3	97.0	156.2	456.5	664.5	649.1	599.5
77.5°	29.0	29.8	34.2	43.9	52.2	60.1	78.1	210.2	366.0	330.9	318.6
80°	17.6	16.2	19.3	25.0	30.3	30.7	33.4	90.9	157.1	149.7	140.4
82.5°	6.1	6.1	7.5	10.1	10.1	10.1	12.3	21.9	31.2	28.5	27.2
85°	0.0	0.0	0.0	0.0	0.9	1.3	0.9	1.8	3.1	3.5	3.5
87.5°	0.0	0.0	0.0	0.0	0.0	0.4	0.4	0.9	1.3	1.8	1.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1211904

CATALOG NUMBER: GKO-PB1C-830-U-T2R

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	319.5	319.5	319.5	319.5	319.5	319.5	319.5	319.5	319.5	319.5	319.5
2.5°	320.8	320.8	319.5	317.8	316.9	316.4	315.1	313.4	314.7	316.0	316.0
5°	325.2	324.3	321.7	320.0	318.6	318.6	316.9	316.4	317.8	319.1	318.6
7.5°	332.2	330.5	327.4	324.8	325.2	325.7	323.0	323.0	324.3	325.7	325.7
10°	341.9	338.8	335.8	333.6	334.0	334.4	331.8	330.9	332.2	333.6	334.4
12.5°	354.2	350.2	346.7	344.5	344.1	344.5	341.9	341.0	341.0	341.9	341.9
15°	368.7	364.3	359.9	356.8	355.9	355.5	352.0	348.9	348.9	349.4	349.4
17.5°	385.4	379.2	373.5	370.0	367.8	364.7	360.8	356.4	355.1	355.5	355.5
20°	402.0	395.4	388.0	383.2	378.8	373.5	367.4	361.7	359.0	359.0	358.6
22.5°	421.3	412.6	402.5	395.9	388.0	379.2	370.4	363.0	360.3	359.5	359.5
25°	441.1	431.0	416.5	406.4	395.0	382.3	370.9	360.8	356.4	354.6	354.6
27.5°	461.3	449.4	430.6	416.1	399.4	381.8	366.5	353.8	347.6	345.4	344.5
30°	484.1	467.0	442.8	423.1	400.3	377.9	358.1	343.2	334.0	328.7	329.2
32.5°	507.8	486.3	454.3	427.5	399.0	370.4	345.4	326.5	314.7	309.9	308.1
35°	531.9	504.7	464.4	429.7	394.6	359.0	329.2	308.1	294.9	287.9	287.9
37.5°	556.5	524.0	471.4	429.2	386.7	344.1	310.3	287.9	272.6	263.8	261.6
40°	580.7	542.0	476.6	425.7	374.8	326.1	290.1	266.0	245.3	233.9	232.2
42.5°	604.4	557.0	479.3	420.0	360.8	306.4	267.3	234.8	215.1	204.5	204.1
45°	625.9	568.8	479.7	412.6	342.3	284.0	236.6	205.4	185.7	174.7	174.7
47.5°	646.9	582.0	479.3	402.9	322.2	255.0	204.1	173.8	155.8	148.8	146.6
50°	672.4	595.1	478.8	391.1	296.3	220.3	172.5	146.6	131.2	124.2	124.2
52.5°	698.3	610.5	479.7	374.4	265.5	186.5	144.4	121.6	111.5	107.1	106.7
55°	731.6	626.7	481.9	354.6	233.5	153.6	120.3	104.9	97.9	95.7	96.1
57.5°	772.0	649.1	486.3	331.4	196.2	126.0	103.1	94.8	93.0	93.9	94.4
60°	818.1	676.8	492.4	305.0	163.3	104.9	93.0	91.3	93.0	96.6	97.0
62.5°	871.7	710.1	500.3	275.6	130.8	92.2	88.7	90.0	91.3	97.0	97.4
65°	919.1	746.1	502.1	241.0	106.2	83.8	86.0	86.9	90.4	97.0	97.4
67°	945.8	770.7	490.2	208.0	90.9	79.4	82.5	83.4	89.5	96.1	97.0
67.5°	948.9	776.0	482.3	199.7	87.8	78.6	81.6	83.4	89.5	96.1	96.6
70°	939.7	772.5	429.7	150.5	72.4	72.4	75.9	79.9	86.0	93.0	96.1
72.5°	857.6	704.4	332.7	102.3	61.4	65.4	70.7	76.4	82.1	90.4	95.7
75°	542.0	453.4	203.6	68.5	51.4	58.4	66.7	73.3	78.1	84.3	87.8
77.5°	289.7	224.3	87.8	40.4	40.4	51.8	61.9	68.0	70.7	72.9	75.1
80°	136.9	104.5	42.6	24.1	28.1	40.4	54.9	61.4	62.3	65.0	65.8
82.5°	27.2	23.7	14.0	12.7	18.4	29.0	45.6	53.1	53.5	57.9	58.8
85°	3.5	3.1	2.2	4.8	11.9	21.5	35.1	45.6	46.5	46.5	45.6
87.5°	1.8	1.3	1.3	3.5	8.8	16.2	29.0	38.2	38.6	30.3	29.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)