

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1211924

Luminaire Tested: **GKO-PB1C-840-U-T2R**

Issue Date: 11/5/2025



Test Information

Test Method: LM-79-08
Report Number: P1211924
Test Lab: INNOVATION CENTER(G1)
Issue Date: 11/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: GKO-PB1C-840-U-T2R
Description: GEKKO WALL PACK 2500LM PACKAGE 80CRI 4000K FIXTURE w/ TYPE II
ROADWAY DISTRIBUTION OPTIC
Light Source: (10) 4000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2405.7 lumens
Efficiency: N/A
Efficacy: 141.5 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
IES Classification: Type II - Medium
BUG Rating: B1 - U0 - G1

Input Watts (W): 17
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): 13%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

REPORT NUMBER: P1211924
 CATALOG NUMBER: GKO-PB1C-840-U-T2R

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

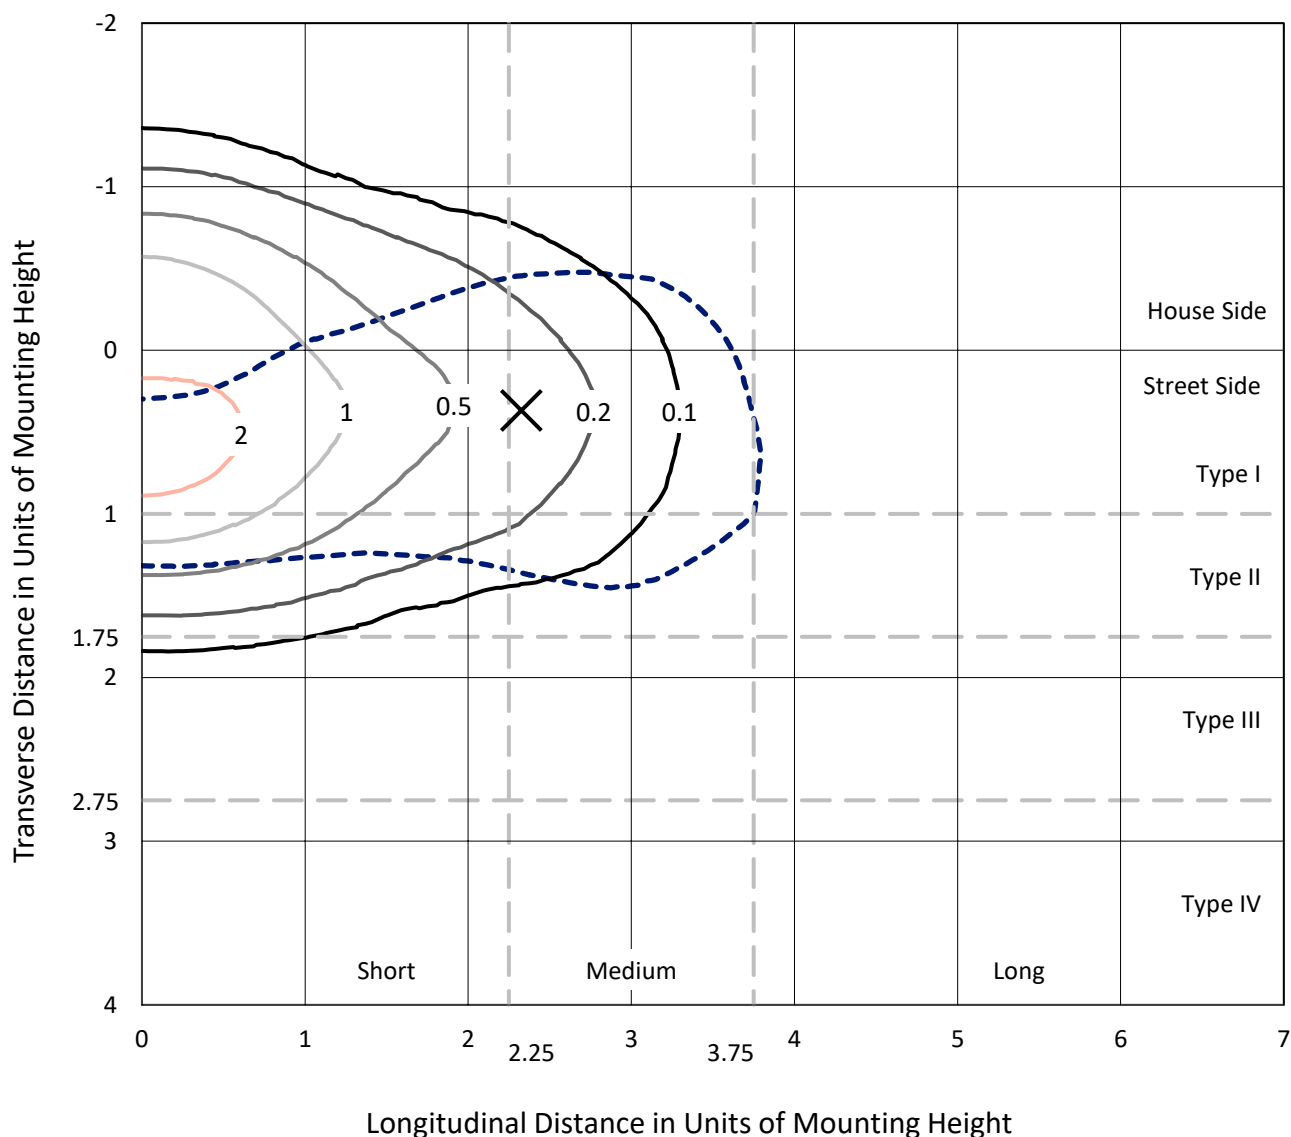

Based on 15 foot mounting height. Maximum calculated value = 2.9 fc
 Type II - Medium - N/A

REPORT NUMBER: P1211924
CATALOG NUMBER: GKO-PB1C-840-U-T2R

Luminous Intensity Polar Plot

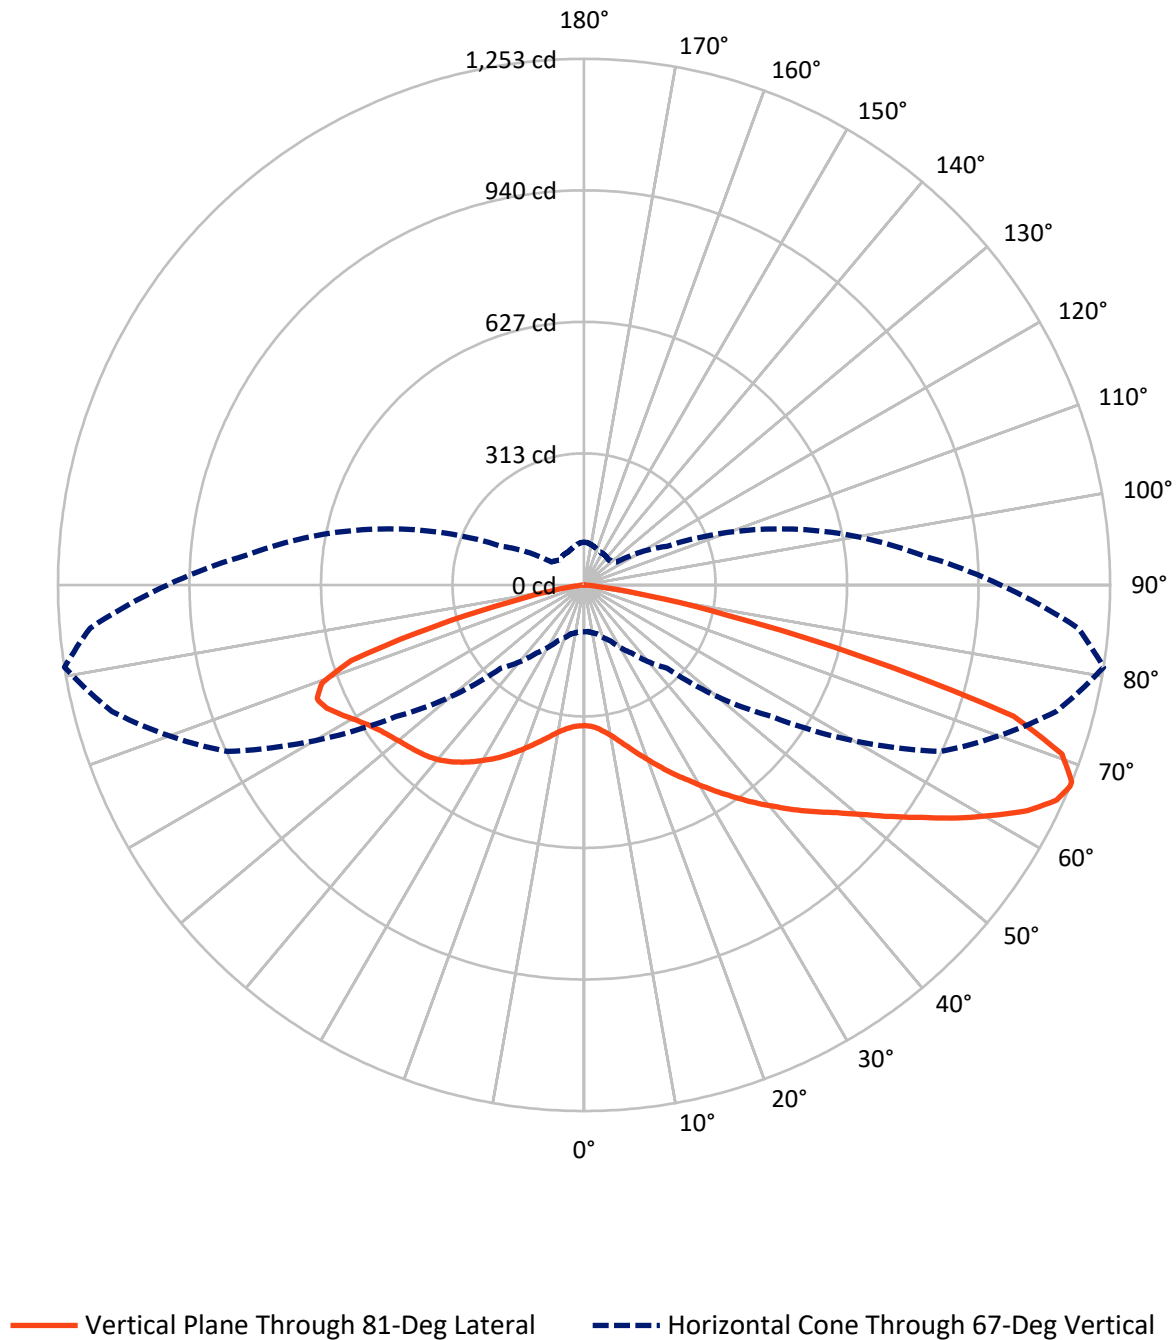

REPORT NUMBER: P1211924

CATALOG NUMBER: GKO-PB1C-840-U-T2R


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	742.9	0.0	742.9
	% Fixture	30.9	0.0	30.9
Street Side	Lumens	1662.8	0.0	1662.8
	% Fixture	69.1	0.0	69.1
Total	Lumens	2405.7	0.0	2405.7
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	34.7	1.4
10°-20°	125.6	5.2
20°-30°	254.5	10.6
30°-40°	401.4	16.7
40°-50°	492.9	20.5
50°-60°	470.9	19.6
60°-70°	394.9	16.4
70°-80°	209.2	8.7
80°-90°	21.6	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	2405.7	100.0
0°-180°	2405.7	100.0

Coefficient of Utilization

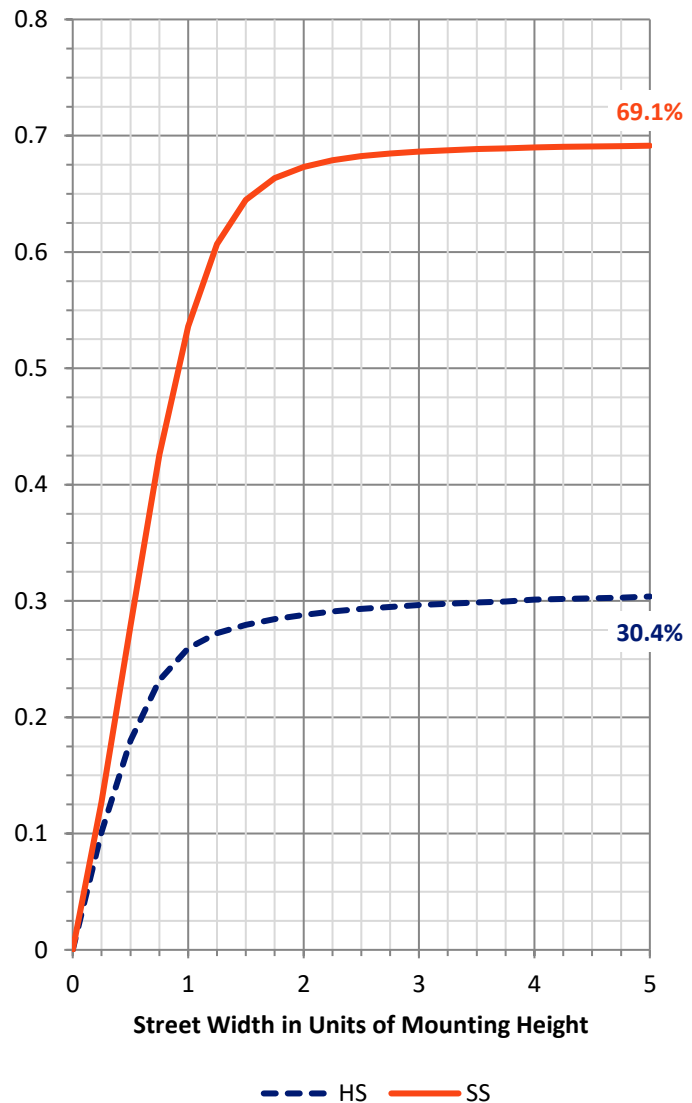

REPORT NUMBER: P1211924


CATALOG NUMBER: GKO-PB1C-840-U-T2R

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	252.3	10.5			
FM	(30°-60°)	990.8	41.2			
FH	(60°-80°)	413.0	17.2			G0/660
FVH	(80°-90°)	6.7	0.3			G0/10
BL	(0°-30°)	162.6	6.8	B1/500		
BM	(30°-60°)	374.3	15.6	B1/1000		
BH	(60°-80°)	191.1	7.9	B1/500		G1/500
BVH	(80°-90°)	14.9	0.6			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G1

Type II Medium

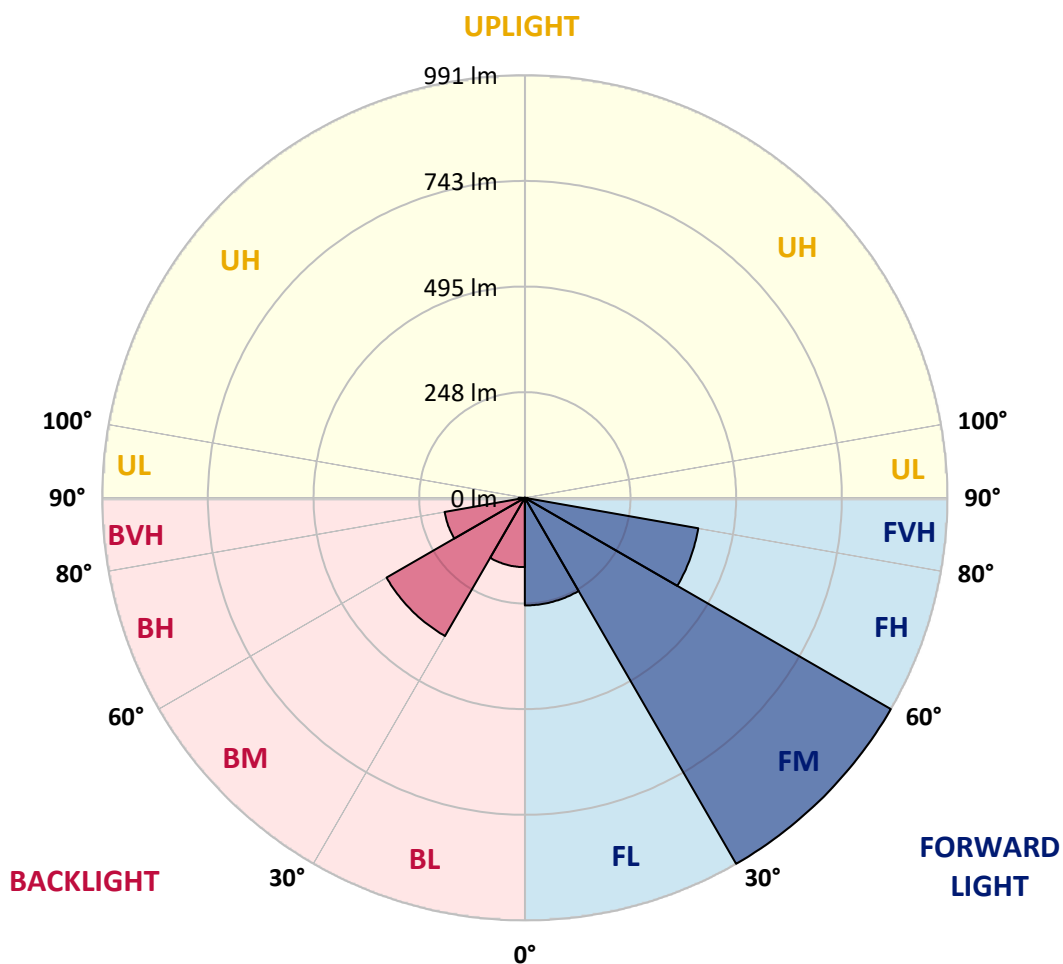



REPORT NUMBER: P1211924

CATALOG NUMBER: GKO-PB1C-840-U-T2R

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	81°	85°
0°	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.1
2.5°	354.4	355.4	353.5	353.1	351.2	348.5	345.2	342.9	339.3	337.4	336.5
5°	388.0	386.2	384.8	382.5	376.1	370.6	361.4	354.9	348.0	343.4	342.0
7.5°	429.0	429.9	425.3	419.4	410.1	399.1	384.4	372.4	359.5	353.5	350.8
10°	473.7	477.4	472.7	465.4	447.9	431.3	413.4	392.7	375.2	366.0	362.3
12.5°	528.0	530.3	524.3	514.6	493.5	468.6	443.3	417.5	394.5	383.0	376.5
15°	588.7	586.9	580.9	566.7	539.5	511.9	477.4	443.7	416.6	402.3	393.1
17.5°	651.4	649.1	641.2	622.8	592.0	557.4	516.5	474.1	440.1	424.4	412.0
20°	711.2	708.9	703.4	682.7	645.4	603.0	555.1	509.1	466.8	447.4	433.6
22.5°	777.5	775.6	766.9	741.6	701.5	655.0	599.3	544.6	495.8	472.7	456.2
25°	849.3	849.7	840.1	804.6	759.5	705.2	646.7	584.6	528.4	499.4	480.6
27.5°	933.1	932.6	916.0	877.8	821.2	758.6	693.7	626.5	560.7	526.6	505.0
30°	1009.0	1007.2	988.8	950.6	885.2	814.8	743.4	667.0	597.0	556.5	530.3
32.5°	1065.2	1065.6	1050.4	1008.6	944.6	869.5	789.9	712.6	632.0	588.7	559.7
35°	1105.7	1106.1	1091.4	1055.5	995.7	920.6	839.2	755.4	671.1	621.9	590.6
37.5°	1118.6	1118.6	1108.9	1080.8	1032.0	966.7	887.5	804.2	710.3	657.8	621.9
40°	1101.1	1102.5	1102.0	1083.6	1050.0	998.4	932.1	851.1	754.0	693.2	653.7
42.5°	1061.5	1062.4	1063.8	1056.9	1046.3	1015.5	968.1	899.0	797.7	731.9	685.0
45°	996.1	999.8	1006.7	1009.5	1013.6	1011.3	990.1	943.7	846.5	770.6	715.8
47.5°	913.3	919.3	928.5	945.0	968.1	986.5	995.7	978.2	893.9	810.6	750.3
50°	798.2	804.6	829.5	864.0	909.6	945.5	980.5	1004.0	946.9	859.4	789.0
52.5°	638.9	652.7	694.6	760.9	839.2	892.6	948.3	1016.4	1000.7	917.0	835.0
55°	486.1	491.2	545.0	624.7	745.3	835.5	904.1	1009.9	1051.4	977.3	887.5
57.5°	339.7	345.2	392.2	479.2	612.7	760.9	859.9	988.3	1097.4	1048.1	947.8
60°	241.2	247.2	282.2	346.6	476.0	652.3	818.9	960.7	1137.4	1115.4	1017.3
62.5°	175.4	178.6	197.0	251.3	343.9	510.0	760.4	942.7	1165.5	1185.3	1088.7
65°	134.4	137.6	148.2	182.3	254.1	372.9	655.5	942.3	1172.9	1236.9	1150.3
67°	111.9	111.4	120.6	146.4	198.4	280.3	547.3	938.6	1164.6	1253.4	1181.6
67.5°	105.9	107.7	115.1	136.7	187.3	258.2	523.8	932.6	1161.8	1253.0	1183.9
70°	84.2	84.7	91.1	108.2	140.9	187.3	377.0	873.7	1120.0	1207.9	1158.2
72.5°	61.7	61.2	70.9	81.9	107.7	136.3	252.7	733.7	1029.3	1070.2	1029.7
75°	45.6	45.1	50.2	62.6	76.9	101.7	163.9	478.7	696.9	680.8	628.8
77.5°	30.4	31.3	35.9	46.0	54.8	63.1	81.9	220.5	383.9	347.1	334.2
80°	18.4	17.0	20.3	26.2	31.8	32.2	35.0	95.3	164.8	157.0	147.3
82.5°	6.4	6.4	7.8	10.6	10.6	10.6	12.9	23.0	32.7	29.9	28.5
85°	0.0	0.0	0.0	0.0	0.9	1.4	0.9	1.8	3.2	3.7	3.7
87.5°	0.0	0.0	0.0	0.0	0.0	0.5	0.5	0.9	1.4	1.8	1.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1211924

CATALOG NUMBER: GKO-PB1C-840-U-T2R

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.1	335.1
2.5°	336.5	336.5	335.1	333.3	332.4	331.9	330.5	328.7	330.0	331.4	331.4
5°	341.1	340.2	337.4	335.6	334.2	334.2	332.4	331.9	333.3	334.7	334.2
7.5°	348.5	346.6	343.4	340.6	341.1	341.6	338.8	338.8	340.2	341.6	341.6
10°	358.6	355.4	352.1	349.8	350.3	350.8	348.0	347.1	348.5	349.8	350.8
12.5°	371.5	367.3	363.7	361.4	360.9	361.4	358.6	357.7	357.7	358.6	358.6
15°	386.7	382.1	377.5	374.2	373.3	372.9	369.2	366.0	366.0	366.4	366.4
17.5°	404.2	397.7	391.7	388.0	385.7	382.5	378.4	373.8	372.4	372.9	372.9
20°	421.7	414.7	406.9	401.9	397.3	391.7	385.3	379.3	376.5	376.5	376.1
22.5°	441.9	432.7	422.1	415.2	406.9	397.7	388.5	380.7	377.9	377.0	377.0
25°	462.6	452.0	436.8	426.3	414.3	400.9	389.0	378.4	373.8	371.9	371.9
27.5°	483.8	471.4	451.6	436.4	418.9	400.5	384.4	371.0	364.6	362.3	361.4
30°	507.7	489.8	464.5	443.7	419.8	396.3	375.6	360.0	350.3	344.8	345.2
32.5°	532.6	510.0	476.4	448.4	418.4	388.5	362.3	342.5	330.0	325.0	323.1
35°	557.9	529.4	487.0	450.7	413.8	376.5	345.2	323.1	309.3	302.0	302.0
37.5°	583.7	549.6	494.4	450.2	405.5	360.9	325.4	302.0	285.9	276.7	274.4
40°	609.0	568.5	499.9	446.5	393.1	342.0	304.3	279.0	257.3	245.4	243.5
42.5°	633.9	584.1	502.7	440.5	378.4	321.3	280.3	246.3	225.6	214.5	214.0
45°	656.4	596.6	503.1	432.7	359.0	297.8	248.1	215.4	194.7	183.2	183.2
47.5°	678.5	610.4	502.7	422.6	337.9	267.4	214.0	182.3	163.4	156.0	153.7
50°	705.2	624.2	502.2	410.1	310.7	231.1	180.9	153.7	137.6	130.3	130.3
52.5°	732.4	640.3	503.1	392.7	278.5	195.6	151.4	127.5	116.9	112.3	111.9
55°	767.4	657.3	505.4	371.9	244.9	161.1	126.1	110.0	102.7	100.3	100.8
57.5°	809.7	680.8	510.0	347.5	205.8	132.1	108.2	99.4	97.6	98.5	99.0
60°	858.0	709.8	516.5	319.9	171.2	110.0	97.6	95.7	97.6	101.3	101.7
62.5°	914.2	744.8	524.8	289.1	137.2	96.7	93.0	94.4	95.7	101.7	102.2
65°	963.9	782.5	526.6	252.7	111.4	87.9	90.2	91.1	94.8	101.7	102.2
67°	992.0	808.3	514.2	218.2	95.3	83.3	86.5	87.5	93.9	100.8	101.7
67.5°	995.2	813.8	505.9	209.4	92.1	82.4	85.6	87.5	93.9	100.8	101.3
70°	985.5	810.2	450.7	157.9	76.0	76.0	79.6	83.8	90.2	97.6	100.8
72.5°	899.5	738.8	348.9	107.3	64.4	68.6	74.1	80.1	86.1	94.8	100.3
75°	568.5	475.5	213.6	71.8	53.9	61.2	70.0	76.9	81.9	88.4	92.1
77.5°	303.8	235.2	92.1	42.3	42.3	54.3	64.9	71.3	74.1	76.4	78.7
80°	143.6	109.6	44.7	25.3	29.5	42.3	57.5	64.4	65.4	68.1	69.0
82.5°	28.5	24.9	14.7	13.3	19.3	30.4	47.9	55.7	56.2	60.8	61.7
85°	3.7	3.2	2.3	5.1	12.4	22.6	36.8	47.9	48.8	48.8	47.9
87.5°	1.8	1.4	1.4	3.7	9.2	17.0	30.4	40.0	40.5	31.8	30.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)