

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1211929

Luminaire Tested: **GKO-PB2C-840-U-T2R**

Issue Date: 11/5/2025



Test Information

Test Method: LM-79-08
Report Number: P1211929
Test Lab: INNOVATION CENTER(G1)
Issue Date: 11/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: GKO-PB2C-840-U-T2R
Description: GEKKO WALL PACK 8000LM PACKAGE 80CRI 4000K FIXTURE w/ TYPE II
ROADWAY DISTRIBUTION OPTIC
Light Source: (20) 4000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7764.2 lumens
Efficiency: N/A
Efficacy: 133.4 lumens/watt
Luminous Opening: Rectangular (W 0.67' x L: 0.33' x H: 0')
IES Classification: Type II - Medium
BUG Rating: B2 - U0 - G2

Input Watts (W): 58.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): 5%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT


REPORT NUMBER: P1211929

CATALOG NUMBER: GKO-PB2C-840-U-T2R

Iso-Footcandle Lines of Horizontal Illumination

✕ Max cd


--- 1/2 Max cd

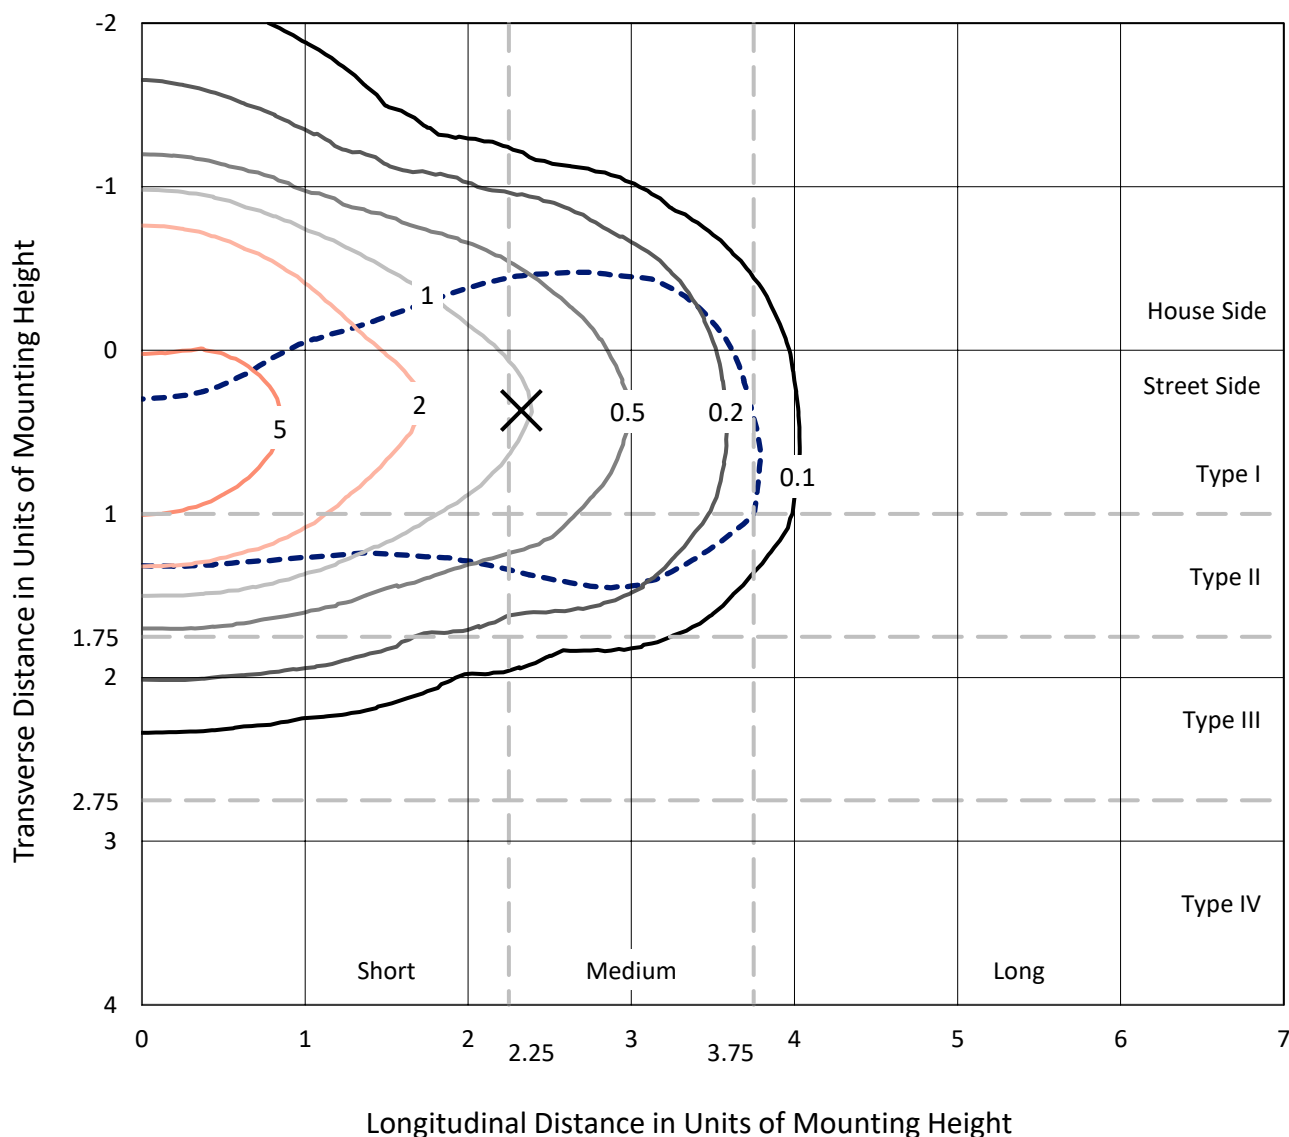

Based on 15 foot mounting height. Maximum calculated value = 9.3 fc
 Type II - Medium - N/A

REPORT NUMBER: P1211929
CATALOG NUMBER: GKO-PB2C-840-U-T2R

Luminous Intensity Polar Plot

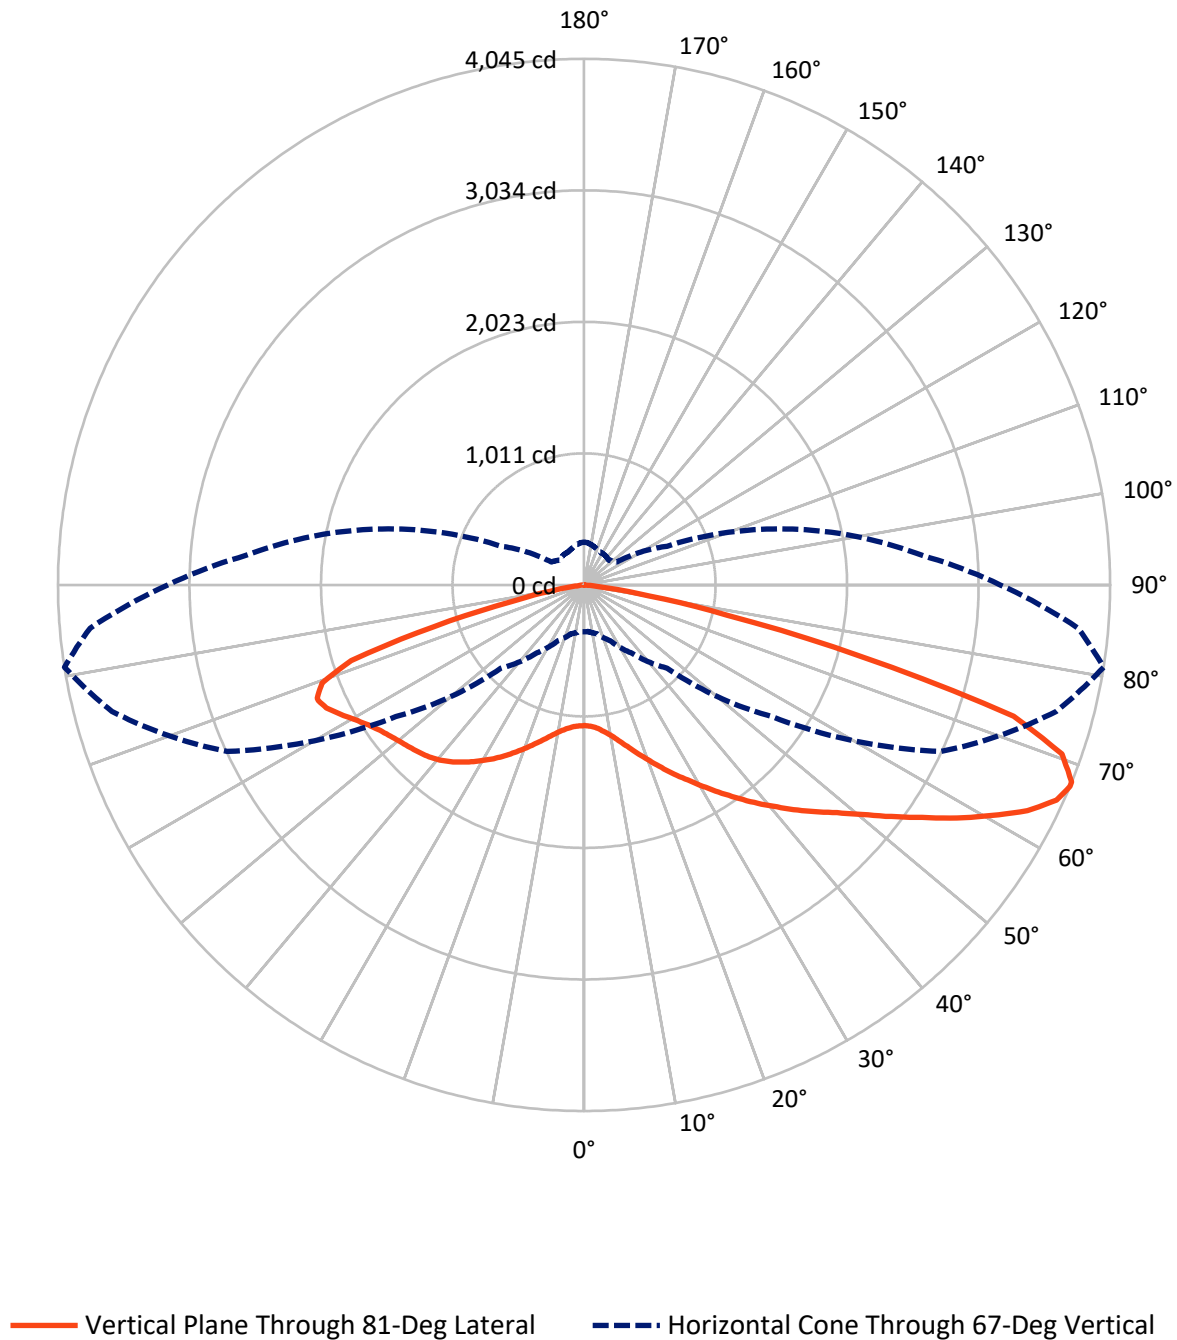

REPORT NUMBER: P1211929

CATALOG NUMBER: GKO-PB2C-840-U-T2R


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	2397.6	0.0	2397.6
	% Fixture	30.9	0.0	30.9
Street Side	Lumens	5366.7	0.0	5366.7
	% Fixture	69.1	0.0	69.1
Total	Lumens	7764.2	0.0	7764.2
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.0	1.4
10°-20°	405.5	5.2
20°-30°	821.5	10.6
30°-40°	1295.4	16.7
40°-50°	1590.8	20.5
50°-60°	1519.7	19.6
60°-70°	1274.5	16.4
70°-80°	675.1	8.7
80°-90°	69.8	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	7764.2	100.0
0°-180°	7764.2	100.0

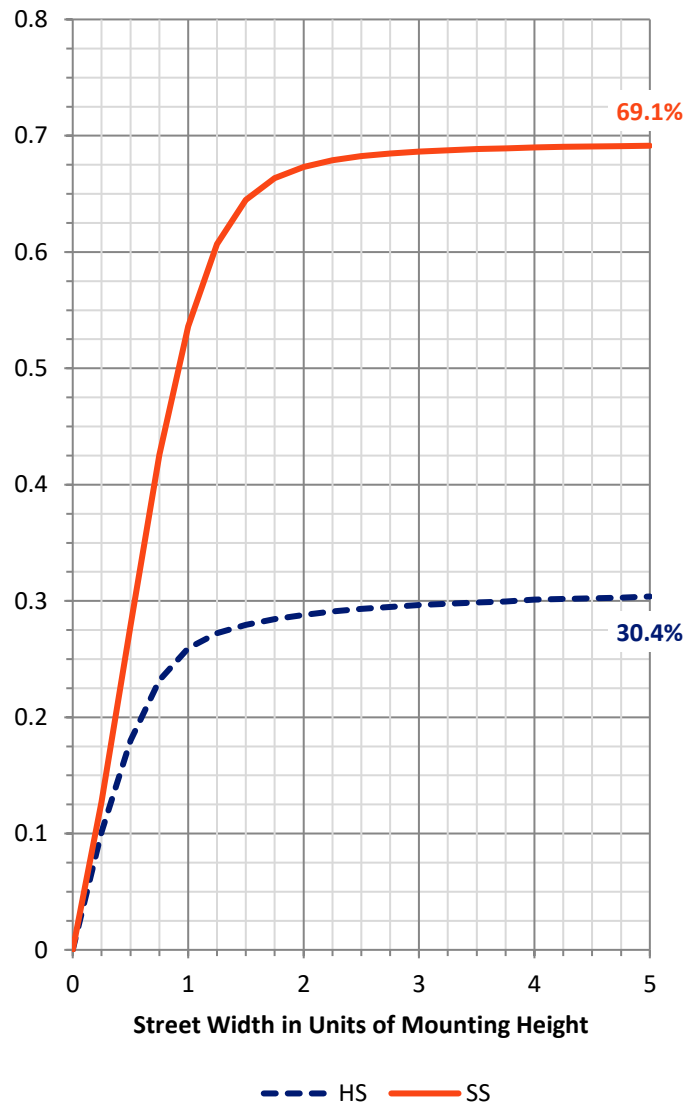

REPORT NUMBER: P1211929


CATALOG NUMBER: GKO-PB2C-840-U-T2R

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	814.4	10.5			
FM	(30°-60°)	3197.8	41.2			
FH	(60°-80°)	1332.8	17.2			G1/1800
FVH	(80°-90°)	21.7	0.3			G1/100
BL	(0°-30°)	524.7	6.8	B2/1000		
BM	(30°-60°)	1208.1	15.6	B2/2500		
BH	(60°-80°)	616.8	7.9	B2/1000		G2/1000
BVH	(80°-90°)	48.1	0.6			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G2

Type II Medium

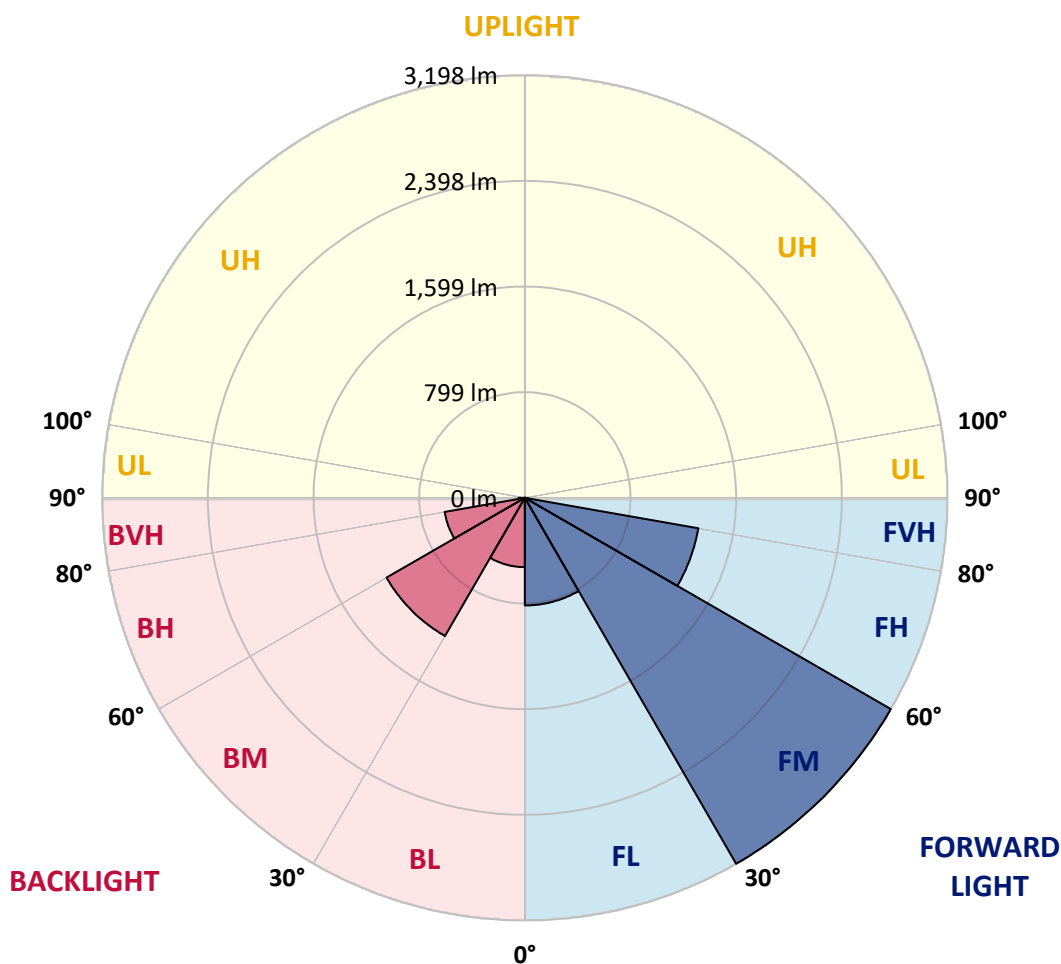



REPORT NUMBER: P1211929

CATALOG NUMBER: GKO-PB2C-840-U-T2R

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	81°	85°
0°	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5
2.5°	1143.9	1146.9	1141.0	1139.5	1133.5	1124.6	1114.2	1106.8	1094.9	1089.0	1086.0
5°	1252.4	1246.4	1242.0	1234.6	1213.8	1195.9	1166.2	1145.4	1123.1	1108.3	1103.8
7.5°	1384.6	1387.6	1372.7	1353.4	1323.7	1288.0	1240.5	1201.9	1160.3	1141.0	1132.1
10°	1528.7	1540.6	1525.7	1502.0	1445.5	1392.0	1334.1	1267.2	1210.8	1181.1	1169.2
12.5°	1704.0	1711.5	1692.1	1660.9	1592.6	1512.4	1430.7	1347.5	1273.2	1236.0	1215.2
15°	1900.1	1894.2	1874.9	1828.8	1741.2	1652.0	1540.6	1432.2	1344.5	1298.4	1268.7
17.5°	2102.2	2094.7	2069.5	2010.1	1910.5	1799.1	1666.9	1530.2	1420.3	1369.8	1329.6
20°	2295.3	2287.9	2270.0	2203.2	2082.9	1946.2	1791.7	1643.1	1506.4	1444.0	1399.5
22.5°	2509.2	2503.3	2475.1	2393.4	2264.1	2114.1	1934.3	1757.5	1600.0	1525.7	1472.3
25°	2741.0	2742.5	2711.3	2596.9	2451.3	2276.0	2087.3	1886.8	1705.5	1611.9	1551.0
27.5°	3011.4	3009.9	2956.4	2833.1	2650.4	2448.3	2238.9	2021.9	1809.5	1699.6	1629.7
30°	3256.5	3250.6	3191.1	3067.8	2856.9	2629.6	2399.3	2152.7	1926.9	1796.1	1711.5
32.5°	3437.8	3439.2	3390.2	3255.0	3048.5	2806.4	2549.3	2299.8	2039.8	1900.1	1806.5
35°	3568.5	3570.0	3522.4	3406.6	3213.4	2971.3	2708.3	2437.9	2166.1	2007.1	1906.1
37.5°	3610.1	3610.1	3578.9	3488.3	3330.8	3119.8	2864.3	2595.4	2292.3	2123.0	2007.1
40°	3553.6	3558.1	3556.6	3497.2	3388.7	3222.3	3008.4	2746.9	2433.5	2237.4	2109.6
42.5°	3425.9	3428.8	3433.3	3411.0	3376.8	3277.3	3124.3	2901.4	2574.6	2362.2	2210.6
45°	3214.9	3226.8	3249.1	3258.0	3271.4	3263.9	3195.6	3045.6	2732.1	2487.0	2310.2
47.5°	2947.5	2966.8	2996.5	3050.0	3124.3	3183.7	3213.4	3157.0	2885.1	2616.2	2421.6
50°	2576.1	2596.9	2677.1	2788.5	2935.6	3051.5	3164.4	3240.2	3056.0	2773.7	2546.4
52.5°	2062.1	2106.6	2241.8	2455.8	2708.3	2880.6	3060.4	3280.3	3229.8	2959.4	2694.9
55°	1568.8	1585.2	1759.0	2016.0	2405.2	2696.4	2917.8	3259.5	3393.2	3154.0	2864.3
57.5°	1096.4	1114.2	1265.8	1546.5	1977.4	2455.8	2775.2	3189.7	3541.8	3382.8	3058.9
60°	778.5	797.8	910.7	1118.7	1536.1	2105.1	2642.9	3100.5	3671.0	3599.7	3283.3
62.5°	566.0	576.4	635.9	811.2	1109.8	1646.1	2454.3	3042.6	3761.6	3825.5	3513.5
65°	433.8	444.2	478.4	588.3	820.1	1203.4	2115.5	3041.1	3785.4	3991.9	3712.6
67°	361.0	359.5	389.2	472.4	640.3	904.8	1766.4	3029.2	3758.7	4045.4	3813.6
67.5°	341.7	347.6	371.4	441.2	604.7	833.4	1690.7	3009.9	3749.7	4043.9	3821.1
70°	271.9	273.4	294.2	349.1	454.6	604.7	1216.7	2819.7	3614.5	3898.3	3737.9
72.5°	199.1	197.6	228.8	264.4	347.6	439.7	815.6	2368.1	3321.9	3454.1	3323.4
75°	147.1	145.6	161.9	202.0	248.1	328.3	528.9	1545.1	2249.3	2197.3	2029.4
77.5°	98.1	101.0	115.9	148.6	176.8	203.5	264.4	711.6	1239.0	1120.2	1078.6
80°	59.4	55.0	65.4	84.7	102.5	104.0	112.9	307.5	531.9	506.6	475.4
82.5°	20.8	20.8	25.3	34.2	34.2	34.2	41.6	74.3	105.5	96.6	92.1
85°	0.0	0.0	0.0	0.0	3.0	4.5	3.0	5.9	10.4	11.9	11.9
87.5°	0.0	0.0	0.0	0.0	0.0	1.5	1.5	3.0	4.5	5.9	5.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1211929

CATALOG NUMBER: GKO-PB2C-840-U-T2R

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5	1081.5
2.5°	1086.0	1086.0	1081.5	1075.6	1072.6	1071.1	1066.7	1060.7	1065.2	1069.7	1069.7
5°	1100.9	1097.9	1089.0	1083.0	1078.6	1078.6	1072.6	1071.1	1075.6	1080.1	1078.6
7.5°	1124.6	1118.7	1108.3	1099.4	1100.9	1102.3	1093.4	1093.4	1097.9	1102.3	1102.3
10°	1157.3	1146.9	1136.5	1129.1	1130.6	1132.1	1123.1	1120.2	1124.6	1129.1	1132.1
12.5°	1198.9	1185.5	1173.7	1166.2	1164.7	1166.2	1157.3	1154.3	1154.3	1157.3	1157.3
15°	1247.9	1233.1	1218.2	1207.8	1204.8	1203.4	1191.5	1181.1	1181.1	1182.6	1182.6
17.5°	1304.4	1283.6	1264.3	1252.4	1245.0	1234.6	1221.2	1206.3	1201.9	1203.4	1203.4
20°	1360.8	1338.6	1313.3	1297.0	1282.1	1264.3	1243.5	1224.2	1215.2	1215.2	1213.8
22.5°	1426.2	1396.5	1362.3	1340.0	1313.3	1283.6	1253.9	1228.6	1219.7	1216.7	1216.7
25°	1493.1	1458.9	1409.9	1375.7	1337.1	1294.0	1255.4	1221.2	1206.3	1200.4	1200.4
27.5°	1561.4	1521.3	1457.4	1408.4	1351.9	1292.5	1240.5	1197.4	1176.6	1169.2	1166.2
30°	1638.7	1580.7	1499.0	1432.2	1354.9	1279.1	1212.3	1161.8	1130.6	1112.7	1114.2
32.5°	1718.9	1646.1	1537.6	1447.0	1350.4	1253.9	1169.2	1105.3	1065.2	1048.9	1042.9
35°	1800.6	1708.5	1571.8	1454.4	1335.6	1215.2	1114.2	1042.9	998.3	974.6	974.6
37.5°	1883.8	1773.8	1595.6	1453.0	1308.8	1164.7	1050.3	974.6	922.6	892.9	885.4
40°	1965.5	1834.8	1613.4	1441.1	1268.7	1103.8	982.0	900.3	830.5	791.8	785.9
42.5°	2045.7	1885.3	1622.3	1421.8	1221.2	1037.0	904.8	794.8	728.0	692.3	690.8
45°	2118.5	1925.4	1623.8	1396.5	1158.8	961.2	800.8	695.3	628.4	591.3	591.3
47.5°	2189.8	1970.0	1622.3	1363.8	1090.5	863.2	690.8	588.3	527.4	503.6	496.2
50°	2276.0	2014.5	1620.8	1323.7	1002.8	745.8	583.9	496.2	444.2	420.4	420.4
52.5°	2363.6	2066.5	1623.8	1267.2	898.8	631.4	488.8	411.5	377.4	362.5	361.0
55°	2476.6	2121.5	1631.2	1200.4	790.4	520.0	407.1	355.1	331.3	323.9	325.4
57.5°	2613.2	2197.3	1646.1	1121.7	664.1	426.4	349.1	320.9	315.0	317.9	319.4
60°	2769.2	2290.8	1666.9	1032.5	552.7	355.1	315.0	309.0	315.0	326.8	328.3
62.5°	2950.5	2403.8	1693.6	933.0	442.7	312.0	300.1	304.6	309.0	328.3	329.8
65°	3110.9	2525.6	1699.6	815.6	359.5	283.8	291.2	294.2	306.0	328.3	329.8
67°	3201.5	2608.8	1659.5	704.2	307.5	268.9	279.3	282.3	303.1	325.4	328.3
67.5°	3211.9	2626.6	1632.7	676.0	297.1	265.9	276.3	282.3	303.1	325.4	326.8
70°	3180.7	2614.7	1454.4	509.6	245.1	245.1	257.0	270.4	291.2	315.0	325.4
72.5°	2902.9	2384.4	1126.1	346.2	208.0	221.4	239.2	258.5	277.8	306.0	323.9
75°	1834.8	1534.7	689.3	231.8	173.8	197.6	225.8	248.1	264.4	285.2	297.1
77.5°	980.5	759.2	297.1	136.7	136.7	175.3	209.5	230.3	239.2	246.6	254.0
80°	463.5	353.6	144.1	81.7	95.1	136.7	185.7	208.0	211.0	219.9	222.8
82.5°	92.1	80.2	47.5	43.1	62.4	98.1	154.5	179.8	181.2	196.1	199.1
85°	11.9	10.4	7.4	16.3	40.1	72.8	118.9	154.5	157.5	157.5	154.5
87.5°	5.9	4.5	4.5	11.9	29.7	55.0	98.1	129.3	130.7	102.5	99.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP3-2511-595-3

Test Date: 11/12/2025

Luminaire Tested: GKO-PB1C-840-U-T4W

Data in this report applies to families of products including GKO-PB1C-840*

Test Information

Test Method: LM-79-2019
 Report Number: SP3-2511-595-3
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP3 - 3M SPHERE
 Measurement Geometry: 4π
 Issue Date: 01/27/2026
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GKO-PB1C-840-U-T4W**
 Description: Gekko Wedge Wall Pack Fixture 1 SQ w/ T4W distribution

Spectral Parameters

CCT (K): 3958
 CIE u' : 0.2251
 CIE v' : 0.5041
 Duv: 0.0014
 CIE x: 0.3833
 CIE y: 0.3816
 CIE z: 0.2351
 Peak Wavelength (nm): 450
 Dominant Wavelength (nm): 578
 Purity: 29.56261
 R_f: 82.9
 R_g: 94.7

CRI (Ra): 80.8
 R1: 78.3
 R2: 87.6
 R3: 95.0
 R4: 79.6
 R5: 78.8
 R6: 83.3
 R7: 84.3
 R8: 59.4
 R9: -5.1
 R10: 71.4
 R11: 78.5
 R12: 60.5
 R13: 80.5
 R14: 97.5
 R15: 70.7



Test Conditions

Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP3-2511-595-3

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	3M SPHERE IN02505	7/1/2025	1/1/2026
Power Meter	XITRON INXT2011006	10/21/2025	10/21/2026
AC Power Source	CHROMA 61604 IN6064A	10/20/2025	10/20/2026
DC Power Source	EYSIGHT N5770A IN0534	10/20/2025	10/20/2026
Sphere Thermometer	TANDD IN4036E	10/21/2025	10/21/2026

REPORT NUMBER: SP3-2511-595-3

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP3-2511-595-3

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	296	NR	620	736	NR	750	18	NR	880	0	NR
365	0	NR	495	355	NR	625	683	NR	755	15	NR	885	0	NR
370	0	NR	500	415	NR	630	628	NR	760	13	NR	890	0	NR
375	0	NR	505	468	NR	635	571	NR	765	11	NR	895	0	NR
380	0	NR	510	511	NR	640	515	NR	770	9	NR	900	0	NR
385	0	NR	515	545	NR	645	460	NR	775	8	NR	905	0	NR
390	1	NR	520	570	NR	650	408	NR	780	7	NR	910	0	NR
395	3	NR	525	590	NR	655	359	NR	785	6	NR	915	0	NR
400	5	NR	530	606	NR	660	313	NR	790	5	NR	920	0	NR
405	7	NR	535	623	NR	665	273	NR	795	4	NR	925	0	NR
410	12	NR	540	641	NR	670	236	NR	800	4	NR	930	0	NR
415	22	NR	545	664	NR	675	204	NR	805	3	NR	935	0	NR
420	40	NR	550	690	NR	680	175	NR	810	3	NR	940	0	NR
425	73	NR	555	715	NR	685	151	NR	815	2	NR	945	0	NR
430	133	NR	560	747	NR	690	128	NR	820	2	NR	950	0	NR
435	236	NR	565	781	NR	695	109	NR	825	2	NR	955	0	NR
440	416	NR	570	809	NR	700	93	NR	830	1	NR	960	0	NR
445	757	NR	575	840	NR	705	78	NR	835	1	NR	965	0	NR
450	1000	NR	580	863	NR	710	67	NR	840	1	NR	970	0	NR
455	730	NR	585	880	NR	715	57	NR	845	1	NR	975	0	NR
460	494	NR	590	890	NR	720	48	NR	850	1	NR	980	0	NR
465	419	NR	595	890	NR	725	41	NR	855	1	NR	985	0	NR
470	305	NR	600	879	NR	730	35	NR	860	1	NR	990	0	NR
475	235	NR	605	856	NR	735	29	NR	865	1	NR	995	0	NR
480	237	NR	610	824	NR	740	25	NR	870	1	NR	1000	0	NR
485	257	NR	615	783	NR	745	21	NR	875	1	NR			

REPORT NUMBER: SP3-2511-595-3

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.65

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	296	NR	620	736	NR	750	18	NR	880	0	NR
365	0	NR	495	355	NR	625	683	NR	755	15	NR	885	0	NR
370	0	NR	500	415	NR	630	628	NR	760	13	NR	890	0	NR
375	0	NR	505	468	NR	635	571	NR	765	11	NR	895	0	NR
380	0	NR	510	511	NR	640	515	NR	770	9	NR	900	0	NR
385	0	NR	515	545	NR	645	460	NR	775	8	NR	905	0	NR
390	1	NR	520	570	NR	650	408	NR	780	7	NR	910	0	NR
395	3	NR	525	590	NR	655	359	NR	785	6	NR	915	0	NR
400	5	NR	530	606	NR	660	313	NR	790	5	NR	920	0	NR
405	7	NR	535	623	NR	665	273	NR	795	4	NR	925	0	NR
410	12	NR	540	641	NR	670	236	NR	800	4	NR	930	0	NR
415	22	NR	545	664	NR	675	204	NR	805	3	NR	935	0	NR
420	40	NR	550	690	NR	680	175	NR	810	3	NR	940	0	NR
425	73	NR	555	715	NR	685	151	NR	815	2	NR	945	0	NR
430	133	NR	560	747	NR	690	128	NR	820	2	NR	950	0	NR
435	236	NR	565	781	NR	695	109	NR	825	2	NR	955	0	NR
440	416	NR	570	809	NR	700	93	NR	830	1	NR	960	0	NR
445	757	NR	575	840	NR	705	78	NR	835	1	NR	965	0	NR
450	1000	NR	580	863	NR	710	67	NR	840	1	NR	970	0	NR
455	730	NR	585	880	NR	715	57	NR	845	1	NR	975	0	NR
460	494	NR	590	890	NR	720	48	NR	850	1	NR	980	0	NR
465	419	NR	595	890	NR	725	41	NR	855	1	NR	985	0	NR
470	305	NR	600	879	NR	730	35	NR	860	1	NR	990	0	NR
475	235	NR	605	856	NR	735	29	NR	865	1	NR	995	0	NR
480	237	NR	610	824	NR	740	25	NR	870	1	NR	1000	0	NR
485	257	NR	615	783	NR	745	21	NR	875	1	NR			

REPORT NUMBER: SP3-2511-595-3

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 3.36


λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	296	NR	620	736	NR	750	18	NR	880	0	NR
365	0	NR	495	355	NR	625	683	NR	755	15	NR	885	0	NR
370	0	NR	500	415	NR	630	628	NR	760	13	NR	890	0	NR
375	0	NR	505	468	NR	635	571	NR	765	11	NR	895	0	NR
380	0	NR	510	511	NR	640	515	NR	770	9	NR	900	0	NR
385	0	NR	515	545	NR	645	460	NR	775	8	NR	905	0	NR
390	1	NR	520	570	NR	650	408	NR	780	7	NR	910	0	NR
395	3	NR	525	590	NR	655	359	NR	785	6	NR	915	0	NR
400	5	NR	530	606	NR	660	313	NR	790	5	NR	920	0	NR
405	7	NR	535	623	NR	665	273	NR	795	4	NR	925	0	NR
410	12	NR	540	641	NR	670	236	NR	800	4	NR	930	0	NR
415	22	NR	545	664	NR	675	204	NR	805	3	NR	935	0	NR
420	40	NR	550	690	NR	680	175	NR	810	3	NR	940	0	NR
425	73	NR	555	715	NR	685	151	NR	815	2	NR	945	0	NR
430	133	NR	560	747	NR	690	128	NR	820	2	NR	950	0	NR
435	236	NR	565	781	NR	695	109	NR	825	2	NR	955	0	NR
440	416	NR	570	809	NR	700	93	NR	830	1	NR	960	0	NR
445	757	NR	575	840	NR	705	78	NR	835	1	NR	965	0	NR
450	1000	NR	580	863	NR	710	67	NR	840	1	NR	970	0	NR
455	730	NR	585	880	NR	715	57	NR	845	1	NR	975	0	NR
460	494	NR	590	890	NR	720	48	NR	850	1	NR	980	0	NR
465	419	NR	595	890	NR	725	41	NR	855	1	NR	985	0	NR
470	305	NR	600	879	NR	730	35	NR	860	1	NR	990	0	NR
475	235	NR	605	856	NR	735	29	NR	865	1	NR	995	0	NR
480	237	NR	610	824	NR	740	25	NR	870	1	NR	1000	0	NR
485	257	NR	615	783	NR	745	21	NR	875	1	NR			

REPORT NUMBER: SP3-2511-595-3





TM-30-18

Summary

$R_f = 82.9$
 $R_g = 94.7$
 $CIE R_a = 80.8$
 $R_g = -5.1$

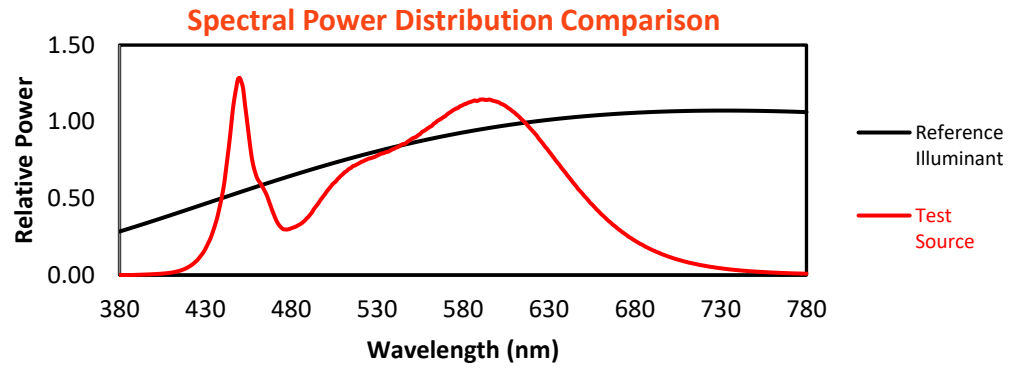


Color Vector Graphics

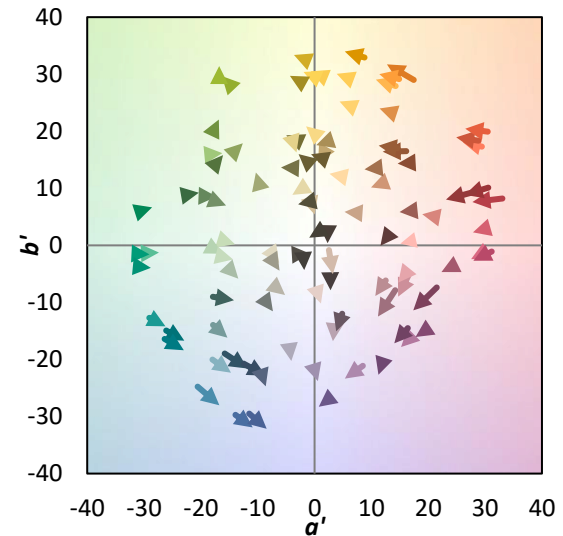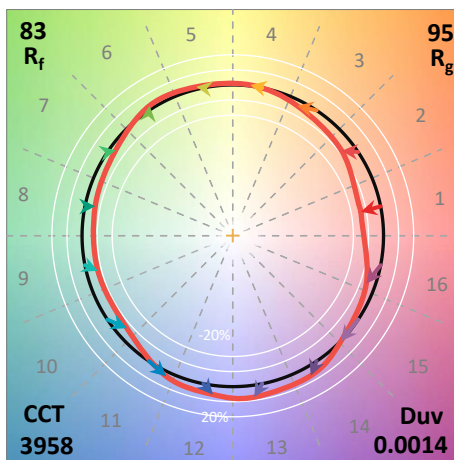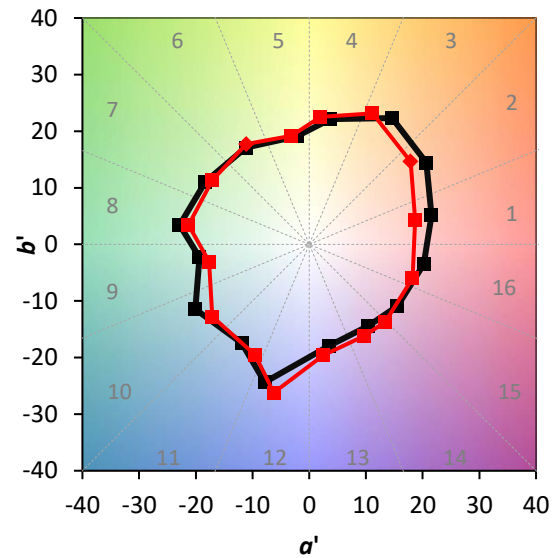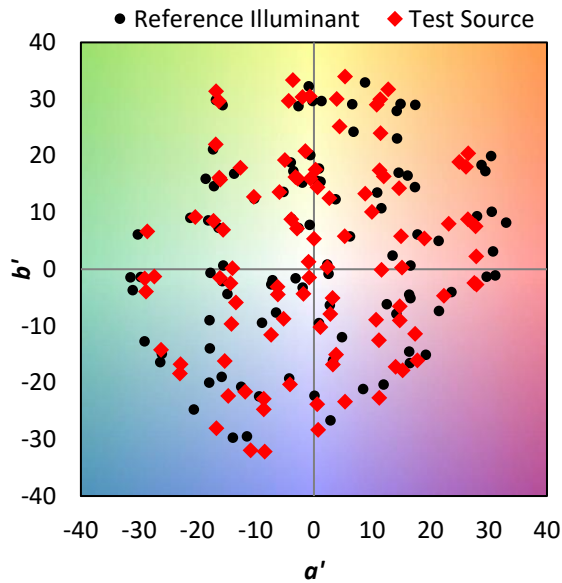

Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 80	CES51 = 94	CES76 = 73
CES02 = 61	CES27 = 93	CES52 = 94	CES77 = 82
CES03 = 31	CES28 = 91	CES53 = 88	CES78 = 72
CES04 = 70	CES29 = 85	CES54 = 89	CES79 = 91
CES05 = 48	CES30 = 96	CES55 = 88	CES80 = 89
CES06 = 50	CES31 = 87	CES56 = 84	CES81 = 79
CES07 = 40	CES32 = 80	CES57 = 83	CES82 = 95
CES08 = 39	CES33 = 92	CES58 = 84	CES83 = 95
CES09 = 29	CES34 = 86	CES59 = 90	CES84 = 90
CES10 = 74	CES35 = 92	CES60 = 90	CES85 = 78
CES11 = 57	CES36 = 83	CES61 = 86	CES86 = 72
CES12 = 63	CES37 = 91	CES62 = 86	CES87 = 83
CES13 = 42	CES38 = 93	CES63 = 85	CES88 = 87
CES14 = 74	CES39 = 98	CES64 = 78	CES89 = 76
CES15 = 71	CES40 = 95	CES65 = 75	CES90 = 87
CES16 = 47	CES41 = 99	CES66 = 74	CES91 = 71
CES17 = 49	CES42 = 93	CES67 = 73	CES92 = 62
CES18 = 56	CES43 = 89	CES68 = 77	CES93 = 77
CES19 = 71	CES44 = 99	CES69 = 82	CES94 = 60
CES20 = 65	CES45 = 93	CES70 = 73	CES95 = 70
CES21 = 86	CES46 = 90	CES71 = 67	CES96 = 82
CES22 = 78	CES47 = 96	CES72 = 89	CES97 = 90
CES23 = 91	CES48 = 84	CES73 = 66	CES98 = 84
CES24 = 90	CES49 = 89	CES74 = 93	CES99 = 73
CES25 = 71	CES50 = 94	CES75 = 70	

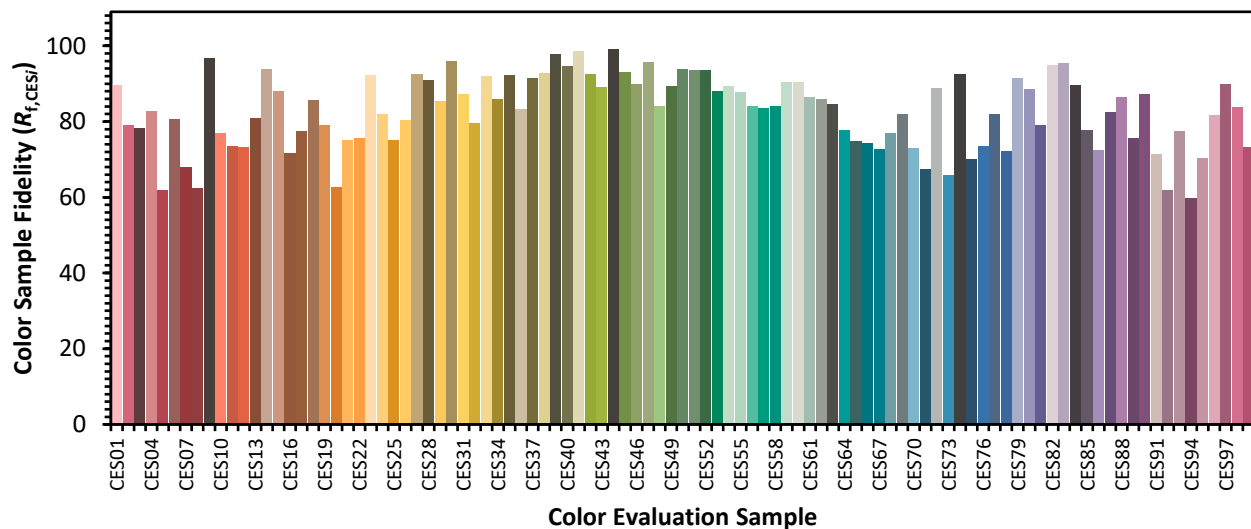

Color Rendition by Hue-Angle Bin



Measure Comparisons

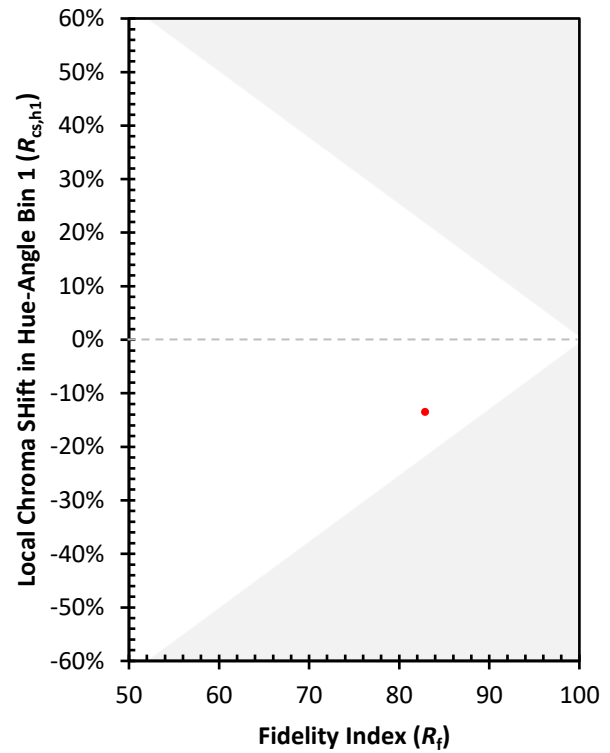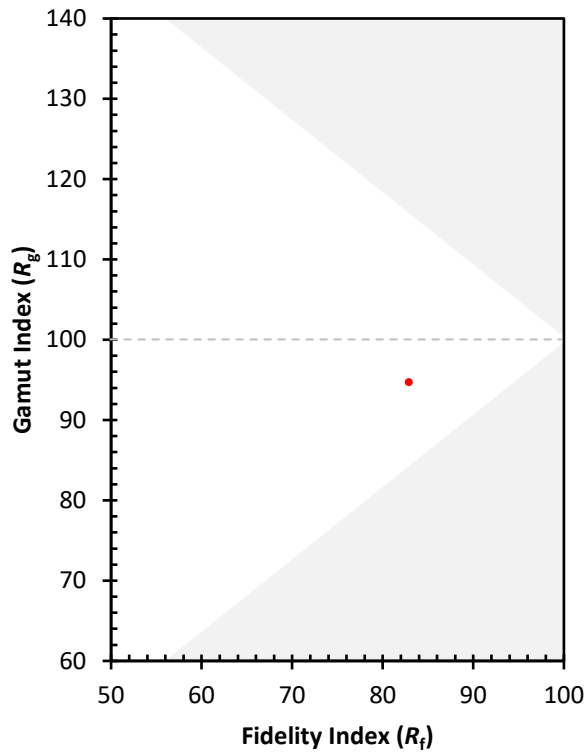

(END OF REPORT)