

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1211989

Luminaire Tested: **GKO-PB2C-840-U-T2U**

Issue Date: 11/5/2025



Test Information

Test Method: LM-79-08
Report Number: P1211989
Test Lab: INNOVATION CENTER(G1)
Issue Date: 11/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: GKO-PB2C-840-U-T2U
Description: GEKKO WALL PACK 8000LM PACKAGE 80CRI 4000K FIXTURE w/ TYPE II URBAN DISTRIBUTION OPTIC
Light Source: (20) 4000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7682.3 lumens
Efficiency: N/A
Efficacy: 132.0 lumens/watt
Luminous Opening: Rectangular (W 0.67' x L: 0.33' x H: 0')
IES Classification: Type II - Medium
BUG Rating: B2 - U0 - G2


Input Watts (W): 58.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): 5%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

REPORT NUMBER: P1211989

CATALOG NUMBER: GKO-PB2C-840-U-T2U

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

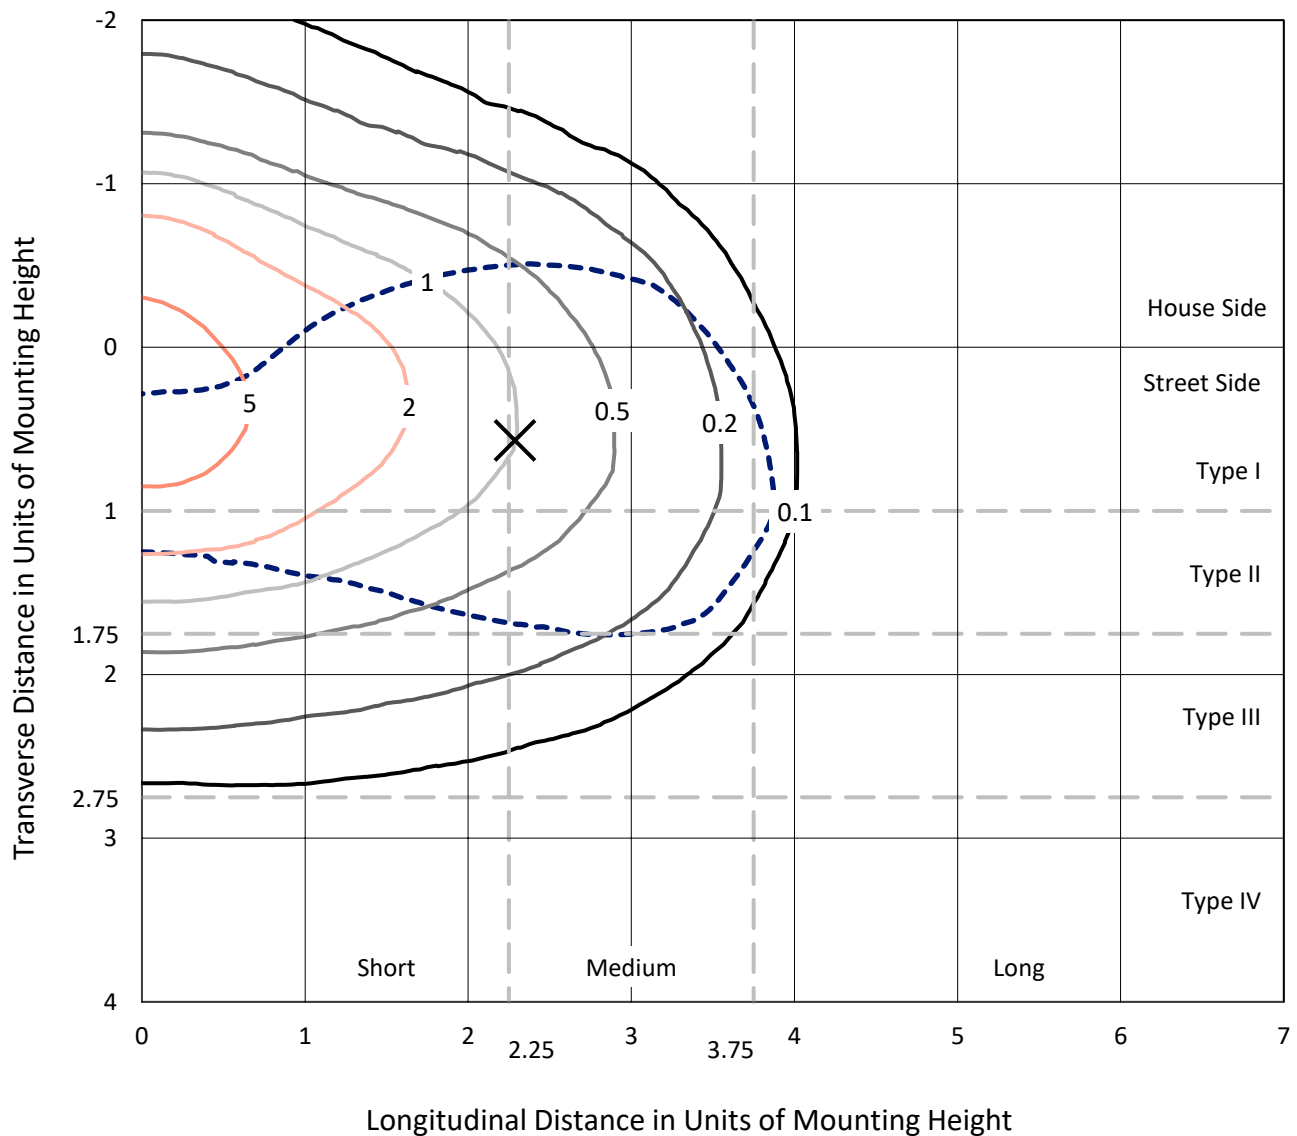

Based on 15 foot mounting height. Maximum calculated value = 7.5 fc
 Type II - Medium - N/A

REPORT NUMBER: P1211989
CATALOG NUMBER: GKO-PB2C-840-U-T2U

Luminous Intensity Polar Plot

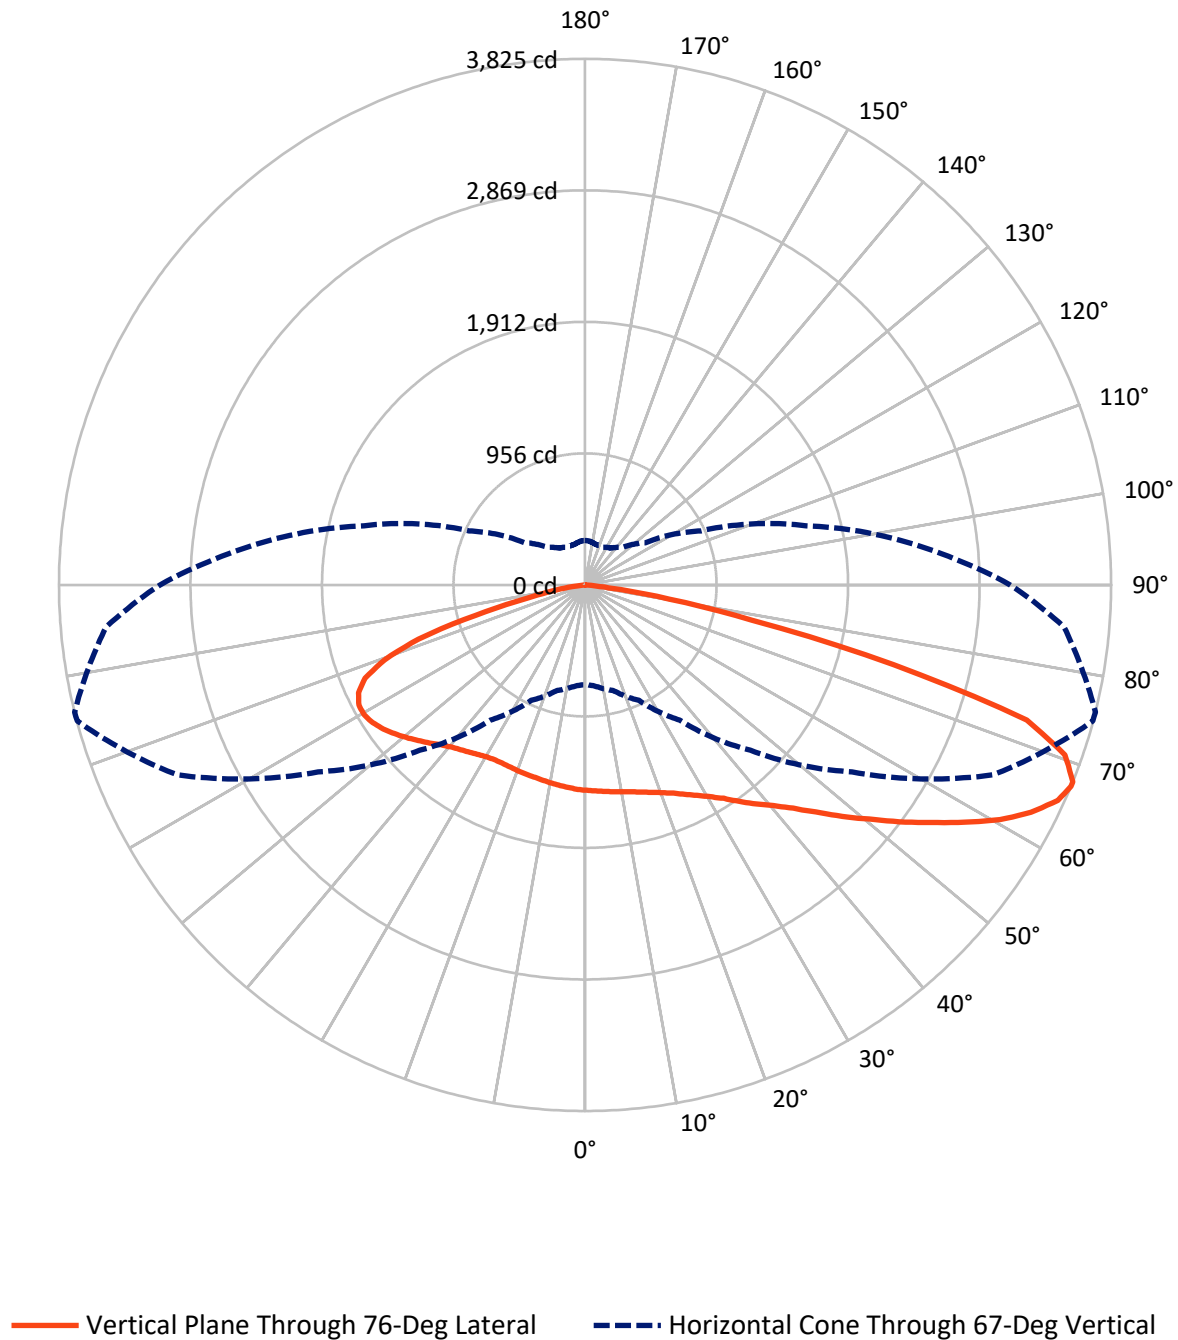

REPORT NUMBER: P1211989

CATALOG NUMBER: GKO-PB2C-840-U-T2U

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	2534.5	0.0	2534.5
	% Fixture	33.0	0.0	33.0
Street Side	Lumens	5147.8	0.0	5147.8
	% Fixture	67.0	0.0	67.0
Total	Lumens	7682.3	0.0	7682.3
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	143.6	1.9
10°-20°	439.2	5.7
20°-30°	755.5	9.8
30°-40°	1085.7	14.1
40°-50°	1376.8	17.9
50°-60°	1511.9	19.7
60°-70°	1466.3	19.1
70°-80°	809.6	10.5
80°-90°	93.9	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	7682.3	100.0
0°-180°	7682.3	100.0

Coefficient of Utilization



REPORT NUMBER: P1211989


CATALOG NUMBER: GKO-PB2C-840-U-T2U

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	778.2	10.1			
FM	(30°-60°)	2732.4	35.6			
FH	(60°-80°)	1604.0	20.9			G1/1800
FVH	(80°-90°)	33.2	0.4			G1/100
BL	(0°-30°)	560.0	7.3	B2/1000		
BM	(30°-60°)	1242.0	16.2	B2/2500		
BH	(60°-80°)	671.8	8.7	B2/1000		G2/1000
BVH	(80°-90°)	60.7	0.8			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G2

Type II Medium

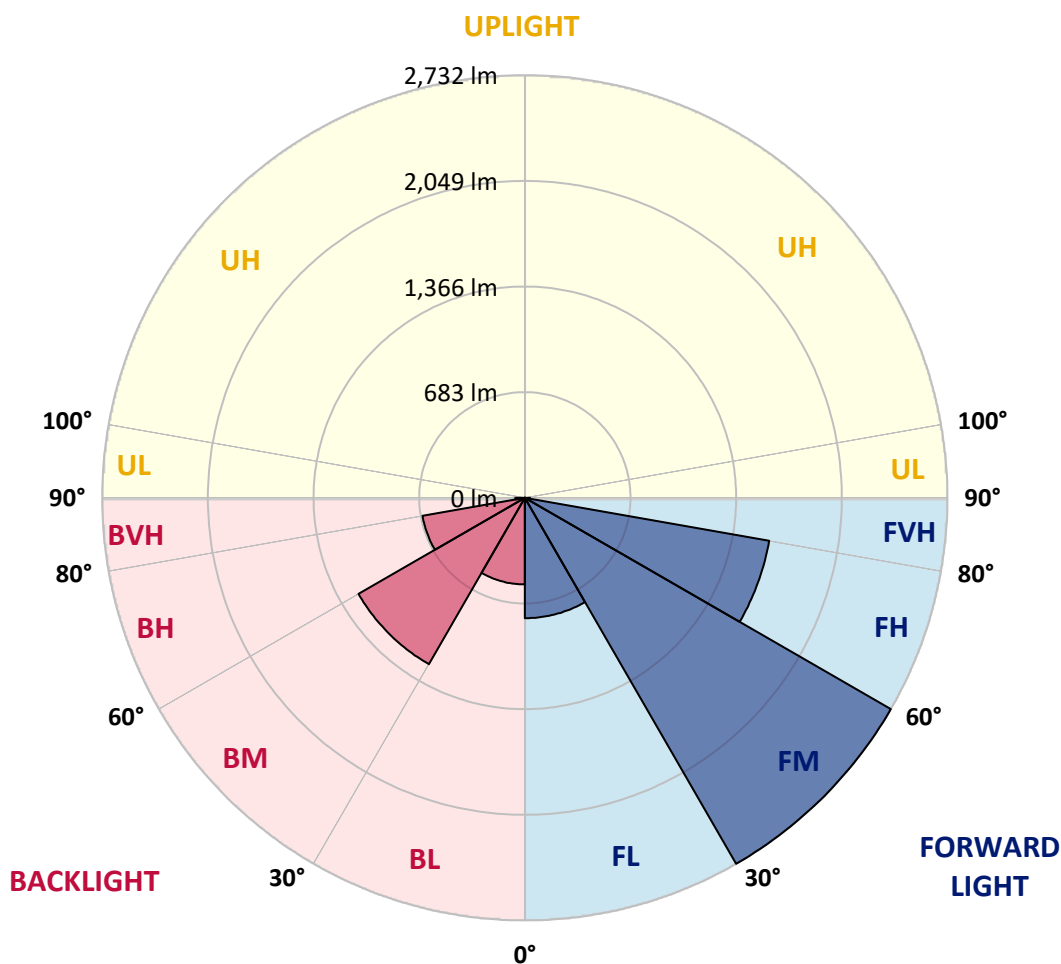



REPORT NUMBER: P1211989

CATALOG NUMBER: GKO-PB2C-840-U-T2U

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	76°	85°
0°	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4
2.5°	1537.9	1536.5	1535.0	1535.0	1529.0	1523.1	1517.1	1512.7	1500.8	1499.3	1493.4
5°	1584.0	1584.0	1579.5	1578.1	1569.1	1554.3	1540.9	1527.5	1511.2	1508.2	1494.8
7.5°	1643.4	1643.4	1636.0	1630.1	1616.7	1592.9	1569.1	1545.4	1521.6	1518.6	1497.8
10°	1719.2	1719.2	1713.3	1699.9	1671.7	1640.5	1601.8	1564.7	1533.5	1530.5	1500.8
12.5°	1798.0	1799.5	1790.6	1771.2	1737.1	1689.5	1642.0	1588.5	1548.3	1543.9	1506.7
15°	1878.2	1879.7	1873.8	1853.0	1806.9	1748.9	1685.0	1621.2	1567.7	1563.2	1515.7
17.5°	1957.0	1959.9	1954.0	1930.2	1876.7	1814.3	1735.6	1655.3	1591.4	1585.5	1530.5
20°	2031.3	2031.3	2031.3	2004.5	1952.5	1881.2	1790.6	1696.9	1618.2	1612.2	1548.3
22.5°	2098.1	2101.1	2105.6	2090.7	2031.3	1952.5	1854.4	1743.0	1652.4	1644.9	1570.6
25°	2165.0	2166.5	2178.4	2168.0	2110.0	2028.3	1922.8	1801.0	1694.0	1686.5	1597.4
27.5°	2242.3	2246.7	2254.2	2249.7	2184.3	2104.1	1998.6	1864.8	1740.0	1732.6	1630.1
30°	2332.9	2332.9	2337.4	2329.9	2264.6	2184.3	2074.4	1931.7	1798.0	1786.1	1670.2
32.5°	2407.2	2414.6	2411.7	2408.7	2340.3	2260.1	2151.6	2006.0	1864.8	1850.0	1725.2
35°	2477.1	2478.5	2477.1	2480.0	2411.7	2335.9	2233.4	2092.2	1939.1	1933.2	1795.0
37.5°	2517.2	2520.1	2527.6	2536.5	2475.6	2404.2	2315.1	2187.3	2031.3	2020.9	1878.2
40°	2536.5	2540.9	2581.1	2594.4	2529.1	2469.6	2401.3	2273.5	2120.4	2108.5	1961.4
42.5°	2566.2	2601.9	2622.7	2625.6	2569.2	2517.2	2475.6	2371.6	2230.4	2220.0	2072.9
45°	2468.1	2454.8	2509.7	2573.6	2570.7	2548.4	2546.9	2481.5	2365.6	2355.2	2199.2
47.5°	2344.8	2334.4	2364.1	2457.7	2524.6	2561.8	2616.7	2610.8	2529.1	2514.2	2346.3
50°	2050.6	2068.4	2214.0	2341.8	2457.7	2566.2	2676.2	2746.0	2688.1	2676.2	2502.3
52.5°	1775.7	1787.6	1887.1	2191.8	2371.6	2552.8	2728.2	2888.7	2873.8	2860.4	2673.2
55°	1582.5	1594.4	1753.4	1948.1	2243.8	2484.5	2762.4	3023.9	3062.5	3049.1	2854.5
57.5°	1380.4	1399.7	1508.2	1679.1	2072.9	2371.6	2774.2	3160.6	3267.6	3255.7	3028.3
60°	1185.8	1212.5	1276.4	1462.2	1861.9	2237.8	2743.0	3270.5	3465.2	3465.2	3208.1
62.5°	1006.0	1020.8	1087.7	1255.6	1594.4	2066.9	2664.3	3340.4	3646.5	3639.1	3365.6
65°	857.4	864.8	918.3	1062.4	1370.0	1878.2	2527.6	3335.9	3775.8	3777.2	3469.7
67°	723.6	735.5	795.0	925.7	1199.1	1699.9	2370.1	3269.1	3821.8	3824.8	3494.9
67.5°	677.6	691.0	756.3	891.6	1163.5	1650.9	2332.9	3240.8	3818.9	3824.8	3487.5
70°	466.6	469.6	579.5	734.1	956.9	1390.8	2075.8	3044.7	3705.9	3701.5	3325.5
72.5°	297.2	292.7	398.2	536.4	769.7	1126.3	1751.9	2701.4	3362.7	3358.2	2931.7
75°	197.6	202.1	269.0	383.4	540.9	870.8	1365.6	2038.7	2335.9	2318.1	1934.7
77.5°	141.2	138.2	166.4	276.4	362.6	529.0	741.5	1084.7	1240.8	1240.8	1062.4
80°	77.3	78.8	90.6	153.1	205.1	206.5	277.9	543.9	606.3	619.6	515.6
82.5°	22.3	23.8	32.7	52.0	56.5	62.4	96.6	156.0	163.5	172.4	139.7
85°	0.0	0.0	0.0	1.5	5.9	7.4	7.4	8.9	14.9	14.9	16.3
87.5°	0.0	0.0	0.0	0.0	0.0	1.5	1.5	3.0	5.9	5.9	7.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1211989

CATALOG NUMBER: GKO-PB2C-840-U-T2U

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4	1493.4
2.5°	1491.9	1493.4	1487.4	1480.0	1474.0	1471.1	1462.2	1454.7	1459.2	1463.6	1463.6
5°	1490.4	1488.9	1477.0	1463.6	1454.7	1448.8	1433.9	1423.5	1425.0	1429.5	1428.0
7.5°	1490.4	1484.4	1468.1	1448.8	1433.9	1422.0	1402.7	1390.8	1389.3	1392.3	1389.3
10°	1491.9	1481.5	1459.2	1432.4	1411.6	1393.8	1370.0	1356.7	1352.2	1353.7	1350.7
12.5°	1494.8	1478.5	1450.3	1416.1	1389.3	1365.6	1338.8	1322.5	1319.5	1322.5	1322.5
15°	1499.3	1478.5	1442.8	1401.2	1365.6	1338.8	1312.1	1297.2	1297.2	1298.7	1298.7
17.5°	1508.2	1483.0	1436.9	1384.9	1341.8	1312.1	1288.3	1277.9	1279.4	1283.8	1283.8
20°	1517.1	1488.9	1431.0	1368.5	1321.0	1286.8	1267.5	1260.1	1266.0	1272.0	1272.0
22.5°	1530.5	1496.3	1425.0	1353.7	1297.2	1263.0	1246.7	1240.8	1246.7	1254.1	1251.2
25°	1551.3	1509.7	1420.6	1340.3	1274.9	1237.8	1221.4	1215.5	1218.5	1224.4	1224.4
27.5°	1575.1	1526.1	1419.1	1324.0	1248.2	1208.1	1188.7	1179.8	1179.8	1181.3	1182.8
30°	1615.2	1554.3	1425.0	1312.1	1224.4	1176.9	1151.6	1138.2	1136.7	1142.7	1142.7
32.5°	1662.8	1592.9	1439.9	1301.7	1200.6	1139.7	1105.5	1095.1	1092.2	1096.6	1092.2
35°	1716.3	1636.0	1459.2	1300.2	1176.9	1099.6	1061.0	1049.1	1040.2	1037.2	1034.2
37.5°	1792.0	1695.5	1478.5	1292.8	1153.1	1056.5	1014.9	989.6	979.2	976.3	976.3
40°	1866.3	1753.4	1502.3	1280.9	1124.9	1013.4	954.0	925.7	921.3	921.3	921.3
42.5°	1959.9	1829.2	1535.0	1273.4	1090.7	970.3	888.6	855.9	855.9	855.9	854.4
45°	2075.8	1928.7	1576.6	1270.5	1058.0	918.3	818.7	775.7	774.2	772.7	771.2
47.5°	2211.1	2032.8	1616.7	1263.0	1019.4	855.9	738.5	691.0	680.6	677.6	673.1
50°	2350.7	2145.7	1659.8	1252.6	973.3	783.1	662.7	607.7	585.5	578.0	581.0
52.5°	2499.3	2255.6	1701.4	1237.8	918.3	710.3	585.5	527.5	505.2	496.3	494.8
55°	2645.0	2367.1	1740.0	1218.5	858.9	636.0	520.1	463.6	444.3	441.3	441.3
57.5°	2792.1	2474.1	1769.7	1190.2	793.5	570.6	463.6	417.5	404.2	410.1	410.1
60°	2925.8	2567.7	1784.6	1151.6	728.1	511.2	419.0	384.9	378.9	393.8	392.3
62.5°	3046.2	2630.1	1777.2	1095.1	664.2	460.6	384.9	359.6	361.1	378.9	380.4
65°	3104.1	2640.5	1734.1	1017.9	592.9	417.5	349.2	325.4	328.4	347.7	352.2
67°	3090.7	2600.4	1662.8	930.2	534.9	384.9	326.9	303.1	304.6	321.0	322.4
67.5°	3075.9	2581.1	1643.4	903.4	520.1	378.9	321.0	298.7	301.6	316.5	316.5
70°	2878.3	2384.9	1465.1	766.7	450.2	337.3	292.7	277.9	280.8	289.8	289.8
72.5°	2515.7	2065.4	1185.8	615.2	381.9	298.7	264.5	255.6	255.6	255.6	248.2
75°	1604.8	1294.2	775.7	471.0	315.0	255.6	237.7	227.3	221.4	230.3	227.3
77.5°	887.1	676.1	404.2	270.4	227.3	212.5	206.5	202.1	200.6	221.4	215.5
80°	420.5	334.3	227.3	154.5	130.8	157.5	178.3	175.3	209.5	286.8	288.3
82.5°	133.7	110.0	92.1	84.7	87.7	112.9	138.2	159.0	271.9	307.6	303.1
85°	16.3	14.9	10.4	34.2	58.0	83.2	107.0	206.5	249.6	208.0	196.1
87.5°	5.9	5.9	5.9	23.8	44.6	63.9	96.6	208.0	153.1	139.7	127.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP3-2511-595-3

Test Date: 11/12/2025

Luminaire Tested: GKO-PB1C-840-U-T4W

Data in this report applies to families of products including GKO-PB1C-840*

Test Information

Test Method: LM-79-2019
 Report Number: SP3-2511-595-3
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP3 - 3M SPHERE
 Measurement Geometry: 4π
 Issue Date: 01/27/2026
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GKO-PB1C-840-U-T4W**
 Description: Gekko Wedge Wall Pack Fixture 1 SQ w/ T4W distribution

Spectral Parameters

CCT (K): 3958
 CIE u' : 0.2251
 CIE v' : 0.5041
 Duv: 0.0014
 CIE x: 0.3833
 CIE y: 0.3816
 CIE z: 0.2351
 Peak Wavelength (nm): 450
 Dominant Wavelength (nm): 578
 Purity: 29.56261
 R_f: 82.9
 R_g: 94.7

CRI (Ra): 80.8
 R1: 78.3
 R2: 87.6
 R3: 95.0
 R4: 79.6
 R5: 78.8
 R6: 83.3
 R7: 84.3
 R8: 59.4
 R9: -5.1
 R10: 71.4
 R11: 78.5
 R12: 60.5
 R13: 80.5
 R14: 97.5
 R15: 70.7



Test Conditions

Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP3-2511-595-3

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	3M SPHERE IN02505	7/1/2025	1/1/2026
Power Meter	XITRON INXT2011006	10/21/2025	10/21/2026
AC Power Source	CHROMA 61604 IN6064A	10/20/2025	10/20/2026
DC Power Source	EYSIGHT N5770A IN0534	10/20/2025	10/20/2026
Sphere Thermometer	TANDD IN4036E	10/21/2025	10/21/2026

REPORT NUMBER: SP3-2511-595-3

CIE 1931 Chromaticity Diagram




CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP3-2511-595-3

Photopic Flux vs. Wavelength

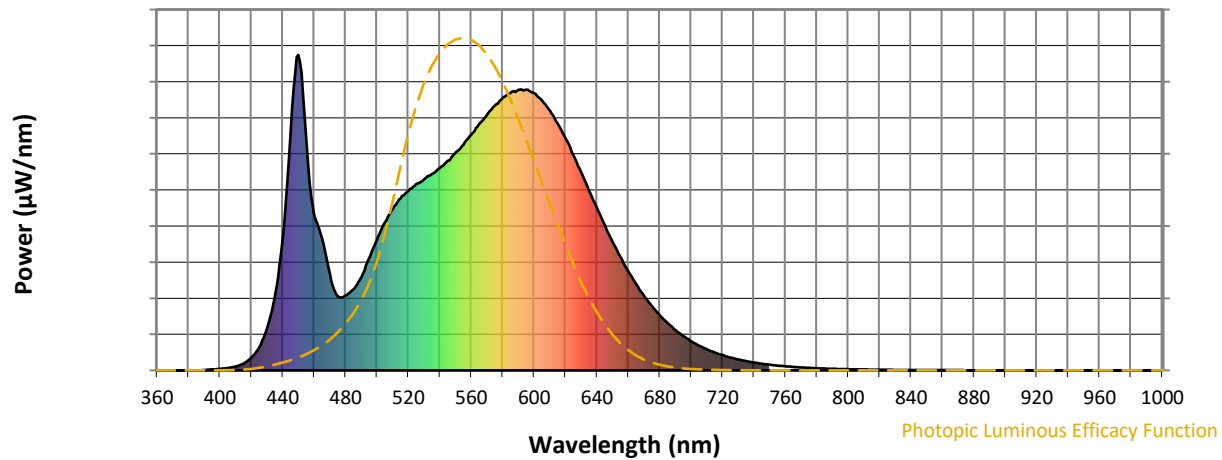

Photopic Lumens: NR

λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	296	NR	620	736	NR	750	18	NR	880	0	NR
365	0	NR	495	355	NR	625	683	NR	755	15	NR	885	0	NR
370	0	NR	500	415	NR	630	628	NR	760	13	NR	890	0	NR
375	0	NR	505	468	NR	635	571	NR	765	11	NR	895	0	NR
380	0	NR	510	511	NR	640	515	NR	770	9	NR	900	0	NR
385	0	NR	515	545	NR	645	460	NR	775	8	NR	905	0	NR
390	1	NR	520	570	NR	650	408	NR	780	7	NR	910	0	NR
395	3	NR	525	590	NR	655	359	NR	785	6	NR	915	0	NR
400	5	NR	530	606	NR	660	313	NR	790	5	NR	920	0	NR
405	7	NR	535	623	NR	665	273	NR	795	4	NR	925	0	NR
410	12	NR	540	641	NR	670	236	NR	800	4	NR	930	0	NR
415	22	NR	545	664	NR	675	204	NR	805	3	NR	935	0	NR
420	40	NR	550	690	NR	680	175	NR	810	3	NR	940	0	NR
425	73	NR	555	715	NR	685	151	NR	815	2	NR	945	0	NR
430	133	NR	560	747	NR	690	128	NR	820	2	NR	950	0	NR
435	236	NR	565	781	NR	695	109	NR	825	2	NR	955	0	NR
440	416	NR	570	809	NR	700	93	NR	830	1	NR	960	0	NR
445	757	NR	575	840	NR	705	78	NR	835	1	NR	965	0	NR
450	1000	NR	580	863	NR	710	67	NR	840	1	NR	970	0	NR
455	730	NR	585	880	NR	715	57	NR	845	1	NR	975	0	NR
460	494	NR	590	890	NR	720	48	NR	850	1	NR	980	0	NR
465	419	NR	595	890	NR	725	41	NR	855	1	NR	985	0	NR
470	305	NR	600	879	NR	730	35	NR	860	1	NR	990	0	NR
475	235	NR	605	856	NR	735	29	NR	865	1	NR	995	0	NR
480	237	NR	610	824	NR	740	25	NR	870	1	NR	1000	0	NR
485	257	NR	615	783	NR	745	21	NR	875	1	NR			

REPORT NUMBER: SP3-2511-595-3

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.65

λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)
360	0	NR	490	296	NR	620	736	NR	750	18	NR	880	0	NR
365	0	NR	495	355	NR	625	683	NR	755	15	NR	885	0	NR
370	0	NR	500	415	NR	630	628	NR	760	13	NR	890	0	NR
375	0	NR	505	468	NR	635	571	NR	765	11	NR	895	0	NR
380	0	NR	510	511	NR	640	515	NR	770	9	NR	900	0	NR
385	0	NR	515	545	NR	645	460	NR	775	8	NR	905	0	NR
390	1	NR	520	570	NR	650	408	NR	780	7	NR	910	0	NR
395	3	NR	525	590	NR	655	359	NR	785	6	NR	915	0	NR
400	5	NR	530	606	NR	660	313	NR	790	5	NR	920	0	NR
405	7	NR	535	623	NR	665	273	NR	795	4	NR	925	0	NR
410	12	NR	540	641	NR	670	236	NR	800	4	NR	930	0	NR
415	22	NR	545	664	NR	675	204	NR	805	3	NR	935	0	NR
420	40	NR	550	690	NR	680	175	NR	810	3	NR	940	0	NR
425	73	NR	555	715	NR	685	151	NR	815	2	NR	945	0	NR
430	133	NR	560	747	NR	690	128	NR	820	2	NR	950	0	NR
435	236	NR	565	781	NR	695	109	NR	825	2	NR	955	0	NR
440	416	NR	570	809	NR	700	93	NR	830	1	NR	960	0	NR
445	757	NR	575	840	NR	705	78	NR	835	1	NR	965	0	NR
450	1000	NR	580	863	NR	710	67	NR	840	1	NR	970	0	NR
455	730	NR	585	880	NR	715	57	NR	845	1	NR	975	0	NR
460	494	NR	590	890	NR	720	48	NR	850	1	NR	980	0	NR
465	419	NR	595	890	NR	725	41	NR	855	1	NR	985	0	NR
470	305	NR	600	879	NR	730	35	NR	860	1	NR	990	0	NR
475	235	NR	605	856	NR	735	29	NR	865	1	NR	995	0	NR
480	237	NR	610	824	NR	740	25	NR	870	1	NR	1000	0	NR
485	257	NR	615	783	NR	745	21	NR	875	1	NR			

REPORT NUMBER: SP3-2511-595-3

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 3.36


λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	296	NR	620	736	NR	750	18	NR	880	0	NR
365	0	NR	495	355	NR	625	683	NR	755	15	NR	885	0	NR
370	0	NR	500	415	NR	630	628	NR	760	13	NR	890	0	NR
375	0	NR	505	468	NR	635	571	NR	765	11	NR	895	0	NR
380	0	NR	510	511	NR	640	515	NR	770	9	NR	900	0	NR
385	0	NR	515	545	NR	645	460	NR	775	8	NR	905	0	NR
390	1	NR	520	570	NR	650	408	NR	780	7	NR	910	0	NR
395	3	NR	525	590	NR	655	359	NR	785	6	NR	915	0	NR
400	5	NR	530	606	NR	660	313	NR	790	5	NR	920	0	NR
405	7	NR	535	623	NR	665	273	NR	795	4	NR	925	0	NR
410	12	NR	540	641	NR	670	236	NR	800	4	NR	930	0	NR
415	22	NR	545	664	NR	675	204	NR	805	3	NR	935	0	NR
420	40	NR	550	690	NR	680	175	NR	810	3	NR	940	0	NR
425	73	NR	555	715	NR	685	151	NR	815	2	NR	945	0	NR
430	133	NR	560	747	NR	690	128	NR	820	2	NR	950	0	NR
435	236	NR	565	781	NR	695	109	NR	825	2	NR	955	0	NR
440	416	NR	570	809	NR	700	93	NR	830	1	NR	960	0	NR
445	757	NR	575	840	NR	705	78	NR	835	1	NR	965	0	NR
450	1000	NR	580	863	NR	710	67	NR	840	1	NR	970	0	NR
455	730	NR	585	880	NR	715	57	NR	845	1	NR	975	0	NR
460	494	NR	590	890	NR	720	48	NR	850	1	NR	980	0	NR
465	419	NR	595	890	NR	725	41	NR	855	1	NR	985	0	NR
470	305	NR	600	879	NR	730	35	NR	860	1	NR	990	0	NR
475	235	NR	605	856	NR	735	29	NR	865	1	NR	995	0	NR
480	237	NR	610	824	NR	740	25	NR	870	1	NR	1000	0	NR
485	257	NR	615	783	NR	745	21	NR	875	1	NR			

REPORT NUMBER: SP3-2511-595-3



TM-30-18

Summary

$R_f = 82.9$
 $R_g = 94.7$
 $CIE R_a = 80.8$
 $R_g = -5.1$

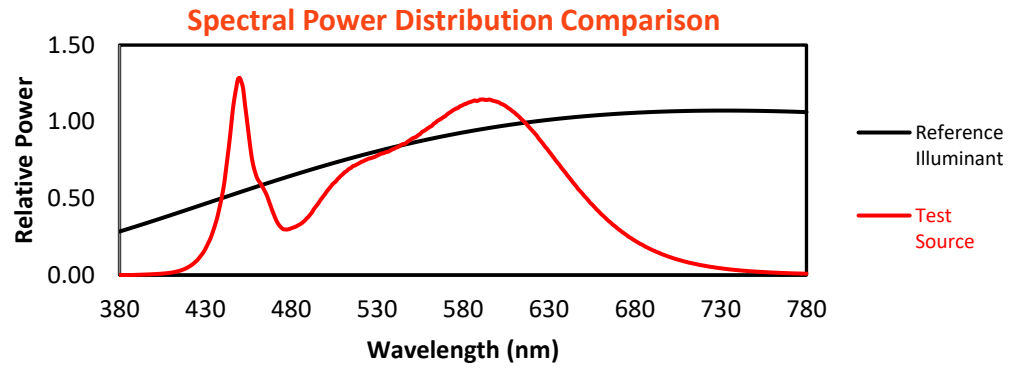


Color Vector Graphics

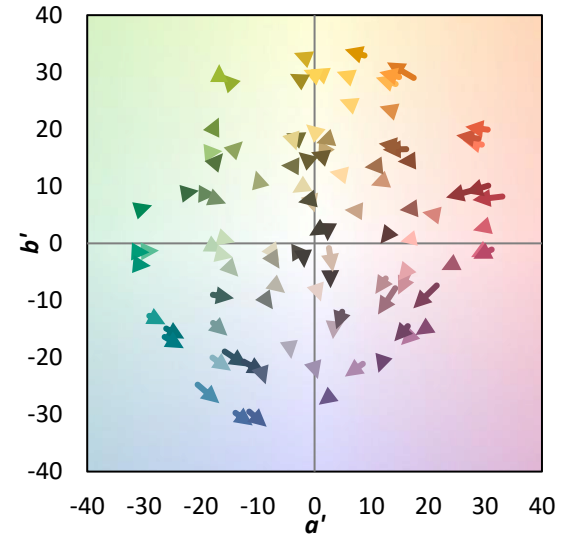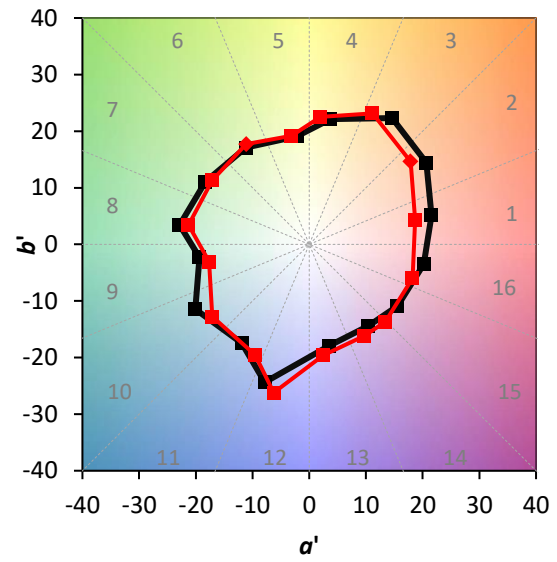

Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 80	CES51 = 94	CES76 = 73
CES02 = 61	CES27 = 93	CES52 = 94	CES77 = 82
CES03 = 31	CES28 = 91	CES53 = 88	CES78 = 72
CES04 = 70	CES29 = 85	CES54 = 89	CES79 = 91
CES05 = 48	CES30 = 96	CES55 = 88	CES80 = 89
CES06 = 50	CES31 = 87	CES56 = 84	CES81 = 79
CES07 = 40	CES32 = 80	CES57 = 83	CES82 = 95
CES08 = 39	CES33 = 92	CES58 = 84	CES83 = 95
CES09 = 29	CES34 = 86	CES59 = 90	CES84 = 90
CES10 = 74	CES35 = 92	CES60 = 90	CES85 = 78
CES11 = 57	CES36 = 83	CES61 = 86	CES86 = 72
CES12 = 63	CES37 = 91	CES62 = 86	CES87 = 83
CES13 = 42	CES38 = 93	CES63 = 85	CES88 = 87
CES14 = 74	CES39 = 98	CES64 = 78	CES89 = 76
CES15 = 71	CES40 = 95	CES65 = 75	CES90 = 87
CES16 = 47	CES41 = 99	CES66 = 74	CES91 = 71
CES17 = 49	CES42 = 93	CES67 = 73	CES92 = 62
CES18 = 56	CES43 = 89	CES68 = 77	CES93 = 77
CES19 = 71	CES44 = 99	CES69 = 82	CES94 = 60
CES20 = 65	CES45 = 93	CES70 = 73	CES95 = 70
CES21 = 86	CES46 = 90	CES71 = 67	CES96 = 82
CES22 = 78	CES47 = 96	CES72 = 89	CES97 = 90
CES23 = 91	CES48 = 84	CES73 = 66	CES98 = 84
CES24 = 90	CES49 = 89	CES74 = 93	CES99 = 73
CES25 = 71	CES50 = 94	CES75 = 70	

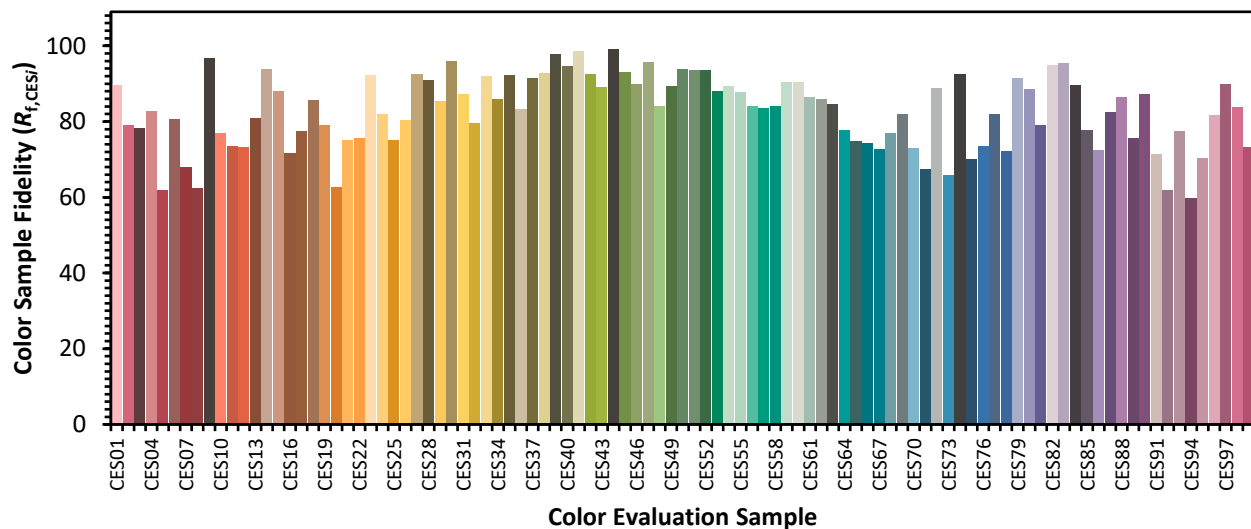

Color Rendition by Hue-Angle Bin



Measure Comparisons

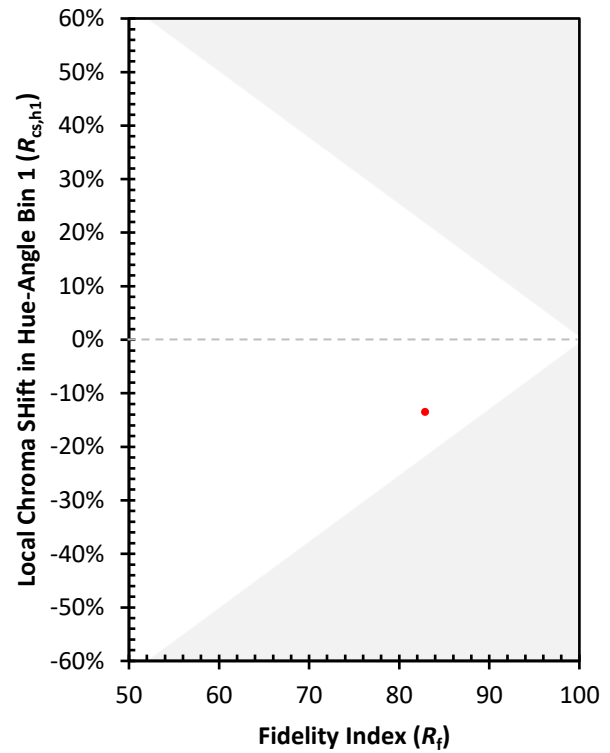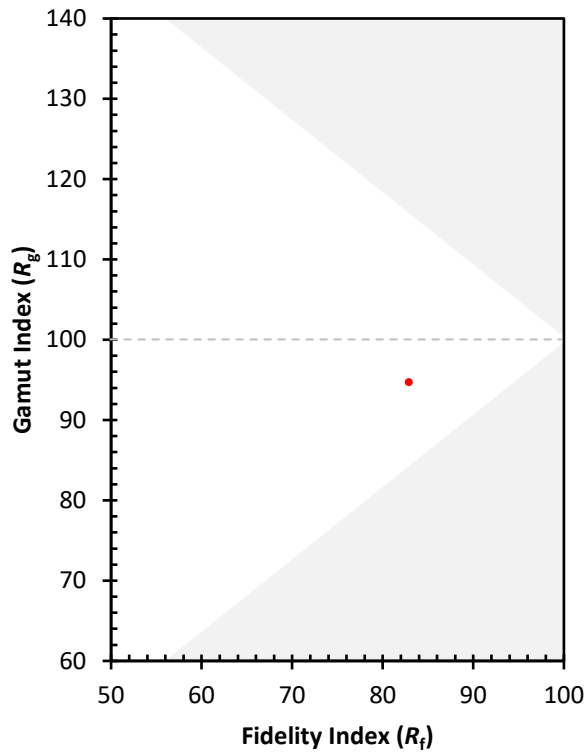

(END OF REPORT)