

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1211818

Luminaire Tested: **GKO-PB2D-850-U-T4W**

Issue Date: 11/5/2025



Test Information

Test Method: LM-79-08
Report Number: P1211818
Test Lab: INNOVATION CENTER(G1)
Issue Date: 11/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: GKO-PB2D-850-U-T4W
Description: GEKKO WALL PACK 10000LM PACKAGE 80CRI 5000K FIXTURE w/ TYPE IV WIDE DISTRIBUTION OPTIC
Light Source: (20) 5000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9286 lumens
Efficiency: N/A
Efficacy: 121.9 lumens/watt
Luminous Opening: Rectangular (W 0.67' x L: 0.33' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B2 - U0 - G2

Input Watts (W): 76.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): 8%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

REPORT NUMBER: P1211818
 CATALOG NUMBER: GKO-PB2D-850-U-T4W

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

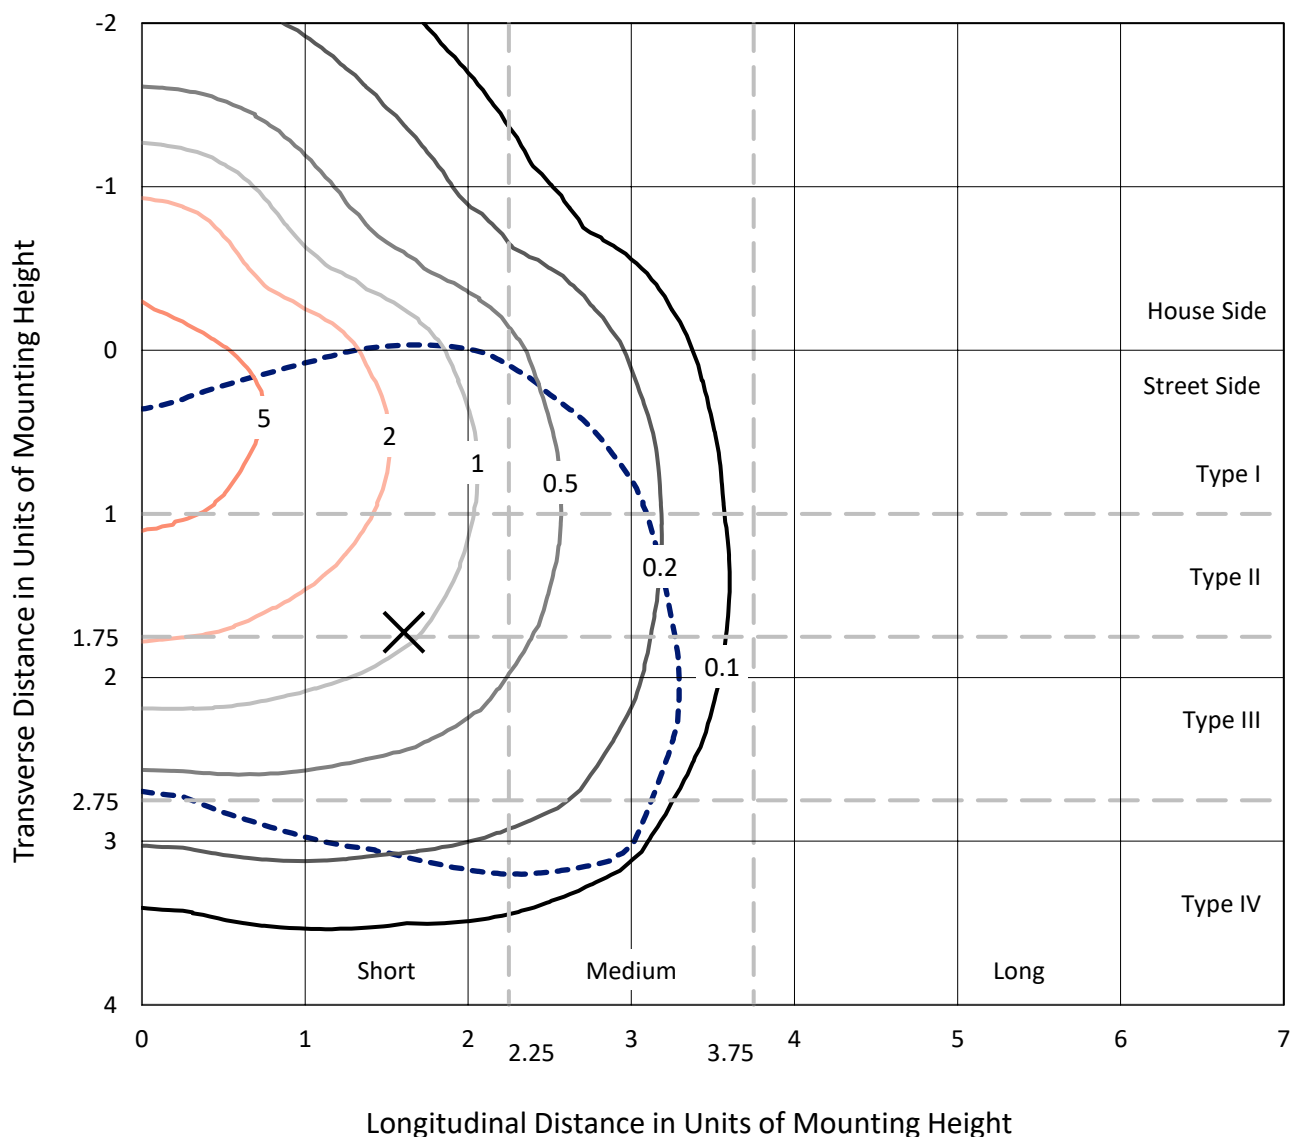

Based on 15 foot mounting height. Maximum calculated value = 7.9 fc
 Type IV - Short - N/A

REPORT NUMBER: P1211818
CATALOG NUMBER: GKO-PB2D-850-U-T4W

Luminous Intensity Polar Plot

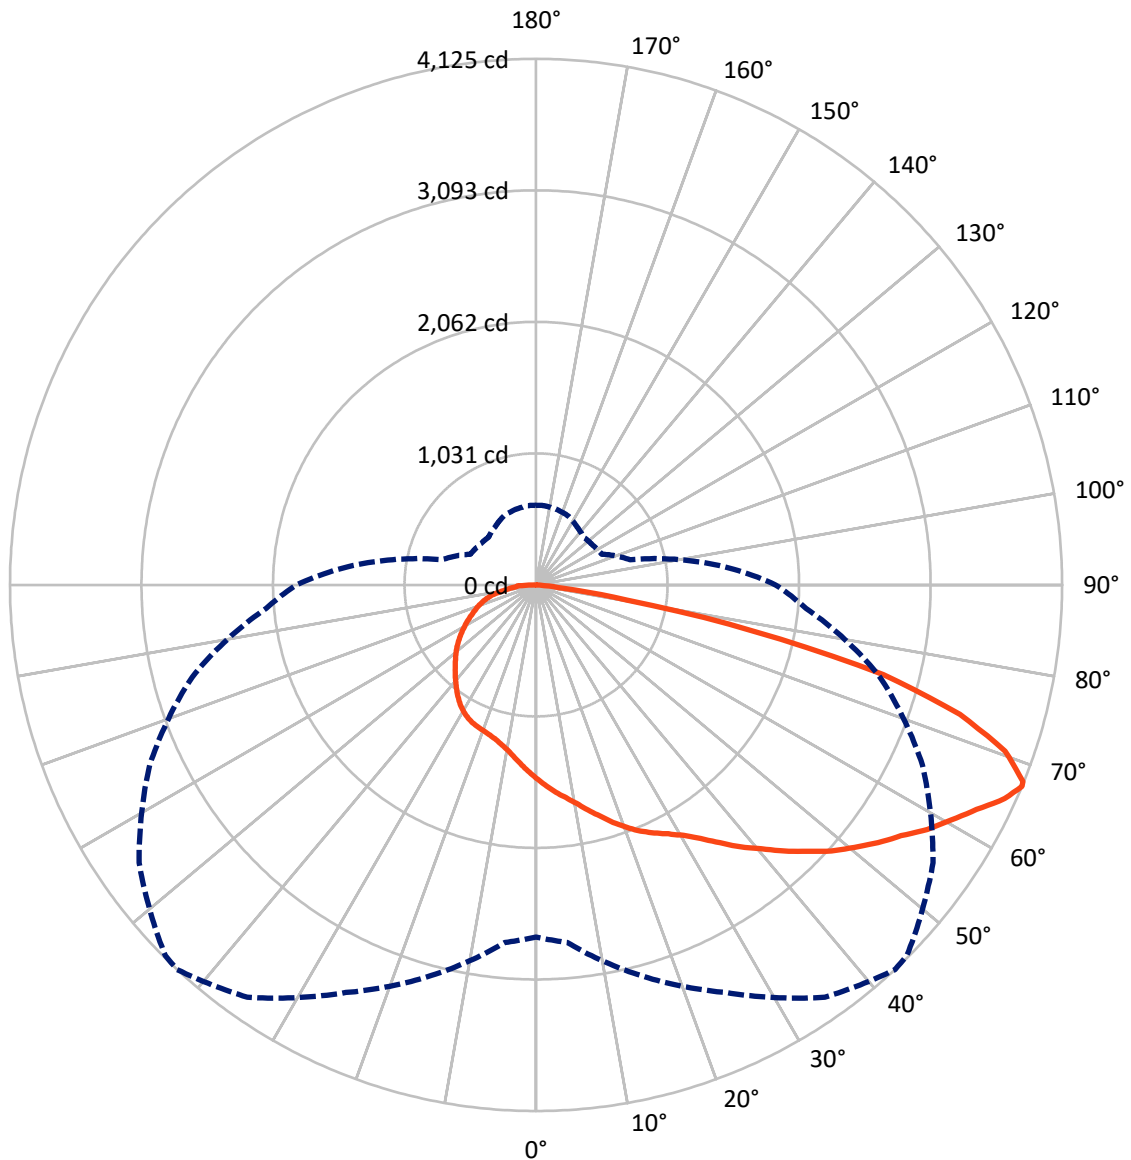

— Vertical Plane Through 43-Deg Lateral - - - Horizontal Cone Through 67-Deg Vertical

REPORT NUMBER: P1211818

CATALOG NUMBER: GKO-PB2D-850-U-T4W


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	2497.6	0.0	2497.6
	% Fixture	26.9	0.0	26.9
Street Side	Lumens	6788.4	0.0	6788.4
	% Fixture	73.1	0.0	73.1
Total	Lumens	9286.0	0.0	9286.0
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	145.7	1.6
10°-20°	447.8	4.8
20°-30°	775.2	8.3
30°-40°	1150.5	12.4
40°-50°	1562.9	16.8
50°-60°	1918.6	20.7
60°-70°	2022.1	21.8
70°-80°	1116.2	12.0
80°-90°	147.0	1.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	9286.0	100.0
0°-180°	9286.0	100.0

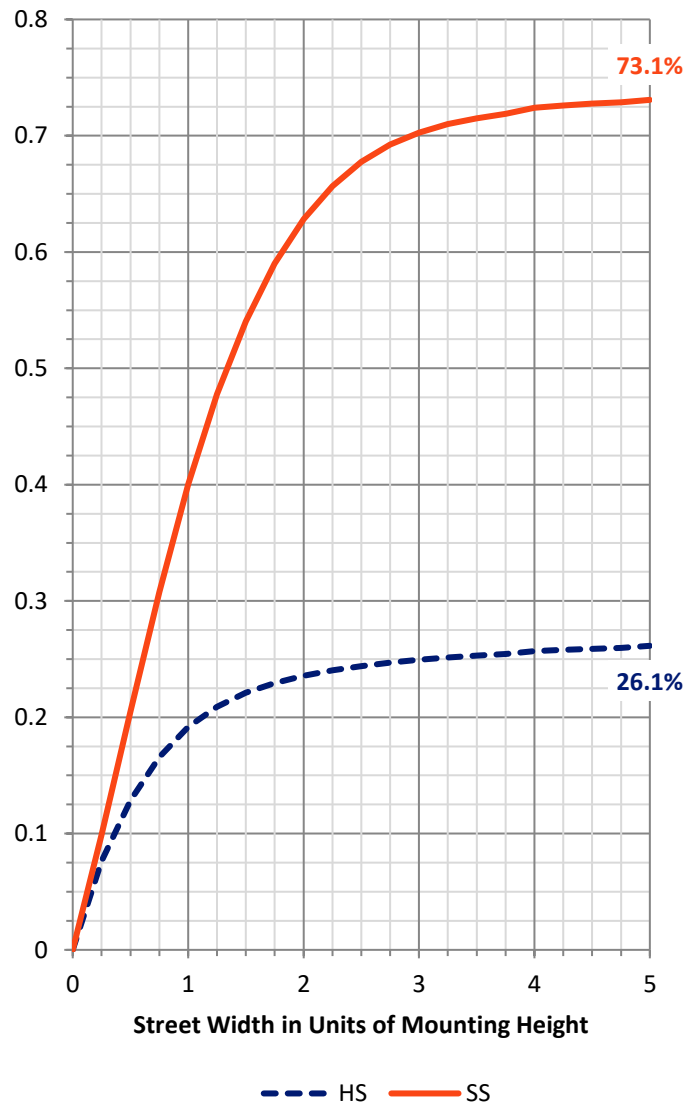

REPORT NUMBER: P1211818


CATALOG NUMBER: GKO-PB2D-850-U-T4W

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	816.9	8.8			
FM	(30°-60°)	3391.5	36.5			
FH	(60°-80°)	2526.2	27.2			G2/5000
FVH	(80°-90°)	53.7	0.6			G1/100
BL	(0°-30°)	551.8	5.9	B2/1000		
BM	(30°-60°)	1240.5	13.4	B2/2500		
BH	(60°-80°)	612.1	6.6	B2/1000		G2/1000
BVH	(80°-90°)	93.3	1.0			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G2

Type IV Short

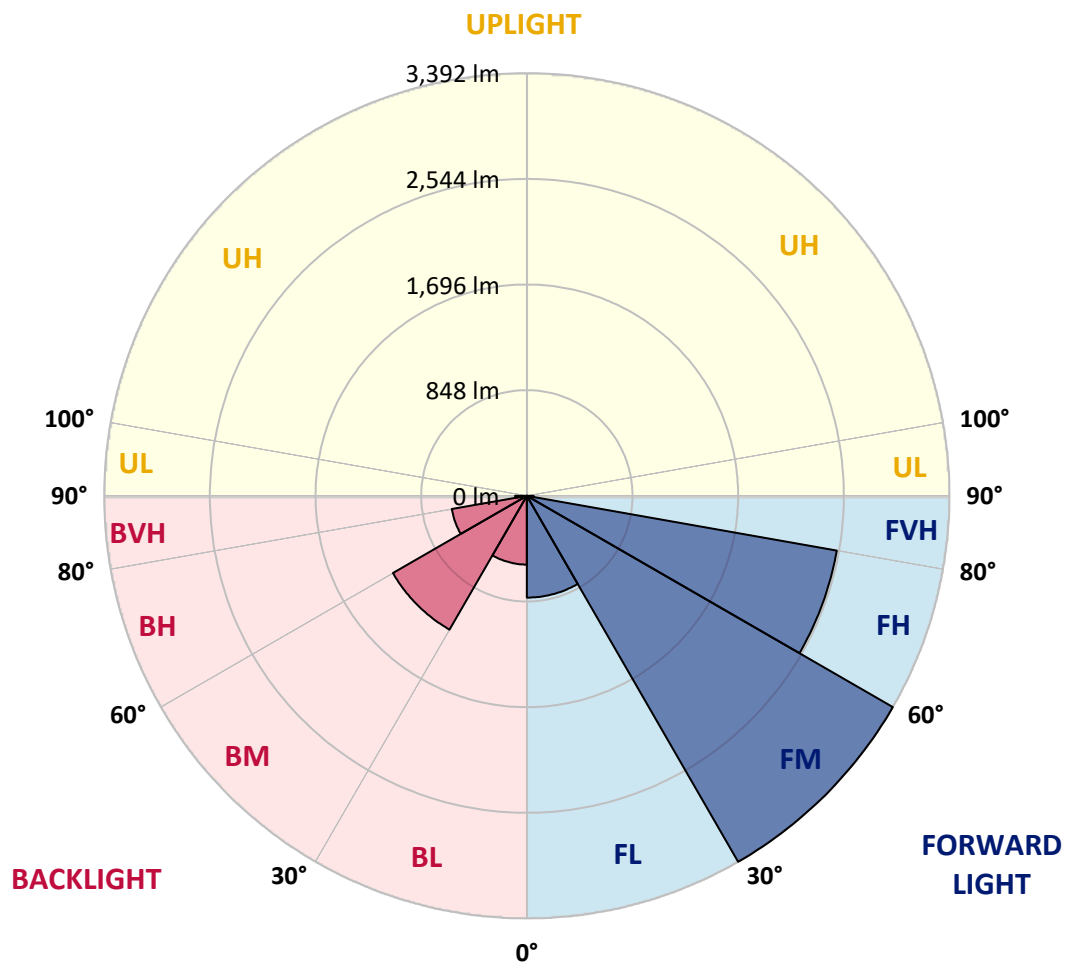

REPORT NUMBER: P1211818

CATALOG NUMBER: GKO-PB2D-850-U-T4W

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	43°	45°	55°	65°	75°	85°
0°	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2
2.5°	1594.8	1598.5	1594.8	1591.1	1583.6	1579.9	1576.2	1566.9	1555.8	1539.0	1526.0
5°	1665.4	1665.4	1659.8	1656.1	1645.0	1633.8	1628.2	1605.9	1581.8	1553.9	1527.9
7.5°	1730.5	1737.9	1728.6	1719.3	1702.6	1684.0	1680.3	1646.8	1613.4	1576.2	1537.2
10°	1812.3	1817.8	1804.8	1797.4	1765.8	1741.6	1734.2	1693.3	1648.7	1602.2	1552.0
12.5°	1895.9	1899.6	1890.3	1873.6	1840.1	1810.4	1799.2	1745.3	1687.7	1632.0	1568.8
15°	1968.4	1972.1	1968.4	1949.8	1918.2	1881.0	1866.2	1806.7	1736.1	1663.6	1589.2
17.5°	2022.3	2029.7	2029.7	2020.4	1992.6	1957.2	1947.9	1873.6	1791.8	1700.7	1613.4
20°	2068.8	2072.5	2079.9	2074.3	2059.5	2029.7	2016.7	1946.1	1847.6	1743.5	1637.5
22.5°	2105.9	2109.7	2122.7	2120.8	2111.5	2096.6	2083.6	2018.6	1912.6	1786.2	1659.8
25°	2171.0	2169.1	2176.6	2171.0	2159.8	2154.3	2146.8	2089.2	1977.7	1836.4	1689.6
27.5°	2284.4	2280.7	2273.2	2245.3	2217.5	2210.0	2204.5	2163.6	2053.9	1894.0	1723.0
30°	2451.7	2455.4	2420.1	2356.9	2301.1	2278.8	2271.4	2243.5	2139.4	1961.0	1760.2
32.5°	2650.5	2648.7	2591.1	2501.8	2414.5	2369.9	2355.0	2325.3	2224.9	2027.9	1803.0
35°	2793.7	2789.9	2760.2	2680.3	2589.2	2483.3	2455.4	2408.9	2316.0	2104.1	1845.7
37.5°	2987.0	2981.4	2923.8	2840.1	2758.4	2605.9	2574.3	2511.1	2403.3	2178.4	1894.0
40°	3208.2	3172.8	3078.1	2992.6	2881.0	2719.3	2693.3	2611.5	2503.7	2269.5	1949.8
42.5°	3408.9	3356.9	3234.2	3126.4	2987.0	2853.1	2819.7	2723.0	2600.4	2353.1	2007.4
45°	3710.0	3583.6	3407.0	3343.8	3102.2	2979.5	2951.7	2832.7	2706.3	2444.2	2065.0
47.5°	3672.8	3583.6	3526.0	3518.6	3223.0	3117.1	3076.2	2953.5	2819.7	2540.9	2124.5
50°	3745.3	3674.7	3678.4	3587.3	3332.7	3234.2	3204.4	3079.9	2934.9	2635.7	2187.7
52.5°	3730.5	3750.9	3739.8	3598.5	3438.6	3356.9	3334.6	3210.0	3044.6	2726.8	2243.5
55°	3849.4	3838.3	3814.1	3674.7	3555.7	3472.1	3453.5	3345.7	3156.1	2804.8	2291.8
57.5°	3936.8	3879.2	3877.3	3760.2	3685.9	3617.1	3587.3	3485.1	3260.2	2873.6	2329.0
60°	3882.9	3814.1	3864.3	3773.2	3765.8	3739.8	3723.0	3607.8	3353.1	2925.6	2343.9
62.5°	3594.8	3611.5	3760.2	3754.6	3853.1	3877.3	3858.7	3693.3	3414.5	2944.2	2332.7
65°	3213.7	3263.9	3492.5	3687.7	3955.4	4039.0	4020.4	3754.6	3408.9	2901.5	2258.4
67°	2760.2	2814.1	3171.0	3526.0	3946.1	4124.5	4111.5	3799.2	3342.0	2791.8	2124.5
67.5°	2659.8	2721.2	3078.1	3451.7	3912.6	4117.1	4107.8	3803.0	3319.7	2739.8	2072.5
70°	1957.2	2029.7	2533.4	3033.4	3645.0	3901.5	3899.6	3663.6	3089.2	2457.2	1797.4
72.5°	1219.3	1284.4	1806.7	2366.2	3158.0	3474.0	3460.9	3191.4	2659.8	2005.6	1418.2
75°	747.2	788.1	1137.5	1542.7	2290.0	2812.3	2830.8	2494.4	1814.1	1191.4	801.1
77.5°	457.2	501.9	717.5	951.7	1399.6	1749.1	1752.8	1382.9	931.2	648.7	438.7
80°	254.6	265.8	373.6	498.1	717.5	721.2	691.4	609.7	483.3	312.3	224.9
82.5°	100.4	107.8	161.7	200.7	204.5	213.8	198.9	180.3	152.4	100.4	70.6
85°	0.0	0.0	0.0	3.7	13.0	26.0	26.0	18.6	7.4	5.6	5.6
87.5°	0.0	0.0	0.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1211818

CATALOG NUMBER: GKO-PB2D-850-U-T4W

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2	1524.2
2.5°	1522.3	1520.4	1507.4	1492.6	1481.4	1472.1	1462.8	1451.7	1451.7	1455.4	1453.5
5°	1518.6	1509.3	1485.1	1459.1	1438.7	1420.1	1403.3	1388.5	1386.6	1388.5	1390.3
7.5°	1520.4	1503.7	1466.5	1427.5	1394.0	1369.9	1345.7	1334.6	1332.7	1332.7	1332.7
10°	1527.9	1503.7	1453.5	1399.6	1358.7	1323.4	1297.4	1286.2	1288.1	1290.0	1291.8
12.5°	1540.9	1507.4	1444.2	1375.5	1323.4	1288.1	1262.1	1252.8	1260.2	1269.5	1271.4
15°	1553.9	1514.9	1434.9	1355.0	1295.5	1256.5	1237.9	1236.1	1249.1	1265.8	1269.5
17.5°	1568.8	1520.4	1423.8	1329.0	1265.8	1234.2	1224.9	1230.5	1250.9	1276.9	1282.5
20°	1583.6	1527.9	1410.8	1304.8	1237.9	1215.6	1221.2	1237.9	1263.9	1295.5	1301.1
22.5°	1598.5	1533.4	1394.0	1275.1	1208.2	1200.7	1221.2	1249.1	1275.1	1310.4	1317.8
25°	1615.2	1540.9	1373.6	1237.9	1178.4	1184.0	1219.3	1252.8	1280.7	1317.8	1327.1
27.5°	1641.3	1552.0	1353.2	1204.5	1145.0	1163.6	1210.0	1250.9	1280.7	1316.0	1327.1
30°	1667.3	1563.2	1336.4	1169.1	1111.5	1135.7	1191.4	1241.6	1271.4	1303.0	1317.8
32.5°	1697.0	1578.1	1321.6	1133.8	1074.3	1104.1	1165.4	1221.2	1256.5	1284.4	1299.3
35°	1728.6	1600.4	1310.4	1102.2	1037.2	1063.2	1126.4	1195.2	1230.5	1256.5	1269.5
37.5°	1769.5	1624.5	1303.0	1070.6	998.1	1020.4	1085.5	1158.0	1198.9	1219.3	1236.1
40°	1814.1	1659.8	1303.0	1044.6	961.0	975.8	1042.7	1120.8	1161.7	1178.4	1195.2
42.5°	1858.7	1695.2	1301.1	1018.6	921.9	933.1	1000.0	1079.9	1119.0	1132.0	1145.0
45°	1910.8	1736.1	1299.3	988.8	879.2	890.3	959.1	1039.0	1076.2	1087.4	1098.5
47.5°	1966.5	1776.9	1291.8	951.7	840.1	849.4	918.2	992.6	1029.7	1042.7	1053.9
50°	2016.7	1816.0	1273.2	908.9	804.8	814.1	875.5	936.8	970.3	985.1	996.3
52.5°	2061.3	1843.9	1243.5	860.6	765.8	776.9	823.4	877.3	903.3	914.5	921.9
55°	2096.6	1858.7	1195.2	814.1	728.6	734.2	771.4	819.7	840.1	842.0	847.6
57.5°	2120.8	1856.9	1130.1	760.2	691.4	693.3	719.3	762.1	776.9	775.1	778.8
60°	2126.4	1832.7	1052.0	710.0	654.3	648.7	674.7	704.5	713.8	721.2	730.5
62.5°	2104.1	1775.1	962.8	659.8	617.1	607.8	626.4	652.4	667.3	671.0	674.7
65°	2022.3	1669.1	855.0	607.8	579.9	563.2	583.6	620.8	645.0	652.4	650.6
67°	1879.2	1520.4	762.1	568.8	542.7	527.9	557.6	596.7	613.4	624.5	624.5
67.5°	1832.7	1466.5	730.5	555.8	533.5	520.4	548.3	585.5	607.8	620.8	620.8
70°	1555.8	1202.6	617.1	490.7	479.6	481.4	514.9	555.8	583.6	596.7	596.7
72.5°	1185.9	931.2	501.9	427.5	423.8	436.8	479.6	516.7	552.0	574.3	572.5
75°	672.9	537.2	366.2	349.4	364.3	390.3	444.2	485.1	516.7	539.0	537.2
77.5°	392.2	323.4	252.8	239.8	282.5	342.0	397.8	449.8	472.1	479.6	474.0
80°	198.9	169.1	158.0	163.6	189.6	254.6	347.6	408.9	425.6	431.2	425.6
82.5°	63.2	57.6	63.2	83.6	126.4	200.7	280.7	369.9	390.3	390.3	388.5
85°	3.7	3.7	3.7	37.2	87.4	148.7	219.3	323.4	366.2	362.5	356.9
87.5°	1.9	1.9	1.9	24.2	68.8	124.5	193.3	293.7	349.4	323.4	304.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2511-595-4

Test Date: 01/09/2026

Luminaire Tested: GKO-PB1C-850-U-T4W

Data in this report applies to families of products including GKO-PB1C

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2511-595-4
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 01/09/2026
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GKO-PB1C-850-U-T4W**
 Description: Gekko Wedge Wall Pack Fixture 1 SQ w/ T4W distribution

Spectral Parameters

CCT (K): 5005
 CIE u' : 0.2100
 CIE v' : 0.4867
 Duv: 0.0019
 CIE x: 0.3453
 CIE y: 0.3557
 CIE z: 0.2990
 Peak Wavelength (nm): 451
 Dominant Wavelength (nm): 570
 Purity: 10.34221
 R_f: 83.7
 R_g: 95.5

CRI (Ra): 83.1
 R1: 81.4
 R2: 89.2
 R3: 93.9
 R4: 82.4
 R5: 82.2
 R6: 84.5
 R7: 86.1
 R8: 65.5
 R9: 4.4
 R10: 74.2
 R11: 81.9
 R12: 62.2
 R13: 83.6
 R14: 97.0
 R15: 75.4



Test Conditions


Stabilization Time: 21M
 Operation Time: 1H 21M
 Sphere Temperature (°C): 25.1

REPORT NUMBER: SP1-2511-595-4


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	12/16/2025	6/16/2026
Power Meter	XITRON INXT2011004	10/21/2025	10/21/2026
AC Power Source	CHROMA 61603 IN0063	10/21/2025	10/21/2026
DC Power Source	AGILENT E3634A IN0208	10/21/2025	10/21/2026
Sphere Thermometer	ONSET IN0085	10/21/2025	10/21/2026
Room Thermometer	ONSET IN0046	10/21/2025	10/21/2026

REPORT NUMBER: SP1-2511-595-4

CIE 1931 Chromaticity Diagram

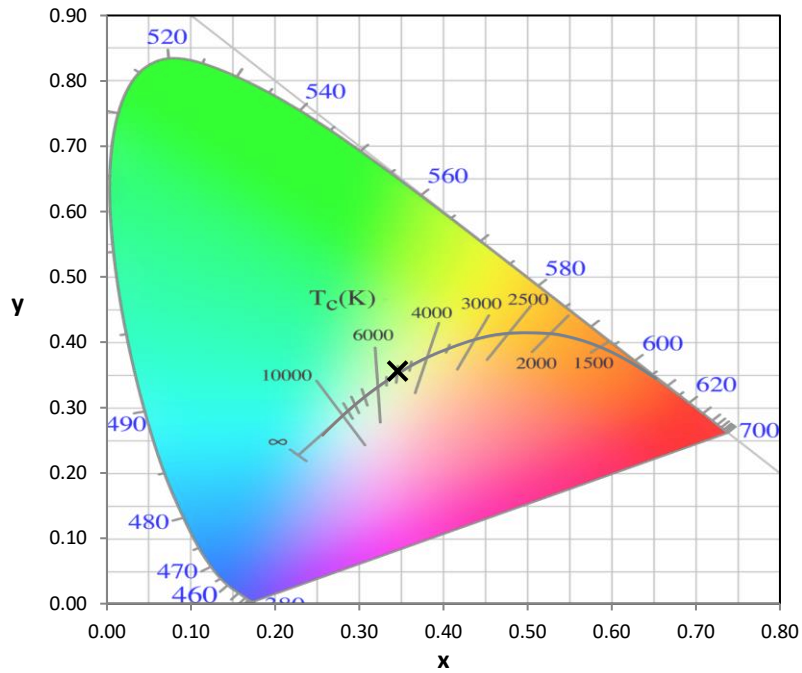

CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

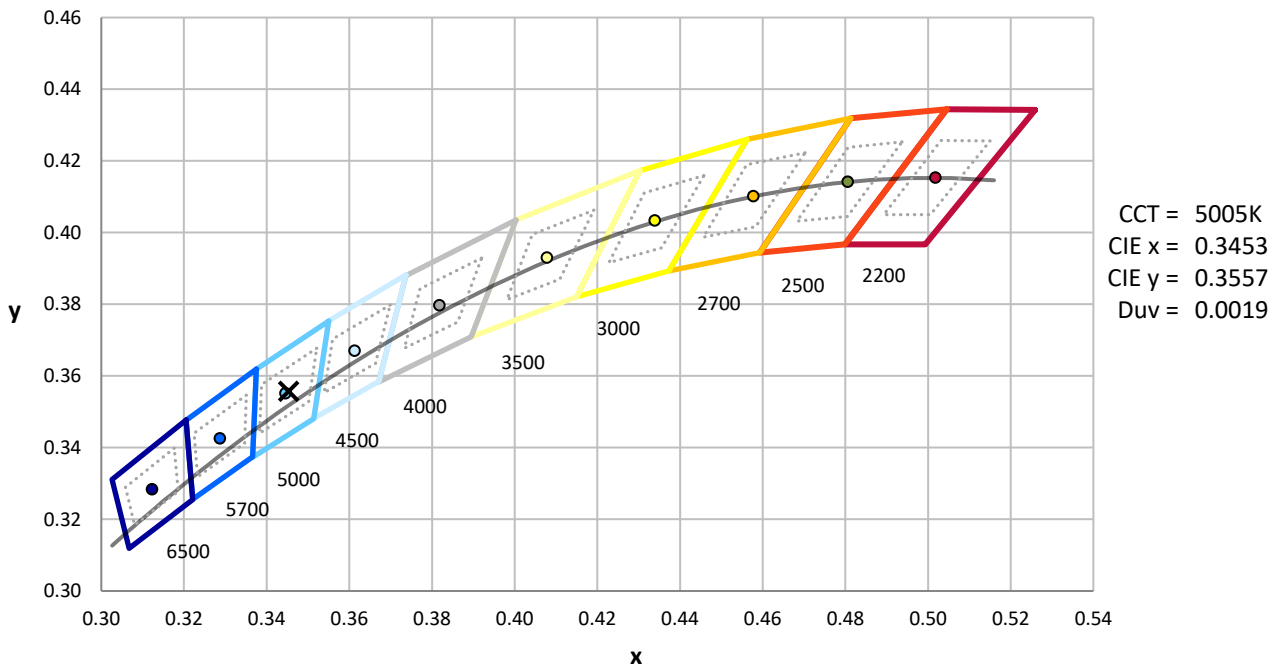

Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-2511-595-4

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	267	NR	620	453	NR	750	11	NR	880	0	NR
365	0	NR	495	305	NR	625	420	NR	755	10	NR	885	0	NR
370	0	NR	500	350	NR	630	387	NR	760	8	NR	890	0	NR
375	1	NR	505	386	NR	635	351	NR	765	7	NR	895	0	NR
380	1	NR	510	415	NR	640	317	NR	770	6	NR	900	0	NR
385	2	NR	515	441	NR	645	283	NR	775	5	NR	905	0	NR
390	3	NR	520	454	NR	650	252	NR	780	4	NR	910	0	NR
395	4	NR	525	466	NR	655	222	NR	785	4	NR	915	0	NR
400	6	NR	530	474	NR	660	194	NR	790	3	NR	920	0	NR
405	8	NR	535	484	NR	665	170	NR	795	3	NR	925	0	NR
410	12	NR	540	492	NR	670	147	NR	800	2	NR	930	0	NR
415	19	NR	545	502	NR	675	127	NR	805	2	NR	935	0	NR
420	33	NR	550	512	NR	680	109	NR	810	2	NR	940	0	NR
425	57	NR	555	522	NR	685	94	NR	815	2	NR	945	0	NR
430	101	NR	560	535	NR	690	80	NR	820	1	NR	950	0	NR
435	183	NR	565	546	NR	695	69	NR	825	1	NR	955	0	NR
440	325	NR	570	555	NR	700	58	NR	830	1	NR	960	0	NR
445	630	NR	575	562	NR	705	50	NR	835	1	NR	965	0	NR
450	982	NR	580	567	NR	710	42	NR	840	1	NR	970	0	NR
455	847	NR	585	567	NR	715	36	NR	845	1	NR	975	0	NR
460	545	NR	590	566	NR	720	31	NR	850	1	NR	980	0	NR
465	456	NR	595	561	NR	725	26	NR	855	0	NR	985	0	NR
470	349	NR	600	547	NR	730	22	NR	860	0	NR	990	0	NR
475	253	NR	605	530	NR	735	19	NR	865	0	NR	995	0	NR
480	235	NR	610	509	NR	740	16	NR	870	0	NR	1000	0	NR
485	247	NR	615	482	NR	745	13	NR	875	0	NR			

REPORT NUMBER: SP1-2511-595-4

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.97

λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)
360	0	NR	490	267	NR	620	453	NR	750	11	NR	880	0	NR
365	0	NR	495	305	NR	625	420	NR	755	10	NR	885	0	NR
370	0	NR	500	350	NR	630	387	NR	760	8	NR	890	0	NR
375	1	NR	505	386	NR	635	351	NR	765	7	NR	895	0	NR
380	1	NR	510	415	NR	640	317	NR	770	6	NR	900	0	NR
385	2	NR	515	441	NR	645	283	NR	775	5	NR	905	0	NR
390	3	NR	520	454	NR	650	252	NR	780	4	NR	910	0	NR
395	4	NR	525	466	NR	655	222	NR	785	4	NR	915	0	NR
400	6	NR	530	474	NR	660	194	NR	790	3	NR	920	0	NR
405	8	NR	535	484	NR	665	170	NR	795	3	NR	925	0	NR
410	12	NR	540	492	NR	670	147	NR	800	2	NR	930	0	NR
415	19	NR	545	502	NR	675	127	NR	805	2	NR	935	0	NR
420	33	NR	550	512	NR	680	109	NR	810	2	NR	940	0	NR
425	57	NR	555	522	NR	685	94	NR	815	2	NR	945	0	NR
430	101	NR	560	535	NR	690	80	NR	820	1	NR	950	0	NR
435	183	NR	565	546	NR	695	69	NR	825	1	NR	955	0	NR
440	325	NR	570	555	NR	700	58	NR	830	1	NR	960	0	NR
445	630	NR	575	562	NR	705	50	NR	835	1	NR	965	0	NR
450	982	NR	580	567	NR	710	42	NR	840	1	NR	970	0	NR
455	847	NR	585	567	NR	715	36	NR	845	1	NR	975	0	NR
460	545	NR	590	566	NR	720	31	NR	850	1	NR	980	0	NR
465	456	NR	595	561	NR	725	26	NR	855	0	NR	985	0	NR
470	349	NR	600	547	NR	730	22	NR	860	0	NR	990	0	NR
475	253	NR	605	530	NR	735	19	NR	865	0	NR	995	0	NR
480	235	NR	610	509	NR	740	16	NR	870	0	NR	1000	0	NR
485	247	NR	615	482	NR	745	13	NR	875	0	NR			

REPORT NUMBER: SP1-2511-595-4

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 4.21

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	267	NR	620	453	NR	750	11	NR	880	0	NR
365	0	NR	495	305	NR	625	420	NR	755	10	NR	885	0	NR
370	0	NR	500	350	NR	630	387	NR	760	8	NR	890	0	NR
375	1	NR	505	386	NR	635	351	NR	765	7	NR	895	0	NR
380	1	NR	510	415	NR	640	317	NR	770	6	NR	900	0	NR
385	2	NR	515	441	NR	645	283	NR	775	5	NR	905	0	NR
390	3	NR	520	454	NR	650	252	NR	780	4	NR	910	0	NR
395	4	NR	525	466	NR	655	222	NR	785	4	NR	915	0	NR
400	6	NR	530	474	NR	660	194	NR	790	3	NR	920	0	NR
405	8	NR	535	484	NR	665	170	NR	795	3	NR	925	0	NR
410	12	NR	540	492	NR	670	147	NR	800	2	NR	930	0	NR
415	19	NR	545	502	NR	675	127	NR	805	2	NR	935	0	NR
420	33	NR	550	512	NR	680	109	NR	810	2	NR	940	0	NR
425	57	NR	555	522	NR	685	94	NR	815	2	NR	945	0	NR
430	101	NR	560	535	NR	690	80	NR	820	1	NR	950	0	NR
435	183	NR	565	546	NR	695	69	NR	825	1	NR	955	0	NR
440	325	NR	570	555	NR	700	58	NR	830	1	NR	960	0	NR
445	630	NR	575	562	NR	705	50	NR	835	1	NR	965	0	NR
450	982	NR	580	567	NR	710	42	NR	840	1	NR	970	0	NR
455	847	NR	585	567	NR	715	36	NR	845	1	NR	975	0	NR
460	545	NR	590	566	NR	720	31	NR	850	1	NR	980	0	NR
465	456	NR	595	561	NR	725	26	NR	855	0	NR	985	0	NR
470	349	NR	600	547	NR	730	22	NR	860	0	NR	990	0	NR
475	253	NR	605	530	NR	735	19	NR	865	0	NR	995	0	NR
480	235	NR	610	509	NR	740	16	NR	870	0	NR	1000	0	NR
485	247	NR	615	482	NR	745	13	NR	875	0	NR			

REPORT NUMBER: SP1-2511-595-4





TM-30-18

Summary

$R_f = 83.7$
 $R_g = 95.5$
 $\text{CIE } R_a = 83.1$
 $R_9 = 4.4$



Color Vector Graphics

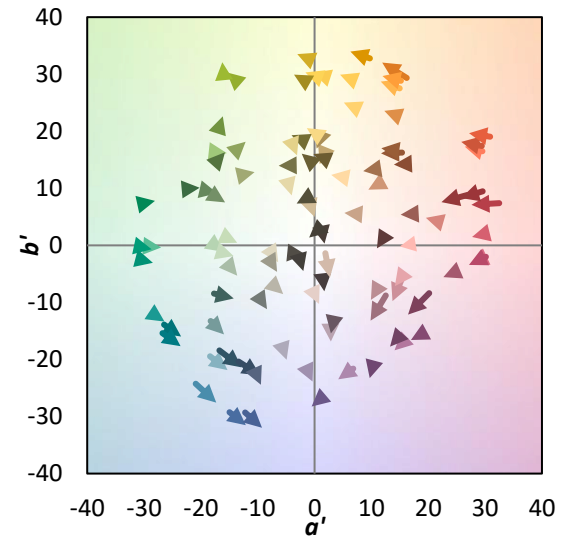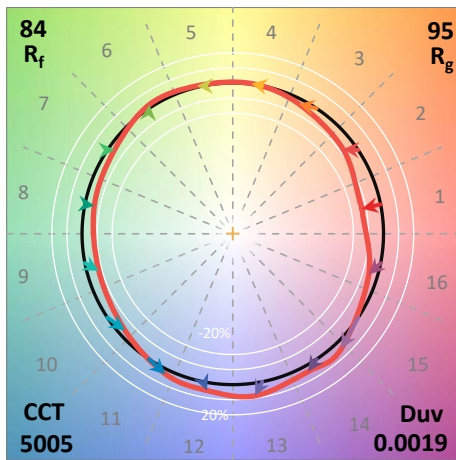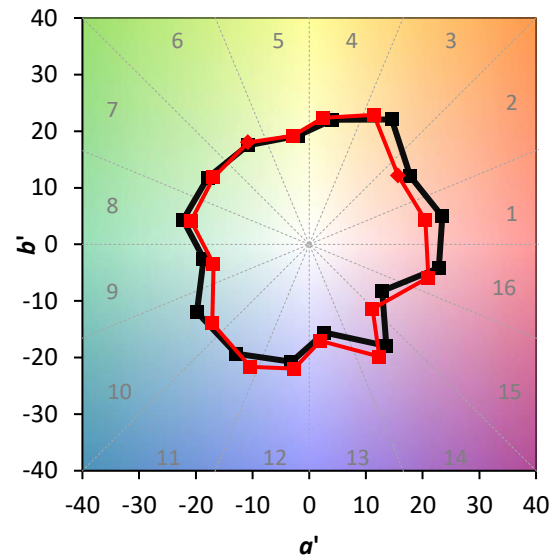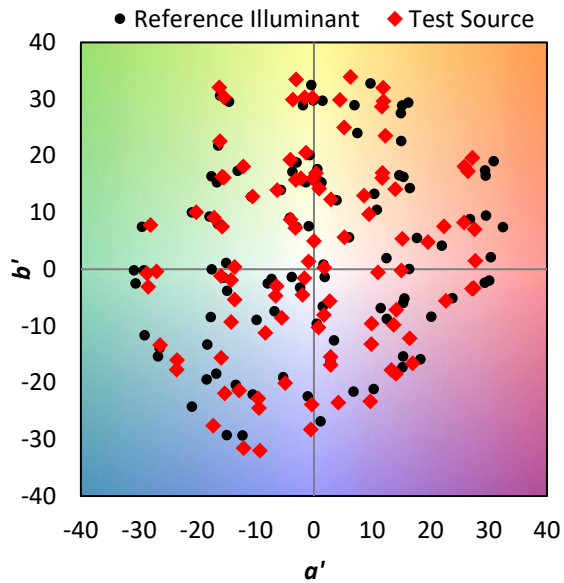

Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 81	CES51 = 94	CES76 = 74
CES02 = 60	CES27 = 93	CES52 = 95	CES77 = 81
CES03 = 30	CES28 = 91	CES53 = 90	CES78 = 73
CES04 = 69	CES29 = 87	CES54 = 89	CES79 = 91
CES05 = 47	CES30 = 95	CES55 = 87	CES80 = 88
CES06 = 50	CES31 = 89	CES56 = 85	CES81 = 82
CES07 = 39	CES32 = 81	CES57 = 85	CES82 = 95
CES08 = 39	CES33 = 95	CES58 = 85	CES83 = 96
CES09 = 29	CES34 = 86	CES59 = 91	CES84 = 90
CES10 = 73	CES35 = 92	CES60 = 90	CES85 = 80
CES11 = 56	CES36 = 82	CES61 = 87	CES86 = 77
CES12 = 62	CES37 = 91	CES62 = 83	CES87 = 84
CES13 = 42	CES38 = 90	CES63 = 85	CES88 = 88
CES14 = 74	CES39 = 98	CES64 = 78	CES89 = 78
CES15 = 71	CES40 = 95	CES65 = 76	CES90 = 89
CES16 = 46	CES41 = 98	CES66 = 74	CES91 = 71
CES17 = 49	CES42 = 92	CES67 = 73	CES92 = 64
CES18 = 55	CES43 = 90	CES68 = 77	CES93 = 79
CES19 = 71	CES44 = 99	CES69 = 81	CES94 = 63
CES20 = 64	CES45 = 94	CES70 = 73	CES95 = 72
CES21 = 85	CES46 = 92	CES71 = 67	CES96 = 83
CES22 = 77	CES47 = 97	CES72 = 89	CES97 = 91
CES23 = 91	CES48 = 86	CES73 = 67	CES98 = 86
CES24 = 90	CES49 = 91	CES74 = 91	CES99 = 75
CES25 = 71	CES50 = 94	CES75 = 69	



Color Rendition by Hue-Angle Bin



Measure Comparisons

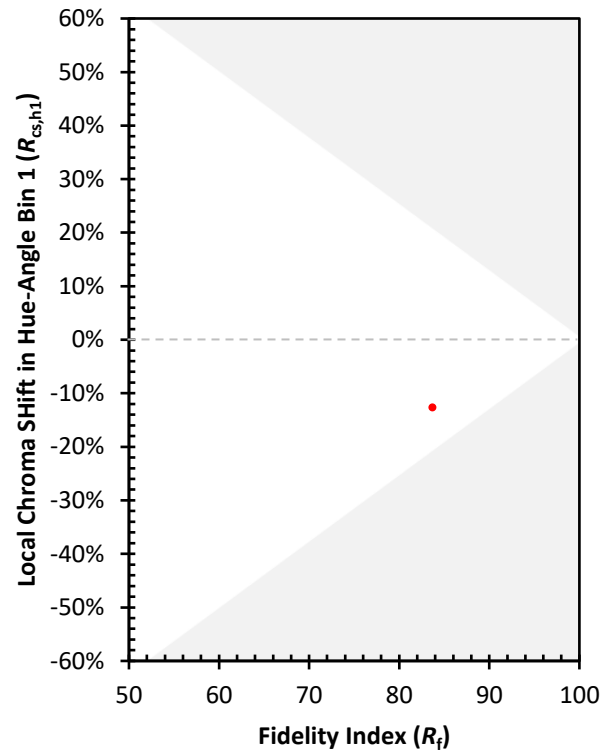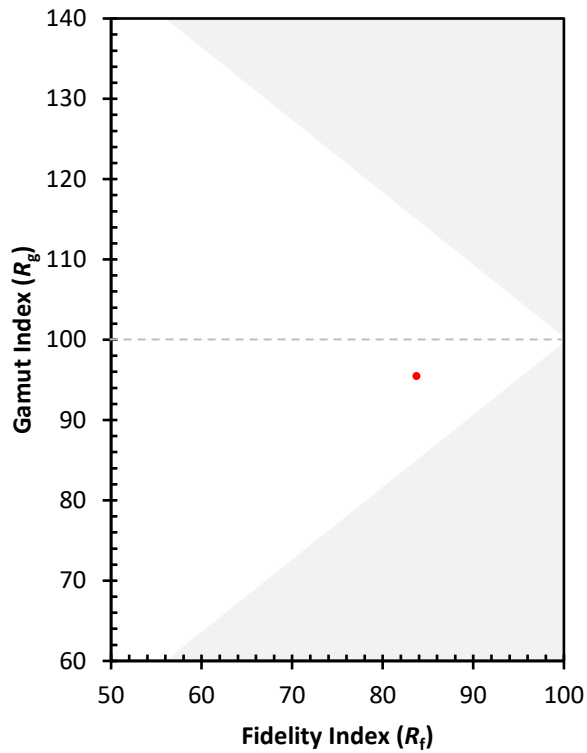

(END OF REPORT)