

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1055348

Luminaire Tested: S122R3DRP-H485D930-X4F0-XX-UDD-F-S

Issue Date: 7/25/2025

Test Information

Test Method: LM-79-2024
Report Number: P1055348
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-3)
Test Lab: INNOVATION CENTER
Issue Date: 7/25/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122R3DRP-H485D930-X4F0-XX-UDD-F-S
Description: DEFINE 2, SILVER 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 527.2 lumens
Efficiency: N/A
Efficacy: 30.5 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 0.64 / 0.81
Luminous Opening: Rectangular (W 0.15' x L: 3.9' x H: 0')
CIE Type: Direct

Input Watts (W): 17.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P105348

CATALOG NUMBER: S122R3DRP-H485D930-X4F0-XX-UDD-F-S

Luminous Intensity Polar Plot

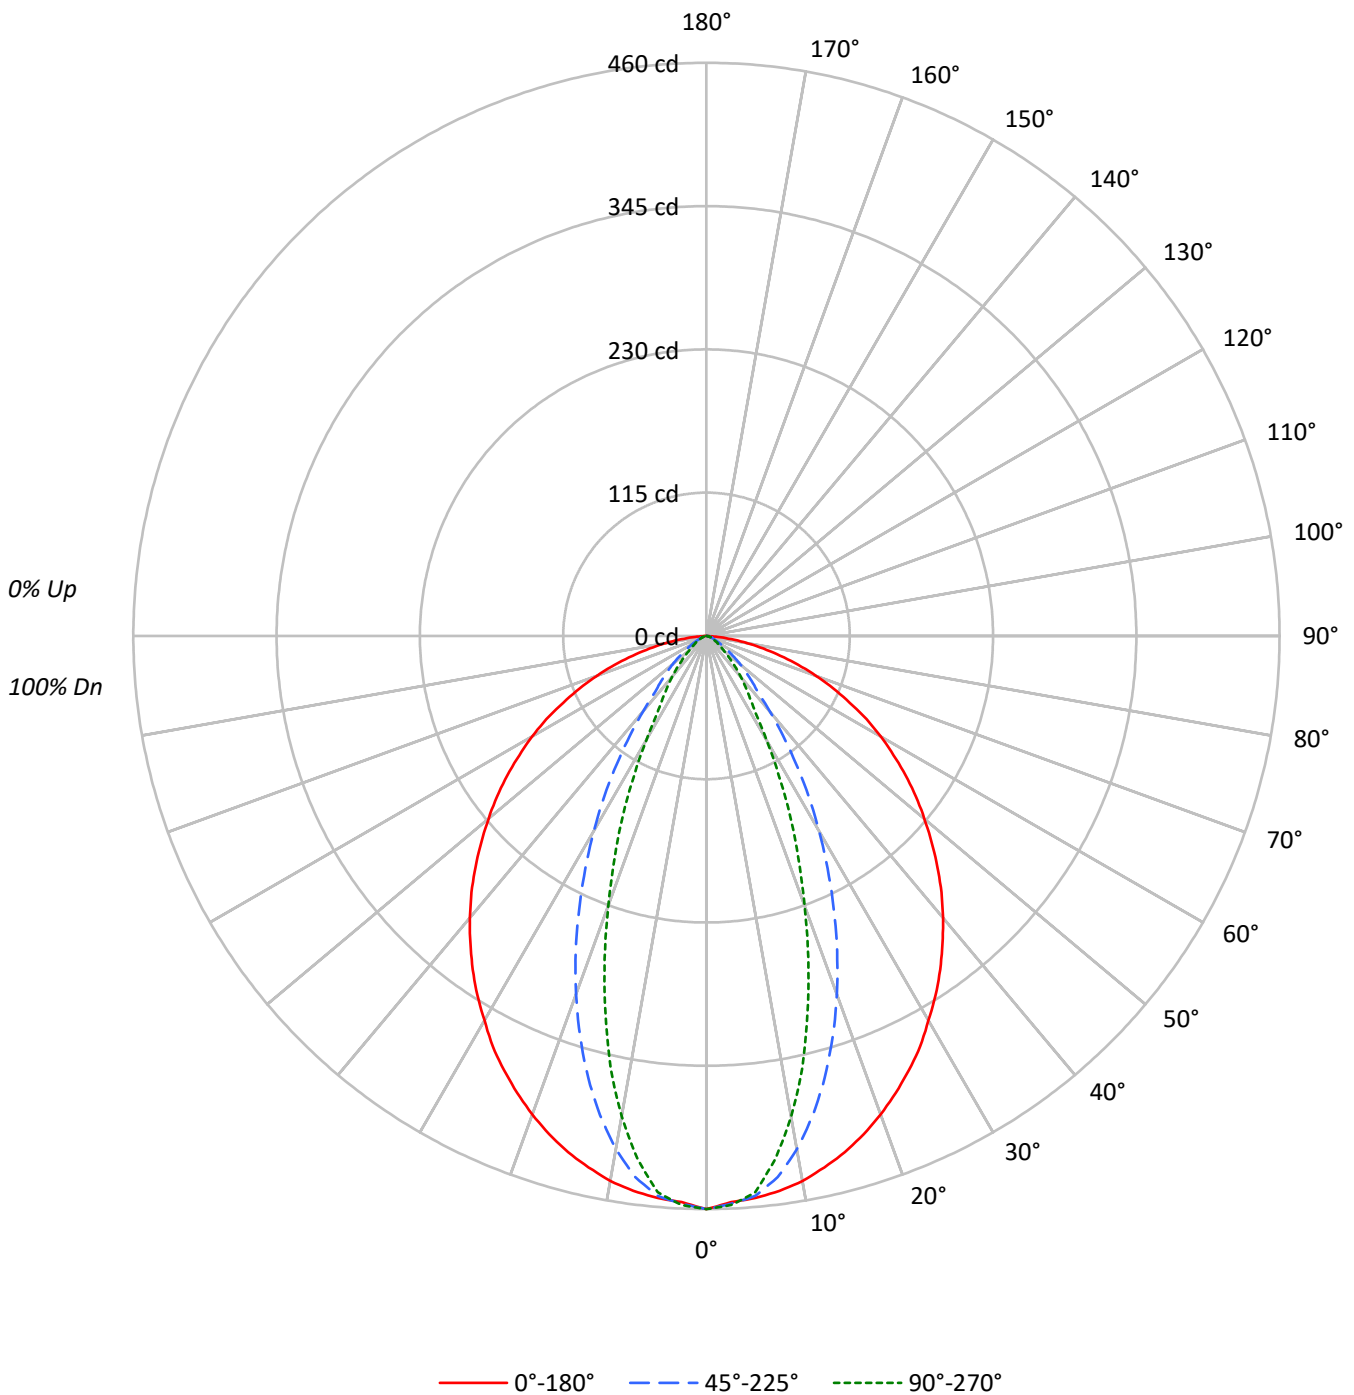

TEST NUMBER: P1055348

CATALOG NUMBER: S122R3DRP-H485D930-X4F0-XX-UDD-F-S

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90					90			
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80					80			
3	97	89	83	78	95	88	82	77	85	80	76	82	78	74	80	76	73	71					71			
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	70	66	64					64			
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58					58			
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53					53			
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49					49			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45					45			
9	67	56	49	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42					42			
10	63	52	45	41	62	52	45	41	51	45	41	50	44	40	49	44	40	39					39			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8715	8715	8715
5°	8610	8577	8524
10°	8546	8047	7537
15°	8414	7198	6147
20°	8240	6172	4637
25°	8038	5055	3311
30°	7795	3947	2109
35°	7563	2893	1409
40°	7306	1951	1059
45°	7023	1375	756
50°	6729	1046	531
55°	6444	727	390
60°	6131	493	322
65°	5684	354	251
70°	5185	283	216
75°	4495	249	168
80°	3568	185	185
85°	1956	239	130

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7023 cd/sqm



TEST NUMBER: P1055348

CATALOG NUMBER: S122R3DRP-H485D930-X4F0-XX-UDD-F-S

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	42.1	8.0
10°-20°	103.2	19.6
20°-30°	117.9	22.4
30°-40°	100.0	19.0
40°-50°	74.6	14.2
50°-60°	48.2	9.1
60°-70°	26.9	5.1
70°-80°	11.8	2.2
80°-90°	2.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	263.2	49.9
0°-40°	363.2	68.9
0°-60°	486.0	92.2
0°-90°	527.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	527.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	460	460	460	460	460	
5°	453	458	451	446	448	43
15°	429	418	367	328	313	121
25°	384	339	242	177	158	177
35°	327	246	125	68	61	204
45°	262	156	51	33	28	202
55°	195	74	22	14	12	174
65°	127	27	8	6	6	126
75°	61	6	3	3	2	66
85°	9	1	1	1	1	13
90°	0	0	0	0	0	



TEST NUMBER: P1055348

CATALOG NUMBER: S122R3DRP-H485D930-X4F0-XX-UDD-F-S

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	460.0	460.0	460.0	460.0	460.0
2.5°	454.9	461.7	456.1	456.1	457.2
5°	452.7	458.3	451.0	446.5	448.2
7.5°	449.3	453.2	438.0	424.5	423.4
10°	444.2	445.9	418.3	397.4	391.8
12.5°	436.9	433.0	394.1	364.7	355.2
15°	429.0	418.3	367.0	328.1	313.4
17.5°	419.4	400.3	337.1	289.8	271.7
20°	408.7	381.7	306.1	249.7	230.0
22.5°	396.9	360.8	274.0	212.0	192.2
25°	384.5	339.4	241.8	177.0	158.4
27.5°	371.5	316.8	210.3	145.4	125.1
30°	356.3	293.7	180.4	115.0	96.4
32.5°	342.2	269.5	152.8	89.1	73.3
35°	327.0	246.4	125.1	68.2	60.9
37.5°	311.2	223.2	100.9	57.5	51.3
40°	295.4	200.1	78.9	48.5	42.8
42.5°	279.1	177.6	60.9	40.6	35.0
45°	262.1	155.6	51.3	33.3	28.2
47.5°	245.2	133.6	42.8	26.5	22.5
50°	228.3	112.7	35.5	20.9	18.0
52.5°	212.0	93.0	28.2	16.9	14.7
55°	195.1	73.8	22.0	13.5	11.8
57.5°	178.1	57.5	16.9	11.3	10.1
60°	161.8	43.4	13.0	9.0	8.5
62.5°	144.9	35.0	10.1	7.3	6.8
65°	126.8	27.1	7.9	6.2	5.6
67.5°	110.5	19.7	6.2	5.1	4.5
70°	93.6	13.5	5.1	4.5	3.9
72.5°	77.2	8.5	3.9	3.4	3.4
75°	61.4	5.6	3.4	2.8	2.3
77.5°	46.8	3.4	2.3	2.3	1.7
80°	32.7	2.3	1.7	1.7	1.7
82.5°	20.3	1.7	1.1	1.1	1.1
85°	9.0	0.6	1.1	0.6	0.6
87.5°	1.7	0.6	0.6	0.6	0.6
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1055348
 CATALOG NUMBER: S122R3DRP-H485D930-X4F0-XX-UDD-F-S

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.77	17.09	16.14	17.41	17.72	2.09	3.41	2.46	3.72	4.04
	3H	18.24	19.41	18.62	19.74	20.11	2.94	4.11	3.32	4.44	4.80
	4H	19.20	20.29	19.60	20.64	21.02	3.22	4.31	3.62	4.66	5.04
	6H	19.89	20.89	20.30	21.26	21.65	3.41	4.41	3.83	4.78	5.18
	8H	20.08	21.03	20.51	21.42	21.83	3.48	4.43	3.91	4.82	5.23
	12H	20.16	21.07	20.60	21.45	21.88	3.51	4.42	3.94	4.80	5.23
4H	2H	15.56	16.65	15.96	17.00	17.38	2.66	3.75	3.06	4.10	4.49
	3H	18.04	18.94	18.45	19.34	19.74	3.69	4.58	4.10	4.99	5.39
	4H	18.98	19.78	19.42	20.20	20.65	4.06	4.86	4.49	5.28	5.72
	6H	19.74	20.43	20.20	20.88	21.34	4.36	5.05	4.82	5.49	5.96
	8H	19.98	20.63	20.45	21.08	21.55	4.45	5.10	4.92	5.54	6.01
	12H	20.11	20.68	20.60	21.16	21.64	4.50	5.07	4.99	5.55	6.03
8H	4H	18.85	19.50	19.32	19.94	20.41	4.43	5.08	4.90	5.52	6.00
	6H	19.59	20.12	20.09	20.61	21.09	4.80	5.32	5.30	5.82	6.30
	8H	19.84	20.31	20.36	20.82	21.31	4.93	5.40	5.45	5.92	6.41
	12H	19.99	20.40	20.50	20.90	21.47	5.02	5.43	5.54	5.93	6.50
12H	4H	18.81	19.38	19.29	19.86	20.33	4.56	5.12	5.04	5.61	6.08
	6H	19.53	20.00	20.05	20.52	21.01	4.92	5.39	5.44	5.90	6.40
	8H	19.80	20.21	20.31	20.70	21.28	5.09	5.50	5.61	6.00	6.57