

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1055231

Luminaire Tested: S122R3DRP-S675D840-X4F0-XX-UDD-F-S

Issue Date: 7/25/2025

Test Information

Test Method: LM-79-2024
Report Number: P1055231
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-3)
Test Lab: INNOVATION CENTER
Issue Date: 7/25/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122R3DRP-S675D840-X4F0-XX-UDD-F-S
Description: DEFINE 2, SILVER 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS
CORE LIGHT ENGINE
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 944.4 lumens
Efficiency: N/A
Efficacy: 35.8 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 0.64 / 0.81
Luminous Opening: Rectangular (W 0.15' x L: 3.9' x H: 0')
CIE Type: Direct

Input Watts (W): 26.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1055231

CATALOG NUMBER: S122R3DRP-S675D840-X4F0-XX-UDD-F-S

Luminous Intensity Polar Plot

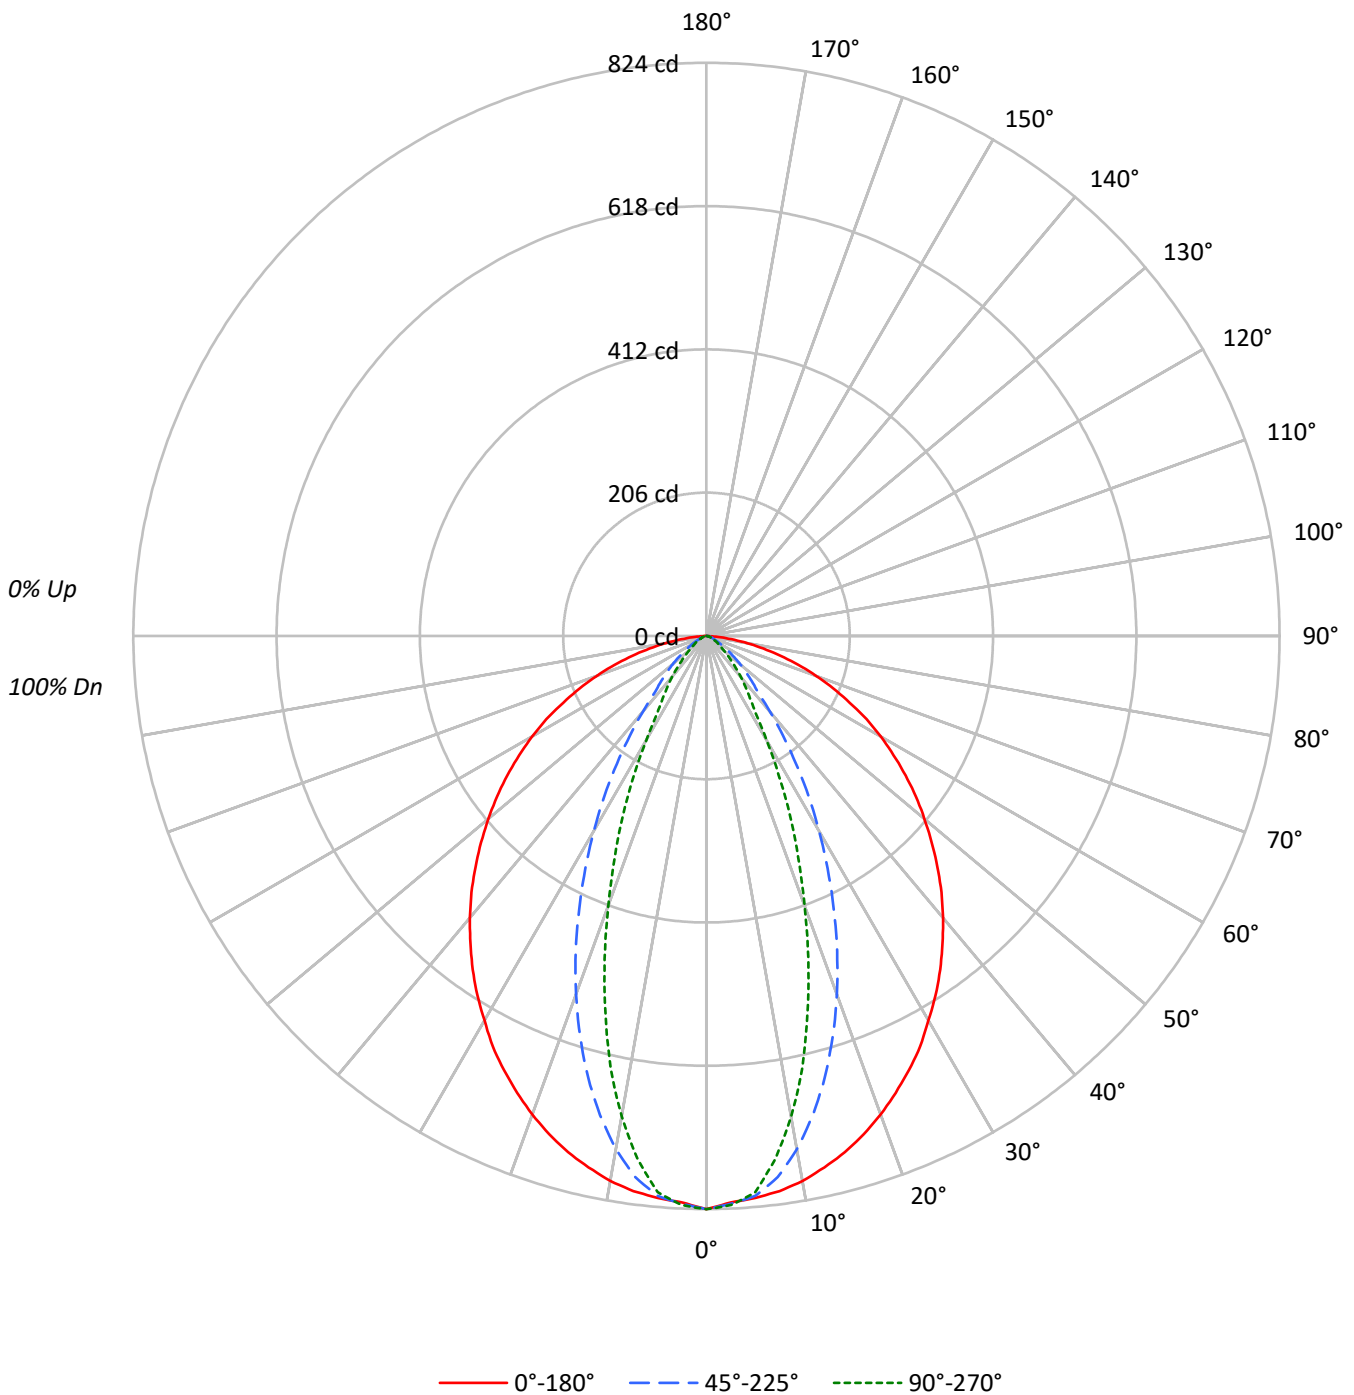



TEST NUMBER: P1055231

CATALOG NUMBER: S122R3DRP-S675D840-X4F0-XX-UDD-F-S

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76	82	78	74	80	76	73	71
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	70	66	64
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45
9	67	56	49	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42
10	63	52	45	41	62	52	45	41	51	45	41	50	44	40	49	44	40	39

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15613	15613	15613
5°	15422	15365	15268
10°	15310	14415	13503
15°	15074	12894	11013
20°	14762	11057	8307
25°	14397	9056	5933
30°	13962	7071	3778
35°	13546	5185	2523
40°	13088	3497	1897
45°	12582	2462	1353
50°	12055	1875	952
55°	11541	1301	700
60°	10981	879	572
65°	10185	632	453
70°	9284	504	393
75°	8059	447	293
80°	6394	327	327
85°	3522	435	217

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12582 cd/sqm



TEST NUMBER: P1055231

CATALOG NUMBER: S122R3DRP-S675D840-X4F0-XX-UDD-F-S

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.3	8.0
10°-20°	184.9	19.6
20°-30°	211.2	22.4
30°-40°	179.1	19.0
40°-50°	133.7	14.2
50°-60°	86.4	9.1
60°-70°	48.2	5.1
70°-80°	21.1	2.2
80°-90°	4.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	471.5	49.9
0°-40°	650.6	68.9
0°-60°	870.7	92.2
0°-90°	944.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	944.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	824	824	824	824	824	
5°	811	821	808	800	803	77
15°	768	749	657	588	562	216
25°	689	608	433	317	284	317
35°	586	441	224	122	109	366
45°	470	279	92	60	50	362
55°	349	132	39	24	21	312
65°	227	48	14	11	10	226
75°	110	10	6	5	4	117
85°	16	1	2	1	1	23
90°	0	0	0	0	0	



TEST NUMBER: P1055231

CATALOG NUMBER: S122R3DRP-S675D840-X4F0-XX-UDD-F-S

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	824.1	824.1	824.1	824.1	824.1
2.5°	815.0	827.1	817.0	817.0	819.0
5°	810.9	821.0	807.9	799.8	802.8
7.5°	804.9	811.9	784.7	760.4	758.4
10°	795.8	798.8	749.3	712.0	701.9
12.5°	782.6	775.6	705.9	653.4	636.2
15°	768.5	749.3	657.4	587.7	561.5
17.5°	751.3	717.0	603.9	519.1	486.8
20°	732.2	683.7	548.4	447.4	412.0
22.5°	710.9	646.3	490.8	379.7	344.4
25°	688.7	607.9	433.2	317.1	283.8
27.5°	665.5	567.5	376.7	260.5	224.2
30°	638.2	526.1	323.2	206.0	172.7
32.5°	613.0	482.7	273.7	159.6	131.3
35°	585.7	441.3	224.2	122.2	109.1
37.5°	557.4	399.9	180.8	103.0	91.9
40°	529.2	358.5	141.4	86.8	76.7
42.5°	499.9	318.1	109.1	72.7	62.6
45°	469.6	278.7	91.9	59.6	50.5
47.5°	439.3	239.3	76.7	47.5	40.4
50°	409.0	202.0	63.6	37.4	32.3
52.5°	379.7	166.6	50.5	30.3	26.3
55°	349.4	132.3	39.4	24.2	21.2
57.5°	319.1	103.0	30.3	20.2	18.2
60°	289.8	77.8	23.2	16.2	15.1
62.5°	259.5	62.6	18.2	13.1	12.1
65°	227.2	48.5	14.1	11.1	10.1
67.5°	197.9	35.3	11.1	9.1	8.1
70°	167.6	24.2	9.1	8.1	7.1
72.5°	138.4	15.1	7.1	6.1	6.1
75°	110.1	10.1	6.1	5.0	4.0
77.5°	83.8	6.1	4.0	4.0	3.0
80°	58.6	4.0	3.0	3.0	3.0
82.5°	36.4	3.0	2.0	2.0	2.0
85°	16.2	1.0	2.0	1.0	1.0
87.5°	3.0	1.0	1.0	1.0	1.0
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1055231

CATALOG NUMBER: S122R3DRP-S675D840-X4F0-XX-UDD-F-S

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.80	19.12	18.16	19.43	19.75	4.11	5.43	4.48	5.74	6.06
	3H	20.27	21.44	20.65	21.77	22.13	4.97	6.14	5.35	6.47	6.83
	4H	21.22	22.32	21.63	22.67	23.05	5.24	6.33	5.64	6.68	7.06
	6H	21.91	22.92	22.33	23.29	23.68	5.42	6.43	5.84	6.80	7.19
	8H	22.11	23.06	22.54	23.45	23.85	5.50	6.45	5.93	6.84	7.24
	12H	22.19	23.10	22.62	23.48	23.91	5.52	6.43	5.95	6.81	7.24
4H	2H	17.58	18.68	17.99	19.03	19.41	4.68	5.77	5.08	6.12	6.51
	3H	20.07	20.96	20.48	21.37	21.77	5.72	6.61	6.13	7.02	7.42
	4H	21.01	21.81	21.45	22.23	22.67	6.08	6.88	6.51	7.30	7.74
	6H	21.77	22.46	22.23	22.90	23.37	6.37	7.06	6.83	7.50	7.97
	8H	22.01	22.65	22.48	23.10	23.57	6.46	7.11	6.93	7.55	8.02
	12H	22.14	22.71	22.63	23.19	23.66	6.51	7.07	6.99	7.56	8.03
8H	4H	20.88	21.52	21.35	21.97	22.44	6.45	7.10	6.92	7.54	8.01
	6H	21.62	22.14	22.12	22.64	23.12	6.80	7.33	7.31	7.82	8.31
	8H	21.86	22.33	22.38	22.85	23.34	6.94	7.41	7.46	7.92	8.42
	12H	22.01	22.43	22.53	22.92	23.49	7.02	7.43	7.54	7.93	8.50
12H	4H	20.83	21.40	21.32	21.89	22.36	6.57	7.14	7.06	7.62	8.10
	6H	21.56	22.03	22.08	22.54	23.04	6.92	7.39	7.44	7.91	8.40
	8H	21.82	22.24	22.34	22.73	23.30	7.10	7.51	7.61	8.01	8.58