

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1055382

Luminaire Tested: S122R3DRP-H675D940-X4F0-XX-UDD-F-W

Issue Date: 7/25/2025

Test Information

Test Method: LM-79-2024
Report Number: P1055382
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-1)
Test Lab: INNOVATION CENTER
Issue Date: 7/25/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122R3DRP-H675D940-X4F0-XX-UDD-F-W
Description: DEFINE 2, WHITE 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1562.1 lumens
Efficiency: N/A
Efficacy: 65.6 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 0.71 / 0.9
Luminous Opening: Rectangular (W 0.15' x L: 3.9' x H: 0')
CIE Type: Direct

Input Watts (W): 23.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1055382

CATALOG NUMBER: S122R3DRP-H675D940-X4F0-XX-UDD-F-W

Luminous Intensity Polar Plot

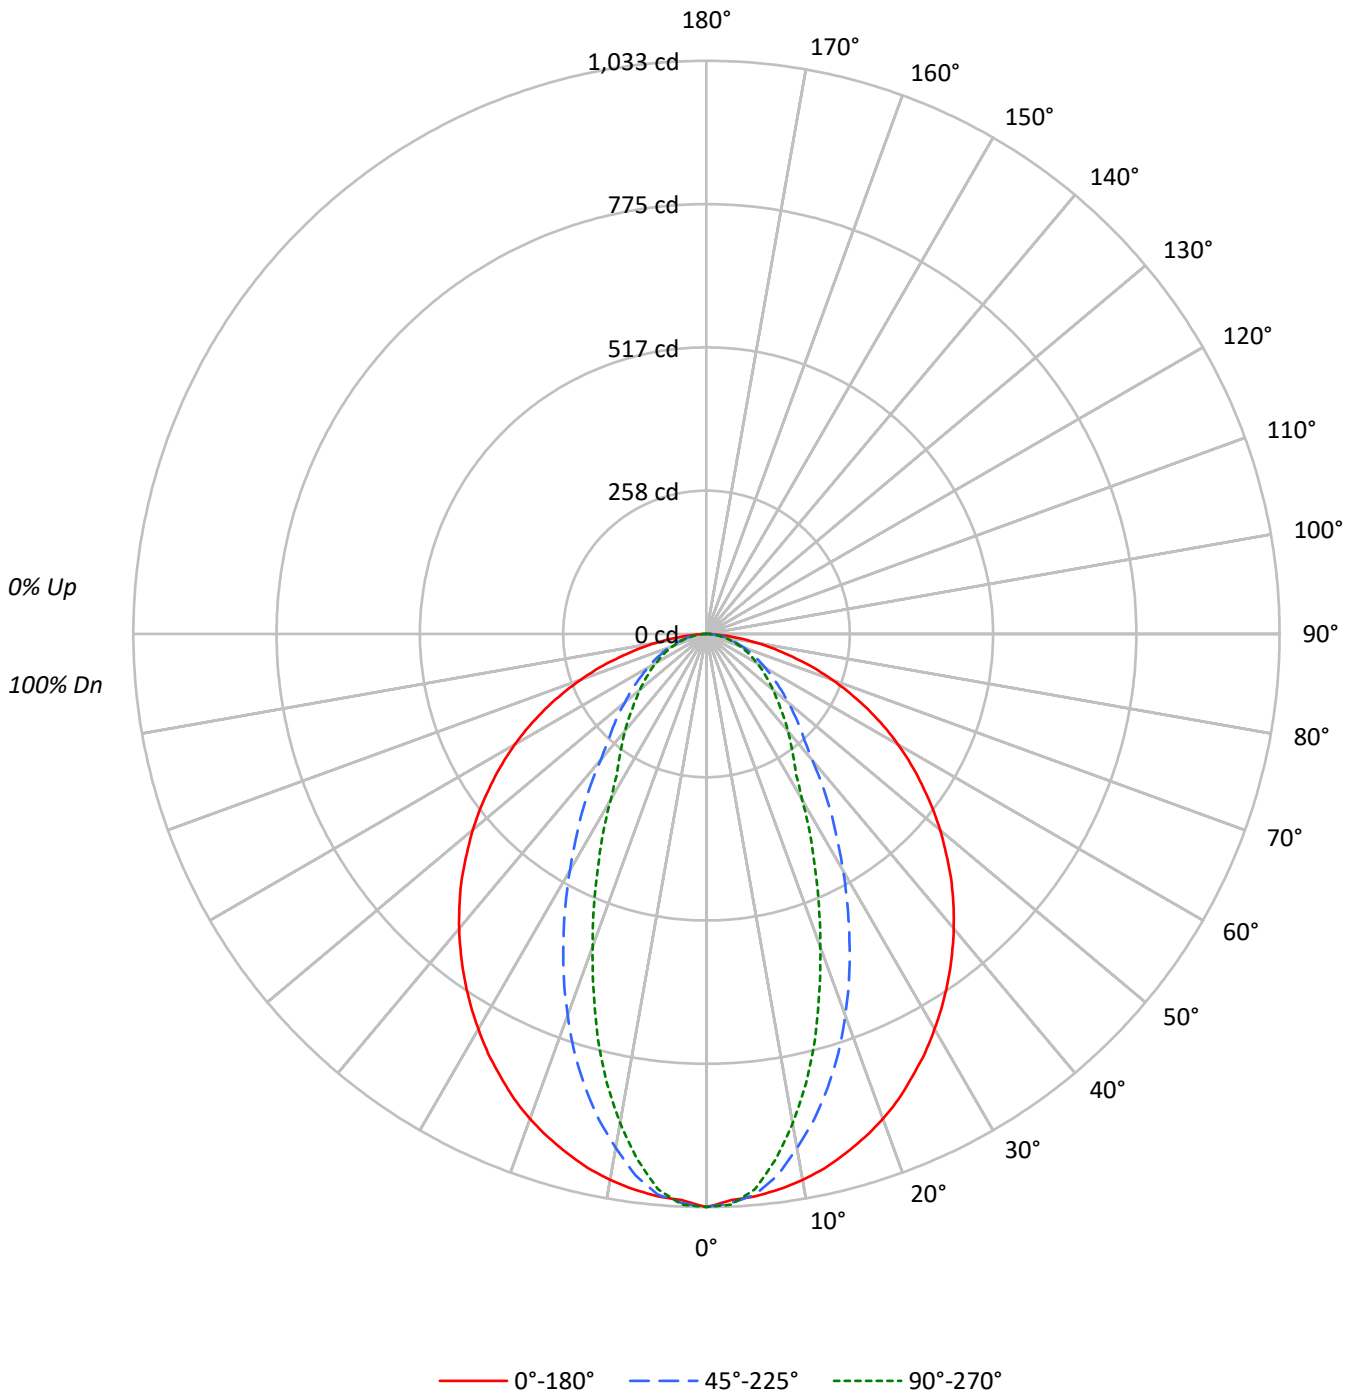



TEST NUMBER: P1055382

CATALOG NUMBER: S122R3DRP-H675D940-X4F0-XX-UDD-F-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	110	106	102	99	108	104	101	97	100	97	94	96	94	92	92	91	89					87				
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77					75				
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68					66				
4	87	76	69	63	85	75	68	62	73	66	61	71	65	61	68	64	60					58				
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	54					52				
6	75	63	55	50	74	63	55	49	61	54	49	59	53	49	58	52	48					46				
7	71	58	50	45	69	58	50	45	56	49	44	55	49	44	53	48	44					42				
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40					38				
9	62	50	43	37	61	49	42	37	48	42	37	47	41	37	46	41	37					35				
10	59	47	39	35	58	46	39	34	45	39	34	44	38	34	43	38	34					32				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19567	19567	19567
5°	19345	19281	19100
10°	19221	18092	17228
15°	19004	16582	14820
20°	18750	14746	12099
25°	18375	12743	9658
30°	17985	10768	7537
35°	17575	9006	6330
40°	17149	7303	5639
45°	16706	6385	5043
50°	16214	5650	4607
55°	15660	5107	4278
60°	15115	4646	3990
65°	14399	4259	3757
70°	13344	3972	3540
75°	11822	3601	3353
80°	10081	3393	3109
85°	6934	3000	2826

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16706 cd/sqm



TEST NUMBER: P1055382

CATALOG NUMBER: S122R3DRP-H675D940-X4F0-XX-UDD-F-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.6	6.1
10°-20°	238.9	15.3
20°-30°	294.4	18.8
30°-40°	282.5	18.1
40°-50°	243.7	15.6
50°-60°	189.0	12.1
60°-70°	129.4	8.3
70°-80°	70.3	4.5
80°-90°	19.3	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	628.0	40.2
0°-40°	910.5	58.3
0°-60°	1343.1	86.0
0°-90°	1562.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1562.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1033	1033	1033	1033	1033	
5°	1017	1032	1014	1001	1004	97
15°	969	940	845	776	756	273
25°	879	785	610	497	462	405
35°	760	603	389	290	274	475
45°	624	420	238	197	188	480
55°	474	252	155	134	130	424
65°	321	137	95	86	84	317
75°	162	63	49	47	46	173
85°	32	16	14	14	13	41
90°	0	0	0	0	0	



TEST NUMBER: P1055382

CATALOG NUMBER: S122R3DRP-H675D940-X4F0-XX-UDD-F-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1032.8	1032.8	1032.8	1032.8	1032.8
2.5°	1021.5	1038.8	1026.7	1026.7	1029.3
5°	1017.2	1031.9	1013.8	1000.8	1004.3
7.5°	1009.4	1019.8	983.5	955.9	955.0
10°	999.1	999.9	940.4	904.1	895.5
12.5°	986.1	972.3	896.3	841.9	829.0
15°	968.9	939.5	845.4	776.3	755.6
17.5°	950.7	905.8	791.0	704.6	676.1
20°	930.0	865.2	731.4	632.9	600.1
22.5°	906.7	826.4	671.8	563.9	529.3
25°	879.0	784.9	609.6	497.4	462.0
27.5°	852.3	742.6	550.1	438.7	402.4
30°	822.1	696.8	492.2	382.5	344.5
32.5°	791.8	650.2	438.7	329.0	300.5
35°	759.9	602.7	389.4	290.1	273.7
37.5°	727.1	556.1	342.8	264.2	249.6
40°	693.4	509.5	295.3	239.2	228.0
42.5°	658.9	463.7	262.5	218.5	208.1
45°	623.5	419.7	238.3	196.9	188.2
47.5°	585.5	375.6	215.0	178.7	171.0
50°	550.1	333.3	191.7	162.3	156.3
52.5°	512.1	291.9	172.7	147.7	142.5
55°	474.1	252.1	154.6	133.8	129.5
57.5°	436.9	214.1	137.3	120.9	117.4
60°	398.9	183.9	122.6	108.8	105.3
62.5°	360.1	159.7	108.8	97.6	94.1
65°	321.2	137.3	95.0	86.4	83.8
67.5°	280.6	115.7	82.9	76.0	74.3
70°	240.9	96.7	71.7	65.6	63.9
72.5°	202.1	78.6	60.4	56.1	54.4
75°	161.5	63.0	49.2	46.6	45.8
77.5°	126.1	49.2	39.7	38.0	37.1
80°	92.4	36.3	31.1	29.4	28.5
82.5°	61.3	25.0	22.5	21.6	20.7
85°	31.9	15.5	13.8	13.8	13.0
87.5°	10.4	6.9	6.9	6.9	6.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1055382
 CATALOG NUMBER: S122R3DRP-H675D940-X4F0-XX-UDD-F-W

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.94	21.41	20.30	21.72	22.04	14.75	16.21	15.11	16.53	16.84
	3H	22.27	23.59	22.65	23.91	24.28	16.39	17.71	16.77	18.04	18.40
	4H	23.17	24.40	23.57	24.75	25.13	17.03	18.26	17.43	18.61	18.99
	6H	23.83	24.97	24.24	25.34	25.73	17.52	18.66	17.94	19.03	19.42
	8H	24.04	25.12	24.46	25.51	25.91	17.69	18.78	18.12	19.17	19.57
	12H	24.15	25.19	24.58	25.57	26.00	17.81	18.85	18.24	19.23	19.66
4H	2H	19.96	21.19	20.36	21.54	21.92	15.46	16.70	15.86	17.05	17.43
	3H	22.37	23.39	22.78	23.79	24.20	17.31	18.34	17.72	18.74	19.14
	4H	23.30	24.22	23.73	24.64	25.08	18.06	18.98	18.49	19.40	19.84
	6H	24.08	24.88	24.53	25.32	25.78	18.67	19.47	19.13	19.92	20.38
	8H	24.35	25.10	24.81	25.54	26.01	18.89	19.64	19.35	20.08	20.55
	12H	24.52	25.19	25.01	25.67	26.14	19.05	19.72	19.53	20.20	20.67
8H	4H	23.29	24.04	23.76	24.49	24.95	18.44	19.18	18.90	19.63	20.10
	6H	24.10	24.72	24.60	25.21	25.69	19.17	19.79	19.67	20.28	20.76
	8H	24.40	24.95	24.92	25.47	25.95	19.47	20.02	19.98	20.53	21.02
	12H	24.63	25.12	25.14	25.61	26.18	19.71	20.20	20.22	20.70	21.26
12H	4H	23.27	23.94	23.75	24.42	24.89	18.49	19.16	18.98	19.64	20.11
	6H	24.07	24.63	24.59	25.14	25.63	19.26	19.81	19.78	20.33	20.81
	8H	24.41	24.90	24.92	25.39	25.96	19.62	20.10	20.13	20.60	21.16