

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1055273

Luminaire Tested: S122R3DRP-S865D940-X4F0-XX-UDD-F-S

Issue Date: 7/25/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1055273  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-3)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/25/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122R3DRP-S865D940-X4F0-XX-UDD-F-S  
Description: DEFINE 2, SILVER 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS  
CORE LIGHT ENGINE  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1071.6 lumens  
Efficiency: N/A  
Efficacy: 30.9 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 0.64 / 0.81  
Luminous Opening: Rectangular (W 0.15' x L: 3.9' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 34.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1055273

CATALOG NUMBER: S122R3DRP-S865D940-X4F0-XX-UDD-F-S

### Luminous Intensity Polar Plot

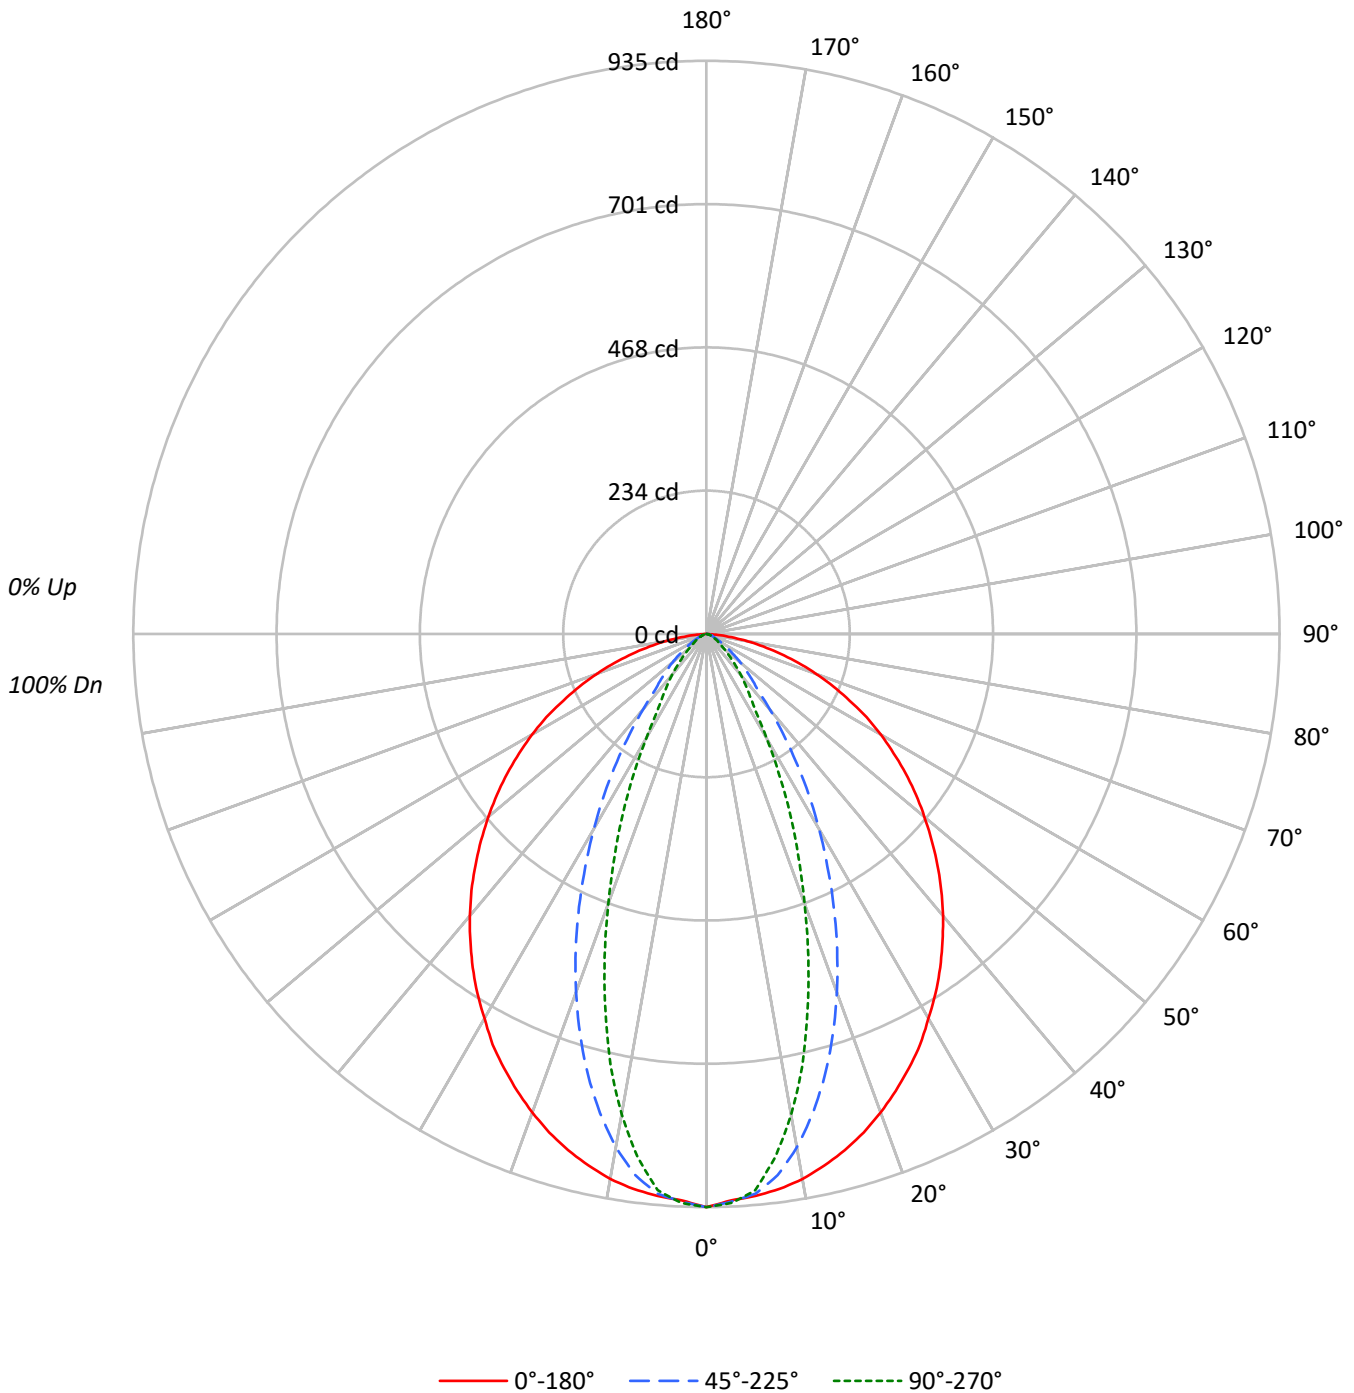



TEST NUMBER: P1055273

CATALOG NUMBER: S122R3DRP-S865D940-X4F0-XX-UDD-F-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90					90			
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80					80			
3	97	89	83	78	95	88	82	77	85	80	76	82	78	74	80	76	73	71					71			
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	70	66	64					64			
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58					58			
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53					53			
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49					49			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45					45			
9	67	56	49	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42					42			
10	63	52	45	41	62	52	45	41	51	45	41	50	44	40	49	44	40	39					39			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	17716	17716	17716
5°	17501	17434	17326
10°	17372	16358	15321
15°	17104	14632	12496
20°	16750	12545	9426
25°	16337	10277	6731
30°	15843	8022	4286
35°	15371	5884	2863
40°	14852	3967	2154
45°	14276	2795	1535
50°	13679	2128	1082
55°	13097	1476	796
60°	12463	1000	652
65°	11557	717	516
70°	10536	571	443
75°	9143	505	337
80°	7255	371	371
85°	3978	500	239

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14276 cd/sqm



TEST NUMBER: P1055273

CATALOG NUMBER: S122R3DRP-S865D940-X4F0-XX-UDD-F-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	85.5	8.0
10°-20°	209.8	19.6
20°-30°	239.7	22.4
30°-40°	203.3	19.0
40°-50°	151.7	14.2
50°-60°	98.0	9.1
60°-70°	54.6	5.1
70°-80°	24.0	2.2
80°-90°	4.9	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	535.0	49.9
0°-40°	738.3	68.9
0°-60°	988.0	92.2
0°-90°	1071.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1071.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	935	935	935	935	935	
5°	920	932	917	908	911	87
15°	872	850	746	667	637	246
25°	782	690	492	360	322	360
35°	665	501	254	139	124	415
45°	533	316	104	68	57	411
55°	396	150	45	28	24	355
65°	258	55	16	13	12	256
75°	125	12	7	6	5	133
85°	18	1	2	1	1	26
90°	0	0	0	0	0	



TEST NUMBER: P1055273

CATALOG NUMBER: S122R3DRP-S865D940-X4F0-XX-UDD-F-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	935.1	935.1	935.1	935.1	935.1
2.5°	924.7	938.5	927.0	927.0	929.3
5°	920.2	931.6	916.7	907.6	911.0
7.5°	913.3	921.3	890.4	862.9	860.6
10°	903.0	906.4	850.3	807.9	796.4
12.5°	888.1	880.1	801.0	741.4	721.9
15°	872.0	850.3	746.0	666.9	637.1
17.5°	852.6	813.6	685.3	589.0	552.3
20°	830.8	775.8	622.2	507.6	467.5
22.5°	806.7	733.4	556.9	430.9	390.8
25°	781.5	689.8	491.6	359.8	322.0
27.5°	755.2	644.0	427.4	295.6	254.4
30°	724.2	597.0	366.7	233.8	195.9
32.5°	695.6	547.7	310.5	181.1	149.0
35°	664.6	500.8	254.4	138.7	123.8
37.5°	632.5	453.8	205.1	116.9	104.3
40°	600.5	406.8	160.4	98.5	87.1
42.5°	567.2	361.0	123.8	82.5	71.0
45°	532.8	316.3	104.3	67.6	57.3
47.5°	498.5	271.6	87.1	53.9	45.8
50°	464.1	229.2	72.2	42.4	36.7
52.5°	430.9	189.1	57.3	34.4	29.8
55°	396.5	150.1	44.7	27.5	24.1
57.5°	362.1	116.9	34.4	22.9	20.6
60°	328.9	88.2	26.4	18.3	17.2
62.5°	294.5	71.0	20.6	14.9	13.8
65°	257.8	55.0	16.0	12.6	11.5
67.5°	224.6	40.1	12.6	10.3	9.2
70°	190.2	27.5	10.3	9.2	8.0
72.5°	157.0	17.2	8.0	6.9	6.9
75°	124.9	11.5	6.9	5.7	4.6
77.5°	95.1	6.9	4.6	4.6	3.4
80°	66.5	4.6	3.4	3.4	3.4
82.5°	41.3	3.4	2.3	2.3	2.3
85°	18.3	1.1	2.3	1.1	1.1
87.5°	3.4	1.1	1.1	1.1	1.1
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1055273

CATALOG NUMBER: S122R3DRP-S865D940-X4F0-XX-UDD-F-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.24	19.56	18.60	19.87	20.19	4.54	5.86	4.91	6.17	6.49
	3H	20.71	21.88	21.09	22.21	22.57	5.40	6.57	5.77	6.90	7.26
	4H	21.66	22.76	22.07	23.11	23.49	5.67	6.76	6.07	7.11	7.50
	6H	22.35	23.36	22.77	23.73	24.12	5.86	6.86	6.27	7.23	7.63
	8H	22.55	23.50	22.98	23.89	24.29	5.93	6.88	6.36	7.27	7.68
	12H	22.63	23.54	23.06	23.92	24.35	5.96	6.86	6.39	7.25	7.68
4H	2H	18.02	19.12	18.43	19.47	19.85	5.11	6.20	5.51	6.55	6.94
	3H	20.51	21.40	20.92	21.81	22.21	6.15	7.04	6.56	7.45	7.85
	4H	21.45	22.25	21.89	22.67	23.11	6.52	7.32	6.95	7.73	8.18
	6H	22.21	22.90	22.67	23.34	23.81	6.80	7.49	7.27	7.94	8.41
	8H	22.45	23.09	22.92	23.54	24.01	6.90	7.55	7.37	7.99	8.46
	12H	22.58	23.15	23.06	23.63	24.10	6.94	7.51	7.43	8.00	8.47
8H	4H	21.32	21.96	21.79	22.41	22.88	6.89	7.53	7.36	7.98	8.45
	6H	22.06	22.58	22.56	23.08	23.56	7.24	7.77	7.75	8.27	8.75
	8H	22.30	22.77	22.82	23.29	23.78	7.38	7.85	7.91	8.37	8.86
	12H	22.45	22.87	22.97	23.36	23.93	7.46	7.88	7.98	8.37	8.94
12H	4H	21.27	21.84	21.76	22.33	22.80	7.01	7.58	7.50	8.06	8.54
	6H	22.00	22.47	22.52	22.98	23.48	7.36	7.83	7.89	8.35	8.84
	8H	22.26	22.68	22.78	23.17	23.74	7.54	7.96	8.06	8.45	9.02