

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1055330

Luminaire Tested: S122R3DRP-H290D950-X4F0-XX-UDD-F-S

Issue Date: 7/25/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1055330  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-3)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/25/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122R3DRP-H290D950-X4F0-XX-UDD-F-S  
Description: DEFINE 2, SILVER 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 5000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 387.3 lumens  
Efficiency: N/A  
Efficacy: 33.1 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 0.64 / 0.81  
Luminous Opening: Rectangular (W 0.15' x L: 3.9' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1055330

CATALOG NUMBER: S122R3DRP-H290D950-X4F0-XX-UDD-F-S

### Luminous Intensity Polar Plot

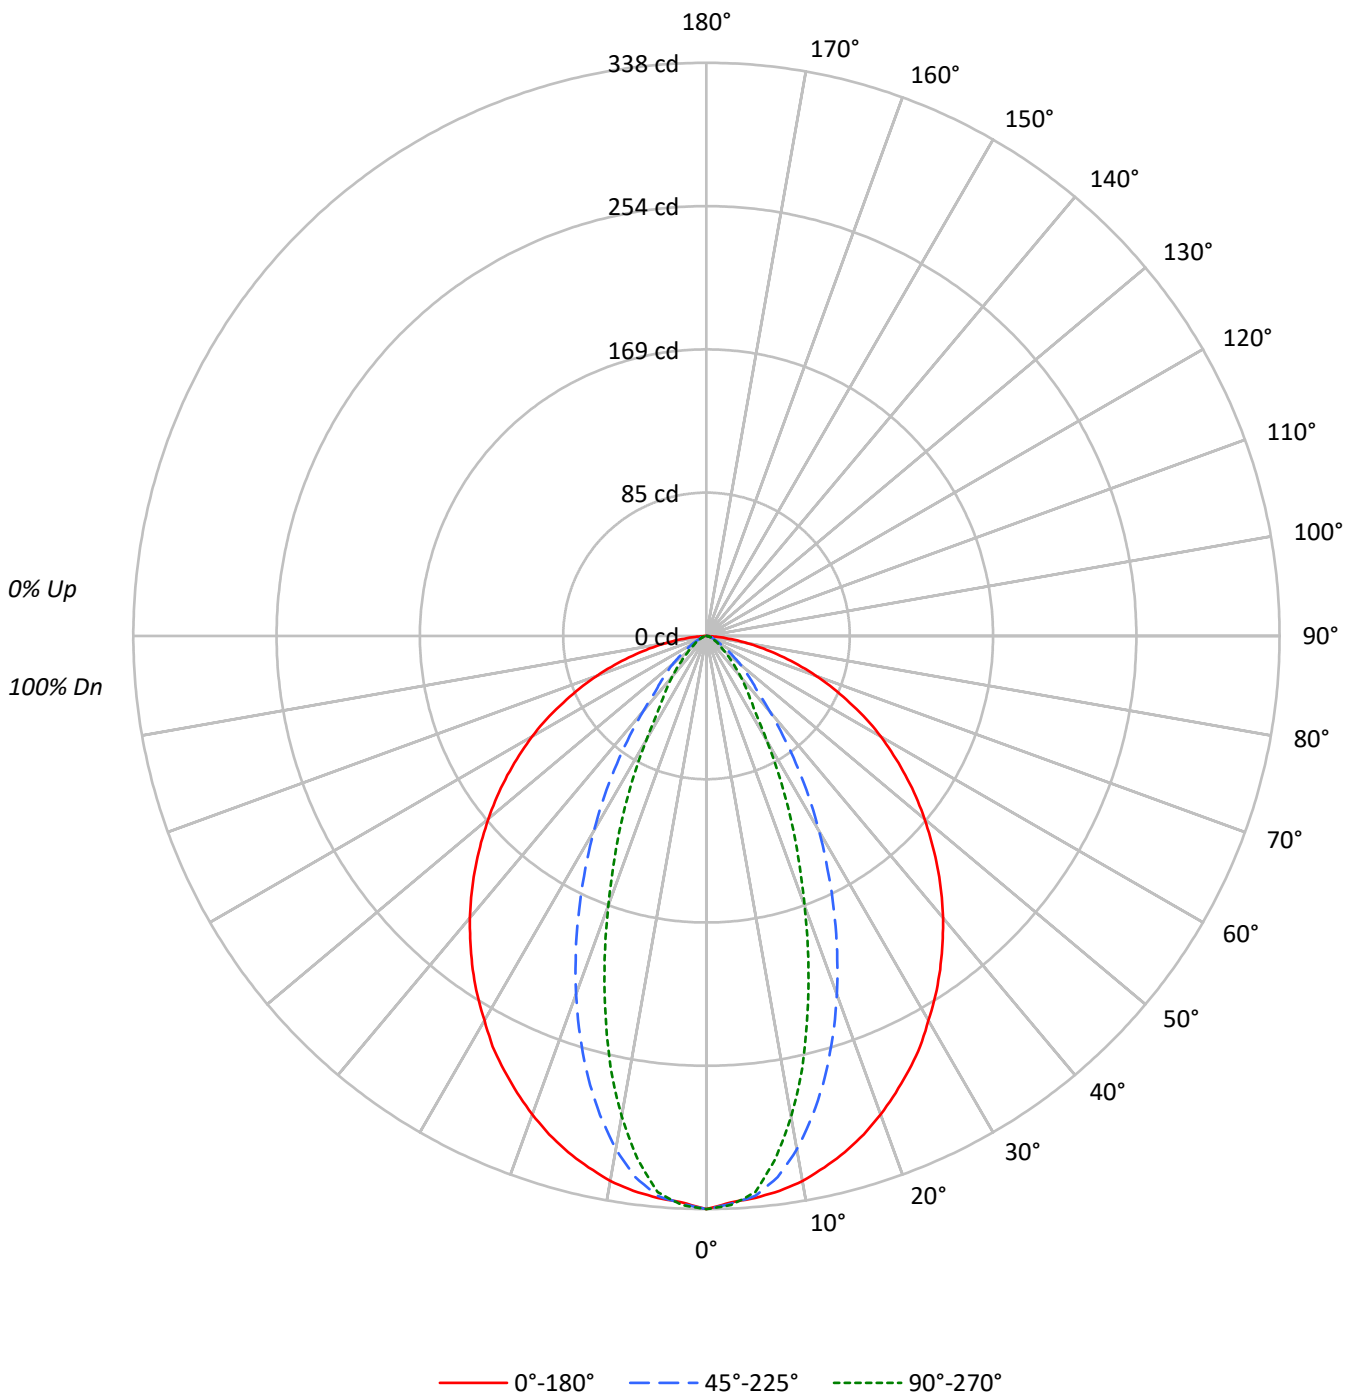



TEST NUMBER: P1055330

CATALOG NUMBER: S122R3DRP-H290D950-X4F0-XX-UDD-F-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90				90
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80				80
3	97	89	83	78	95	88	82	77	85	80	76	82	78	74	80	76	73	71				71
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	70	66	64				64
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58				58
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53				53
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49				49
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45				45
9	67	56	49	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42				42
10	63	52	45	41	62	52	45	41	51	45	41	50	44	40	49	44	40	39				39

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6404	6404	6404
5°	6325	6303	6263
10°	6279	5914	5539
15°	6182	5290	4517
20°	6055	4534	3407
25°	5906	3715	2433
30°	5727	2901	1549
35°	5555	2128	1034
40°	5369	1434	779
45°	5160	1010	555
50°	4946	769	392
55°	4733	535	287
60°	4505	360	235
65°	4178	260	184
70°	3811	205	161
75°	3301	183	124
80°	2619	131	131
85°	1435	174	87

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 5160 cd/sqm



TEST NUMBER: P1055330

CATALOG NUMBER: S122R3DRP-H290D950-X4F0-XX-UDD-F-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	30.9	8.0
10°-20°	75.9	19.6
20°-30°	86.6	22.4
30°-40°	73.5	19.0
40°-50°	54.8	14.2
50°-60°	35.4	9.1
60°-70°	19.8	5.1
70°-80°	8.7	2.2
80°-90°	1.8	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	193.4	49.9
0°-40°	266.9	68.9
0°-60°	357.1	92.2
0°-90°	387.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	387.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	338	338	338	338	338	
5°	333	337	331	328	329	32
15°	315	307	270	241	230	89
25°	282	249	178	130	116	130
35°	240	181	92	50	45	150
45°	193	114	38	24	21	149
55°	143	54	16	10	9	128
65°	93	20	6	5	4	93
75°	45	4	2	2	2	48
85°	7	0	1	0	0	9
90°	0	0	0	0	0	



TEST NUMBER: P1055330

CATALOG NUMBER: S122R3DRP-H290D950-X4F0-XX-UDD-F-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	338.0	338.0	338.0	338.0	338.0
2.5°	334.3	339.2	335.1	335.1	335.9
5°	332.6	336.8	331.4	328.1	329.3
7.5°	330.1	333.0	321.8	311.9	311.1
10°	326.4	327.6	307.4	292.0	287.9
12.5°	321.0	318.1	289.5	268.0	261.0
15°	315.2	307.4	269.7	241.1	230.3
17.5°	308.2	294.1	247.7	212.9	199.7
20°	300.3	280.4	224.9	183.5	169.0
22.5°	291.6	265.1	201.3	155.7	141.2
25°	282.5	249.4	177.7	130.1	116.4
27.5°	273.0	232.8	154.5	106.9	92.0
30°	261.8	215.8	132.6	84.5	70.8
32.5°	251.4	198.0	112.3	65.4	53.8
35°	240.2	181.0	92.0	50.1	44.7
37.5°	228.6	164.0	74.1	42.3	37.7
40°	217.1	147.0	58.0	35.6	31.5
42.5°	205.0	130.5	44.7	29.8	25.7
45°	192.6	114.3	37.7	24.4	20.7
47.5°	180.2	98.2	31.5	19.5	16.6
50°	167.8	82.8	26.1	15.3	13.3
52.5°	155.7	68.3	20.7	12.4	10.8
55°	143.3	54.3	16.2	9.9	8.7
57.5°	130.9	42.3	12.4	8.3	7.5
60°	118.9	31.9	9.5	6.6	6.2
62.5°	106.5	25.7	7.5	5.4	5.0
65°	93.2	19.9	5.8	4.6	4.1
67.5°	81.2	14.5	4.6	3.7	3.3
70°	68.8	9.9	3.7	3.3	2.9
72.5°	56.7	6.2	2.9	2.5	2.5
75°	45.1	4.1	2.5	2.1	1.7
77.5°	34.4	2.5	1.7	1.7	1.2
80°	24.0	1.7	1.2	1.2	1.2
82.5°	14.9	1.2	0.8	0.8	0.8
85°	6.6	0.4	0.8	0.4	0.4
87.5°	1.2	0.4	0.4	0.4	0.4
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1055330  
 CATALOG NUMBER: S122R3DRP-H290D950-X4F0-XX-UDD-F-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.71	16.03	15.07	16.34	16.66	1.03	2.35	1.39	2.66	2.98
	3H	17.18	18.35	17.55	18.68	19.04	1.87	3.04	2.25	3.37	3.73
	4H	18.13	19.22	18.53	19.57	19.95	2.15	3.24	2.55	3.59	3.98
	6H	18.82	19.82	19.23	20.19	20.58	2.33	3.33	2.74	3.70	4.10
	8H	19.01	19.96	19.44	20.35	20.76	2.40	3.35	2.83	3.74	4.14
	12H	19.09	20.00	19.52	20.38	20.81	2.42	3.33	2.85	3.71	4.14
4H	2H	14.49	15.58	14.90	15.94	16.32	1.60	2.69	2.00	3.04	3.42
	3H	16.97	17.87	17.39	18.27	18.68	2.62	3.51	3.03	3.92	4.32
	4H	17.91	18.72	18.35	19.13	19.58	3.00	3.80	3.43	4.22	4.66
	6H	18.67	19.36	19.13	19.81	20.27	3.28	3.97	3.74	4.42	4.88
	8H	18.91	19.56	19.38	20.00	20.48	3.37	4.01	3.84	4.46	4.93
	12H	19.04	19.61	19.53	20.09	20.57	3.41	3.98	3.89	4.46	4.93
8H	4H	17.78	18.43	18.25	18.87	19.34	3.37	4.02	3.84	4.46	4.93
	6H	18.52	19.05	19.02	19.54	20.02	3.71	4.24	4.22	4.74	5.22
	8H	18.77	19.24	19.29	19.75	20.24	3.84	4.31	4.36	4.83	5.32
	12H	18.91	19.33	19.43	19.82	20.40	3.92	4.33	4.43	4.82	5.40
12H	4H	17.74	18.31	18.22	18.79	19.26	3.49	4.06	3.98	4.54	5.02
	6H	18.46	18.93	18.98	19.45	19.94	3.83	4.30	4.35	4.82	5.31
	8H	18.72	19.14	19.24	19.63	20.20	4.00	4.41	4.51	4.91	5.48