

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058234

Luminaire Tested: S122RDRP-H1005D927-X4F0-XX-UDD-SVL-S

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1058234
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-59)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-H1005D927-X4F0-XX-UDD-SVL-S
Description: DEFINE 2 SILVER REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 741.2 lumens
Efficiency: N/A
Efficacy: 20.3 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.97 / 0.94
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 36.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058234

CATALOG NUMBER: S122RDRP-H1005D927-X4F0-XX-UDD-SVL-S

Luminous Intensity Polar Plot

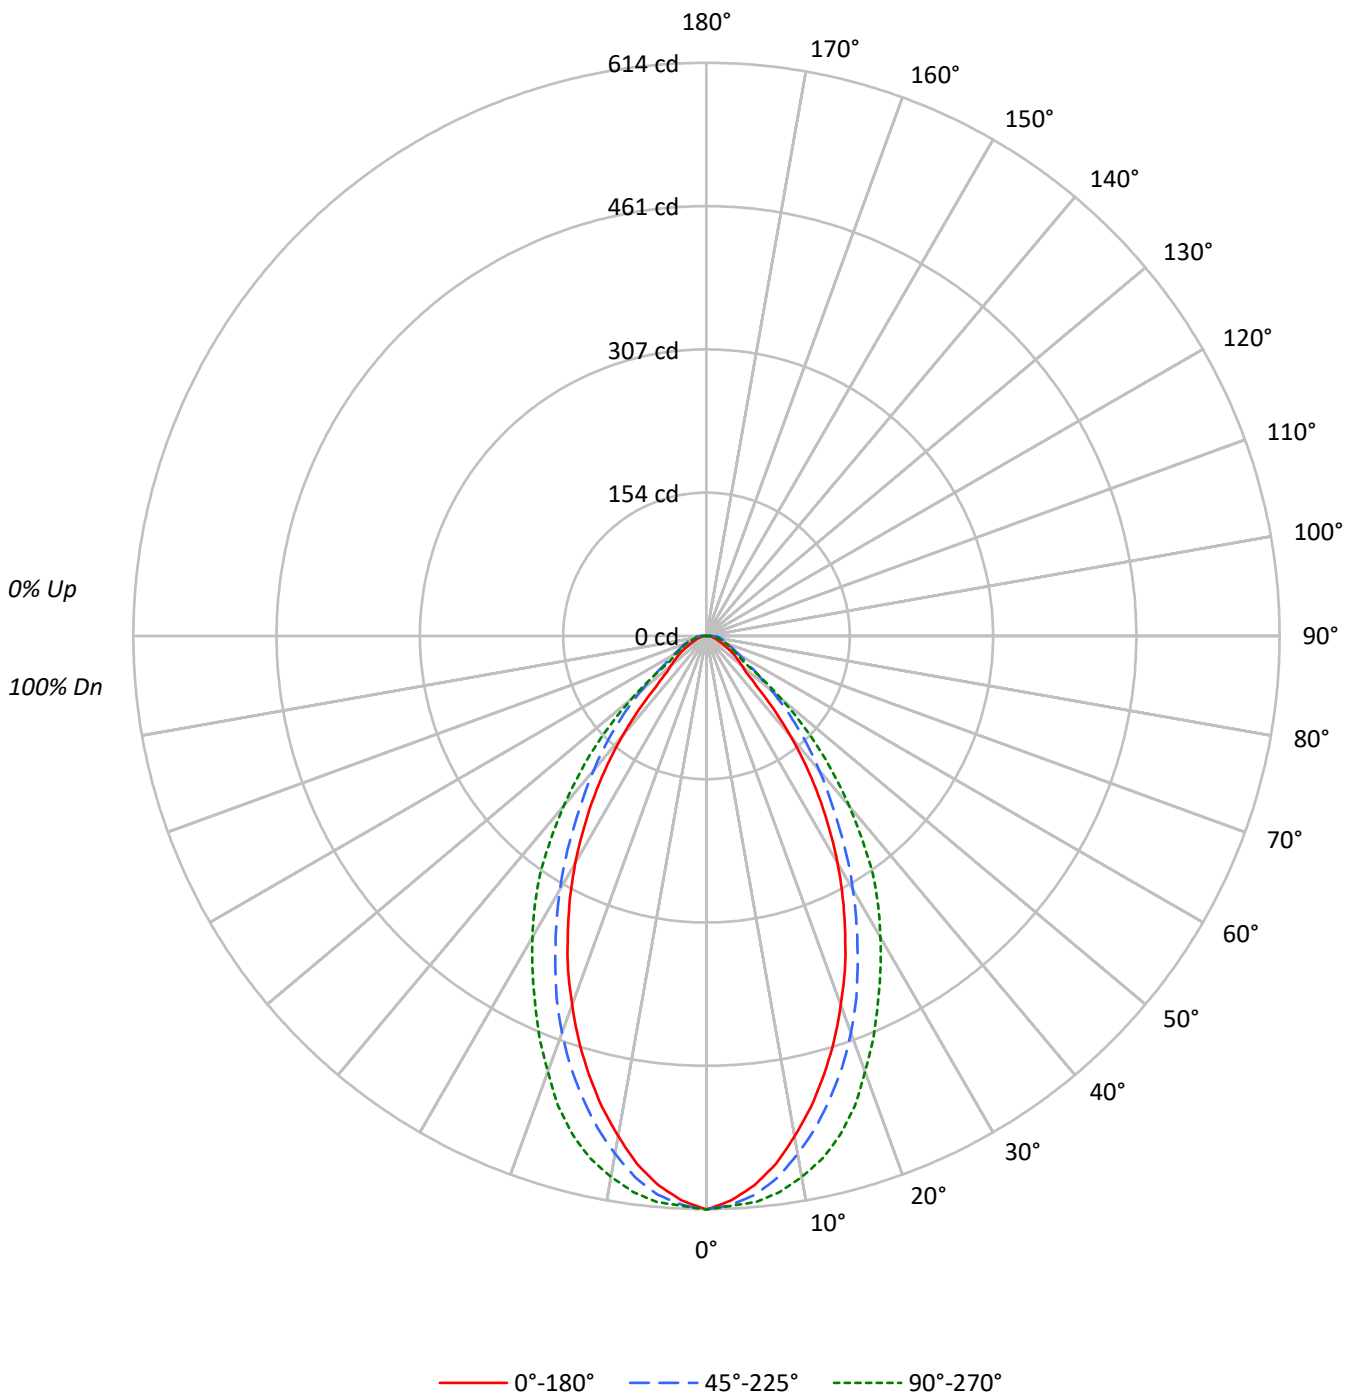



TEST NUMBER: P1058234

CATALOG NUMBER: S122RDRP-H1005D927-X4F0-XX-UDD-SVL-S

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			100									
1	111	108	105	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89																			89									
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80																			80									
3	97	89	83	78	95	88	82	77	85	80	76	82	78	75	80	77	74	72																			72									
4	91	82	75	70	89	81	74	69	78	73	68	76	71	68	74	70	67	65																			65									
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59																			59									
6	80	70	62	57	79	69	62	57	67	61	57	66	60	56	64	59	56	54																			54									
7	76	65	57	52	74	64	57	52	62	56	52	61	56	52	60	55	51	50																			50									
8	71	60	53	48	70	59	53	48	58	52	48	57	52	48	56	51	47	46																			46									
9	67	56	49	45	66	56	49	44	55	49	44	54	48	44	53	48	44	42																			42									
10	64	53	46	41	63	52	46	41	51	45	41	50	45	41	50	45	41	39																			39									

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11337	11337	11337
5°	10940	11129	11275
10°	10195	10556	11023
15°	9290	9789	10568
20°	8259	8882	9750
25°	7155	7800	8840
30°	5989	6690	7945
35°	4724	5541	6997
40°	3387	4533	5735
45°	1981	3580	4436
50°	1432	2604	2994
55°	1203	1859	1567
60°	963	1506	1340
65°	790	1336	1236
70°	674	1284	1160
75°	649	1376	1134
80°	723	1690	1201
85°	1207	2646	1673

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 4436 cd/sqm



TEST NUMBER: P1058234

CATALOG NUMBER: S122RDRP-H1005D927-X4F0-XX-UDD-SVL-S

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.3	7.6
10°-20°	144.2	19.5
20°-30°	177.3	23.9
30°-40°	156.7	21.1
40°-50°	100.0	13.5
50°-60°	48.8	6.6
60°-70°	29.0	3.9
70°-80°	18.6	2.5
80°-90°	10.2	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	377.8	51.0
0°-40°	534.5	72.1
0°-60°	683.3	92.2
0°-90°	741.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	741.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	614	614	614	614	614	
5°	591	603	601	603	609	55
15°	486	500	512	535	553	136
25°	351	364	383	407	434	161
35°	210	221	246	280	311	130
45°	76	98	137	154	170	64
55°	37	50	58	54	49	33
65°	18	34	31	28	28	18
75°	9	20	19	17	16	10
85°	6	11	12	11	8	5
90°	0	0	0	0	0	



TEST NUMBER: P1058234

CATALOG NUMBER: S122RDRP-H1005D927-X4F0-XX-UDD-SVL-S

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	614.4	614.4	614.4	614.4	614.4
2.5°	605.3	616.7	609.9	609.9	611.0
5°	590.6	603.1	600.8	603.1	608.7
7.5°	570.2	582.7	584.9	594.0	600.8
10°	544.1	556.6	563.4	578.1	588.3
12.5°	516.9	529.4	539.6	558.9	573.6
15°	486.3	499.9	512.4	535.0	553.2
17.5°	454.6	468.2	484.0	506.7	528.2
20°	420.6	433.0	452.3	473.8	496.5
22.5°	387.7	399.0	419.4	439.8	467.0
25°	351.4	363.9	383.1	407.0	434.2
27.5°	316.3	328.7	348.0	375.2	403.6
30°	281.1	292.5	314.0	342.3	372.9
32.5°	244.9	256.2	280.0	310.6	342.3
35°	209.7	221.0	246.0	280.0	310.6
37.5°	174.6	187.0	215.4	247.1	273.2
40°	140.6	155.3	188.2	215.4	238.1
42.5°	106.6	127.0	162.1	184.8	202.9
45°	75.9	97.5	137.2	154.2	170.0
47.5°	57.8	74.8	113.4	125.8	136.0
50°	49.9	61.2	90.7	99.8	104.3
52.5°	43.1	54.4	72.5	75.9	73.7
55°	37.4	49.9	57.8	54.4	48.7
57.5°	31.7	46.5	47.6	40.8	41.9
60°	26.1	41.9	40.8	35.1	36.3
62.5°	21.5	38.5	35.1	31.7	31.7
65°	18.1	34.0	30.6	28.3	28.3
67.5°	14.7	30.6	27.2	24.9	24.9
70°	12.5	27.2	23.8	21.5	21.5
72.5°	11.3	23.8	21.5	19.3	19.3
75°	9.1	20.4	19.3	17.0	15.9
77.5°	7.9	17.0	17.0	15.9	13.6
80°	6.8	14.7	15.9	13.6	11.3
82.5°	6.8	13.6	13.6	12.5	9.1
85°	5.7	11.3	12.5	11.3	7.9
87.5°	3.4	10.2	10.2	9.1	5.7
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058234
 CATALOG NUMBER: S122RDRP-H1005D927-X4F0-XX-UDD-SVL-S

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.47	11.74	10.83	12.06	12.37	9.99	11.27	10.35	11.58	11.89
	3H	11.64	12.78	12.02	13.11	13.47	11.55	12.68	11.93	13.01	13.38
	4H	12.07	13.13	12.47	13.48	13.87	12.23	13.29	12.63	13.64	14.03
	6H	12.41	13.39	12.83	13.76	14.16	12.88	13.86	13.29	14.23	14.62
	8H	12.61	13.54	13.04	13.93	14.33	13.17	14.09	13.60	14.49	14.89
	12H	12.83	13.72	13.26	14.10	14.53	13.49	14.37	13.92	14.75	15.18
4H	2H	10.97	12.03	11.37	12.38	12.76	10.59	11.65	10.99	12.00	12.38
	3H	12.61	13.49	13.02	13.89	14.29	12.38	13.26	12.80	13.66	14.07
	4H	13.38	14.16	13.81	14.58	15.02	13.23	14.01	13.66	14.43	14.88
	6H	13.98	14.66	14.44	15.10	15.57	14.08	14.76	14.55	15.21	15.68
	8H	14.27	14.91	14.74	15.36	15.83	14.48	15.11	14.95	15.56	16.03
	12H	14.59	15.15	15.08	15.63	16.11	14.91	15.47	15.40	15.96	16.43
8H	4H	13.79	14.43	14.26	14.88	15.35	13.69	14.32	14.16	14.77	15.24
	6H	14.74	15.26	15.24	15.76	16.24	14.80	15.32	15.30	15.81	16.30
	8H	15.29	15.76	15.81	16.27	16.76	15.38	15.85	15.90	16.36	16.85
	12H	15.85	16.27	16.37	16.76	17.33	16.04	16.46	16.56	16.95	17.53
12H	4H	13.86	14.43	14.35	14.91	15.38	13.77	14.33	14.26	14.82	15.29
	6H	14.92	15.39	15.45	15.91	16.40	14.98	15.45	15.50	15.97	16.46
	8H	15.62	16.03	16.13	16.53	17.10	15.69	16.11	16.21	16.60	17.18