

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058313

Luminaire Tested: S122RDRP-H290D927-X4F0-XX-UDD-BVL-W

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1058313  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-57)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122RDRP-H290D927-X4F0-XX-UDD-BVL-W  
Description: DEFINE 2 WHITE REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 229.5 lumens  
Efficiency: N/A  
Efficacy: 19.6 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.96 / 0.91  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1058313

CATALOG NUMBER: S122RDRP-H290D927-X4F0-XX-UDD-BVL-W

### Luminous Intensity Polar Plot

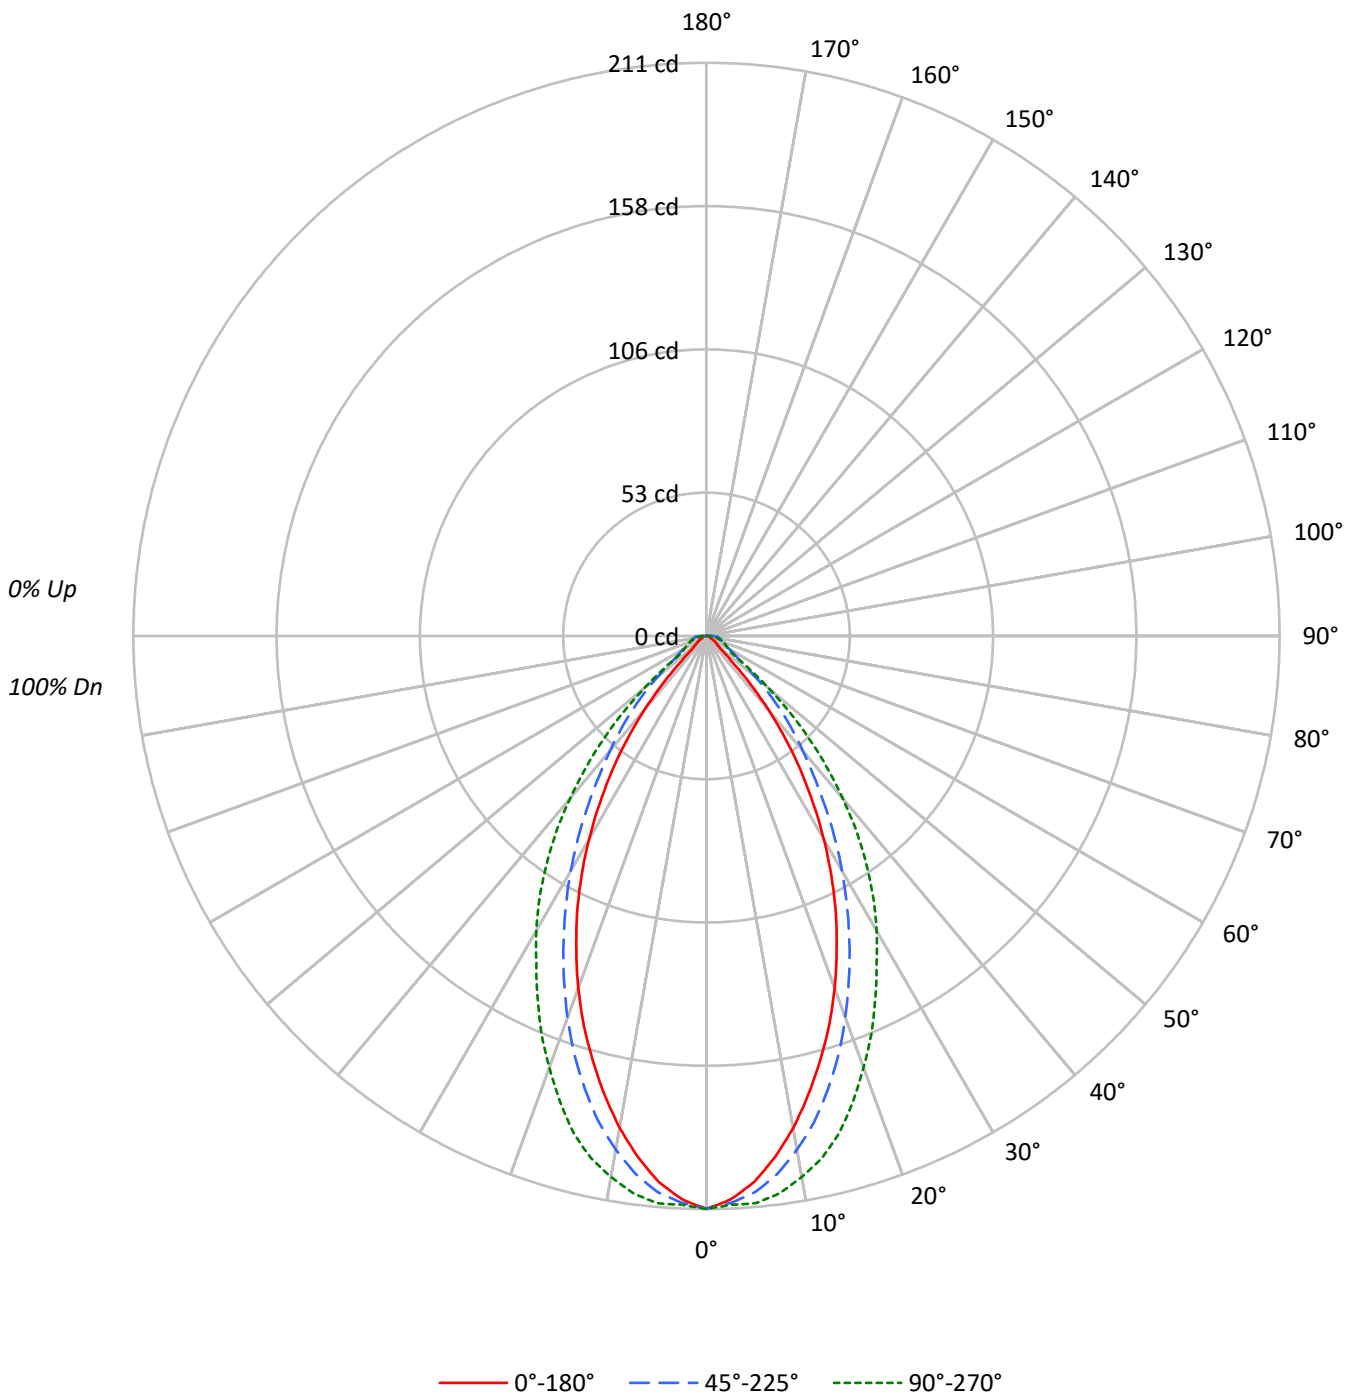



TEST NUMBER: P1058313

CATALOG NUMBER: S122RDRP-H290D927-X4F0-XX-UDD-BVL-W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81
3	98	91	85	80	96	89	84	79	86	82	78	84	80	77	81	78	75	74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67
5	87	77	70	65	85	76	70	65	74	69	64	72	67	64	71	66	63	61
6	82	72	65	60	80	71	64	59	69	63	59	68	62	58	66	62	58	56
7	77	67	60	55	76	66	59	55	64	59	54	63	58	54	62	57	54	52
8	73	62	55	51	72	62	55	51	60	54	50	59	54	50	58	53	50	48
9	69	58	52	47	68	58	51	47	57	51	47	56	50	47	55	50	46	45
10	66	55	48	44	64	54	48	44	53	48	44	53	47	43	52	47	43	42

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3892	3892	3892
5°	3738	3806	3882
10°	3446	3598	3789
15°	3089	3301	3616
20°	2710	2936	3321
25°	2295	2535	2995
30°	1841	2129	2668
35°	1361	1703	2311
40°	853	1332	1879
45°	334	1005	1391
50°	164	677	853
55°	129	444	380
60°	100	362	347
65°	74	341	341
70°	92	345	345
75°	93	385	364
80°	138	499	393
85°	275	847	572

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 87.5°  
 Luminance: 1565 cd/sqm



TEST NUMBER: P1058313

CATALOG NUMBER: S122RDRP-H290D927-X4F0-XX-UDD-BVL-W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	19.3	8.4
10°-20°	48.7	21.2
20°-30°	58.3	25.4
30°-40°	49.0	21.4
40°-50°	27.9	12.2
50°-60°	11.0	4.8
60°-70°	6.9	3.0
70°-80°	5.2	2.2
80°-90°	3.3	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	126.2	55.0
0°-40°	175.3	76.4
0°-60°	214.2	93.3
0°-90°	229.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	229.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	211	211	211	211	211	
5°	202	206	206	208	210	19
15°	162	167	173	183	189	45
25°	113	118	124	137	147	51
35°	60	66	76	92	103	37
45°	13	23	38	48	53	12
55°	4	9	14	14	12	4
65°	2	8	8	7	8	2
75°	1	5	5	5	5	1
85°	1	4	4	4	3	1
90°	0	0	0	0	0	



TEST NUMBER: P1058313

CATALOG NUMBER: S122RDRP-H290D927-X4F0-XX-UDD-BVL-W

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	210.9	210.9	210.9	210.9	210.9
2.5°	207.6	211.3	208.9	209.2	209.6
5°	201.8	206.2	205.5	207.9	209.6
7.5°	193.4	198.1	199.8	203.8	206.9
10°	183.9	189.3	192.0	198.4	202.2
12.5°	173.1	179.2	183.3	191.4	196.8
15°	161.7	167.4	172.8	182.9	189.3
17.5°	150.2	155.9	161.7	172.8	179.5
20°	138.0	143.4	149.5	161.3	169.1
22.5°	125.2	130.9	137.0	149.2	158.6
25°	112.7	117.8	124.5	137.4	147.1
27.5°	99.6	104.6	112.0	125.2	135.7
30°	86.4	91.5	99.9	113.4	125.2
32.5°	73.2	78.6	87.7	102.6	114.4
35°	60.4	65.8	75.6	91.8	102.6
37.5°	47.9	54.0	64.8	80.7	90.8
40°	35.4	42.5	55.3	69.5	78.0
42.5°	23.6	32.4	46.6	58.4	65.5
45°	12.8	22.6	38.5	48.3	53.3
47.5°	7.1	14.5	30.7	38.5	41.5
50°	5.7	10.1	23.6	29.4	29.7
52.5°	4.7	9.1	17.5	20.9	19.2
55°	4.0	8.8	13.8	14.2	11.8
57.5°	3.4	8.4	11.5	10.1	10.1
60°	2.7	8.4	9.8	9.1	9.4
62.5°	2.0	8.4	8.8	8.1	8.4
65°	1.7	7.8	7.8	7.4	7.8
67.5°	1.7	7.1	7.1	6.7	7.1
70°	1.7	6.7	6.4	6.4	6.4
72.5°	1.3	6.1	6.1	5.7	5.7
75°	1.3	5.4	5.4	5.1	5.1
77.5°	1.3	5.1	5.1	4.7	4.4
80°	1.3	4.4	4.7	4.4	3.7
82.5°	1.3	4.0	4.4	4.0	3.0
85°	1.3	3.7	4.0	3.7	2.7
87.5°	1.0	3.7	3.7	3.0	2.0
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1058313  
 CATALOG NUMBER: S122RDRP-H290D927-X4F0-XX-UDD-BVL-W

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	2.39	3.61	2.75	3.92	4.24	4.42	5.64	4.79	5.95	6.27
	3H	3.94	5.03	4.32	5.36	5.72	6.39	7.48	6.78	7.81	8.18
	4H	4.49	5.50	4.89	5.85	6.24	7.32	8.33	7.72	8.68	9.07
	6H	5.03	5.96	5.45	6.34	6.73	8.20	9.13	8.62	9.50	9.90
	8H	5.32	6.19	5.75	6.59	6.99	8.60	9.48	9.03	9.87	10.28
	12H	5.66	6.50	6.09	6.88	7.31	9.04	9.88	9.47	10.26	10.69
4H	2H	3.60	4.61	4.00	4.96	5.34	5.05	6.06	5.46	6.42	6.80
	3H	5.79	6.63	6.21	7.03	7.44	7.29	8.13	7.71	8.53	8.93
	4H	6.85	7.59	7.28	8.01	8.46	8.37	9.12	8.81	9.54	9.99
	6H	7.74	8.39	8.20	8.83	9.30	9.48	10.13	9.95	10.58	11.05
	8H	8.11	8.72	8.58	9.16	9.64	10.00	10.60	10.47	11.05	11.52
	12H	8.51	9.05	9.00	9.53	10.01	10.57	11.10	11.06	11.59	12.06
8H	4H	7.65	8.26	8.12	8.71	9.18	8.87	9.47	9.34	9.92	10.39
	6H	9.03	9.53	9.54	10.03	10.51	10.26	10.76	10.77	11.26	11.74
	8H	9.73	10.18	10.26	10.70	11.19	10.99	11.44	11.51	11.95	12.45
	12H	10.47	10.87	10.99	11.36	11.93	11.82	12.21	12.33	12.71	13.28
12H	4H	7.82	8.35	8.30	8.83	9.31	8.97	9.50	9.46	9.99	10.46
	6H	9.36	9.81	9.89	10.33	10.82	10.48	10.93	11.00	11.44	11.94
	8H	10.26	10.66	10.78	11.15	11.72	11.35	11.75	11.87	12.24	12.81