

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058474

Luminaire Tested: S122RDRP-H675D927-X4F0-XX-UDD-BVL-S

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1058474  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-60)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122RDRP-H675D927-X4F0-XX-UDD-BVL-S  
Description: DEFINE 2 SILVER REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 423.4 lumens  
Efficiency: N/A  
Efficacy: 18.0 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.95 / 0.9  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1058474

CATALOG NUMBER: S122RDRP-H675D927-X4F0-XX-UDD-BVL-S

### Luminous Intensity Polar Plot

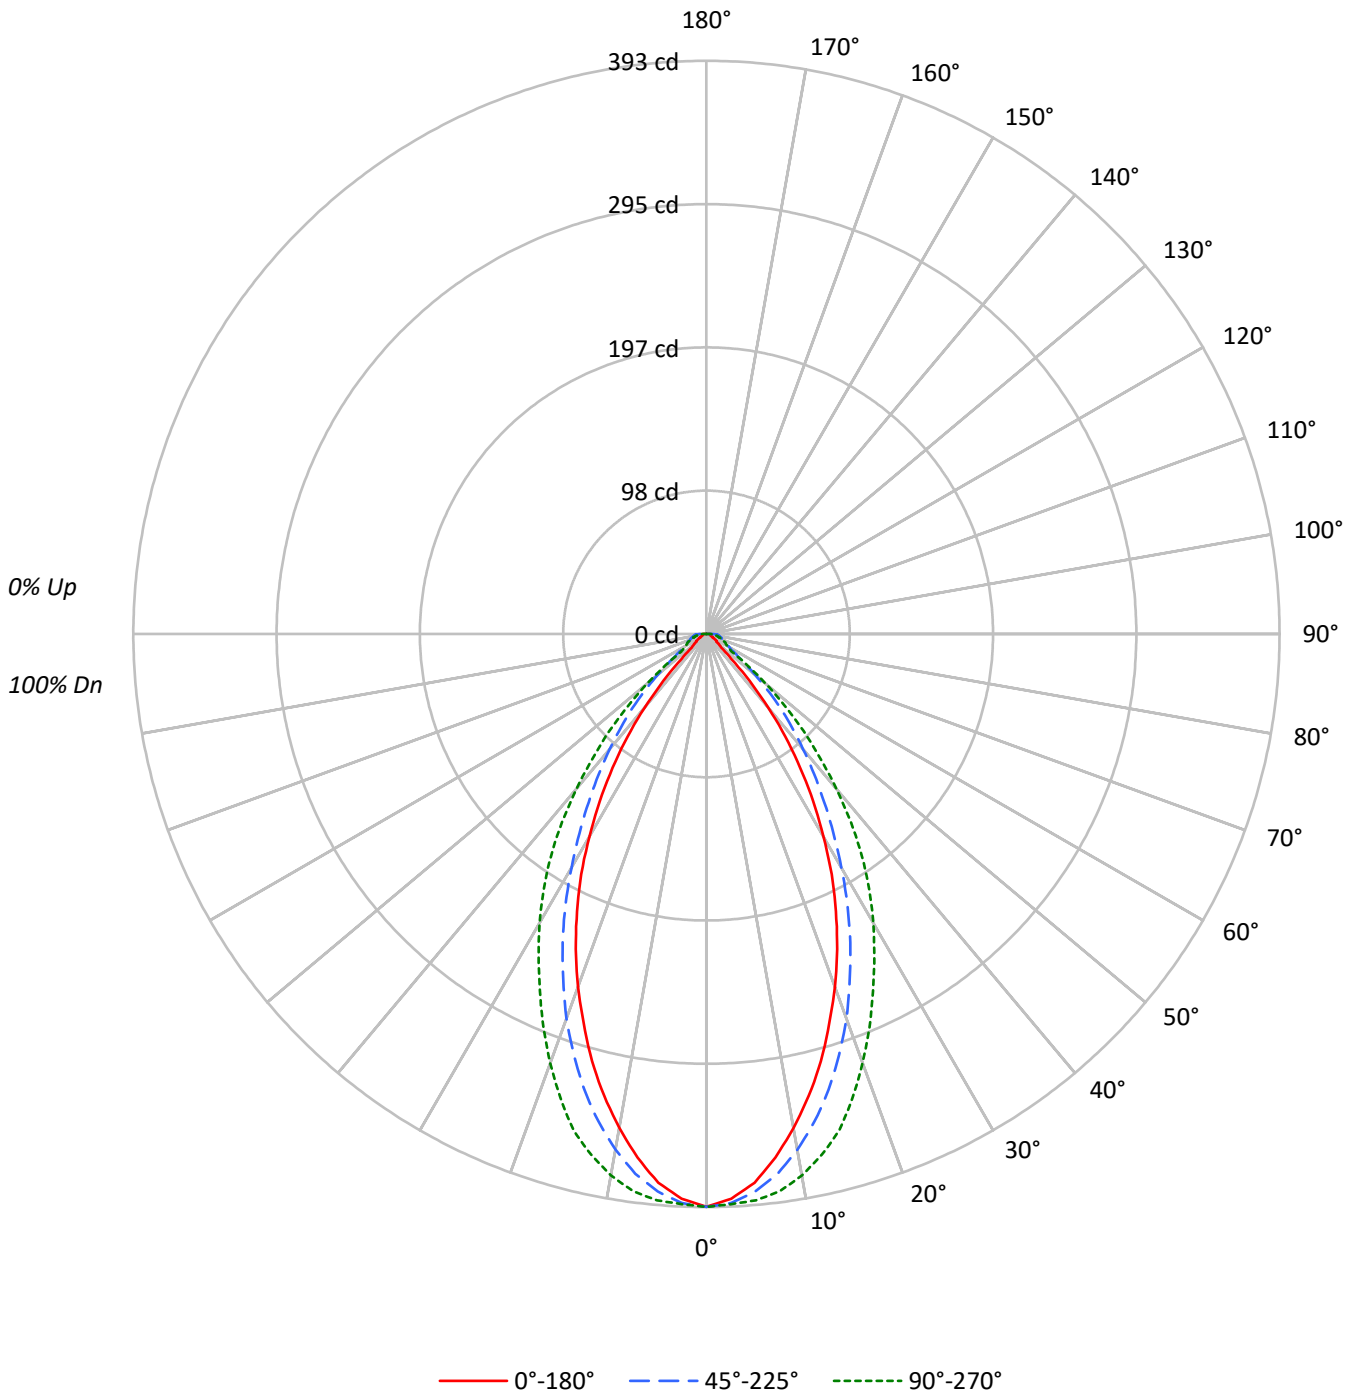



TEST NUMBER: P1058474

CATALOG NUMBER: S122RDRP-H675D927-X4F0-XX-UDD-BVL-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81
3	98	91	85	80	96	89	84	79	86	82	78	84	80	77	82	78	75	74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67
5	87	77	70	65	85	76	70	65	74	69	64	72	68	64	71	67	63	61
6	82	72	65	60	80	71	64	59	69	63	59	68	63	59	66	62	58	57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52
8	73	62	55	51	72	62	55	51	61	55	50	59	54	50	58	54	50	48
9	69	58	52	47	68	58	51	47	57	51	47	56	51	47	55	50	47	45
10	66	55	48	44	65	54	48	44	54	48	44	53	47	44	52	47	44	42

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7248	7248	7248
5°	6998	7109	7220
10°	6444	6727	7064
15°	5794	6182	6728
20°	5054	5512	6148
25°	4276	4750	5501
30°	3416	3944	4875
35°	2525	3169	4188
40°	1595	2483	3336
45°	629	1866	2456
50°	324	1252	1513
55°	267	824	679
60°	196	668	613
65°	166	624	624
70°	162	647	610
75°	214	749	642
80°	319	956	723
85°	487	1588	953

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°  
 Vertical Angle: 87.5°  
 Luminance: 3173 cd/sqm



TEST NUMBER: P1058474

CATALOG NUMBER: S122RDRP-H675D927-X4F0-XX-UDD-BVL-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	35.9	8.5
10°-20°	90.8	21.4
20°-30°	107.8	25.5
30°-40°	89.7	21.2
40°-50°	50.1	11.8
50°-60°	20.2	4.8
60°-70°	13.0	3.1
70°-80°	9.7	2.3
80°-90°	6.2	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	234.5	55.4
0°-40°	324.2	76.6
0°-60°	394.6	93.2
0°-90°	423.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	423.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	393	393	393	393	393	
5°	378	385	384	387	390	35
15°	303	312	324	340	352	84
25°	210	218	233	251	270	96
35°	112	123	141	164	186	70
45°	24	41	72	84	94	23
55°	8	17	26	25	21	7
65°	4	15	14	14	14	4
75°	3	10	10	10	9	3
85°	2	7	8	7	4	2
90°	0	0	0	0	0	



TEST NUMBER: P1058474

CATALOG NUMBER: S122RDRP-H675D927-X4F0-XX-UDD-BVL-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	392.8	392.8	392.8	392.8	392.8
2.5°	387.6	393.6	390.6	390.6	391.3
5°	377.8	384.6	383.8	386.8	389.8
7.5°	362.0	369.5	373.3	380.0	385.3
10°	343.9	352.2	359.0	369.5	377.0
12.5°	324.3	332.6	342.4	356.0	365.7
15°	303.3	312.3	323.6	340.2	352.2
17.5°	279.9	289.7	302.5	320.6	333.4
20°	257.4	267.2	280.7	298.8	313.1
22.5°	234.0	242.3	256.6	274.7	292.0
25°	210.0	218.2	233.3	251.4	270.2
27.5°	185.9	194.2	209.2	228.0	249.1
30°	160.3	169.3	185.1	206.2	228.8
32.5°	136.2	145.2	161.8	185.1	207.7
35°	112.1	122.7	140.7	164.1	185.9
37.5°	88.8	100.8	121.2	143.0	162.6
40°	66.2	79.0	103.1	121.9	138.5
42.5°	43.6	58.7	86.5	102.3	115.1
45°	24.1	40.6	71.5	83.5	94.1
47.5°	13.5	26.3	56.4	66.2	72.2
50°	11.3	19.6	43.6	50.4	52.7
52.5°	9.0	18.1	33.1	36.9	35.4
55°	8.3	17.3	25.6	24.8	21.1
57.5°	6.8	17.3	20.3	18.1	18.1
60°	5.3	16.6	18.1	15.8	16.6
62.5°	4.5	15.8	16.6	15.1	15.1
65°	3.8	15.1	14.3	13.5	14.3
67.5°	3.0	13.5	13.5	12.8	12.8
70°	3.0	12.8	12.0	11.3	11.3
72.5°	3.0	11.3	11.3	10.5	10.5
75°	3.0	10.5	10.5	9.8	9.0
77.5°	3.0	9.0	9.8	9.0	8.3
80°	3.0	8.3	9.0	8.3	6.8
82.5°	3.0	7.5	8.3	7.5	6.0
85°	2.3	6.8	7.5	6.8	4.5
87.5°	2.3	6.8	7.5	6.0	3.8
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1058474

CATALOG NUMBER: S122RDRP-H675D927-X4F0-XX-UDD-BVL-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.25	6.47	5.61	6.78	7.10	6.34	7.56	6.70	7.87	8.18
	3H	6.58	7.66	6.96	7.99	8.36	8.36	9.45	8.74	9.78	10.14
	4H	7.15	8.16	7.55	8.51	8.89	9.31	10.32	9.72	10.67	11.06
	6H	7.71	8.64	8.13	9.01	9.41	10.26	11.19	10.68	11.56	11.96
	8H	8.04	8.92	8.47	9.31	9.71	10.71	11.59	11.14	11.98	12.38
	12H	8.35	9.19	8.78	9.57	10.00	11.13	11.97	11.56	12.35	12.78
4H	2H	6.21	7.22	6.62	7.57	7.96	7.01	8.02	7.42	8.37	8.76
	3H	8.24	9.07	8.65	9.47	9.88	9.29	10.12	9.70	10.53	10.93
	4H	9.31	10.06	9.75	10.48	10.92	10.43	11.18	10.87	11.60	12.05
	6H	10.18	10.83	10.65	11.28	11.75	11.61	12.25	12.07	12.70	13.17
	8H	10.59	11.20	11.06	11.65	12.12	12.16	12.77	12.64	13.22	13.69
	12H	10.98	11.51	11.47	12.00	12.47	12.71	13.24	13.19	13.73	14.20
8H	4H	10.08	10.69	10.55	11.14	11.61	10.98	11.59	11.45	12.04	12.51
	6H	11.42	11.92	11.93	12.42	12.90	12.44	12.94	12.94	13.43	13.92
	8H	12.14	12.58	12.66	13.10	13.59	13.20	13.65	13.72	14.16	14.66
	12H	12.84	13.23	13.35	13.73	14.30	13.99	14.38	14.50	14.88	15.45
12H	4H	10.24	10.77	10.73	11.26	11.73	11.09	11.62	11.58	12.11	12.58
	6H	11.75	12.19	12.27	12.71	13.20	12.67	13.11	13.19	13.63	14.12
	8H	12.65	13.04	13.16	13.54	14.11	13.57	13.96	14.09	14.46	15.03