

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058479

Luminaire Tested: S122RDRP-H675D927-X4F0-XX-UDD-WVL-B

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1058479  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122RDRP-H675D927-X4F0-XX-UDD-WVL-B  
Description: DEFINE 2 BLACK REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 716.8 lumens  
Efficiency: N/A  
Efficacy: 30.5 lumens/watt  
Spacing Criteria (0/90/45): 1 / 0.92 / 1.02  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1058479

CATALOG NUMBER: S122RDRP-H675D927-X4F0-XX-UDD-WVL-B

### Luminous Intensity Polar Plot

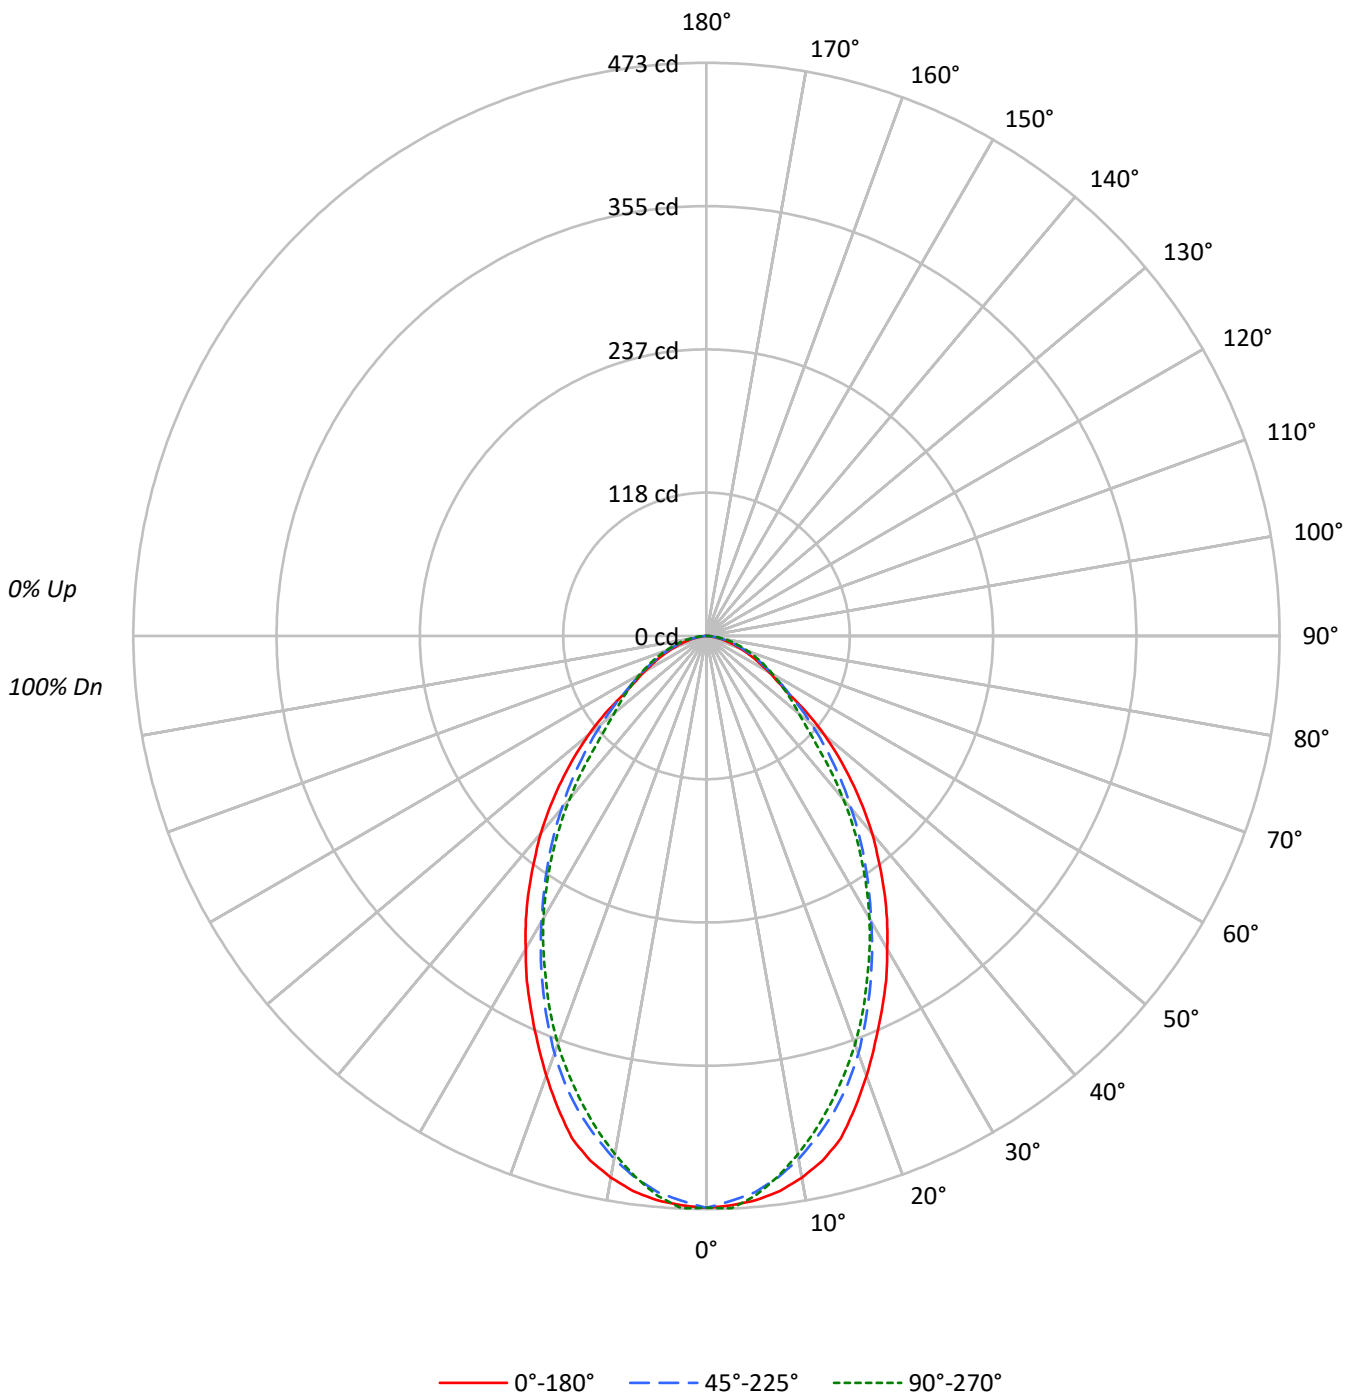



TEST NUMBER: P1058479

CATALOG NUMBER: S122RDRP-H675D927-X4F0-XX-UDD-WVL-B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77
3	95	87	80	74	93	85	79	74	82	77	73	80	75	71	77	73	70	68
4	89	79	71	65	87	77	70	65	75	69	64	73	68	63	71	66	63	61
5	83	72	64	58	81	71	63	58	69	62	57	67	61	57	65	60	56	54
6	77	66	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49
7	72	60	53	47	71	60	52	47	58	52	47	57	51	47	56	50	46	44
8	68	56	48	43	66	55	48	43	54	47	43	53	47	43	52	46	42	41
9	64	52	45	40	63	51	44	39	50	44	39	49	43	39	48	43	39	37
10	60	48	41	36	59	48	41	36	47	41	36	46	40	36	45	40	36	34

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8708	8708	8708
5°	8658	8534	8589
10°	8505	8209	8139
15°	8197	7767	7609
20°	7586	7201	7040
25°	6961	6503	6381
30°	6356	5796	5732
35°	5755	5129	5010
40°	5124	4471	4235
45°	4413	3844	3392
50°	3646	3235	2848
55°	2635	2683	2564
60°	2192	2303	2329
65°	1869	2000	2131
70°	1543	1786	1948
75°	1283	1497	1768
80°	956	1201	1594
85°	318	635	1440

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4413 cd/sqm

TEST NUMBER: P1058479

CATALOG NUMBER: S122RDRP-H675D927-X4F0-XX-UDD-WVL-B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	43.6	6.1
10°-20°	114.9	16.0
20°-30°	148.7	20.7
30°-40°	145.8	20.3
40°-50°	114.8	16.0
50°-60°	75.3	10.5
60°-70°	45.8	6.4
70°-80°	22.9	3.2
80°-90°	4.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	307.2	42.9
0°-40°	453.0	63.2
0°-60°	643.1	89.7
0°-90°	716.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	716.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	472	472	472	472	472	
5°	467	467	461	464	464	44
15°	429	423	407	401	398	120
25°	342	331	319	318	313	157
35°	256	241	228	227	222	159
45°	169	159	147	137	130	130
55°	82	86	83	80	80	78
65°	43	44	46	48	49	43
75°	18	19	21	24	25	19
85°	2	2	3	5	7	3
90°	0	0	0	0	0	



TEST NUMBER: P1058479

CATALOG NUMBER: S122RDRP-H675D927-X4F0-XX-UDD-WVL-B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	471.9	471.9	471.9	471.9	471.9
2.5°	470.4	471.2	466.7	471.2	472.7
5°	467.4	467.4	460.7	463.7	463.7
7.5°	462.2	461.4	450.9	450.9	450.1
10°	453.9	450.9	438.1	435.9	434.4
12.5°	443.4	438.1	423.1	419.3	417.1
15°	429.1	423.1	406.6	401.3	398.3
17.5°	408.1	402.0	387.8	381.8	378.8
20°	386.3	377.3	366.7	361.5	358.5
22.5°	363.7	353.2	343.4	339.7	336.7
25°	341.9	330.7	319.4	317.9	313.4
27.5°	320.9	307.4	296.1	295.3	291.6
30°	298.3	284.1	272.0	272.8	269.0
32.5°	277.3	263.8	249.5	250.2	245.7
35°	255.5	241.2	227.7	227.0	222.4
37.5°	233.0	219.4	206.7	203.7	199.1
40°	212.7	199.1	185.6	180.4	175.8
42.5°	190.9	178.9	166.8	158.6	152.6
45°	169.1	158.6	147.3	136.8	130.0
47.5°	148.0	139.8	130.0	117.2	112.7
50°	127.0	121.0	112.7	101.5	99.2
52.5°	105.2	103.0	97.7	90.2	89.4
55°	81.9	86.4	83.4	80.4	79.7
57.5°	69.1	69.9	72.1	71.4	71.4
60°	59.4	59.4	62.4	63.1	63.1
62.5°	50.4	51.1	54.1	55.6	55.6
65°	42.8	43.6	45.8	48.1	48.8
67.5°	35.3	36.8	39.1	41.3	42.1
70°	28.6	30.1	33.1	35.3	36.1
72.5°	23.3	24.0	27.1	29.3	30.1
75°	18.0	18.8	21.0	24.0	24.8
77.5°	12.8	14.3	16.5	18.8	20.3
80°	9.0	9.8	11.3	14.3	15.0
82.5°	5.3	6.0	7.5	9.8	10.5
85°	1.5	2.3	3.0	5.3	6.8
87.5°	0.0	0.0	0.0	1.5	3.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058479  
 CATALOG NUMBER: S122RDRP-H675D927-X4F0-XX-UDD-WVL-B

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.64	15.04	14.01	15.35	15.67	13.82	15.22	14.19	15.53	15.85
	3H	14.77	16.02	15.15	16.35	16.71	15.28	16.53	15.66	16.86	17.22
	4H	15.13	16.29	15.53	16.64	17.02	15.82	16.99	16.22	17.34	17.72
	6H	15.31	16.38	15.72	16.75	17.14	16.24	17.31	16.65	17.68	18.07
	8H	15.34	16.35	15.77	16.75	17.15	16.36	17.38	16.79	17.77	18.17
	12H	15.32	16.30	15.75	16.68	17.11	16.45	17.42	16.88	17.80	18.23
4H	2H	14.10	15.26	14.50	15.61	15.99	14.25	15.41	14.65	15.76	16.14
	3H	15.44	16.40	15.85	16.80	17.20	15.92	16.88	16.33	17.28	17.68
	4H	15.88	16.74	16.32	17.16	17.60	16.58	17.44	17.02	17.86	18.30
	6H	16.16	16.90	16.62	17.34	17.81	17.12	17.86	17.58	18.31	18.77
	8H	16.20	16.89	16.67	17.34	17.81	17.29	17.98	17.75	18.43	18.90
	12H	16.20	16.81	16.68	17.29	17.77	17.41	18.02	17.89	18.51	18.98
8H	4H	16.10	16.79	16.56	17.24	17.71	16.73	17.43	17.20	17.87	18.34
	6H	16.44	17.01	16.94	17.51	17.99	17.36	17.93	17.86	18.43	18.91
	8H	16.52	17.03	17.04	17.55	18.04	17.60	18.11	18.12	18.62	19.11
	12H	16.54	16.99	17.05	17.48	18.05	17.79	18.24	18.30	18.73	19.30
12H	4H	16.11	16.72	16.59	17.21	17.68	16.72	17.33	17.20	17.82	18.29
	6H	16.47	16.98	16.99	17.49	17.98	17.36	17.87	17.88	18.38	18.87
	8H	16.59	17.04	17.10	17.53	18.10	17.64	18.09	18.15	18.58	19.15