

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058439

Luminaire Tested: S122RDRP-H675D830-X4F0-XX-UDD-BVL-W

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1058439  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-57)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122RDRP-H675D830-X4F0-XX-UDD-BVL-W  
Description: DEFINE 2 WHITE REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3000K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 609.2 lumens  
Efficiency: N/A  
Efficacy: 25.9 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.96 / 0.91  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1058439

CATALOG NUMBER: S122RDRP-H675D830-X4F0-XX-UDD-BVL-W

### Luminous Intensity Polar Plot

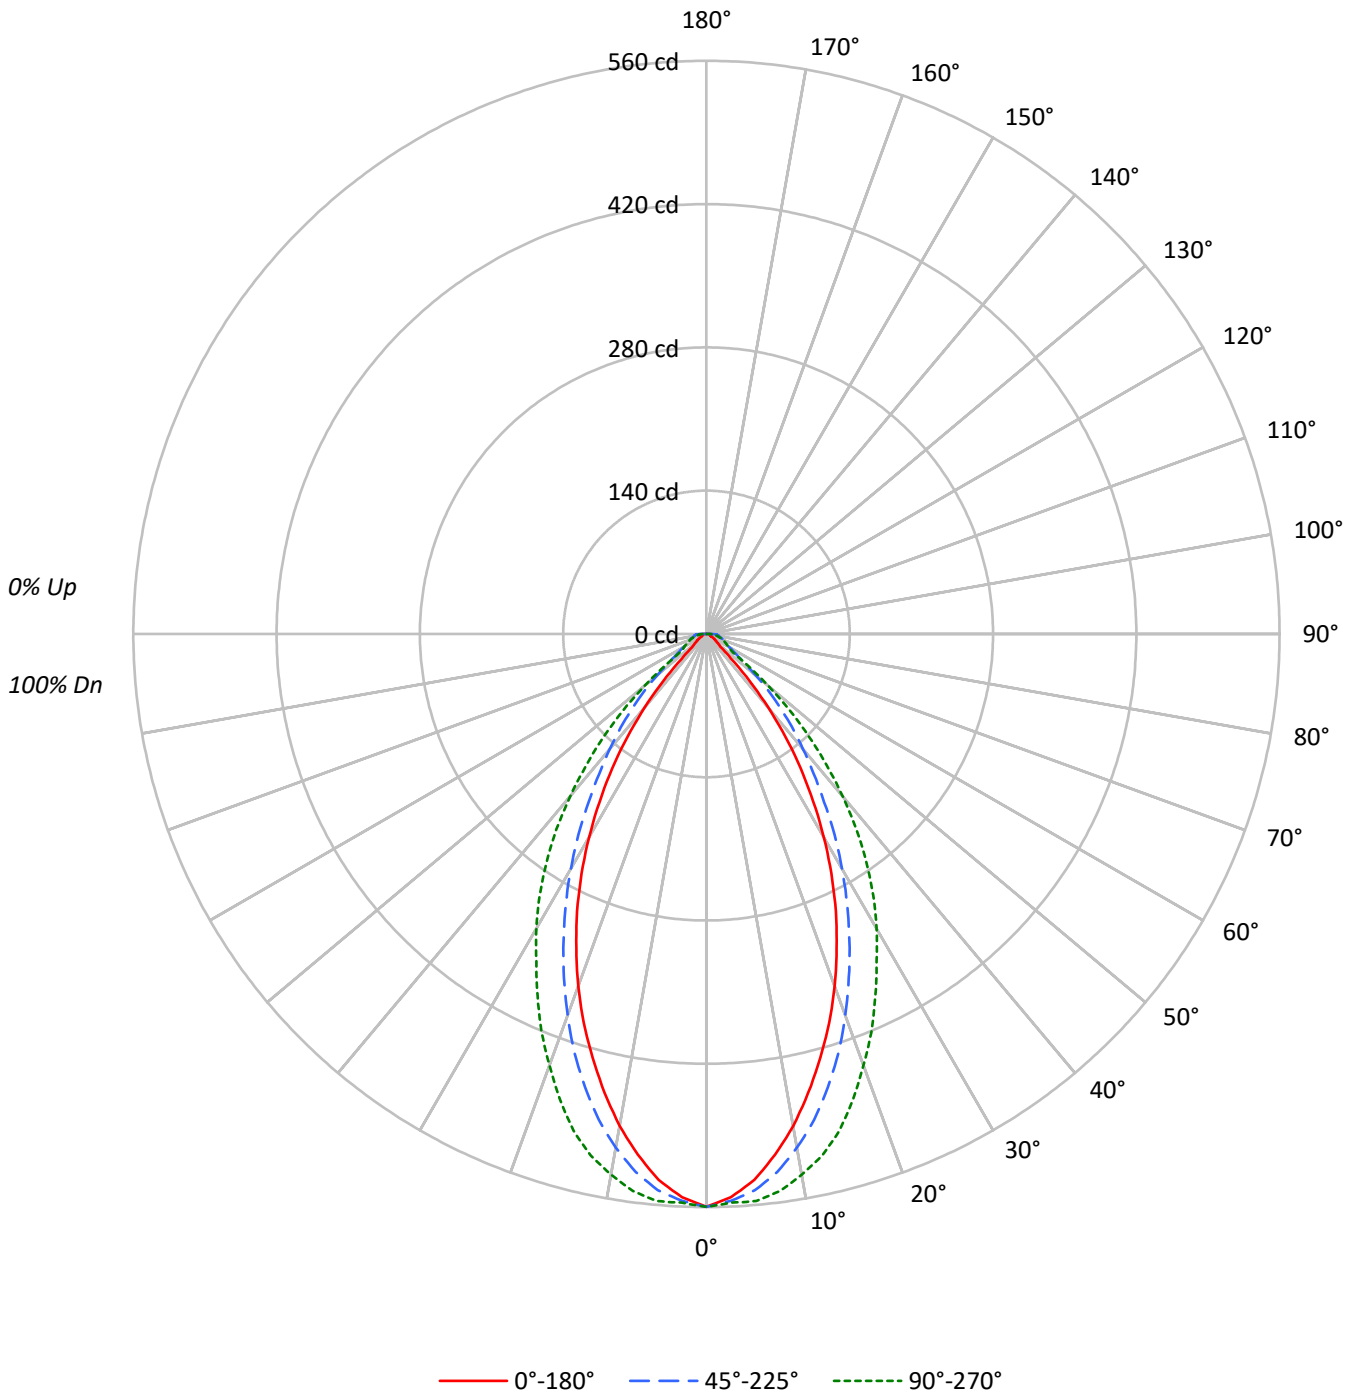



TEST NUMBER: P1058439

CATALOG NUMBER: S122RDRP-H675D830-X4F0-XX-UDD-BVL-W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90																												
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81																												
3	98	91	85	80	96	89	84	79	86	82	78	84	80	76	81	78	75	74																												
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67																												
5	87	77	70	65	85	76	70	65	74	69	64	72	67	64	71	66	63	61																												
6	82	72	65	60	80	71	64	59	69	63	59	68	62	58	66	62	58	56																												
7	77	67	60	55	76	66	59	55	64	59	54	63	58	54	62	57	54	52																												
8	73	62	55	51	72	62	55	51	60	54	50	59	54	50	58	53	50	48																												
9	69	58	52	47	68	58	51	47	57	51	47	56	50	47	55	50	46	45																												
10	66	55	48	44	64	54	48	44	53	48	44	53	47	43	52	47	43	42																												

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10328	10328	10328
5°	9921	10102	10302
10°	9146	9548	10052
15°	8195	8759	9598
20°	7193	7790	8811
25°	6090	6729	7951
30°	4886	5649	7080
35°	3611	4519	6134
40°	2264	3539	4984
45°	887	2664	3693
50°	436	1800	2262
55°	344	1181	1007
60°	266	960	926
65°	196	899	899
70°	243	917	917
75°	257	1020	955
80°	383	1328	1052
85°	762	2265	1524

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 87.5°  
 Luminance: 4188 cd/sqm

TEST NUMBER: P1058439

CATALOG NUMBER: S122RDRP-H675D830-X4F0-XX-UDD-BVL-W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	51.1	8.4
10°-20°	129.2	21.2
20°-30°	154.6	25.4
30°-40°	130.1	21.4
40°-50°	74.1	12.2
50°-60°	29.2	4.8
60°-70°	18.4	3.0
70°-80°	13.7	2.2
80°-90°	8.7	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	335.0	55.0
0°-40°	465.1	76.3
0°-60°	568.5	93.3
0°-90°	609.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	609.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	560	560	560	560	560	
5°	536	547	545	552	556	50
15°	429	444	458	485	502	120
25°	299	313	330	364	390	136
35°	160	175	201	244	272	99
45°	34	60	102	128	142	32
55°	11	23	37	38	31	10
65°	4	21	21	20	21	5
75°	4	14	14	13	13	4
85°	4	10	11	10	7	3
90°	0	0	0	0	0	



TEST NUMBER: P1058439

CATALOG NUMBER: S122RDRP-H675D830-X4F0-XX-UDD-BVL-W

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	559.7	559.7	559.7	559.7	559.7
2.5°	550.8	560.6	554.4	555.3	556.2
5°	535.6	547.2	545.4	551.7	556.2
7.5°	513.2	525.7	530.2	540.9	549.0
10°	488.1	502.4	509.6	526.6	536.5
12.5°	459.4	475.6	486.3	507.8	522.1
15°	429.0	444.2	458.5	485.4	502.4
17.5°	398.5	413.8	429.0	458.5	476.4
20°	366.3	380.6	396.7	428.1	448.7
22.5°	332.3	347.5	363.6	395.8	420.9
25°	299.1	312.6	330.5	364.5	390.5
27.5°	264.2	277.6	297.3	332.3	360.0
30°	229.3	242.7	265.1	300.9	332.3
32.5°	194.3	208.7	232.9	272.3	303.6
35°	160.3	174.6	200.6	243.6	272.3
37.5°	127.2	143.3	172.0	214.0	240.9
40°	94.0	112.8	146.9	184.5	206.9
42.5°	62.7	86.0	123.6	154.9	173.7
45°	34.0	60.0	102.1	128.1	141.5
47.5°	18.8	38.5	81.5	102.1	110.2
50°	15.2	26.9	62.7	77.9	78.8
52.5°	12.5	24.2	46.6	55.5	51.0
55°	10.7	23.3	36.7	37.6	31.3
57.5°	9.0	22.4	30.4	26.9	26.9
60°	7.2	22.4	26.0	24.2	25.1
62.5°	5.4	22.4	23.3	21.5	22.4
65°	4.5	20.6	20.6	19.7	20.6
67.5°	4.5	18.8	18.8	17.9	18.8
70°	4.5	17.9	17.0	17.0	17.0
72.5°	3.6	16.1	16.1	15.2	15.2
75°	3.6	14.3	14.3	13.4	13.4
77.5°	3.6	13.4	13.4	12.5	11.6
80°	3.6	11.6	12.5	11.6	9.9
82.5°	3.6	10.7	11.6	10.7	8.1
85°	3.6	9.9	10.7	9.9	7.2
87.5°	2.7	9.9	9.9	8.1	5.4
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058439

CATALOG NUMBER: S122RDRP-H675D830-X4F0-XX-UDD-BVL-W

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.81	7.03	6.17	7.34	7.66	7.84	9.06	8.20	9.37	9.68
	3H	7.35	8.44	7.73	8.77	9.13	9.80	10.89	10.18	11.22	11.59
	4H	7.91	8.92	8.31	9.27	9.66	10.71	11.73	11.12	12.08	12.46
	6H	8.46	9.39	8.88	9.77	10.16	11.60	12.53	12.01	12.90	13.29
	8H	8.76	9.64	9.19	10.03	10.44	12.00	12.88	12.43	13.27	13.68
	12H	9.12	9.96	9.55	10.35	10.78	12.45	13.29	12.88	13.67	14.10
4H	2H	6.99	8.01	7.40	8.36	8.74	8.45	9.47	8.86	9.82	10.20
	3H	9.19	10.02	9.60	10.43	10.83	10.69	11.53	11.11	11.93	12.34
	4H	10.24	10.99	10.68	11.41	11.85	11.76	12.51	12.20	12.93	13.37
	6H	11.13	11.78	11.60	12.23	12.70	12.87	13.52	13.33	13.96	14.43
	8H	11.52	12.13	11.99	12.57	13.05	13.39	14.00	13.86	14.45	14.92
	12H	11.94	12.48	12.43	12.96	13.44	13.98	14.51	14.46	14.99	15.47
8H	4H	11.04	11.65	11.51	12.09	12.57	12.25	12.86	12.72	13.30	13.78
	6H	12.42	12.91	12.92	13.41	13.89	13.64	14.14	14.15	14.64	15.12
	8H	13.13	13.58	13.66	14.10	14.59	14.38	14.83	14.91	15.35	15.84
	12H	13.89	14.29	14.41	14.78	15.35	15.22	15.62	15.74	16.11	16.69
12H	4H	11.20	11.74	11.69	12.22	12.70	12.35	12.88	12.84	13.37	13.84
	6H	12.75	13.19	13.27	13.71	14.20	13.86	14.31	14.38	14.82	15.32
	8H	13.66	14.05	14.18	14.55	15.12	14.75	15.14	15.26	15.64	16.21