

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058483

Luminaire Tested: S122RDRP-H675D930-X4F0-XX-UDD-BVL-S

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1058483
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-60)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-H675D930-X4F0-XX-UDD-BVL-S
Description: DEFINE 2 SILVER REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 435.8 lumens
Efficiency: N/A
Efficacy: 18.5 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.95 / 0.9
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 23.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058483

CATALOG NUMBER: S122RDRP-H675D930-X4F0-XX-UDD-BVL-S

Luminous Intensity Polar Plot

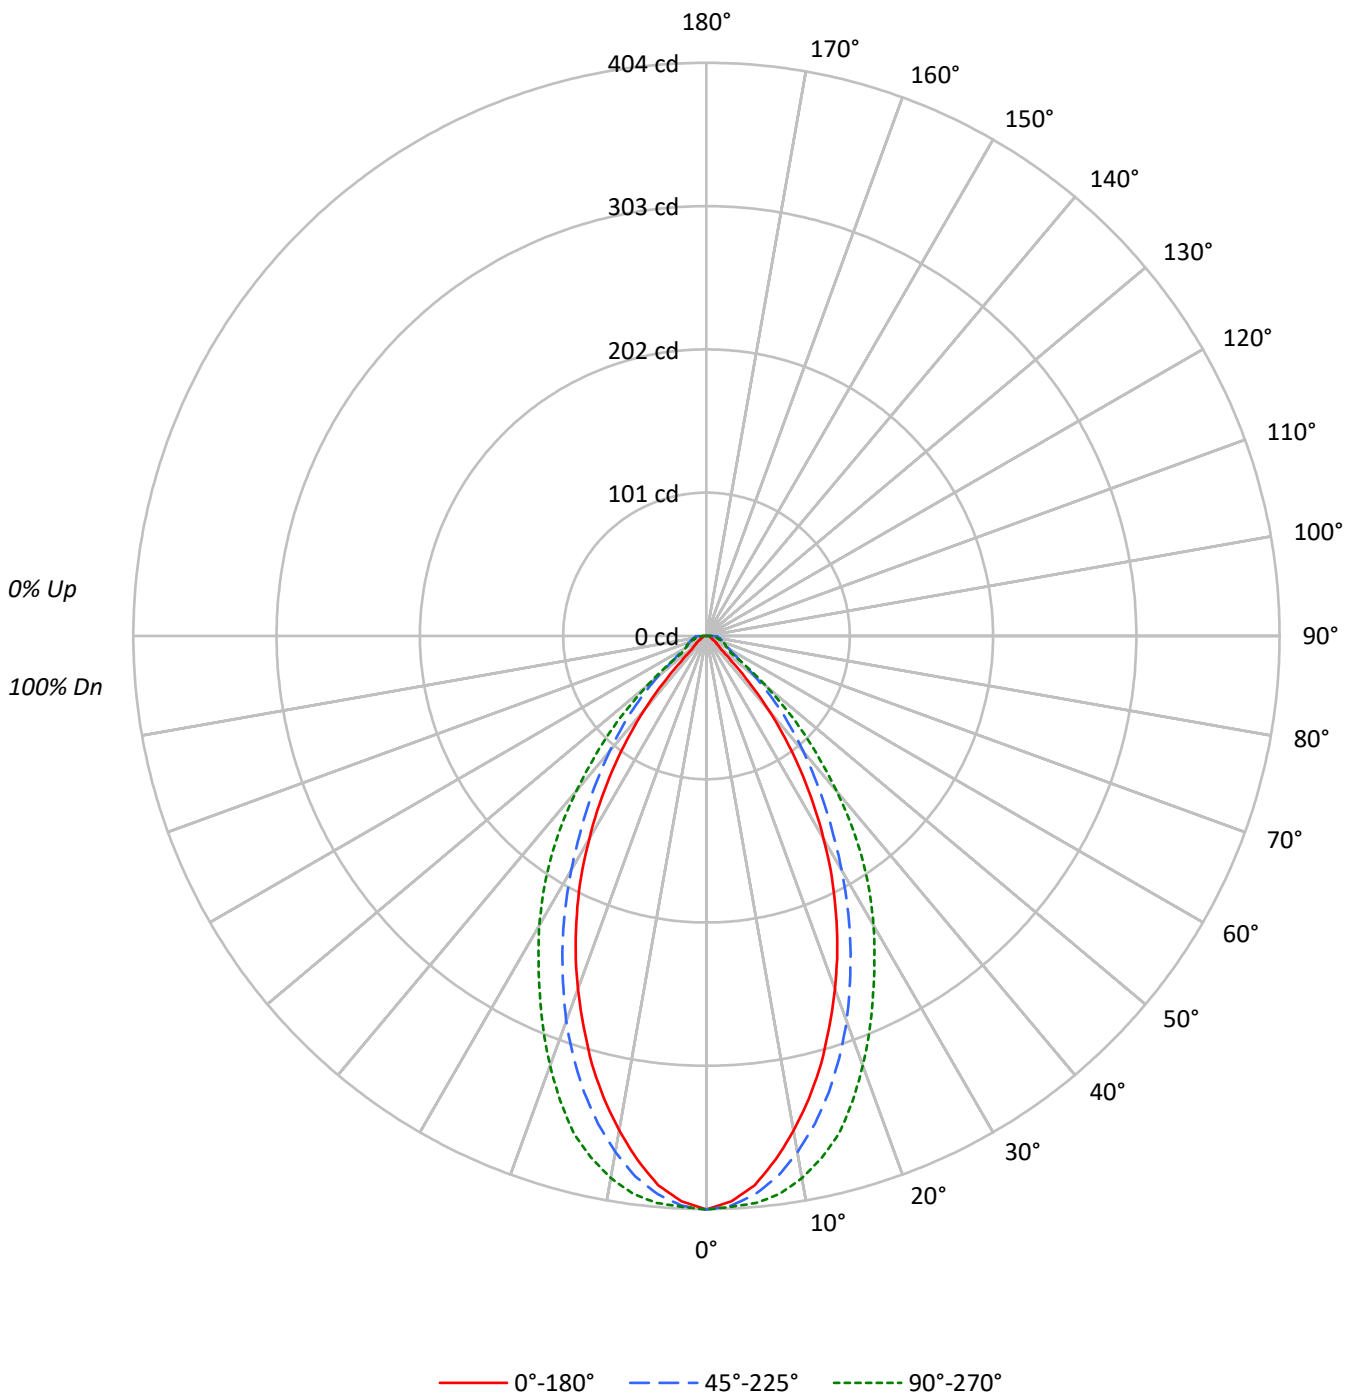

TEST NUMBER: P1058483

CATALOG NUMBER: S122RDRP-H675D930-X4F0-XX-UDD-BVL-S

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90					90			
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81					81			
3	98	91	85	80	96	89	84	79	86	82	78	84	80	77	82	78	75	74					74			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67					67			
5	87	77	70	65	85	76	70	65	74	69	64	72	68	64	71	67	63	61					61			
6	82	72	65	60	80	71	64	59	69	63	59	68	63	59	66	62	58	57					57			
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52					52			
8	73	62	55	51	72	62	55	51	61	55	50	59	54	50	58	54	50	48					48			
9	69	58	52	47	68	58	51	47	57	51	47	56	51	47	55	50	47	45					45			
10	66	55	48	44	65	54	48	44	54	48	44	53	47	44	52	47	44	42					42			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7460	7460	7460
5°	7202	7317	7431
10°	6633	6921	7270
15°	5962	6361	6925
20°	5202	5673	6327
25°	4400	4888	5660
30°	3516	4059	5018
35°	2600	3262	4309
40°	1643	2556	3433
45°	647	1921	2526
50°	333	1289	1556
55°	273	846	698
60°	199	686	627
65°	170	642	642
70°	167	669	626
75°	221	770	663
80°	329	988	744
85°	487	1630	974

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 87.5°
 Luminance: 3257 cd/sqm



TEST NUMBER: P1058483

CATALOG NUMBER: S122RDRP-H675D930-X4F0-XX-UDD-BVL-S

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.0	8.5
10°-20°	93.4	21.4
20°-30°	111.0	25.5
30°-40°	92.3	21.2
40°-50°	51.6	11.8
50°-60°	20.8	4.8
60°-70°	13.3	3.1
70°-80°	10.0	2.3
80°-90°	6.4	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	241.4	55.4
0°-40°	333.7	76.6
0°-60°	406.1	93.2
0°-90°	435.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	435.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	404	404	404	404	404	
5°	389	396	395	398	401	36
15°	312	321	333	350	362	87
25°	216	225	240	259	278	99
35°	115	126	145	169	191	72
45°	25	42	74	86	97	23
55°	8	18	26	26	22	7
65°	4	16	15	14	15	4
75°	3	11	11	10	9	3
85°	2	7	8	7	5	3
90°	0	0	0	0	0	



TEST NUMBER: P1058483

CATALOG NUMBER: S122RDRP-H675D930-X4F0-XX-UDD-BVL-S

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	404.3	404.3	404.3	404.3	404.3
2.5°	398.9	405.1	402.0	402.0	402.7
5°	388.8	395.8	395.0	398.1	401.2
7.5°	372.5	380.3	384.2	391.1	396.5
10°	354.0	362.5	369.4	380.3	388.0
12.5°	333.8	342.3	352.4	366.3	376.4
15°	312.1	321.4	333.0	350.1	362.5
17.5°	288.1	298.2	311.4	329.9	343.1
20°	264.9	275.0	288.9	307.5	322.2
22.5°	240.9	249.4	264.1	282.7	300.5
25°	216.1	224.6	240.1	258.7	278.0
27.5°	191.3	199.8	215.3	234.7	256.4
30°	165.0	174.3	190.5	212.2	235.5
32.5°	140.2	149.5	166.5	190.5	213.8
35°	115.4	126.2	144.8	168.8	191.3
37.5°	91.4	103.8	124.7	147.2	167.3
40°	68.2	81.3	106.1	125.5	142.5
42.5°	44.9	60.4	89.1	105.3	118.5
45°	24.8	41.8	73.6	86.0	96.8
47.5°	13.9	27.1	58.1	68.2	74.4
50°	11.6	20.1	44.9	51.9	54.2
52.5°	9.3	18.6	34.1	38.0	36.4
55°	8.5	17.8	26.3	25.6	21.7
57.5°	7.0	17.8	20.9	18.6	18.6
60°	5.4	17.0	18.6	16.3	17.0
62.5°	4.6	16.3	17.0	15.5	15.5
65°	3.9	15.5	14.7	13.9	14.7
67.5°	3.1	13.9	13.9	13.2	13.2
70°	3.1	13.2	12.4	11.6	11.6
72.5°	3.1	11.6	11.6	10.8	10.8
75°	3.1	10.8	10.8	10.1	9.3
77.5°	3.1	9.3	10.1	9.3	8.5
80°	3.1	8.5	9.3	8.5	7.0
82.5°	3.1	7.7	8.5	7.7	6.2
85°	2.3	7.0	7.7	7.0	4.6
87.5°	2.3	7.0	7.7	6.2	3.9
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058483
 CATALOG NUMBER: S122RDRP-H675D930-X4F0-XX-UDD-BVL-S

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.34	6.56	5.71	6.88	7.19	6.43	7.65	6.79	7.96	8.27
	3H	6.68	7.76	7.06	8.09	8.46	8.46	9.54	8.84	9.87	10.24
	4H	7.25	8.26	7.65	8.61	9.00	9.41	10.42	9.82	10.77	11.16
	6H	7.82	8.75	8.23	9.12	9.51	10.36	11.29	10.77	11.66	12.05
	8H	8.14	9.02	8.57	9.41	9.82	10.81	11.69	11.24	12.08	12.48
	12H	8.45	9.29	8.88	9.67	10.10	11.22	12.07	11.66	12.45	12.88
4H	2H	6.31	7.32	6.71	7.67	8.05	7.10	8.11	7.51	8.46	8.85
	3H	8.34	9.17	8.75	9.57	9.98	9.38	10.22	9.80	10.62	11.03
	4H	9.41	10.16	9.85	10.58	11.02	10.53	11.28	10.97	11.70	12.15
	6H	10.28	10.93	10.75	11.38	11.85	11.70	12.35	12.17	12.80	13.27
	8H	10.69	11.30	11.16	11.75	12.22	12.26	12.87	12.73	13.32	13.79
	12H	11.07	11.61	11.56	12.09	12.57	12.80	13.34	13.29	13.82	14.30
8H	4H	10.18	10.79	10.65	11.24	11.71	11.08	11.69	11.55	12.14	12.61
	6H	11.52	12.02	12.03	12.52	13.00	12.54	13.03	13.04	13.53	14.01
	8H	12.24	12.68	12.76	13.20	13.69	13.30	13.74	13.82	14.26	14.75
	12H	12.93	13.32	13.45	13.82	14.39	14.08	14.47	14.60	14.97	15.54
12H	4H	10.34	10.87	10.83	11.36	11.83	11.19	11.73	11.68	12.21	12.68
	6H	11.84	12.29	12.37	12.81	13.30	12.76	13.21	13.29	13.72	14.22
	8H	12.74	13.14	13.26	13.63	14.20	13.66	14.06	14.18	14.55	15.13