

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058568

Luminaire Tested: S122RDRP-H865D930-X4F0-XX-UDD-SVL-W

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1058568
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-56)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-H865D930-X4F0-XX-UDD-SVL-W
Description: DEFINE 2 WHITE REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 815.4 lumens
Efficiency: N/A
Efficacy: 26.1 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.98 / 0.95
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 31.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058568

CATALOG NUMBER: S122RDRP-H865D930-X4F0-XX-UDD-SVL-W

Luminous Intensity Polar Plot

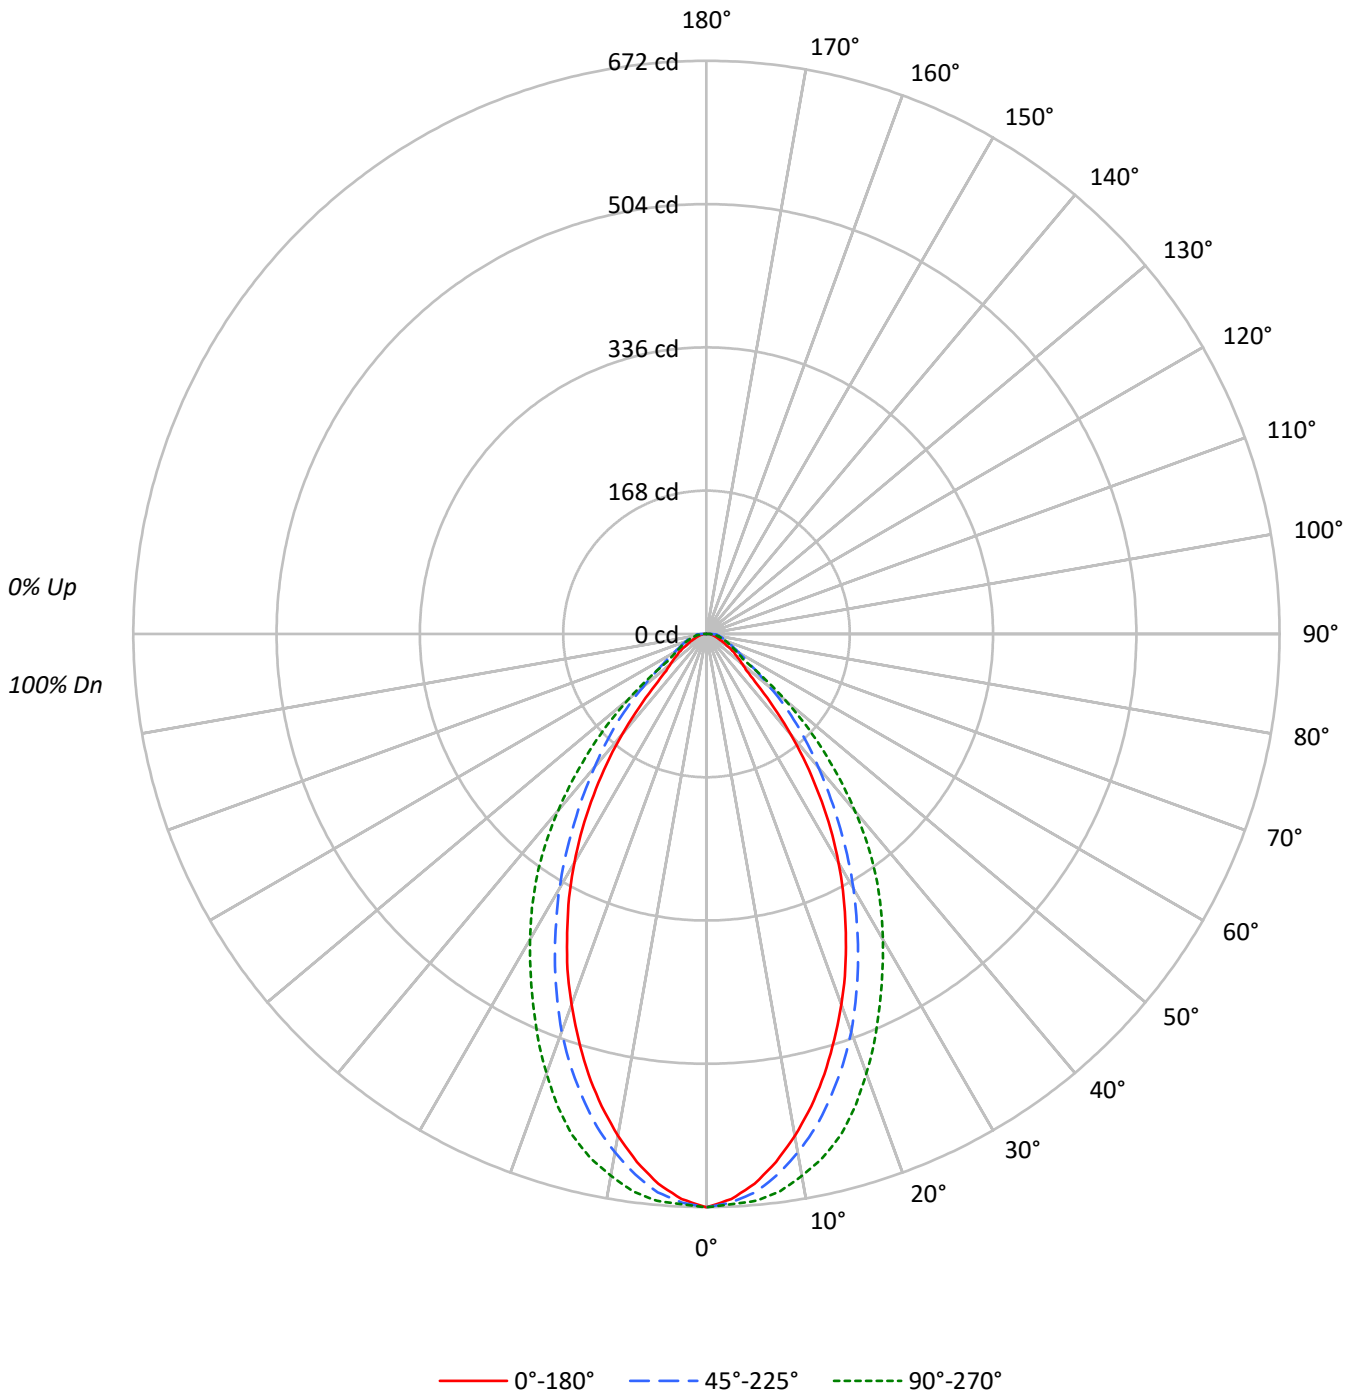



TEST NUMBER: P1058568

CATALOG NUMBER: S122RDRP-H865D930-X4F0-XX-UDD-SVL-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89				89
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80				80
3	97	89	83	78	95	88	82	77	85	80	76	83	78	75	80	77	74	72				72
4	91	82	75	70	89	81	74	69	78	73	68	76	71	68	74	70	67	65				65
5	86	75	68	63	84	74	68	63	72	67	62	71	65	61	69	64	61	59				59
6	80	70	62	57	79	69	62	57	67	61	57	66	60	56	64	59	56	54				54
7	76	65	57	52	74	64	57	52	62	56	52	61	56	52	60	55	51	50				50
8	71	60	53	48	70	59	53	48	58	52	48	57	52	48	56	51	47	46				46
9	67	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	42				42
10	64	53	46	41	63	52	46	41	51	45	41	50	45	41	50	45	41	39				39

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12404	12404	12404
5°	11988	12173	12359
10°	11192	11566	12089
15°	10209	10742	11621
20°	9082	9748	10769
25°	7869	8561	9781
30°	6597	7342	8810
35°	5197	6075	7808
40°	3705	4909	6521
45°	2189	3883	5057
50°	1576	2810	3442
55°	1319	2024	1734
60°	1070	1620	1476
65°	873	1441	1354
70°	755	1403	1295
75°	713	1426	1283
80°	744	1700	1381
85°	1059	2752	1694

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 5057 cd/sqm



TEST NUMBER: P1058568

CATALOG NUMBER: S122RDRP-H865D930-X4F0-XX-UDD-SVL-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.7	7.6
10°-20°	158.4	19.4
20°-30°	195.4	24.0
30°-40°	173.8	21.3
40°-50°	110.9	13.6
50°-60°	53.3	6.5
60°-70°	31.3	3.8
70°-80°	20.0	2.5
80°-90°	10.7	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	415.5	51.0
0°-40°	589.3	72.3
0°-60°	753.5	92.4
0°-90°	815.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	815.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	672	672	672	672	672	
5°	647	659	657	661	667	60
15°	534	547	562	588	608	149
25°	386	402	420	450	480	177
35°	231	249	270	311	347	143
45°	84	109	149	173	194	70
55°	41	53	63	61	54	37
65°	20	36	33	30	31	20
75°	10	22	20	19	18	11
85°	5	12	13	11	8	5
90°	0	0	0	0	0	



TEST NUMBER: P1058568

CATALOG NUMBER: S122RDRP-H865D930-X4F0-XX-UDD-SVL-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	672.2	672.2	672.2	672.2	672.2
2.5°	663.2	674.2	667.2	667.2	669.2
5°	647.2	659.2	657.2	661.2	667.2
7.5°	624.3	637.3	639.3	650.2	659.2
10°	597.3	611.3	617.3	633.3	645.2
12.5°	567.3	581.3	592.3	612.3	629.3
15°	534.4	547.4	562.3	588.3	608.3
17.5°	498.4	515.4	530.4	557.3	580.3
20°	462.5	478.4	496.4	522.4	548.4
22.5°	425.5	440.5	458.5	485.4	515.4
25°	386.5	401.5	420.5	450.5	480.4
27.5°	348.6	363.6	381.6	414.5	446.5
30°	309.6	324.6	344.6	378.6	413.5
32.5°	270.7	286.7	306.6	343.6	380.6
35°	230.7	248.7	269.7	310.6	346.6
37.5°	191.8	209.8	235.7	275.7	309.6
40°	153.8	174.8	203.8	239.7	270.7
42.5°	116.9	139.8	175.8	204.8	231.7
45°	83.9	108.9	148.8	172.8	193.8
47.5°	63.9	81.9	122.9	141.8	156.8
50°	54.9	65.9	97.9	111.9	119.9
52.5°	47.9	57.9	77.9	84.9	84.9
55°	41.0	52.9	62.9	60.9	53.9
57.5°	35.0	47.9	51.9	43.9	45.9
60°	29.0	43.9	43.9	39.0	40.0
62.5°	24.0	41.0	38.0	34.0	35.0
65°	20.0	36.0	33.0	30.0	31.0
67.5°	16.0	32.0	29.0	27.0	27.0
70°	14.0	29.0	26.0	24.0	24.0
72.5°	12.0	25.0	23.0	21.0	21.0
75°	10.0	22.0	20.0	19.0	18.0
77.5°	9.0	19.0	18.0	16.0	15.0
80°	7.0	16.0	16.0	15.0	13.0
82.5°	6.0	14.0	14.0	13.0	11.0
85°	5.0	12.0	13.0	11.0	8.0
87.5°	4.0	11.0	11.0	9.0	6.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058568
 CATALOG NUMBER: S122RDRP-H865D930-X4F0-XX-UDD-SVL-W

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.42	11.69	10.78	12.00	12.32	10.20	11.48	10.57	11.79	12.11
	3H	11.65	12.79	12.03	13.12	13.48	11.80	12.94	12.18	13.27	13.63
	4H	12.10	13.16	12.51	13.51	13.90	12.52	13.58	12.92	13.93	14.31
	6H	12.49	13.46	12.90	13.83	14.22	13.17	14.15	13.59	14.52	14.91
	8H	12.64	13.56	13.07	13.95	14.36	13.50	14.43	13.93	14.82	15.22
	12H	12.80	13.68	13.23	14.06	14.49	13.80	14.68	14.23	15.07	15.50
4H	2H	10.97	12.03	11.37	12.38	12.76	10.80	11.86	11.20	12.21	12.59
	3H	12.67	13.54	13.08	13.94	14.35	12.64	13.51	13.05	13.92	14.32
	4H	13.46	14.24	13.90	14.66	15.11	13.52	14.30	13.95	14.72	15.16
	6H	14.11	14.78	14.57	15.23	15.70	14.36	15.04	14.83	15.49	15.95
	8H	14.36	14.99	14.83	15.44	15.91	14.79	15.42	15.26	15.87	16.34
	12H	14.60	15.16	15.09	15.65	16.12	15.19	15.75	15.68	16.23	16.71
8H	4H	13.88	14.51	14.35	14.96	15.43	13.93	14.57	14.40	15.02	15.49
	6H	14.86	15.38	15.36	15.88	16.36	15.02	15.54	15.52	16.04	16.52
	8H	15.35	15.82	15.87	16.33	16.83	15.61	16.08	16.14	16.60	17.09
	12H	15.85	16.27	16.37	16.76	17.33	16.22	16.63	16.73	17.12	17.70
12H	4H	13.95	14.51	14.43	14.99	15.47	14.01	14.57	14.50	15.05	15.53
	6H	15.03	15.50	15.55	16.01	16.50	15.19	15.65	15.71	16.17	16.66
	8H	15.67	16.08	16.18	16.57	17.14	15.90	16.31	16.41	16.81	17.38