

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058529

Luminaire Tested: S122RDRP-H865D835-X4F0-XX-UDD-BVL-W

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1058529  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-57)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122RDRP-H865D835-X4F0-XX-UDD-BVL-W  
Description: DEFINE 2 WHITE REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3500K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 833.6 lumens  
Efficiency: N/A  
Efficacy: 26.7 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.96 / 0.91  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 31.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1058529

CATALOG NUMBER: S122RDRP-H865D835-X4F0-XX-UDD-BVL-W

### Luminous Intensity Polar Plot

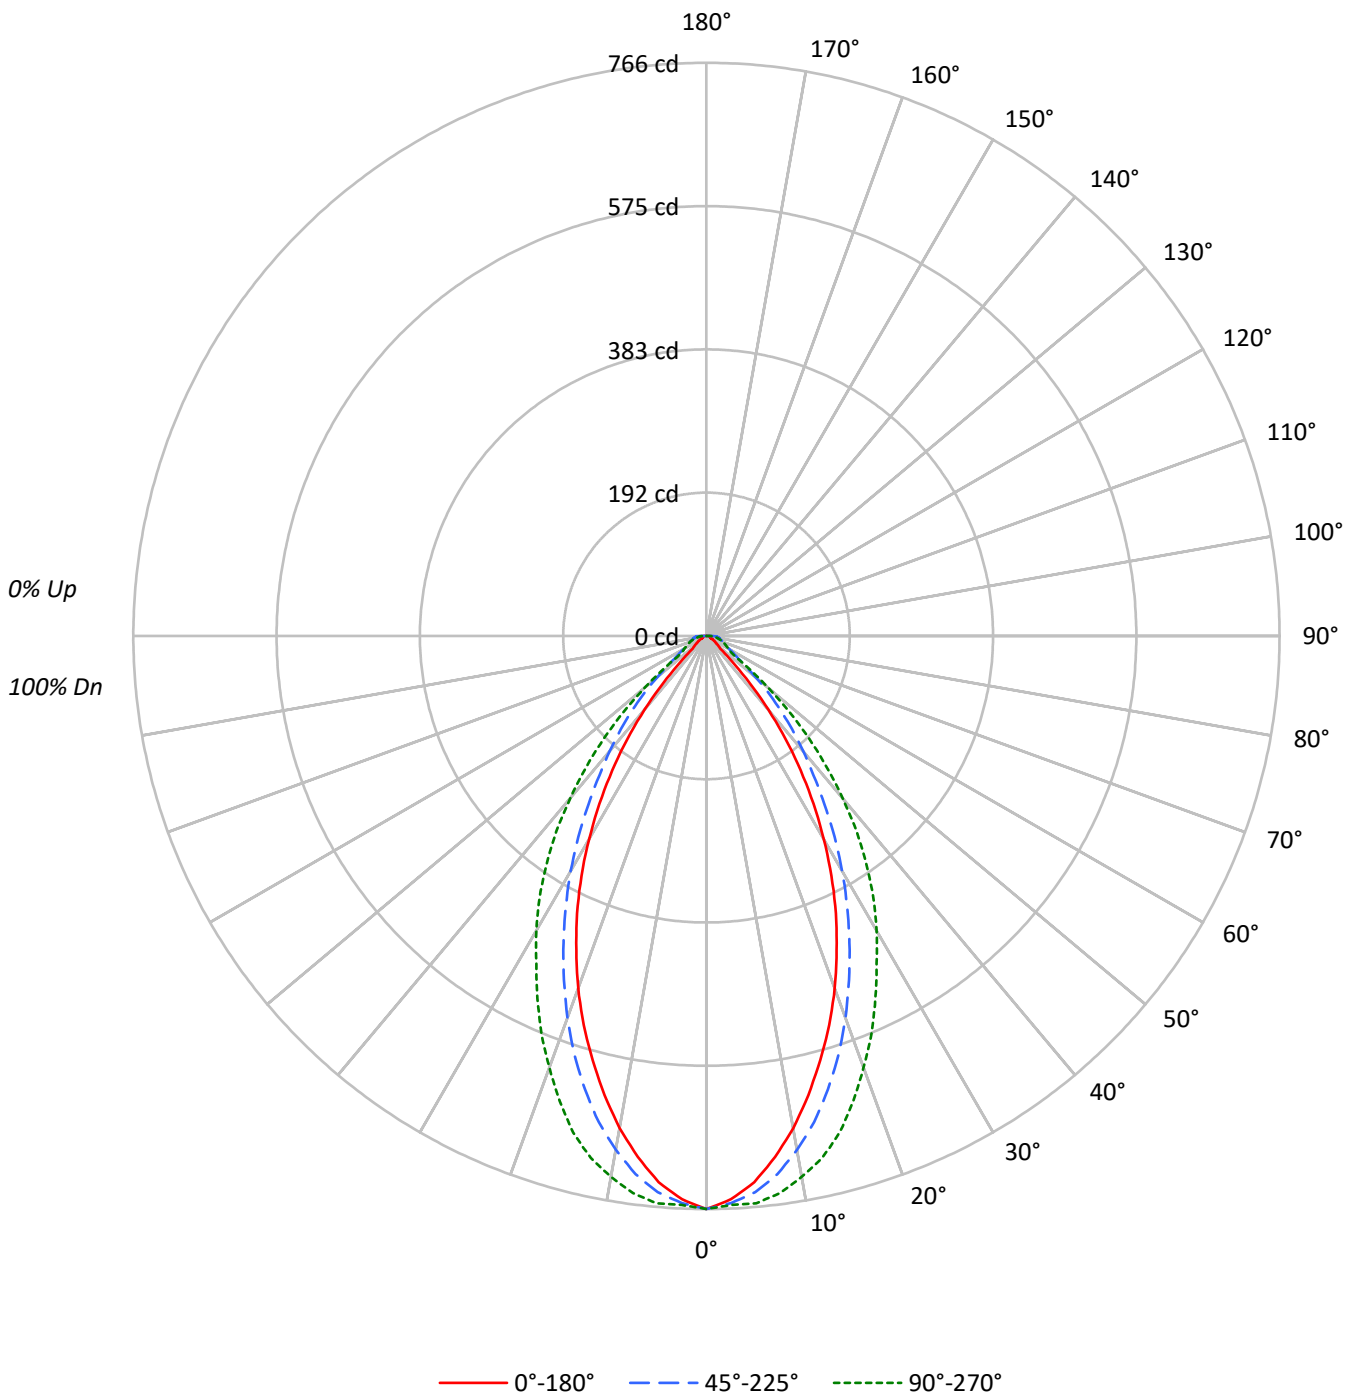



TEST NUMBER: P1058529

CATALOG NUMBER: S122RDRP-H865D835-X4F0-XX-UDD-BVL-W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90					90			
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81					81			
3	98	91	85	80	96	89	84	79	86	82	78	84	80	76	81	78	75	74					74			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67					67			
5	87	77	70	65	85	76	70	65	74	69	64	72	67	64	71	66	63	61					61			
6	82	72	65	60	80	71	64	59	69	63	59	68	62	58	66	62	58	56					56			
7	77	67	60	55	76	66	59	55	64	59	54	63	58	54	62	57	54	52					52			
8	73	62	55	51	72	62	55	51	60	54	50	59	54	50	58	53	50	48					48			
9	69	58	52	47	68	58	51	47	57	51	47	56	50	47	55	50	46	45					45			
10	66	55	48	44	64	54	48	44	53	48	44	53	47	43	52	47	43	42					42			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	14133	14133	14133
5°	13574	13824	14096
10°	12513	13064	13753
15°	11214	11985	13132
20°	9842	10659	12055
25°	8333	9207	10878
30°	6684	7728	9686
35°	4940	6183	8391
40°	3100	4842	6819
45°	1216	3646	5052
50°	597	2463	3095
55°	473	1615	1380
60°	362	1310	1266
65°	266	1231	1231
70°	329	1257	1257
75°	349	1397	1312
80°	521	1828	1435
85°	1037	3112	2075

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 87.5°  
 Luminance: 5711 cd/sqm



TEST NUMBER: P1058529

CATALOG NUMBER: S122RDRP-H865D835-X4F0-XX-UDD-BVL-W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	69.9	8.4
10°-20°	176.8	21.2
20°-30°	211.6	25.4
30°-40°	178.1	21.4
40°-50°	101.4	12.2
50°-60°	40.0	4.8
60°-70°	25.2	3.0
70°-80°	18.7	2.2
80°-90°	11.9	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	458.4	55.0
0°-40°	636.4	76.3
0°-60°	777.8	93.3
0°-90°	833.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	833.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	766	766	766	766	766	
5°	733	749	746	755	761	68
15°	587	608	627	664	687	164
25°	409	428	452	499	534	186
35°	219	239	274	333	372	136
45°	47	82	140	175	194	44
55°	15	32	50	52	43	13
65°	6	28	28	27	28	7
75°	5	20	20	18	18	5
85°	5	14	15	14	10	4
90°	0	0	0	0	0	



TEST NUMBER: P1058529

CATALOG NUMBER: S122RDRP-H865D835-X4F0-XX-UDD-BVL-W

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	765.9	765.9	765.9	765.9	765.9
2.5°	753.6	767.1	758.5	759.7	761.0
5°	732.8	748.7	746.3	754.8	761.0
7.5°	702.1	719.3	725.4	740.1	751.2
10°	667.8	687.4	697.2	720.5	734.0
12.5°	628.6	650.7	665.4	694.8	714.4
15°	587.0	607.8	627.4	664.2	687.4
17.5°	545.3	566.1	587.0	627.4	651.9
20°	501.2	520.8	542.8	585.7	613.9
22.5°	454.6	475.4	497.5	541.6	575.9
25°	409.3	427.7	452.2	498.7	534.3
27.5°	361.5	379.9	406.8	454.6	492.6
30°	313.7	332.1	362.7	411.7	454.6
32.5°	265.9	285.5	318.6	372.5	415.4
35°	219.3	238.9	274.5	333.3	372.5
37.5°	174.0	196.1	235.3	292.9	329.6
40°	128.7	154.4	201.0	252.4	283.1
42.5°	85.8	117.6	169.1	212.0	237.7
45°	46.6	82.1	139.7	175.2	193.6
47.5°	25.7	52.7	111.5	139.7	150.7
50°	20.8	36.8	85.8	106.6	107.8
52.5°	17.2	33.1	63.7	76.0	69.8
55°	14.7	31.9	50.2	51.5	42.9
57.5°	12.3	30.6	41.7	36.8	36.8
60°	9.8	30.6	35.5	33.1	34.3
62.5°	7.4	30.6	31.9	29.4	30.6
65°	6.1	28.2	28.2	27.0	28.2
67.5°	6.1	25.7	25.7	24.5	25.7
70°	6.1	24.5	23.3	23.3	23.3
72.5°	4.9	22.1	22.1	20.8	20.8
75°	4.9	19.6	19.6	18.4	18.4
77.5°	4.9	18.4	18.4	17.2	15.9
80°	4.9	15.9	17.2	15.9	13.5
82.5°	4.9	14.7	15.9	14.7	11.0
85°	4.9	13.5	14.7	13.5	9.8
87.5°	3.7	13.5	13.5	11.0	7.4
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058529  
 CATALOG NUMBER: S122RDRP-H865D835-X4F0-XX-UDD-BVL-W

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.89	8.11	7.25	8.42	8.74	8.92	10.15	9.29	10.46	10.77
	3H	8.43	9.51	8.81	9.85	10.21	10.89	11.98	11.27	12.31	12.68
	4H	8.99	10.00	9.39	10.35	10.73	11.81	12.82	12.21	13.17	13.56
	6H	9.54	10.47	9.96	10.85	11.24	12.69	13.62	13.11	13.99	14.39
	8H	9.84	10.72	10.27	11.11	11.52	13.09	13.97	13.52	14.36	14.77
	12H	10.20	11.04	10.63	11.42	11.85	13.53	14.38	13.97	14.76	15.19
4H	2H	8.08	9.09	8.48	9.44	9.83	9.54	10.56	9.95	10.91	11.29
	3H	10.28	11.11	10.69	11.52	11.92	11.79	12.62	12.20	13.02	13.43
	4H	11.33	12.08	11.77	12.50	12.94	12.86	13.61	13.29	14.03	14.47
	6H	12.23	12.87	12.69	13.32	13.79	13.97	14.61	14.43	15.06	15.53
	8H	12.61	13.22	13.08	13.67	14.14	14.49	15.09	14.96	15.54	16.01
	12H	13.03	13.57	13.52	14.05	14.53	15.06	15.60	15.55	16.08	16.56
8H	4H	12.13	12.74	12.61	13.19	13.66	13.35	13.96	13.82	14.40	14.88
	6H	13.52	14.01	14.02	14.51	14.99	14.75	15.24	15.25	15.74	16.22
	8H	14.23	14.68	14.76	15.20	15.69	15.48	15.93	16.01	16.45	16.94
	12H	14.99	15.38	15.50	15.88	16.45	16.32	16.71	16.83	17.20	17.78
12H	4H	12.30	12.83	12.78	13.32	13.79	13.45	13.98	13.94	14.47	14.94
	6H	13.85	14.29	14.37	14.81	15.30	14.96	15.41	15.49	15.93	16.42
	8H	14.76	15.16	15.28	15.65	16.22	15.85	16.24	16.36	16.74	17.31