

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1057879

Luminaire Tested: S122RDRP-S290D835-X4F0-XX-UDD-BVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1057879
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-21)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-S290D835-X4F0-XX-UDD-BVL-B
Description: DEFINE 2 BLACK REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE
LOUVER WITH DIFFUSER
CORE LIGHT ENGINE
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 189.6 lumens
Efficiency: N/A
Efficacy: 15.2 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.8 / 0.88
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 12.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1057879

CATALOG NUMBER: S122RDRP-S290D835-X4F0-XX-UDD-BVL-B

Luminous Intensity Polar Plot

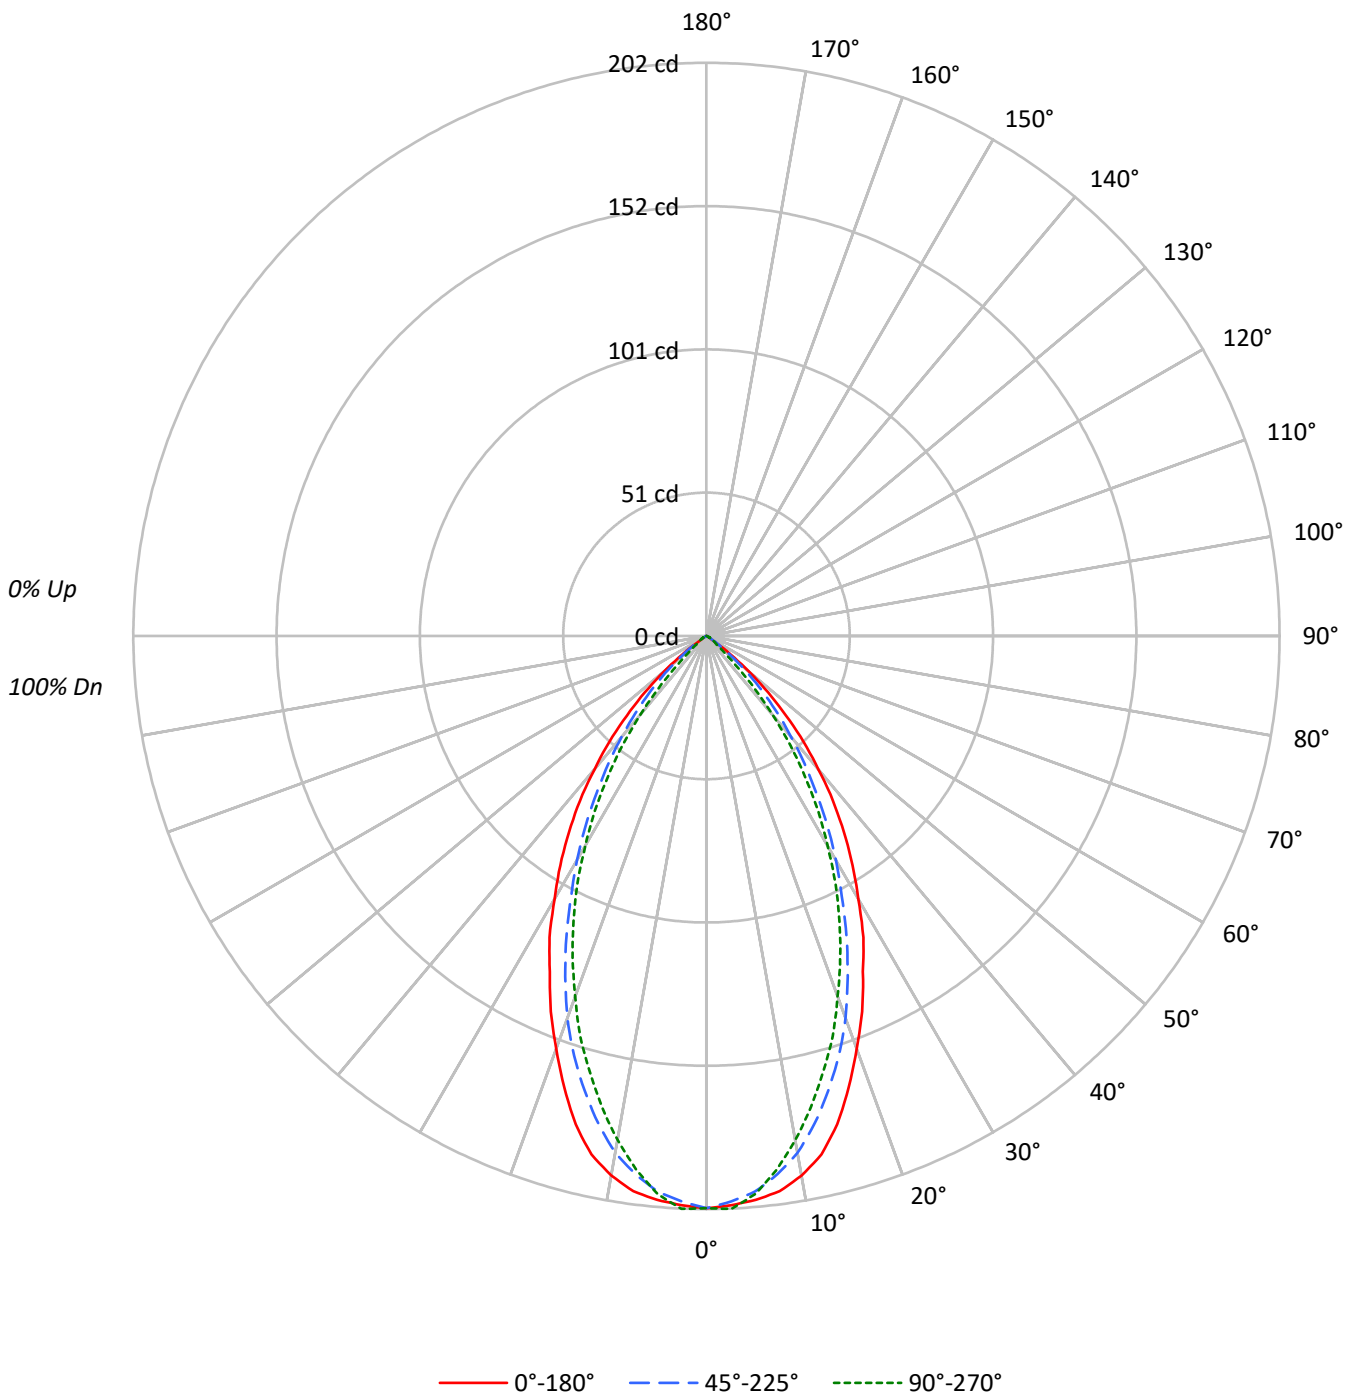



TEST NUMBER: P1057879

CATALOG NUMBER: S122RDRP-S290D835-X4F0-XX-UDD-BVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86
3	101	95	90	85	99	93	89	85	91	87	83	88	85	82	86	83	81	79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54
9	73	63	57	53	72	62	57	52	61	56	52	61	56	52	60	55	52	51
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3722	3722	3722
5°	3695	3642	3656
10°	3618	3466	3380
15°	3404	3169	3037
20°	3040	2814	2655
25°	2657	2378	2258
30°	2280	1943	1817
35°	1901	1518	1363
40°	1479	1120	872
45°	1036	746	378
50°	563	390	135
55°	84	138	97
60°	15	33	63
65°	0	17	39
70°	0	0	22
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1036 cd/sqm



TEST NUMBER: P1057879

CATALOG NUMBER: S122RDRP-S290D835-X4F0-XX-UDD-BVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	18.5	9.8
10°-20°	46.7	24.6
20°-30°	54.4	28.7
30°-40°	43.6	23.0
40°-50°	21.7	11.4
50°-60°	4.3	2.3
60°-70°	0.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	119.7	63.1
0°-40°	163.3	86.1
0°-60°	189.2	99.8
0°-90°	189.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	189.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	202	202	202	202	202	
5°	200	200	197	197	197	19
15°	178	175	166	162	159	49
25°	130	124	117	114	111	60
35°	84	76	67	64	60	52
45°	40	35	29	19	14	31
55°	3	5	4	3	3	5
65°	0	0	0	0	1	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P1057879

CATALOG NUMBER: S122RDRP-S290D835-X4F0-XX-UDD-BVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	201.7	201.7	201.7	201.7	201.7
2.5°	200.8	201.7	199.5	201.7	202.1
5°	199.5	199.5	196.6	197.0	197.4
7.5°	197.4	196.6	191.4	190.6	189.7
10°	193.1	191.4	185.0	181.6	180.4
12.5°	187.2	184.6	176.1	172.3	170.1
15°	178.2	174.8	165.9	161.6	159.0
17.5°	166.7	163.7	155.2	150.5	148.0
20°	154.8	150.5	143.3	138.6	135.2
22.5°	143.3	137.7	130.0	126.6	123.2
25°	130.5	124.1	116.8	114.3	110.9
27.5°	119.8	111.7	103.2	101.5	98.5
30°	107.0	99.3	91.2	88.7	85.3
32.5°	95.9	87.4	79.3	76.3	73.3
35°	84.4	75.9	67.4	64.4	60.5
37.5°	73.3	65.2	56.7	52.0	48.6
40°	61.4	54.6	46.5	40.5	36.2
42.5°	50.7	44.8	37.1	29.4	25.2
45°	39.7	35.0	28.6	19.2	14.5
47.5°	29.4	26.0	20.9	11.1	7.7
50°	19.6	18.3	13.6	5.5	4.7
52.5°	10.7	11.5	8.1	3.4	3.8
55°	2.6	5.1	4.3	2.6	3.0
57.5°	0.4	0.9	2.1	2.1	2.1
60°	0.4	0.4	0.9	1.3	1.7
62.5°	0.4	0.0	0.4	0.9	1.3
65°	0.0	0.0	0.4	0.4	0.9
67.5°	0.0	0.0	0.0	0.4	0.4
70°	0.0	0.0	0.0	0.4	0.4
72.5°	0.0	0.0	0.0	0.0	0.4
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1057879
 CATALOG NUMBER: S122RDRP-S290D835-X4F0-XX-UDD-BVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00