

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1057960

Luminaire Tested: S122RDRP-S485D835-X4F0-XX-UDD-BVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1057960
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-21)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-S485D835-X4F0-XX-UDD-BVL-B
Description: DEFINE 2 BLACK REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE LOUVER WITH DIFFUSER
CORE LIGHT ENGINE
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 314.6 lumens
Efficiency: N/A
Efficacy: 16.1 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.8 / 0.88
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 19.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1057960

CATALOG NUMBER: S122RDRP-S485D835-X4F0-XX-UDD-BVL-B

Luminous Intensity Polar Plot

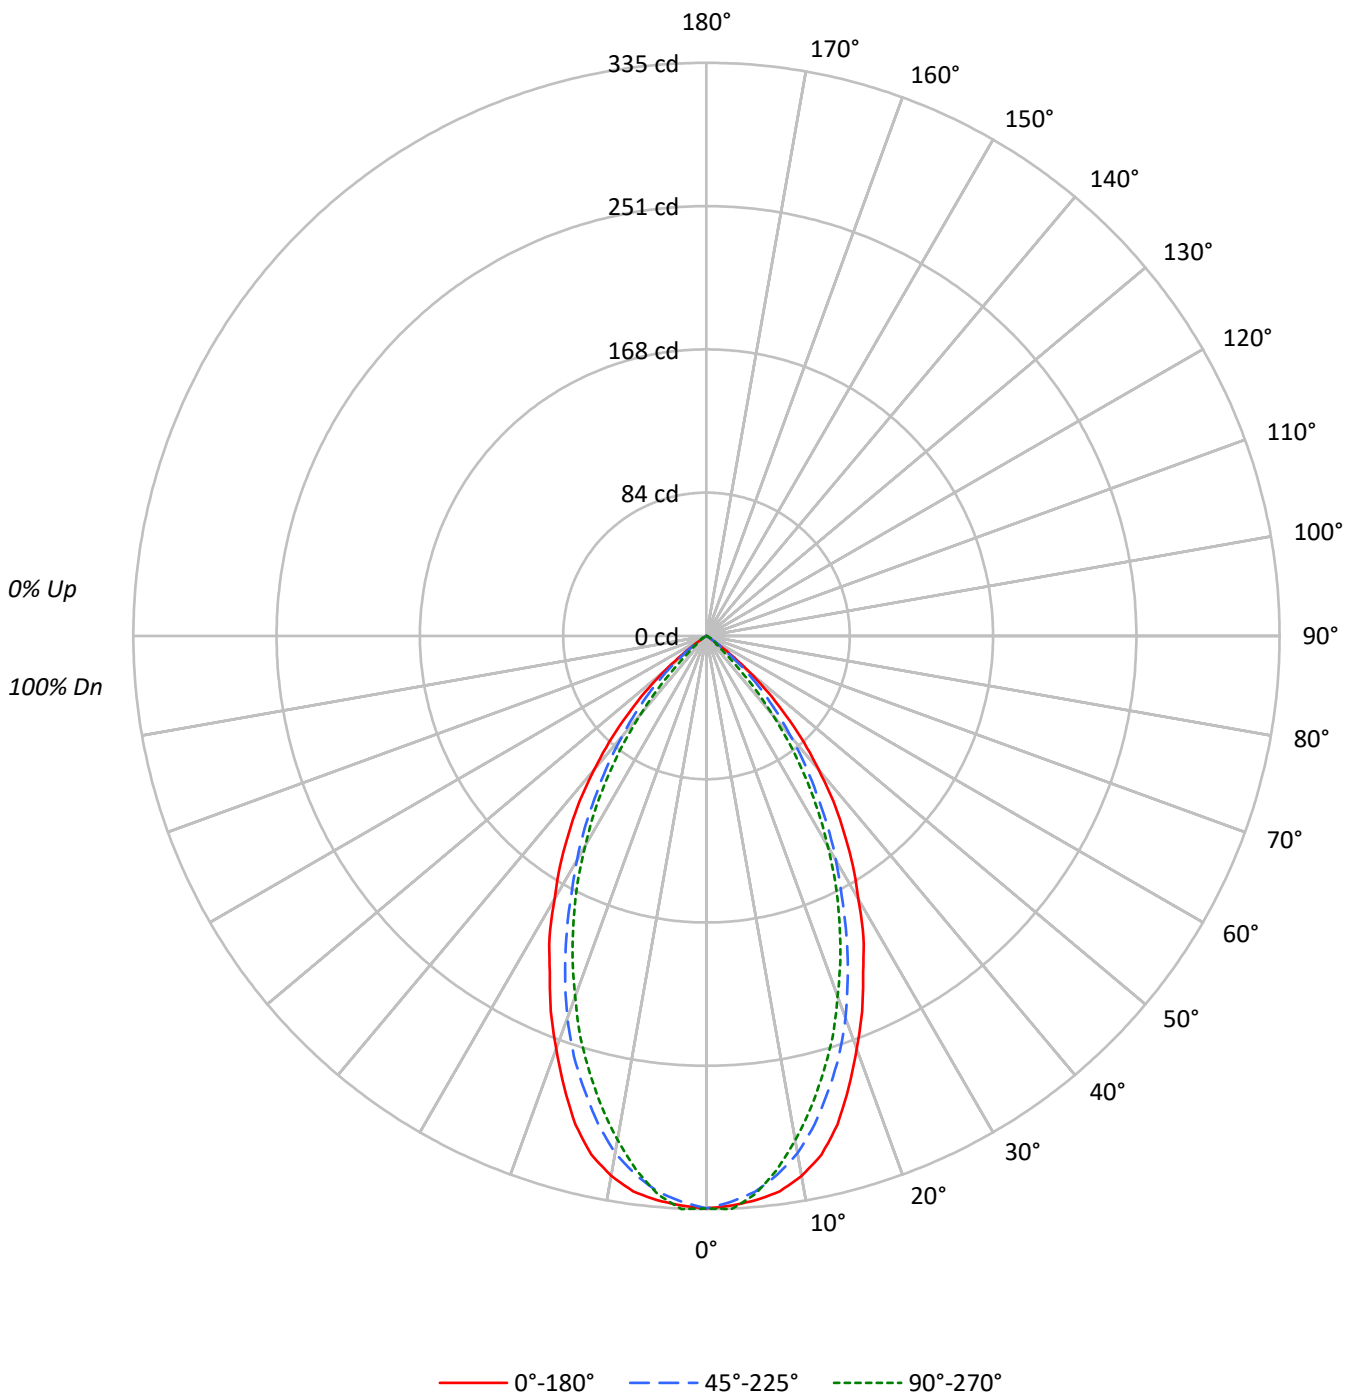



TEST NUMBER: P1057960

CATALOG NUMBER: S122RDRP-S485D835-X4F0-XX-UDD-BVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86
3	101	95	90	85	99	93	89	85	91	87	83	88	85	82	86	83	81	79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54
9	73	63	57	53	72	62	57	52	61	56	52	61	56	52	60	55	52	51
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6174	6174	6174
5°	6133	6040	6066
10°	6005	5752	5606
15°	5649	5257	5041
20°	5043	4668	4403
25°	4408	3946	3744
30°	3784	3226	3015
35°	3156	2518	2264
40°	2455	1857	1448
45°	1717	1237	629
50°	933	649	224
55°	135	228	161
60°	26	52	103
65°	0	31	61
70°	0	0	38
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1717 cd/sqm



TEST NUMBER: P1057960

CATALOG NUMBER: S122RDRP-S485D835-X4F0-XX-UDD-BVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.7	9.8
10°-20°	77.5	24.6
20°-30°	90.3	28.7
30°-40°	72.4	23.0
40°-50°	36.0	11.4
50°-60°	7.1	2.3
60°-70°	0.6	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	198.5	63.1
0°-40°	270.9	86.1
0°-60°	314.0	99.8
0°-90°	314.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	314.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	335	335	335	335	335	
5°	331	331	326	327	328	31
15°	296	290	275	268	264	82
25°	216	206	194	190	184	100
35°	140	126	112	107	100	87
45°	66	58	47	32	24	51
55°	4	8	7	4	5	9
65°	0	0	1	1	1	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P1057960

CATALOG NUMBER: S122RDRP-S485D835-X4F0-XX-UDD-BVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	334.6	334.6	334.6	334.6	334.6
2.5°	333.2	334.6	331.1	334.6	335.3
5°	331.1	331.1	326.1	326.8	327.5
7.5°	327.5	326.1	317.6	316.2	314.8
10°	320.5	317.6	307.0	301.4	299.2
12.5°	310.6	306.3	292.2	285.8	282.3
15°	295.7	290.0	275.2	268.1	263.9
17.5°	276.6	271.6	257.5	249.7	245.5
20°	256.8	249.7	237.7	229.9	224.2
22.5°	237.7	228.5	215.8	210.1	204.4
25°	216.5	205.9	193.8	189.6	183.9
27.5°	198.8	185.3	171.2	168.4	163.4
30°	177.6	164.8	151.4	147.1	141.5
32.5°	159.2	145.0	131.6	126.6	121.7
35°	140.1	125.9	111.8	106.8	100.5
37.5°	121.7	108.2	94.1	86.3	80.6
40°	101.9	90.5	77.1	67.2	60.1
42.5°	84.2	74.3	61.5	48.8	41.7
45°	65.8	58.0	47.4	31.8	24.1
47.5°	48.8	43.2	34.7	18.4	12.7
50°	32.5	30.4	22.6	9.2	7.8
52.5°	17.7	19.1	13.4	5.7	6.4
55°	4.2	8.5	7.1	4.2	5.0
57.5°	0.7	1.4	3.5	3.5	3.5
60°	0.7	0.7	1.4	2.1	2.8
62.5°	0.7	0.0	0.7	1.4	2.1
65°	0.0	0.0	0.7	0.7	1.4
67.5°	0.0	0.0	0.0	0.7	0.7
70°	0.0	0.0	0.0	0.7	0.7
72.5°	0.0	0.0	0.0	0.0	0.7
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1057960
 CATALOG NUMBER: S122RDRP-S485D835-X4F0-XX-UDD-BVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00