

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058334

Luminaire Tested: S122RDRP-H290D935-X4F0-XX-UDD-SVL-W

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1058334
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-56)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-H290D935-X4F0-XX-UDD-SVL-W
Description: DEFINE 2 WHITE REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 299.3 lumens
Efficiency: N/A
Efficacy: 25.6 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.98 / 0.95
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058334

CATALOG NUMBER: S122RDRP-H290D935-X4F0-XX-UDD-SVL-W

Luminous Intensity Polar Plot

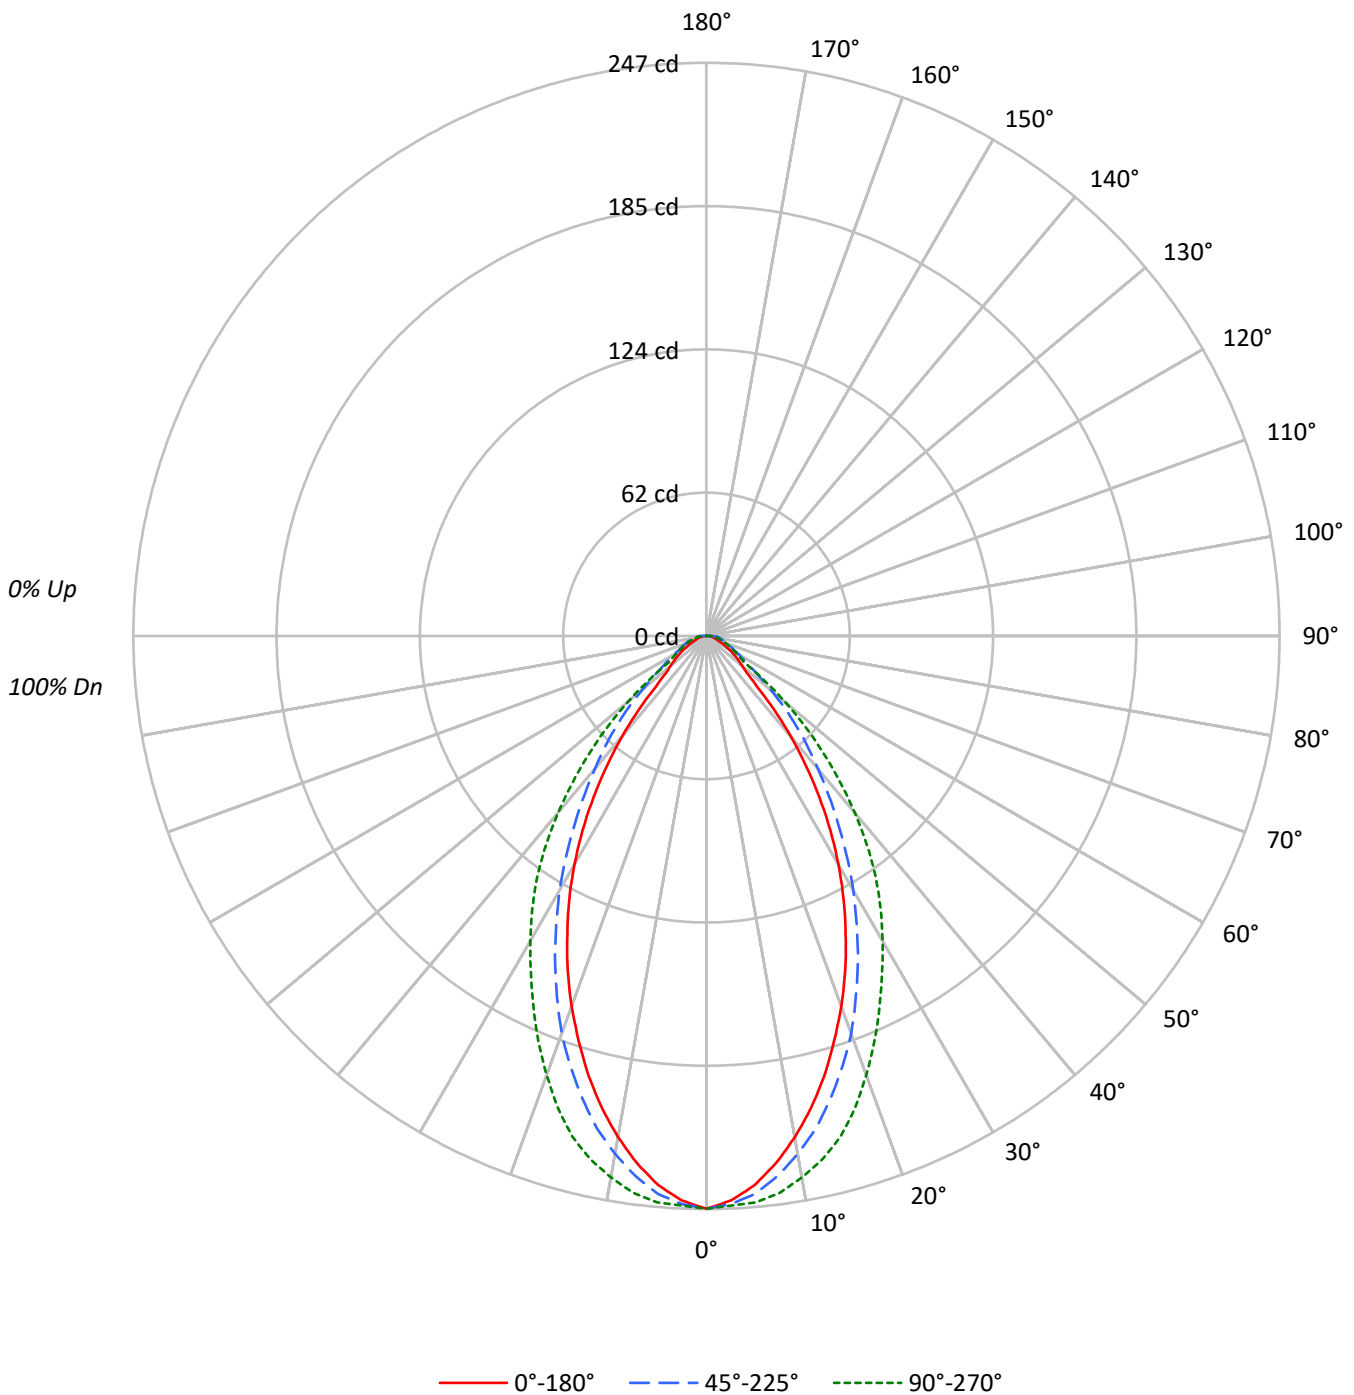



TEST NUMBER: P1058334

CATALOG NUMBER: S122RDRP-H290D935-X4F0-XX-UDD-SVL-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76	83	78	75	80	77	74	72
4	91	82	75	70	89	81	74	69	78	73	68	76	71	68	74	70	67	65
5	86	75	68	63	84	74	68	63	72	67	62	71	65	61	69	64	61	59
6	80	70	62	57	79	69	62	57	67	61	57	66	60	56	64	59	56	54
7	76	65	57	52	74	64	57	52	62	56	52	61	56	52	60	55	51	50
8	71	60	53	48	70	59	53	48	58	52	48	57	52	48	56	51	47	46
9	67	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	42
10	64	53	46	41	63	52	46	41	51	45	41	50	45	41	50	45	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4554	4554	4554
5°	4401	4470	4538
10°	4109	4246	4439
15°	3748	3945	4266
20°	3334	3580	3953
25°	2889	3144	3592
30°	2423	2695	3234
35°	1908	2230	2868
40°	1361	1802	2394
45°	804	1425	1855
50°	580	1031	1263
55°	483	743	637
60°	391	594	543
65°	319	528	498
70°	275	513	475
75°	264	520	471
80°	276	627	510
85°	381	1016	614

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 1855 cd/sqm



TEST NUMBER: P1058334

CATALOG NUMBER: S122RDRP-H290D935-X4F0-XX-UDD-SVL-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.6	7.6
10°-20°	58.2	19.4
20°-30°	71.7	24.0
30°-40°	63.8	21.3
40°-50°	40.7	13.6
50°-60°	19.6	6.5
60°-70°	11.5	3.8
70°-80°	7.3	2.5
80°-90°	3.9	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	152.5	51.0
0°-40°	216.4	72.3
0°-60°	276.6	92.4
0°-90°	299.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	299.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	247	247	247	247	247	
5°	238	242	241	243	245	22
15°	196	201	206	216	223	55
25°	142	147	154	165	176	65
35°	85	91	99	114	127	53
45°	31	40	55	63	71	26
55°	15	19	23	22	20	14
65°	7	13	12	11	11	7
75°	4	8	7	7	7	4
85°	2	4	5	4	3	2
90°	0	0	0	0	0	



TEST NUMBER: P1058334

CATALOG NUMBER: S122RDRP-H290D935-X4F0-XX-UDD-SVL-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	246.8	246.8	246.8	246.8	246.8
2.5°	243.5	247.5	245.0	245.0	245.7
5°	237.6	242.0	241.3	242.8	245.0
7.5°	229.2	234.0	234.7	238.7	242.0
10°	219.3	224.4	226.6	232.5	236.9
12.5°	208.3	213.4	217.5	224.8	231.0
15°	196.2	201.0	206.5	216.0	223.3
17.5°	183.0	189.2	194.7	204.6	213.1
20°	169.8	175.7	182.3	191.8	201.3
22.5°	156.2	161.7	168.3	178.2	189.2
25°	141.9	147.4	154.4	165.4	176.4
27.5°	128.0	133.5	140.1	152.2	163.9
30°	113.7	119.2	126.5	139.0	151.8
32.5°	99.4	105.3	112.6	126.2	139.7
35°	84.7	91.3	99.0	114.1	127.3
37.5°	70.4	77.0	86.5	101.2	113.7
40°	56.5	64.2	74.8	88.0	99.4
42.5°	42.9	51.3	64.5	75.2	85.1
45°	30.8	40.0	54.6	63.4	71.1
47.5°	23.5	30.1	45.1	52.1	57.6
50°	20.2	24.2	35.9	41.1	44.0
52.5°	17.6	21.3	28.6	31.2	31.2
55°	15.0	19.4	23.1	22.4	19.8
57.5°	12.8	17.6	19.1	16.1	16.9
60°	10.6	16.1	16.1	14.3	14.7
62.5°	8.8	15.0	13.9	12.5	12.8
65°	7.3	13.2	12.1	11.0	11.4
67.5°	5.9	11.7	10.6	9.9	9.9
70°	5.1	10.6	9.5	8.8	8.8
72.5°	4.4	9.2	8.4	7.7	7.7
75°	3.7	8.1	7.3	7.0	6.6
77.5°	3.3	7.0	6.6	5.9	5.5
80°	2.6	5.9	5.9	5.5	4.8
82.5°	2.2	5.1	5.1	4.8	4.0
85°	1.8	4.4	4.8	4.0	2.9
87.5°	1.5	4.0	4.0	3.3	2.2
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058334
 CATALOG NUMBER: S122RDRP-H290D935-X4F0-XX-UDD-SVL-W

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.93	8.21	7.30	8.52	8.84	6.72	8.00	7.09	8.31	8.62
	3H	8.16	9.30	8.54	9.63	9.99	8.32	9.45	8.70	9.78	10.15
	4H	8.62	9.68	9.02	10.03	10.42	9.03	10.09	9.44	10.44	10.83
	6H	9.01	9.98	9.42	10.35	10.74	9.69	10.66	10.11	11.04	11.43
	8H	9.16	10.08	9.59	10.47	10.88	10.02	10.94	10.45	11.33	11.74
	12H	9.31	10.20	9.75	10.58	11.01	10.31	11.19	10.74	11.58	12.01
4H	2H	7.48	8.54	7.89	8.89	9.28	7.31	8.37	7.72	8.72	9.11
	3H	9.18	10.05	9.59	10.45	10.85	9.15	10.02	9.57	10.43	10.83
	4H	9.98	10.76	10.41	11.18	11.62	10.03	10.81	10.47	11.23	11.68
	6H	10.63	11.31	11.09	11.75	12.22	10.88	11.56	11.34	12.00	12.47
	8H	10.88	11.51	11.35	11.96	12.43	11.30	11.94	11.77	12.39	12.86
	12H	11.12	11.68	11.61	12.16	12.64	11.70	12.26	12.19	12.74	13.22
8H	4H	10.40	11.03	10.87	11.48	11.95	10.45	11.08	10.92	11.53	12.00
	6H	11.38	11.90	11.88	12.40	12.88	11.54	12.06	12.04	12.56	13.04
	8H	11.87	12.34	12.39	12.85	13.34	12.13	12.60	12.66	13.12	13.61
	12H	12.37	12.78	12.88	13.27	13.85	12.73	13.14	13.24	13.63	14.21
12H	4H	10.46	11.02	10.95	11.51	11.98	10.53	11.09	11.01	11.57	12.04
	6H	11.55	12.02	12.07	12.53	13.02	11.70	12.17	12.23	12.69	13.18
	8H	12.18	12.59	12.70	13.09	13.66	12.42	12.83	12.93	13.32	13.90