

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058335

Luminaire Tested: S122RDRP-H290D935-X4F0-XX-UDD-WVL-B

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1058335  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122RDRP-H290D935-X4F0-XX-UDD-WVL-B  
Description: DEFINE 2 BLACK REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 349.3 lumens  
Efficiency: N/A  
Efficacy: 29.9 lumens/watt  
Spacing Criteria (0/90/45): 1 / 0.92 / 1.02  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1058335

CATALOG NUMBER: S122RDRP-H290D935-X4F0-XX-UDD-WVL-B

### Luminous Intensity Polar Plot

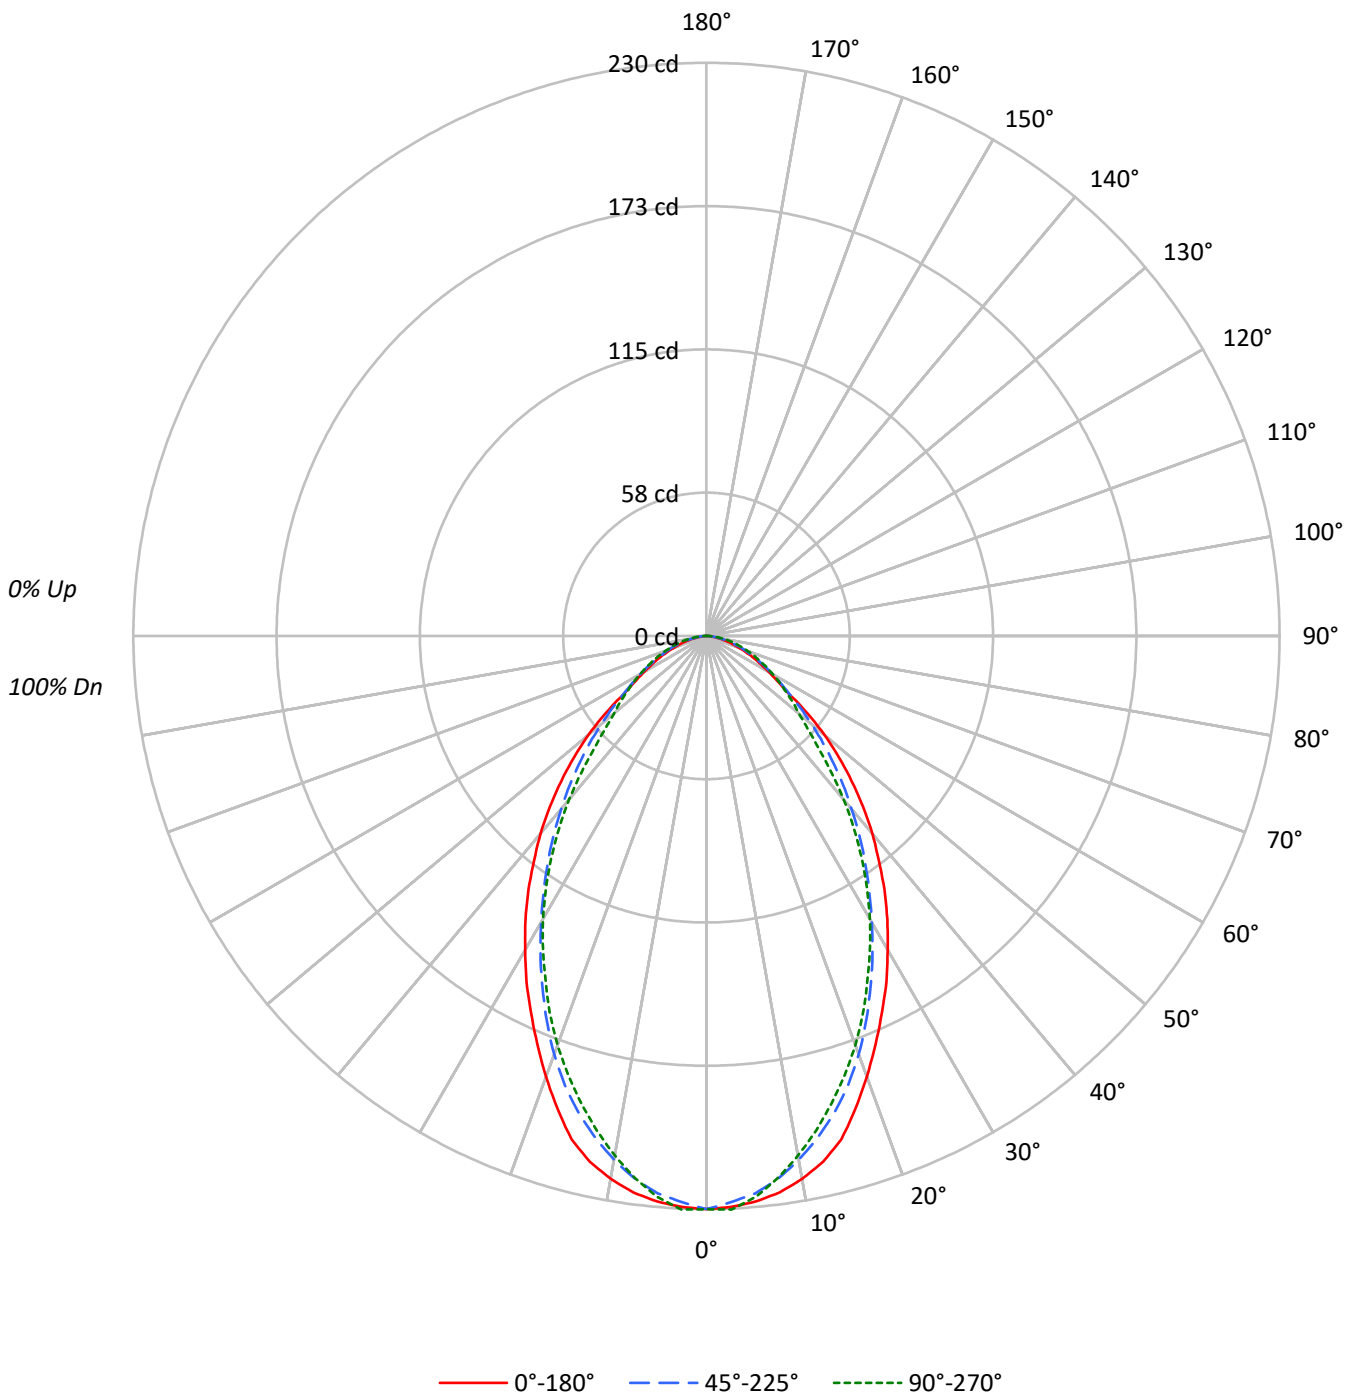

TEST NUMBER: P1058335

CATALOG NUMBER: S122RDRP-H290D935-X4F0-XX-UDD-WVL-B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88					88			
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77					77			
3	95	87	80	74	93	85	79	74	82	77	73	80	75	71	77	73	70	68					68			
4	89	79	71	65	87	77	70	65	75	69	64	73	68	63	71	66	63	61					61			
5	83	72	64	58	81	71	63	58	69	62	57	67	61	57	65	60	56	54					54			
6	77	66	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49					49			
7	72	60	53	47	71	60	52	47	58	52	47	57	51	47	56	50	46	44					44			
8	68	56	48	43	66	55	48	43	54	47	43	53	47	43	52	46	42	41					41			
9	64	52	45	40	63	51	44	39	50	44	39	49	43	39	48	43	39	37					37			
10	60	48	41	36	59	48	41	36	47	41	36	46	40	36	45	40	36	34					34			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4244	4244	4244
5°	4220	4158	4186
10°	4145	4000	3967
15°	3995	3784	3708
20°	3696	3509	3431
25°	3392	3168	3109
30°	3098	2825	2793
35°	2805	2500	2442
40°	2496	2180	2064
45°	2150	1874	1654
50°	1777	1576	1387
55°	1284	1309	1248
60°	1067	1122	1137
65°	913	974	1039
70°	750	869	950
75°	627	734	863
80°	468	584	776
85°	148	318	699

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2150 cd/sqm



TEST NUMBER: P1058335

CATALOG NUMBER: S122RDRP-H290D935-X4F0-XX-UDD-WVL-B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	21.3	6.1
10°-20°	56.0	16.0
20°-30°	72.5	20.7
30°-40°	71.1	20.3
40°-50°	56.0	16.0
50°-60°	36.7	10.5
60°-70°	22.3	6.4
70°-80°	11.2	3.2
80°-90°	2.4	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	149.7	42.9
0°-40°	220.8	63.2
0°-60°	313.4	89.7
0°-90°	349.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	349.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	230	230	230	230	230	
5°	228	228	224	226	226	22
15°	209	206	198	196	194	58
25°	167	161	156	155	153	77
35°	124	118	111	111	108	78
45°	82	77	72	67	63	63
55°	40	42	41	39	39	38
65°	21	21	22	23	24	21
75°	9	9	10	12	12	9
85°	1	1	2	3	3	1
90°	0	0	0	0	0	



TEST NUMBER: P1058335

CATALOG NUMBER: S122RDRP-H290D935-X4F0-XX-UDD-WVL-B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	230.0	230.0	230.0	230.0	230.0
2.5°	229.3	229.6	227.4	229.6	230.4
5°	227.8	227.8	224.5	226.0	226.0
7.5°	225.2	224.9	219.7	219.7	219.4
10°	221.2	219.7	213.5	212.4	211.7
12.5°	216.1	213.5	206.2	204.4	203.3
15°	209.1	206.2	198.1	195.6	194.1
17.5°	198.9	195.9	189.0	186.0	184.6
20°	188.2	183.8	178.7	176.2	174.7
22.5°	177.3	172.1	167.4	165.5	164.1
25°	166.6	161.1	155.6	154.9	152.7
27.5°	156.4	149.8	144.3	143.9	142.1
30°	145.4	138.4	132.6	132.9	131.1
32.5°	135.1	128.5	121.6	122.0	119.8
35°	124.5	117.6	111.0	110.6	108.4
37.5°	113.5	106.9	100.7	99.2	97.0
40°	103.6	97.0	90.5	87.9	85.7
42.5°	93.0	87.2	81.3	77.3	74.3
45°	82.4	77.3	71.8	66.7	63.4
47.5°	72.1	68.1	63.4	57.1	54.9
50°	61.9	59.0	54.9	49.4	48.3
52.5°	51.3	50.2	47.6	43.9	43.6
55°	39.9	42.1	40.7	39.2	38.8
57.5°	33.7	34.1	35.2	34.8	34.8
60°	28.9	28.9	30.4	30.8	30.8
62.5°	24.5	24.9	26.4	27.1	27.1
65°	20.9	21.2	22.3	23.4	23.8
67.5°	17.2	17.9	19.0	20.1	20.5
70°	13.9	14.6	16.1	17.2	17.6
72.5°	11.4	11.7	13.2	14.3	14.6
75°	8.8	9.2	10.3	11.7	12.1
77.5°	6.2	7.0	8.1	9.2	9.9
80°	4.4	4.8	5.5	7.0	7.3
82.5°	2.6	2.9	3.7	4.8	5.1
85°	0.7	1.1	1.5	2.6	3.3
87.5°	0.0	0.0	0.0	0.7	1.5
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058335  
 CATALOG NUMBER: S122RDRP-H290D935-X4F0-XX-UDD-WVL-B

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.15	12.55	11.52	12.86	13.18	11.33	12.72	11.69	13.04	13.35
	3H	12.28	13.52	12.66	13.85	14.21	12.78	14.03	13.16	14.36	14.72
	4H	12.63	13.79	13.03	14.14	14.53	13.32	14.49	13.73	14.84	15.22
	6H	12.81	13.89	13.23	14.25	14.65	13.74	14.81	14.15	15.18	15.57
	8H	12.84	13.86	13.27	14.25	14.65	13.86	14.88	14.29	15.27	15.68
	12H	12.83	13.80	13.26	14.18	14.61	13.95	14.92	14.38	15.30	15.73
4H	2H	11.61	12.77	12.01	13.12	13.50	11.75	12.91	12.15	13.26	13.64
	3H	12.94	13.90	13.35	14.30	14.70	13.42	14.38	13.83	14.78	15.18
	4H	13.39	14.25	13.82	14.66	15.11	14.09	14.94	14.52	15.36	15.80
	6H	13.66	14.40	14.12	14.85	15.31	14.62	15.37	15.08	15.81	16.27
	8H	13.71	14.40	14.17	14.85	15.31	14.79	15.48	15.26	15.93	16.40
	12H	13.70	14.32	14.18	14.80	15.27	14.91	15.53	15.40	16.01	16.48
8H	4H	13.60	14.30	14.07	14.74	15.21	14.24	14.93	14.70	15.38	15.85
	6H	13.95	14.52	14.45	15.02	15.49	14.87	15.44	15.37	15.93	16.41
	8H	14.03	14.54	14.55	15.05	15.54	15.11	15.62	15.62	16.13	16.62
	12H	14.05	14.50	14.56	14.99	15.56	15.29	15.74	15.81	16.24	16.80
12H	4H	13.61	14.23	14.10	14.71	15.18	14.22	14.84	14.71	15.32	15.79
	6H	13.98	14.49	14.50	15.00	15.49	14.87	15.38	15.38	15.89	16.38
	8H	14.09	14.54	14.61	15.04	15.61	15.14	15.59	15.66	16.09	16.66