

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058086

Luminaire Tested: S122RDRP-S675D935-X4F0-XX-UDD-BVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1058086
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-21)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-S675D935-X4F0-XX-UDD-BVL-B
Description: DEFINE 2 BLACK REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE LOUVER WITH DIFFUSER
CORE LIGHT ENGINE
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 375.1 lumens
Efficiency: N/A
Efficacy: 14.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.8 / 0.88
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 25.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058086

CATALOG NUMBER: S122RDRP-S675D935-X4F0-XX-UDD-BVL-B

Luminous Intensity Polar Plot

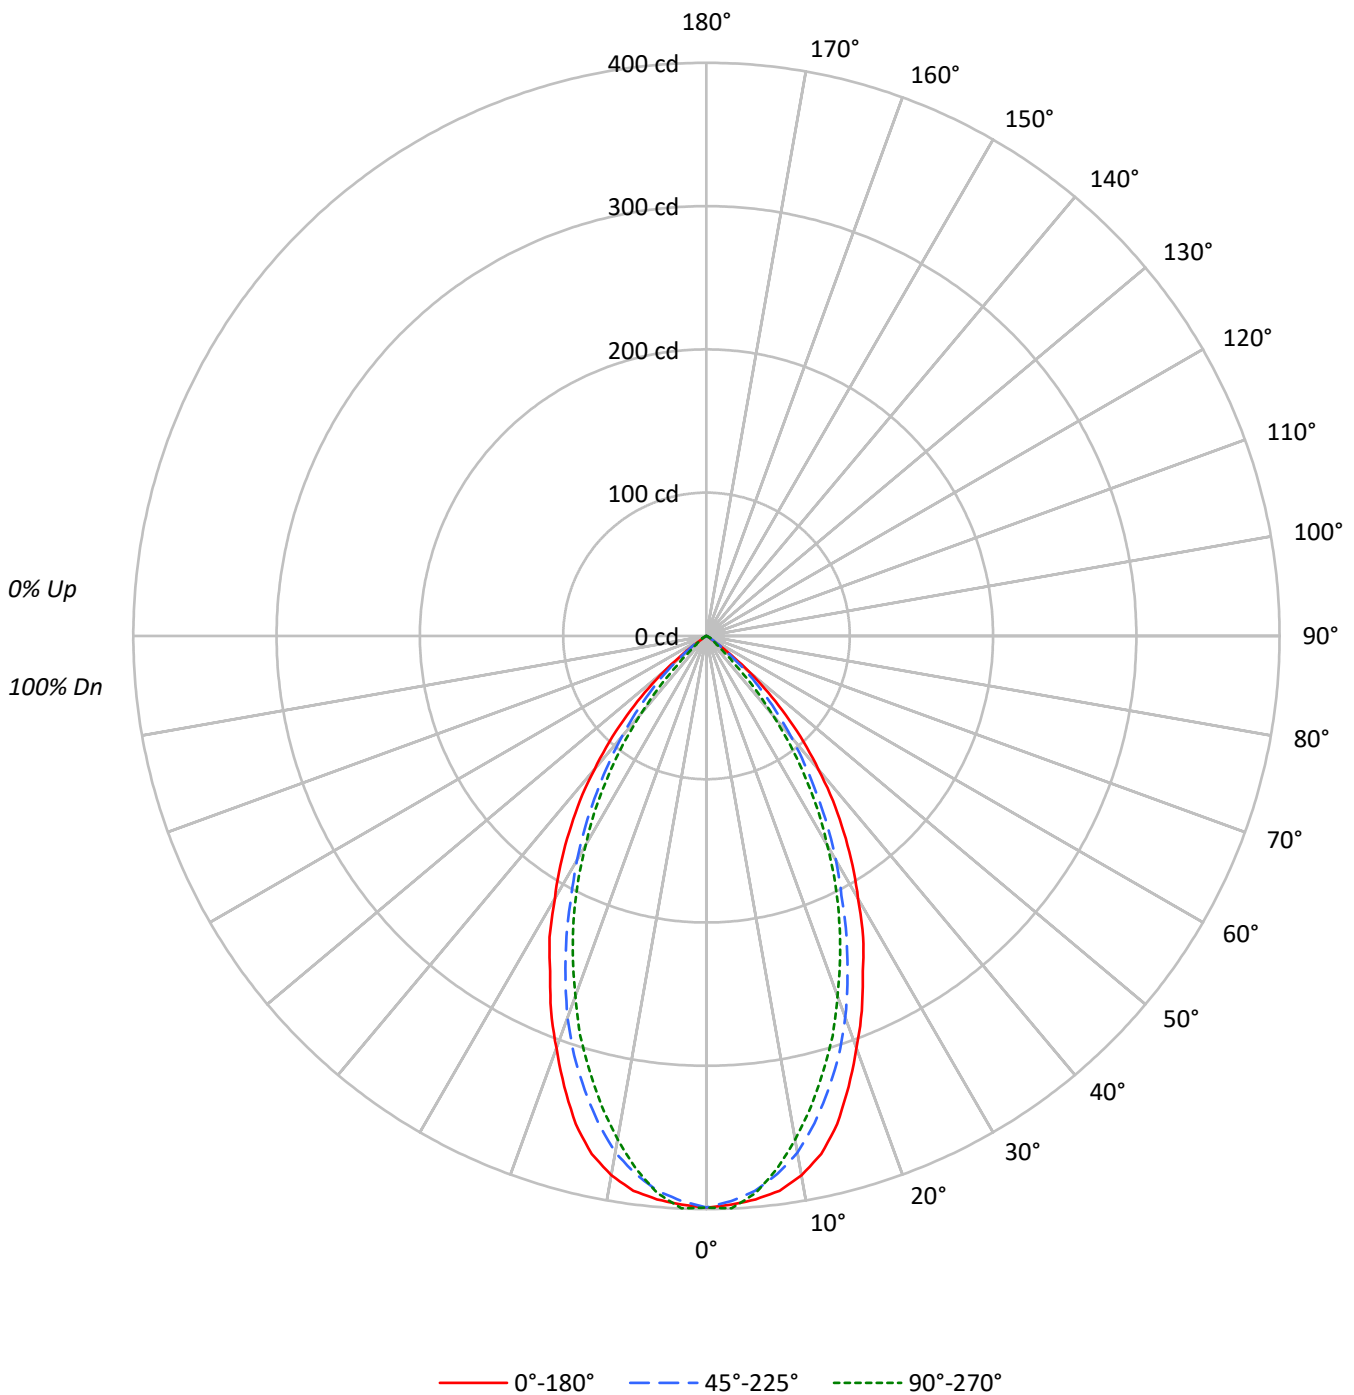



TEST NUMBER: P1058086

CATALOG NUMBER: S122RDRP-S675D935-X4F0-XX-UDD-BVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86
3	101	95	90	85	99	93	89	85	91	87	83	88	85	82	86	83	81	79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54
9	73	63	57	53	72	62	57	52	61	56	52	61	56	52	60	55	52	51
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7361	7361	7361
5°	7311	7202	7233
10°	7159	6858	6685
15°	6736	6268	6010
20°	6013	5565	5251
25°	5255	4705	4465
30°	4511	3846	3595
35°	3762	3003	2699
40°	2927	2214	1727
45°	2046	1474	749
50°	1114	775	267
55°	164	270	190
60°	30	63	125
65°	0	35	74
70°	0	0	43
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2046 cd/sqm



TEST NUMBER: P1058086

CATALOG NUMBER: S122RDRP-S675D935-X4F0-XX-UDD-BVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	36.6	9.8
10°-20°	92.4	24.6
20°-30°	107.7	28.7
30°-40°	86.3	23.0
40°-50°	42.9	11.4
50°-60°	8.5	2.3
60°-70°	0.7	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	236.7	63.1
0°-40°	323.0	86.1
0°-60°	374.3	99.8
0°-90°	375.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	375.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	399	399	399	399	399	
5°	395	395	389	390	390	37
15°	353	346	328	320	315	98
25°	258	245	231	226	219	119
35°	167	150	133	127	120	104
45°	78	69	56	38	29	61
55°	5	10	8	5	6	10
65°	0	0	1	1	2	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P1058086

CATALOG NUMBER: S122RDRP-S675D935-X4F0-XX-UDD-BVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	398.9	398.9	398.9	398.9	398.9
2.5°	397.3	398.9	394.7	398.9	399.8
5°	394.7	394.7	388.8	389.7	390.5
7.5°	390.5	388.8	378.7	377.0	375.3
10°	382.1	378.7	366.0	359.3	356.8
12.5°	370.3	365.2	348.3	340.7	336.5
15°	352.6	345.8	328.1	319.7	314.6
17.5°	329.8	323.9	307.0	297.7	292.7
20°	306.2	297.7	283.4	274.1	267.4
22.5°	283.4	272.4	257.2	250.5	243.7
25°	258.1	245.4	231.1	226.0	219.3
27.5°	237.0	221.0	204.1	200.7	194.8
30°	211.7	196.5	180.5	175.4	168.7
32.5°	189.8	172.9	156.9	151.0	145.1
35°	167.0	150.1	133.3	127.4	119.8
37.5°	145.1	129.0	112.2	102.9	96.2
40°	121.5	108.0	91.9	80.1	71.7
42.5°	100.4	88.6	73.4	58.2	49.8
45°	78.4	69.2	56.5	38.0	28.7
47.5°	58.2	51.4	41.3	21.9	15.2
50°	38.8	36.3	27.0	11.0	9.3
52.5°	21.1	22.8	16.0	6.7	7.6
55°	5.1	10.1	8.4	5.1	5.9
57.5°	0.8	1.7	4.2	4.2	4.2
60°	0.8	0.8	1.7	2.5	3.4
62.5°	0.8	0.0	0.8	1.7	2.5
65°	0.0	0.0	0.8	0.8	1.7
67.5°	0.0	0.0	0.0	0.8	0.8
70°	0.0	0.0	0.0	0.8	0.8
72.5°	0.0	0.0	0.0	0.0	0.8
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058086
 CATALOG NUMBER: S122RDRP-S675D935-X4F0-XX-UDD-BVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00